


Why is this a hard problem?

Why not replace these with hand-tuned libs?

```
FOR I = 1, N:  
  FOR J = 1, N:  
    FOR K = 1, N:  
      C[I, J] += A[I, K] * B[K, J]  
    ENDFOR  
  ENDFOR  
ENDFOR
```

**Extract domain specific
parts from general purpose
programs**

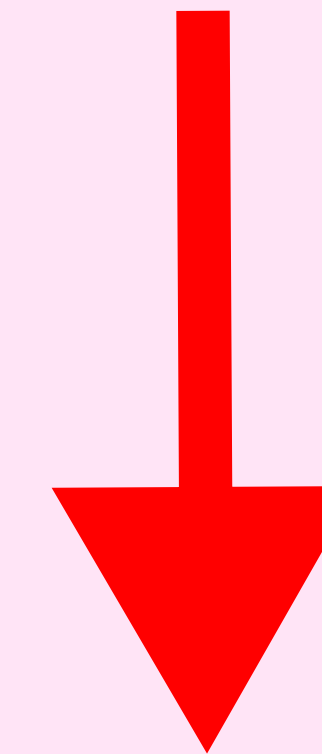

**Then use the domain
specific compiler to
optimize those parts!**