



Apache Hue



一、 课程计划

目录

一、 课程计划.....	2
二、 Apache Hue 介绍	4
1. Hue 是什么	4
2. Hue 能做什么	5
3. Hue 的架构	6
三、 Hue 的安装	7
1. 上传解压安装包.....	7
2. 编译初始化工作.....	7
2.1. 联网安装各种必须的依赖包	7
2.2. Hue 初始化配置	8
2.3. 创建 mysql 中 Hue 使用的 DB	8
3. 编译 Hue	9
4. 启动 Hue、Web UI 访问	10
四、 Hue 与软件的集成	11
1. Hue 集成 HDFS	11
1.1. 修改 core-site.xml 配置	11
1.2. 修改 hdfs-site.xml 配置	11
1.3. 修改 hue.ini	12
1.4. 重启 HDFS、Hue.....	12
2. Hue 集成 YARN	13
2.1. 修改 hue.ini	13
2.2. 开启 yarn 日志聚集服务.....	13
2.3. 重启 Yarn、Hue	13
3. Hue 集成 Hive	14
3.1. 修改 Hue.ini	14
3.2. 启动 Hive 服务、重启 hue	14
4. Hue 集成 Mysql	16
4.1. 修改 hue.ini	16
4.2. 重启 hue	16
5. Hue 集成 Oozie.....	17
5.1. 修改 hue 配置文件 hue.ini	17
5.2. 启动 hue、oozie.....	18
5.3. 使用 hue 配置 oozie 调度	19
5.4. 利用 hue 调度 shell 脚本	19



5.5.	利用 hue 调度 hive 脚本	22
5.6.	利用 hue 调度 MapReduce 程序	24
5.7.	利用 Hue 配置定时调度任务	25
6.	Hue 集成 Hbase	27
6.1.	修改 hbase 配置	27
6.2.	修改 hadoop 配置	27
6.3.	修改 Hue 配置	28
6.4.	启动 hbase(包括 thrift 服务)、hue	28
7.	Hue 集成 Impala	30
7.1.	修改 Hue.ini	30
7.2.	重启 Hue	30



二、 Apache Hue 介绍

1. Hue 是什么

HUE=Hadoop User Experience

Hue 是一个开源的 Apache Hadoop UI 系统，由 Cloudera Desktop 演化而来，最后 Cloudera 公司将其贡献给 Apache 基金会的 Hadoop 社区，它是基于 Python Web 框架 Django 实现的。

通过使用 Hue，可以在浏览器端的 Web 控制台上与 Hadoop 集群进行交互，来分析处理数据，例如操作 HDFS 上的数据，运行 MapReduce Job，执行 Hive 的 SQL 语句，浏览 HBase 数据库等等。



Query. Explore. Repeat.

2. Hue 能做什么

访问 HDFS 和文件浏览

通过 web 调试和开发 hive 以及数据结果展示

查询 solr 和结果展示，报表生成

通过 web 调试和开发 impala 交互式 SQL Query

spark 调试和开发

Pig 开发和调试

oozie 任务的开发，监控，和工作流协调调度

Hbase 数据查询和修改，数据展示

Hive 的元数据（metastore）查询



MapReduce 任务进度查看，日志追踪

创建和提交 MapReduce，Streaming，Java job 任务

Sqoop2 的开发和调试

Zookeeper 的浏览和编辑


数据库（MySQL，PostGRES，SQLite，Oracle）的查询和展示

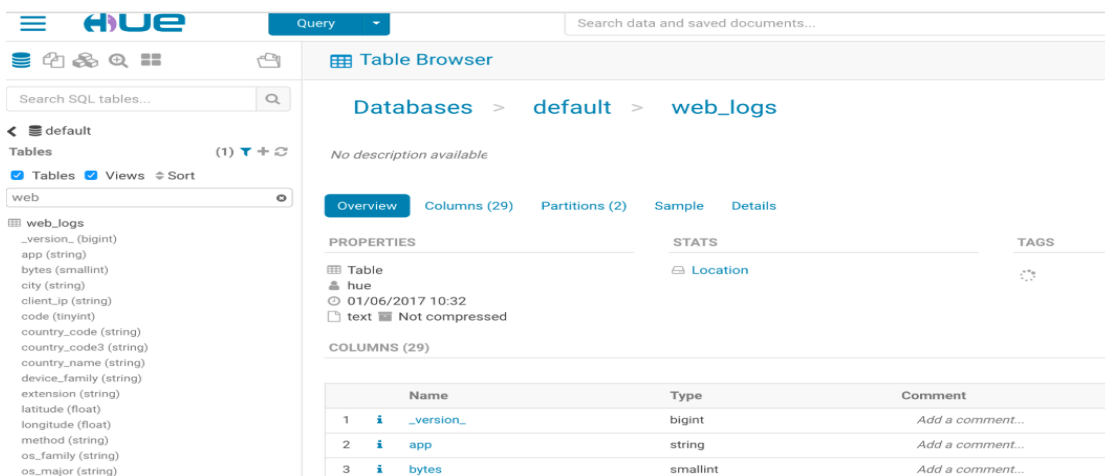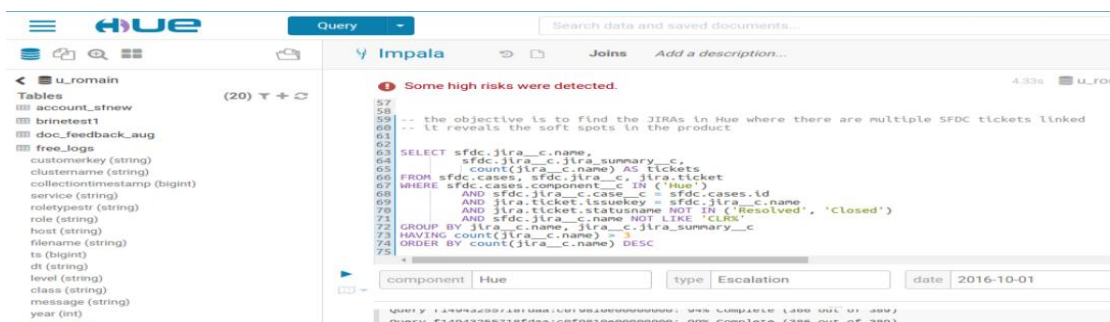

3. Hue 的架构

Hue 是一个友好的界面集成框架，可以集成各种大量的大数据体系软件框架，通过一个界面就可以做到查看以及执行所有的框架。

Hue 提供的这些功能相比 Hadoop 生态各组件提供的界面更加友好，但是一些需要 debug 的场景可能还是要使用原生系统才能更加深入的找到错误的原因。

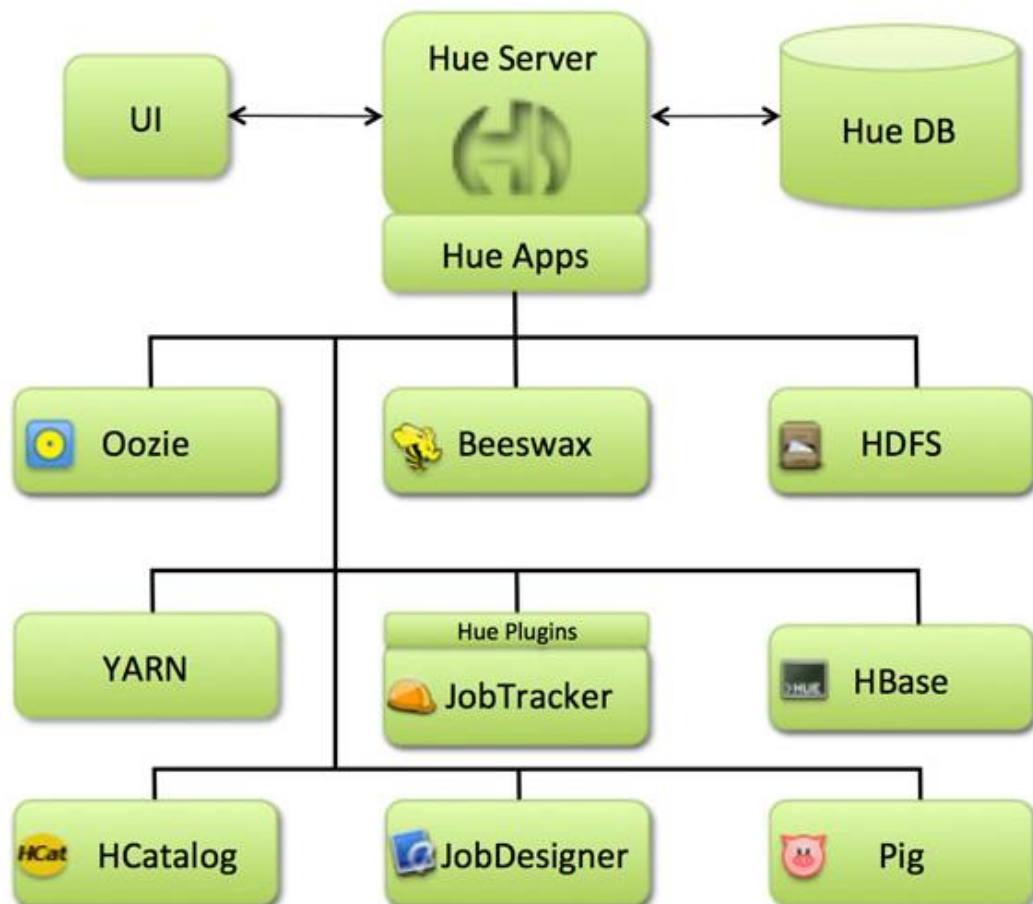



三、 Hue 的安装

1. 上传解压安装包

Hue 的安装支持多种方式，包括 rpm 包的方式进行安装、tar.gz 包的方式进行安装以及 cloudera manager 的方式来进行安装等，我们这里使用 tar.gz 包的方式来进行安装。

Hue 的压缩包的下载地址：

<http://archive.cloudera.com/cdh5/cdh/5/>

我们这里使用的是 CDH5.14.0 这个对应的版本，具体下载地址为

<http://archive.cloudera.com/cdh5/cdh/5/hue-3.9.0-cdh5.14.0.tar.gz>

```
cd /export/servers/
```

```
tar -zxvf hue-3.9.0-cdh5.14.0.tar.gz
```

2. 编译初始化工作

2.1. 联网安装各种必须的依赖包

```
yum install -y asciidoc cyrus-sasl-devel cyrus-sasl-gssapi cyrus-sasl-plain gcc gcc-  
c++ krb5-devel libffi-devel libxml2-devel libxslt-devel make openldap-devel  
python-devel sqlite-devel gmp-devel
```



2.2. Hue 初始化配置

```
cd /export/servers/hue-3.9.0-cdh5.14.0/desktop/conf
```

```
vim hue.ini
```

```
#通用配置
[desktop]
secret_key=jFE93j;2[290-eiw.KEiwN2s3['d;/.q[eIW^y#e=+lei*@Mn<qW5o
http_host=node-1
is_hue_4=true
time_zone=Asia/Shanghai
server_user=root
server_group=root
default_user=root
default_hdfs_superuser=root
#配置使用 mysql 作为 hue 的存储数据库,大概在 hue.ini 的 587 行左右
[[database]]
engine=mysql
host=node-1
port=3306
user=root
password=Hadoop
name=hue
```

2.3. 创建 mysql 中 Hue 使用的 DB

```
create database hue default character set utf8 default
collate utf8_general_ci;
```



3. 编译 Hue

```
cd /export/servers/hue-3.9.0-cdh5.14.0
```

```
make apps
```

编译成功之后，会在 hue 数据库中创建许多初始化表。

```
Post-processed 'dashboard/img/loading.gif' as 'dashboard/img/loading.7b9776076d5f.gif'
Post-processed 'dashboard/less/search.less' as 'dashboard/less/search.435d3cbc062a.less'
Post-processed 'dashboard/less/common_dashboard.less' as 'dashboard/less/common_dashboard.19238e0edc68.less'
Post-processed 'dashboard/less/admin.less' as 'dashboard/less/admin.c7aead55b57c.less'
Post-processed 'dashboard/less/admin_mobile.less' as 'dashboard/less/admin_mobile.5eb5453b4218.less'
Post-processed 'dashboard/less/search_mobile.less' as 'dashboard/less/search_mobile.a011472c6568.less'
Post-processed 'dashboard/templates/restaurant.jpg' as 'dashboard/templates/restaurant.97843577c56e.jpg'
Post-processed 'dashboard/templates/twitter.jpg' as 'dashboard/templates/twitter.95b628c34598.jpg'
Post-processed 'dashboard/templates/logs.jpg' as 'dashboard/templates/logs.02864e53024f.jpg'
Post-processed 'dashboard/templates/templates.xml' as 'dashboard/templates/templates.c9eea5a31d80.xml'
Post-processed 'dashboard/help/index.html' as 'dashboard/help/index.e505932c5f0c.html'

1416 static files copied to '/export/servers/hue-3.9.0-cdh5.14.0/build/static', 1416 post-processed.
make[1]: Leaving directory '/export/servers/hue-3.9.0-cdh5.14.0/apps'
[root@node-1 hue-3.9.0-cdh5.14.0]#
```

auth_group	documentpermission_groups	oozie_join
auth_group_permissions	documentpermission_users	oozie_kill
auth_permission	documentpermission2_groups	oozie_link
auth_user	documentpermission2_users	oozie_mapreduce
auth_user_groups	jobsub_checkforsetup	oozie_node
auth_user_user_permissions	jobsub_jobdesign	oozie_pig
axes_accessattempt	jobsub_jobhistory	oozie_shell
axes_accesslog	jobsub_oozieaction	oozie_sqoop
beeswax_metainstall	jobsub_ooziedesign	oozie_ssh
beeswax_queryhistory	jobsub_ooziejavaaction	oozie_start
beeswax_savedquery	jobsub_ooziemapreduceaction	oozie_streaming
beeswax_session	jobsub_ooziestreamingaction	oozie_subworkflow
defaultconfiguration_groups	oozie_bundle	oozie_workflow
desktop defaultconfiauration	oozie_bundledcoordinator	oia document

4. 启动 Hue、Web UI 访问

```
cd /export/servers/hue-3.9.0-cdh5.14.0/  
build/env/bin/supervisor
```

页面访问路径:

<http://node-1:8888>

第一次访问的时候，**需要设置超级管理员用户和密码。记住它。**



Query. Explore. Repeat.

Since this is your first time logging in, pick any username and password. Be sure to remember these, as **they will become your Hue superuser credentials.**

若想关闭 Hue ,直接在窗口 ctrl+c 即可。



四、 Hue 与软件的集成

1. Hue 集成 HDFS

注意修改完 HDFS 相关配置后，需要把配置 scp 给集群中每台机器，重启 hdfs 集群。

1.1. 修改 core-site.xml 配置

```
<!--允许通过 https 方式访问 hdfs 的主机名 -->
<property>
<name>hadoop.proxyuser.root.hosts</name>
<value>*</value>
</property>
<!--允许通过 https 方式访问 hdfs 的用户组 -->
<property>
<name>hadoop.proxyuser.root.groups</name>
<value>*</value>
</property>
```

1.2. 修改 hdfs-site.xml 配置

```
<property>
  <name>dfs.webhdfs.enabled</name>
  <value>true</value>
</property>
```

1.3. 修改 hue.ini

```
cd /export/servers/hue-3.9.0-cdh5.14.0/desktop/conf
```

```
vim hue.ini
```


```
[[hdfs_clusters]]
  [[[default]]]
fs_defaultfs=hdfs://node-1:9000
webhdfs_url=http://node-1:50070/webhdfs/v1
hadoop_hdfs_home= /export/servers/hadoop-2.7.5
hadoop_bin=/export/servers/hadoop-2.7.5/bin
hadoop_conf_dir=/export/servers/hadoop-2.7.5/etc/hadoop
```

1.4. 重启 HDFS、Hue

```
start-dfs.sh
```

```
cd /export/servers/hue-3.9.0-cdh5.14.0/
```

```
build/env/bin/supervisor
```

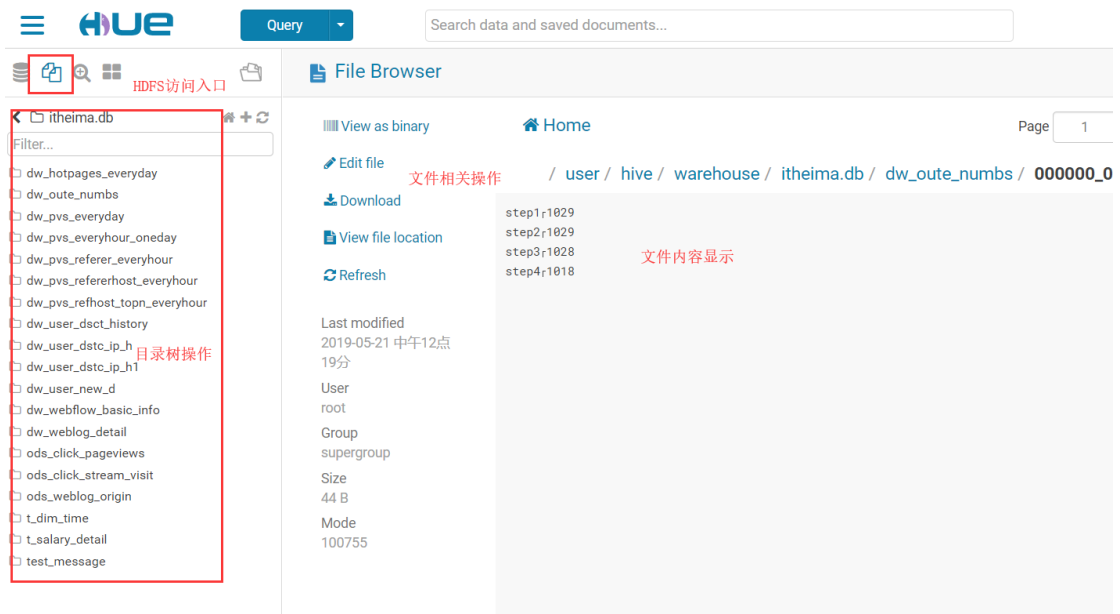

2. Hue 集成 YARN

2.1. 修改 hue.ini

```
[[yarn_clusters]]
  [[[default]]]
    resourcemanager_host=node-1
    resourcemanager_port=8032
    submit_to=True
    resourcemanager_api_url=http://node-1:8088
    history_server_api_url=http://node-1:19888
```


2.2. 开启 yarn 日志聚集服务

MapReduce 是在各个机器上运行的，在运行过程中产生的日志存在于各个机器上，为了能够统一查看各个机器的运行日志，将日志集中存放在 HDFS 上，这个过程就是日志聚集。

```
<property> ##是否启用日志聚集功能。
  <name>yarn.log-aggregation-enable</name>
  <value>>true</value>
</property>
<property> ##设置日志保留时间，单位是秒。
  <name>yarn.log-aggregation.retain-seconds</name>
  <value>106800</value>
</property>
```

2.3. 重启 Yarn、Hue

build/env/bin/supervisor

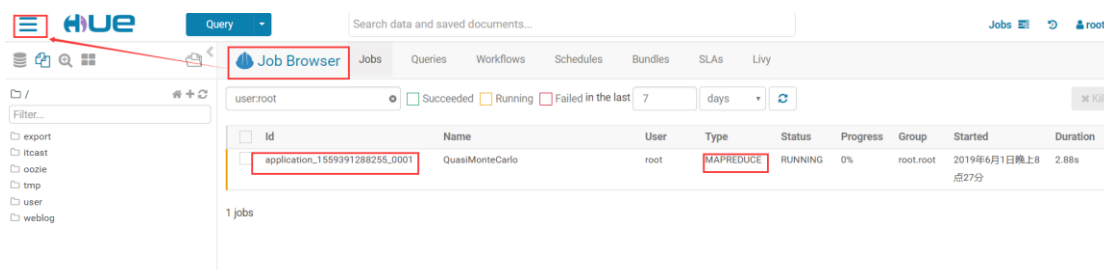



3. Hue 集成 Hive

如果需要配置 hue 与 hive 的集成，我们需要启动 hive 的 **metastore 服务** 以及 **hiveserver2 服务**（impala 需要 hive 的 metastore 服务，hue 需要 hive 的 hiveserver2 服务）。

3.1. 修改 Hue.ini

```
[beeswax]
hive_server_host=node-1
hive_server_port=10000
hive_conf_dir=/export/servers/hive/conf
server_conn_timeout=120
auth_username=root
auth_password=123456

[metastore]
#允许使用 hive 创建数据库表等操作
enable_new_create_table=true
```

3.2. 启动 Hive 服务、重启 hue

去 node-1 机器上启动 hive 的 metastore 以及 hiveserver2 服务

```
cd /export/servers/hive
```

```
nohup bin/hive --service metastore &
```

```
nohup bin/hive --service hiveserver2 &
```

重新启动 hue。

```
cd /export/servers/hue-3.9.0-cdh5.14.0/
```

```
build/env/bin/supervisor
```



Table Br

Sources

Hive

Impala

MySQL

SQLite

PostgreSQL

Oracle

Solr SQL

Databa

No descripti

Overview

dw_hotpa

1 20181101

2 20181101

< itheima

Tables (19) +

Filter...

dw_hotpages_everyday

dw_oute_nums

dw_pvs_everyday

dw_pvs_everyhour_oneday

dw_pvs_referer_everyhour

dw_pvs_refererhost_everyhour

dw_pvs_refhost_topn_everyhour

dw_user_dstc_history

dw_user_dstc_ip_h

dw_user_dstc_ip_h1

dw_user_new_d

dw_webflow_basic_info

dw_weblog_detail

ods_click_pageviews

ods_click_stream_visit

ods_weblog_origin

Databases > itheima > dw_hotpages_everyday

No description available

Overview Columns (3) Sample Details

	dw_hotpages_everyday.day	dw_hotpages_everyday.url
1	20181101	/
2	20181101	/wp-includes/js/jquery/jquery-migrate.min.js?ver=1.2.1
3	20181101	/wp-includes/js/jquery/jquery.js?ver=1.10.2
4	20181101	/js/baidu.js
5	20181101	/js/google.js
6	20181101	/wp-admin/admin-ajax.php
7	20181101	/wp-content/themes/silesia/js/jquery.cycle.all.min.js
8	20181101	/wp-content/themes/silesia/functions/js/shortcode.js

4. Hue 集成 Mysql

4.1. 修改 hue.ini


需要把 mysql 的注释给去掉。大概位于 1546 行

```
[[[mysql]]]
    nice_name="My SQL DB"
    engine=mysql
    host=node-1
    port=3306
    user=root
    password=hadoop
```

4.2. 重启 hue

```
cd /export/servers/hue-3.9.0-cdh5.14.0/
```

```
build/env/bin/supervisor
```

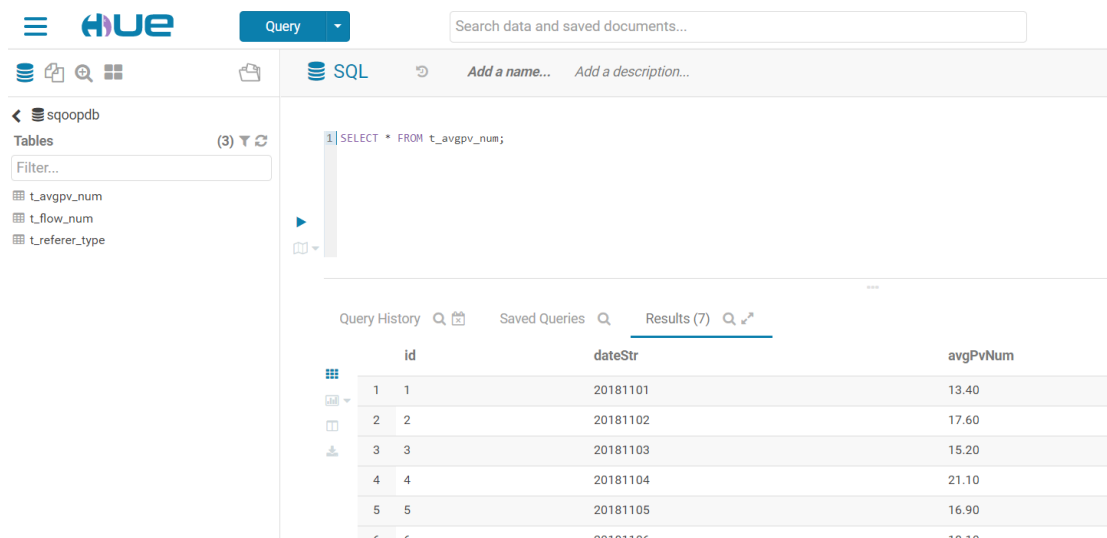

The screenshot shows the Hue web interface. On the left, there's a sidebar with a menu icon, the Hue logo, and a search bar. Below the search bar, there's a section for 'sqoopdb' with a list of tables: 't_avgpv_num', 't_flow_num', and 't_referer_type'. The main area displays a SQL query: 'SELECT * FROM t_avgpv_num;'. Below the query, there's a 'Query History' section with a table of results. The table has columns 'id', 'dateStr', and 'avgPvNum'. The results are as follows:

id	dateStr	avgPvNum
1	20181101	13.40
2	20181102	17.60
3	20181103	15.20
4	20181104	21.10
5	20181105	16.90
6	20181106	18.10



5. Hue 集成 Oozie

5.1. 修改 hue 配置文件 hue.ini

```
[liboozie]

# The URL where the Oozie service runs on. This is required in order for
# users to submit jobs. Empty value disables the config check.
oozie_url=http://node-1:11000/oozie

# Requires FQDN in oozie_url if enabled
## security_enabled=false

# Location on HDFS where the workflows/coordinator are deployed when submitted.
remote_deployment_dir=/user/root/oozie_works
```

```
[oozie]

# Location on local FS where the examples are stored.
# local_data_dir=/export/servers/oozie-4.1.0-cdh5.14.0/examples/apps

# Location on local FS where the data for the examples is stored.
# sample_data_dir=/export/servers/oozie-4.1.0-cdh5.14.0/examples/input-data

# Location on HDFS where the oozie examples and workflows are stored.
# Parameters are $TIME and $USER, e.g. /user/$USER/hue/workspaces/workflow-$TIME
# remote_data_dir=/user/root/oozie_works/examples/apps

# Maximum of Oozie workflows or coordinators to retrieve in one API call.
oozie_jobs_count=100

# Use Cron format for defining the frequency of a Coordinator instead of the old
frequency number/unit.
enable_cron_scheduling=true

# Flag to enable the saved Editor queries to be dragged and dropped into a workflow.
enable_document_action=true

# Flag to enable Oozie backend filtering instead of doing it at the page level in
```



Javascript. Requires Oozie 4.3+.

```
enable_oozie_backend_filtering=true
```

Flag to enable the Impala action.

```
enable_impala_action=true
```

[filebrowser]

Location on local filesystem where the uploaded archives are temporary stored.

```
archive_upload_tmpdir=/tmp
```

Show Download Button for HDFS file browser.

```
show_download_button=true
```

Show Upload Button for HDFS file browser.

```
show_upload_button=true
```

Flag to enable the extraction of a uploaded archive in HDFS.

```
enable_extract_uploaded_archive=true
```

5.2. 启动 hue、oozie

启动 hue 进程

```
cd /export/servers/hue-3.9.0-cdh5.14.0
```

```
build/env/bin/supervisor
```

启动 oozie 进程

```
cd /export/servers/oozie-4.1.0-cdh5.14.0
```


```
bin/oozied.sh start
```

页面访问 hue

<http://node-1:8888/>


5.3. 使用 hue 配置 oozie 调度

hue 提供了页面鼠标拖拽的方式配置 oozie 调度

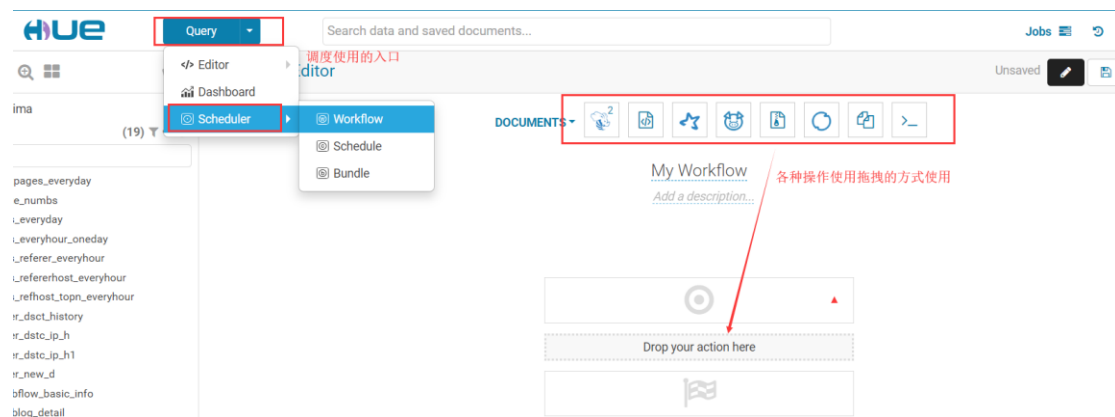

5.4. 利用 hue 调度 shell 脚本

在 HDFS 上创建一个 shell 脚本程序文件。


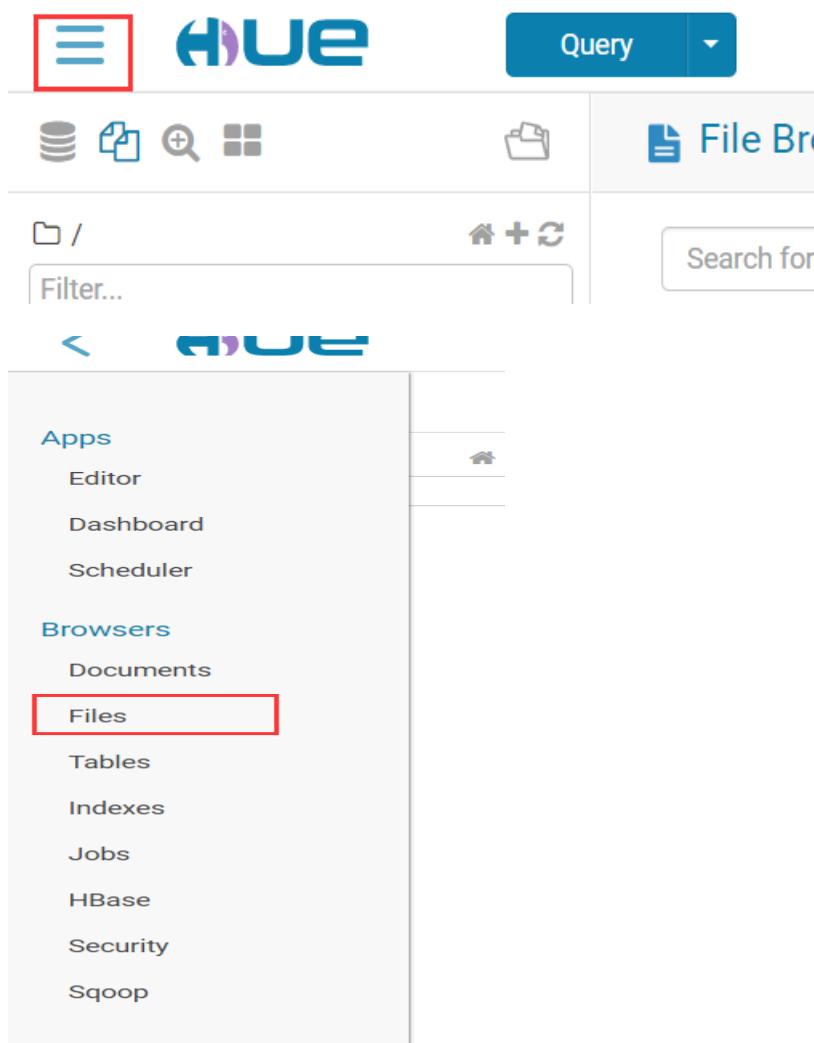




/ user / root / oozie_works / hue_oozie / shell / hellohue.sh

```
#!/bin/bash  
date >> /root/hellohue.txt
```

打开工作流调度页面。

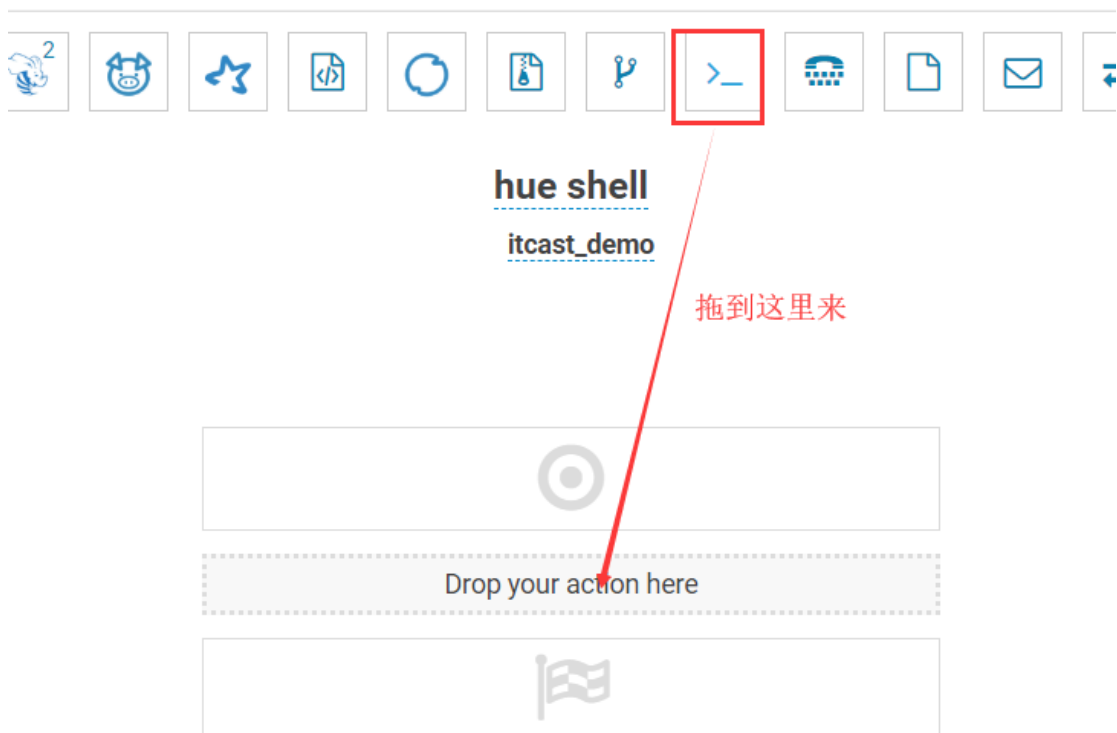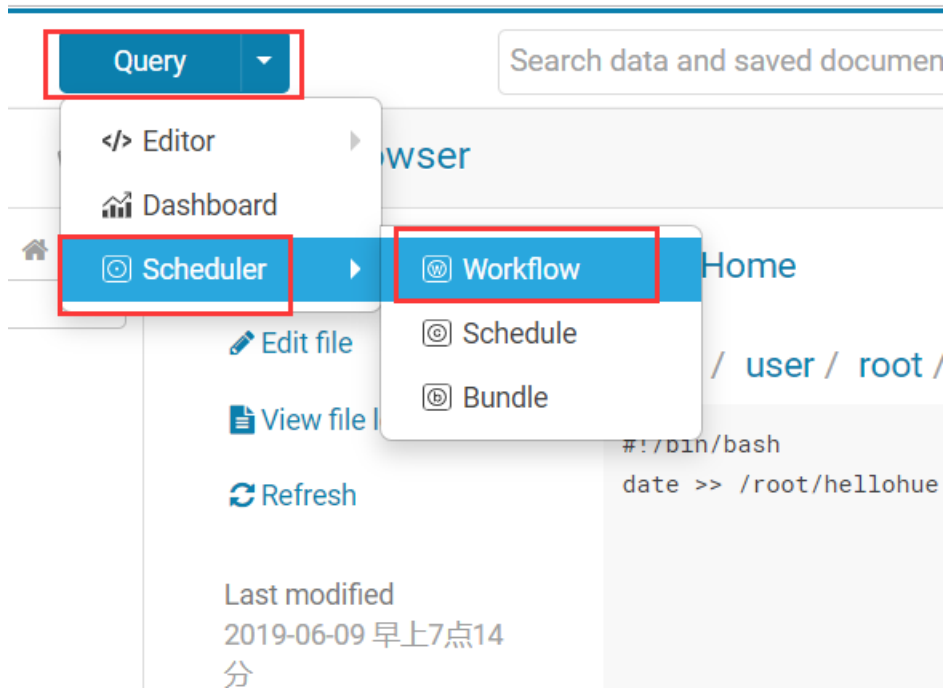




The screenshot shows the Hue Shell interface. At the top, a text box contains the path `/user/root/oozie_works/hue_oozi`, highlighted with a red box. Below it, the 'FILES' section shows a file named `/user/root/ooz` with a red box around it. A red arrow points to the file, with the text '选择shell脚本' (Select shell script). Below the files section, there is a toolbar with icons for 'Unsaved', 'Edit', 'Save', and 'More'. The 'Save' icon is highlighted with a red box, and a red arrow points to it with the text '点击保存' (Click save). Below the toolbar, there is another toolbar with icons for 'Run', 'Copy', 'Paste', and 'More'. The 'Run' icon is highlighted with a red box, and a red arrow points to it with the text '保存之后点击提交执行' (Click submit and execute after saving). The bottom part of the screenshot shows the 'Job Browser' tab with 'Workflows' selected. The workflow details for 'hue shell' are shown, including the ID '0000003-190609145412', the status 'SUCCEEDED', the user 'root', and the progress '100%'. The workflow graph shows a single task 'Shell' with the command 'hellohue.sh'.



5.5. 利用 hue 调度 hive 脚本

在 HDFS 上创建一个 hive sql 脚本程序文件。



打开 workflow 页面，拖拽 hive2 图标到指定位置。

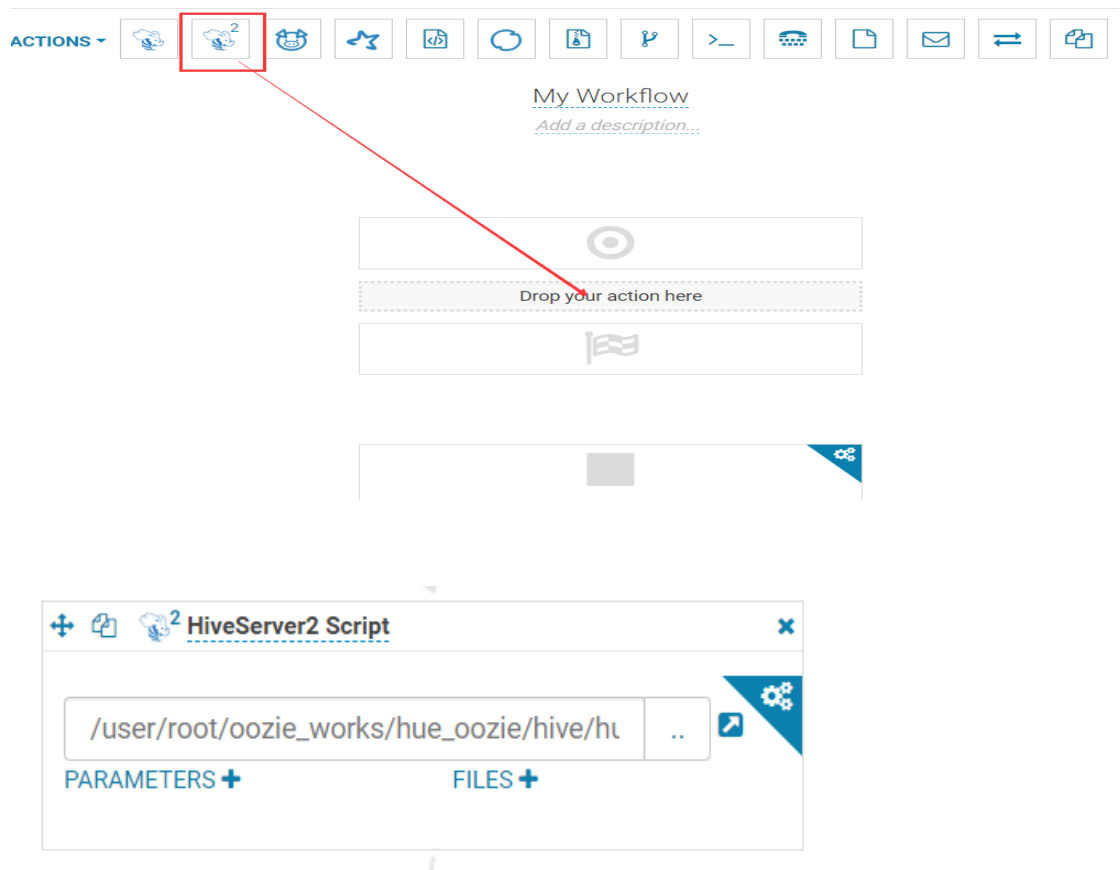

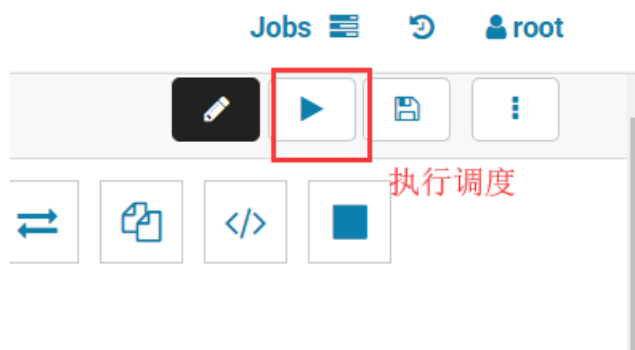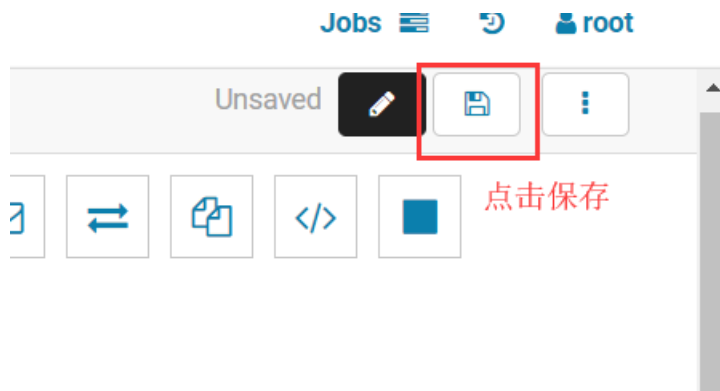

Job Browser

ser:root

☐ Succeeded ☐ Running ☐ Failed in the last 7 days

Id	Name	User	Type	Status	Progress	Group	Started	Duration
application_1559391288255_0003	oozie:launcher:T=hive2:W=My Workflow:A=hive2-b22e:ID=0000001- 190602124006148-oozie-root-W	root	MAPREDUCE	SUCCEEDED	0%	root.root	2019年6月2日下午12点58分	5.31s
application_1559391288255_0002	oozie:launcher:T=hive2:W=My Workflow:A=hive2-58a1:ID=0000000- 190602124006148-oozie-root-W	root	MAPREDUCE	SUCCEEDED	100%	root.root	2019年6月2日下午12点52分	19.83s
application_1559391288255_0001	QuasiMonteCarlo	root	MAPREDUCE	SUCCEEDED	100%	root.root	2019年6月1日晚上8点27分	16.59s

5.6. 利用 hue 调度 MapReduce 程序

利用 hue 提交 MapReduce 程序

jar必须位于hdfs路径

Jar path: /user/root/oozie_works/map-reduce/lib/hadoop-mapreduce-examples-2.7.5.jar

Properties: Hadoop Properties

mapred.mapper.new-api=true	..	+	-
mapred.reducer.new-api=true	..	+	-
mapreduce.job.output.key.class=org.apache.hadoop.mapreduce.lib.output.TextOutputFormat	..	+	-
mapreduce.job.output.value.class=org.apache.hadoop.mapreduce.lib.output.TextOutputFormat	..	+	-
mapred.input.dir=/oozie/input	..	+	-
mapred.output.dir=/oozie/output3	..	+	-
mapreduce.job.map.class=org.apache.hadoop.mapreduce.lib.map.FileInputFormat	..	+	-
mapreduce.job.reduce.class=org.apache.hadoop.mapreduce.lib.reduce.FileOutputFormat	..	+	-

Mapreduce运行时相关参数

Id	Name	User	Type	Status	Progress
application_1559391288255_0007	oozie:launcher:T=map-reduce:W=My MapReduce:A=mapreduce- 3e81:ID=0000005-190602124006148- oozie-root-W	root	MAPREDUCE	SUCCEEDED	100%

output3

Filter...

_SUCCESS

part-r-00000

View as binary

Edit file

Download

View file location

Refresh


Home

/ oozie / output3 / part-r-00000

hadoop	3
hello	2
hive	1
spark	1

5.7. 利用 Hue 配置定时调度任务

在 hue 中，也可以针对 workflow 配置定时调度任务，具体操作如下：

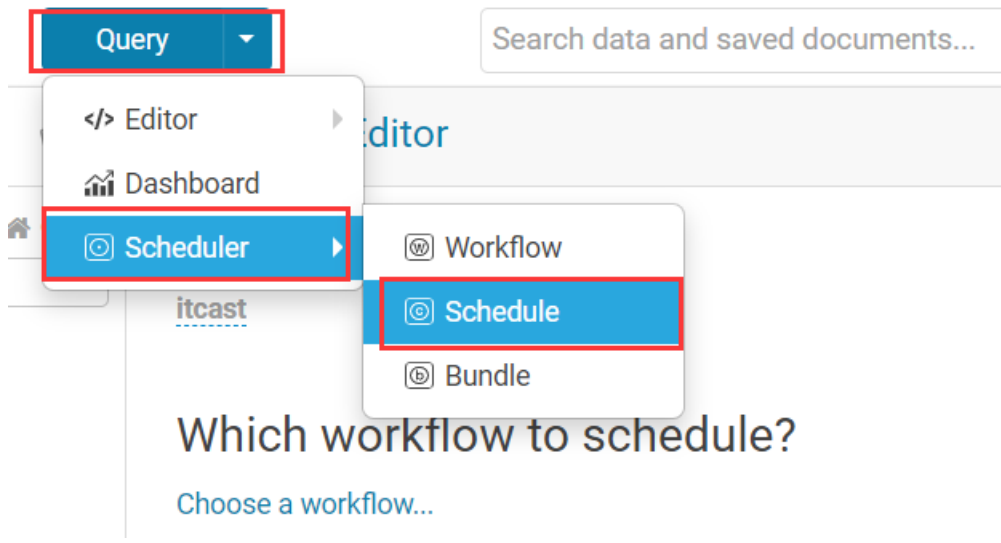


Hue Scheduler

itcast

Which workflow to schedule?

Choose a workflow...

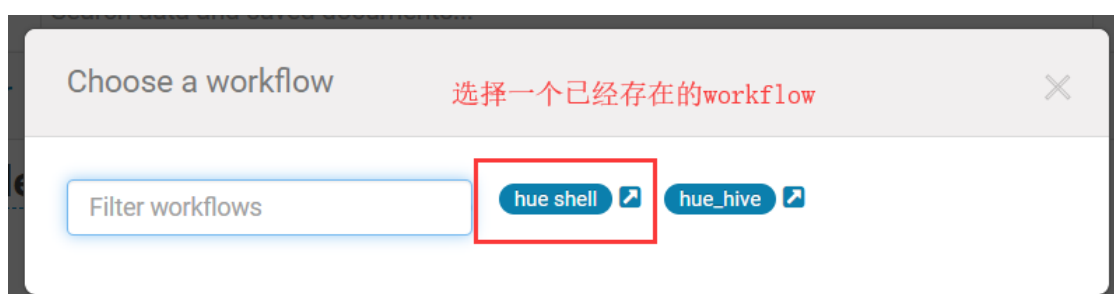

How often?

Every at :

☐ Hide


☐ Advanced syntax

Timezone:

From

To


一定要注意时区的问题，否则调度就出错了。保存之后就可以提交定时任务。

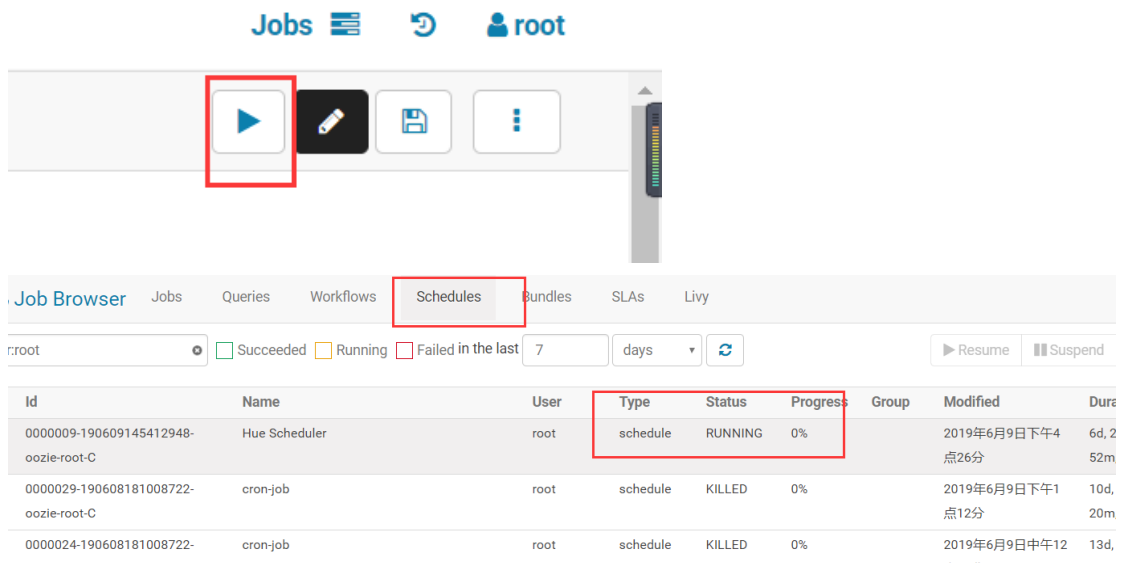

The screenshot shows the Hue interface with the 'Jobs' section selected. The 'Schedules' tab is active, and a table of scheduled jobs is displayed. The first job, 'Hue Scheduler', is highlighted with a red box. The table has columns: Id, Name, User, Type, Status, Progress, Group, Modified, and Duration. The 'Hue Scheduler' job is in a 'RUNNING' state with 0% progress.

Id	Name	User	Type	Status	Progress	Group	Modified	Duration
0000009-190609145412948-oozie-root-C	Hue Scheduler	root	schedule	RUNNING	0%		2019年6月9日下午4点26分	6d, 25m
0000029-190608181008722-oozie-root-C	cron-job	root	schedule	KILLED	0%		2019年6月9日下午1点12分	10d, 20m
0000024-190608181008722-oozie-root-C	cron-job	root	schedule	KILLED	0%		2019年6月9日中午12点	13d, 20m

点击进去，可以看到定时任务的详细信息。

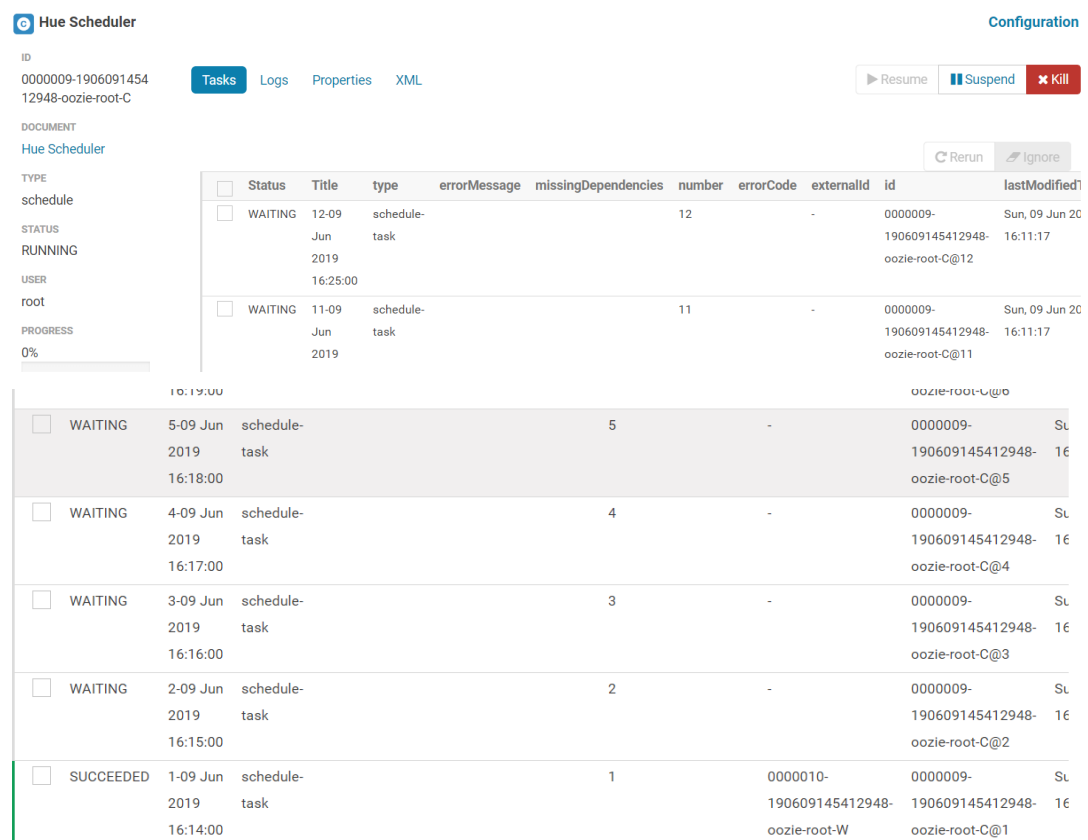

The screenshot shows the Hue Scheduler configuration page. The 'Tasks' tab is selected, and a table of tasks is displayed. The first task, 'Hue Scheduler', is highlighted with a red box. The table has columns: Status, Title, type, errorMessage, missingDependencies, number, errorCode, externalId, id, and lastModifiedTime. The 'Hue Scheduler' task is in a 'WAITING' state.

Status	Title	type	errorMessage	missingDependencies	number	errorCode	externalId	id	lastModifiedTime
WAITING	12-09 Jun 2019 16:25:00	schedule-task			12			0000009-190609145412948-oozie-root-C@12	Sun, 09 Jun 2019 16:11:17
WAITING	11-09 Jun 2019 16:25:00	schedule-task			11			0000009-190609145412948-oozie-root-C@11	Sun, 09 Jun 2019 16:11:17
WAITING	5-09 Jun 2019 16:18:00	schedule-task			5			0000009-190609145412948-oozie-root-C@5	Sun, 09 Jun 2019 16:11:17
WAITING	4-09 Jun 2019 16:17:00	schedule-task			4			0000009-190609145412948-oozie-root-C@4	Sun, 09 Jun 2019 16:11:17
WAITING	3-09 Jun 2019 16:16:00	schedule-task			3			0000009-190609145412948-oozie-root-C@3	Sun, 09 Jun 2019 16:11:17
WAITING	2-09 Jun 2019 16:15:00	schedule-task			2			0000009-190609145412948-oozie-root-C@2	Sun, 09 Jun 2019 16:11:17
SUCCEEDED	1-09 Jun 2019 16:14:00	schedule-task			1	0000010-		0000009-190609145412948-oozie-root-W	Sun, 09 Jun 2019 16:11:17



6. Hue 集成 Hbase

6.1. 修改 hbase 配置

在 `hbase-site.xml` 配置文件中的添加如下内容，开启 hbase thrift 服务。

修改完成之后 scp 给其他机器上 hbase 安装包。

```
<property>
  <name>hbase.thrift.support.proxyuser</name>
  <value>true</value>
</property>
<property>
  <name>hbase.regionserver.thrift.http</name>
  <value>true</value>
</property>
```

6.2. 修改 hadoop 配置

在 `core-site.xml` 中确保 HBase 被授权代理，添加下面内容。

把修改之后的配置文件 scp 给其他机器和 hbase 安装包 conf 目录下。

```
<property>
<name>hadoop.proxyuser.hbase.hosts</name>
<value>*</value>
</property>
<property>
<name>hadoop.proxyuser.hbase.groups</name>
<value>*</value>
</property>
```



6.3. 修改 Hue 配置

```
[hbase]
# Comma-separated list of HBase Thrift servers for clusters in the format of
'(name|host:port)'.
# Use full hostname with security.
# If using Kerberos we assume GSSAPI SASL, not PLAIN.
hbase_clusters=(Cluster|node-1:9090)

# HBase configuration directory, where hbase-site.xml is located.
hbase_conf_dir=/export/servers/hbase-1.2.1/conf

# Hard limit of rows or columns per row fetched before truncating.
## truncate_limit = 500

# 'buffered' is the default of the HBase Thrift Server and supports security.
# 'framed' can be used to chunk up responses,
# which is useful when used in conjunction with the nonblocking server in Thrift.
thrift_transport=buffered
```

6.4. 启动 hbase(包括 thrift 服务)、hue

需要启动 hdfs 和 hbase，然后再启动 thrift。

```
start-dfs.sh
```



```
start-hbase.sh
```

```
hbase-daemon.sh start thrift
```

重新启动 hue。

```
cd /export/servers/hue-3.9.0-cdh5.14.0/
```

```
build/env/bin/supervisor
```

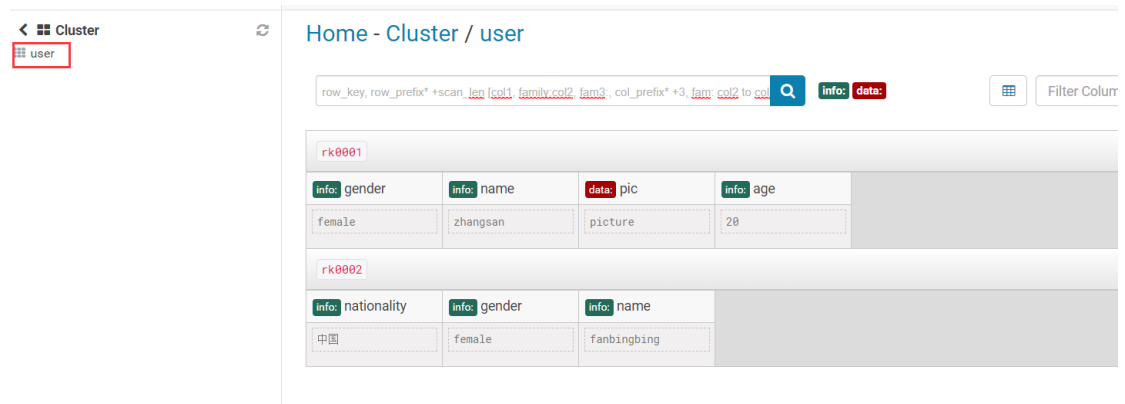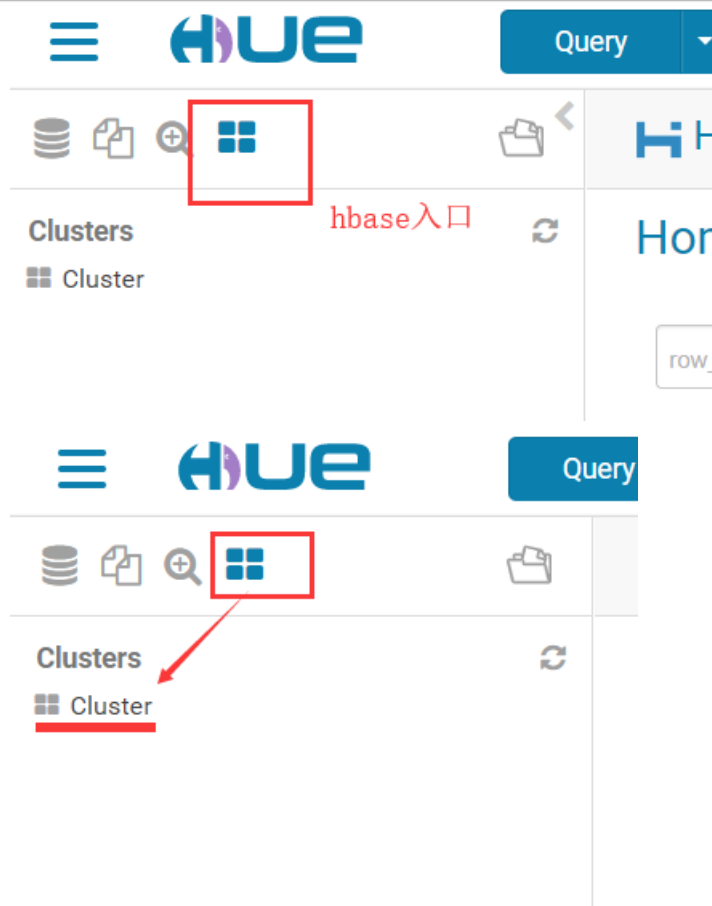

7. Hue 集成 Impala

7.1. 修改 Hue.ini

```
[impala]
server_host=node-3
server_port=21050
impala_conf_dir=/etc/impala/conf
```

7.2. 重启 Hue

```
cd /export/servers/hue-3.9.0-cdh5.14.0/
build/env/bin/supervisor
```

