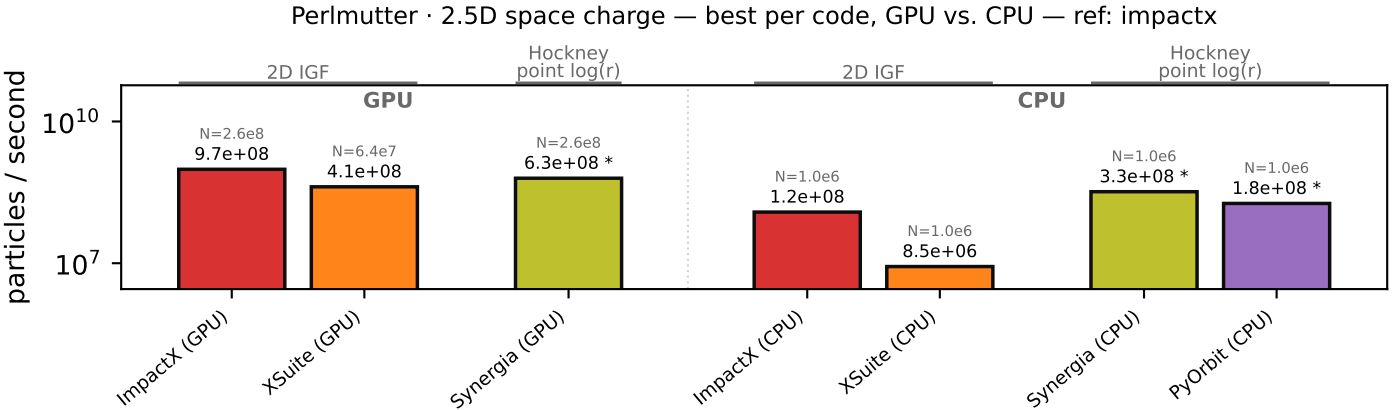

* *not a 2D IGF: cheaper point-sampled kernel (see the method groups)*

kernel over a mesh cell: IGF = integrated in 2D; point log(r) = sampled at cell centres

each bar = the fastest config for that code on that device (any precision / fast-math); N = the particle count that bar was measured at (top of each device's sweep)

hardware: CPU: AMD EPYC 7763 (64 cores) GPU: NVIDIA A100-SXM4-40GB

versions: impactx 26.08 · xsuite 0.53.4 · synergia v2024.04-209-g795b99f39 · pyorbit 96c8def