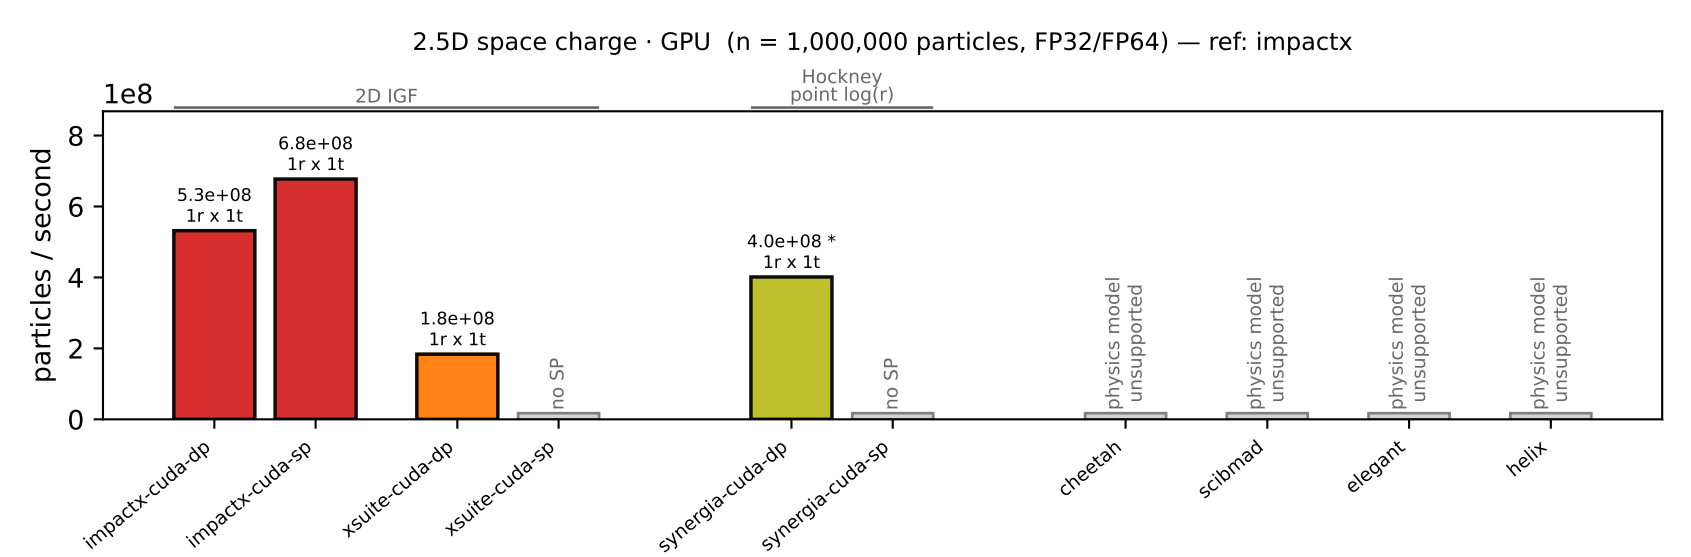

lighter bar behind + lighter value above = fast-math (relaxed FP), shown when >=5% faster than the IEEE bar

** not a 2D IGF: cheaper point-sampled kernel (see the method groups)*

kernel over a mesh cell: IGF = integrated in 2D; point log(r) = sampled at cell centres

versions: impactx 26.08 · xsuite 0.53.4 · synergia v2024.04-209-g795b99f39 · cheetah 0.8.2 · scibmad 0.4.1 · elegant elegant-2026.4.0 · helix v1.10.1