


Java Programming Tutorial

OOP Exercises

1. Exercises on Classes and Instances

TABLE OF CONTENTS (HIDE)

1. Exercises on Classes and Instances
 - 1.1 Exercise: The Circle Class
 - 1.2 Exercise: The Author and Book Class
 - 1.3 Exercise: The MyPoint Class
 - 1.4 Exercise: The MyCircle Class
 - 1.5 Exercise: The MyTriangle Class
 - 1.6 Exercise: The MyComplex class
 - 1.7 Exercise: The MyPolynomial Class
 - 1.8 Exercise: Using JDK's BigInteger
 - 1.9 Exercise: The MyTime Class
 - 1.10 Exercise: The MyDate Class
 - 1.11 Exercise: Book and Author Class
 - 1.12 Exercise: Book and Author Class
 - 1.13 Exercise: Bouncing Balls - Ball Class
 - 1.14 Exercise: Ball and Player
2. Exercises on Inheritance
 - 2.1 Exercise: The Circle and Cylinder
 - 2.2 Exercise: Superclass Shape and subclasses
3. Exercises on Composition vs Inheritance
 - 3.1 Exercise: The Point and Line
 - 3.2 Exercise: Circle and Cylinder
4. Exercises on Polymorphism, Abstraction
 - 4.1 Exercise: Abstract Superclass Shape
 - 4.2 Exercise: Polymorphism
 - 4.3 Exercise: Interface Movable and its Implementations
 - 4.4 Exercise: Interfaces Geometric and its Implementations
5. More Exercises on OOP
 - 5.1 Exercise: The Discount System
 - 5.2 Exercise: Polyline of Points
6. Exercises on Data Structure and Algorithms
 - 6.1 Exercise: MyIntStack



1.1 Exercise: The Circle Class

A class called **circle** is designed as shown in the following class diagram. It contains:

- Two private instance variables: radius (of type double) and color (of type String), with default value of 1.0 and "red", respectively.
- Two *overloaded* constructors;

- Two public methods: `getRadius()` and `getArea()`.

The source codes for Circle is as follows:

```
public class Circle {           // save as "Circle.java"
    // private instance variable, not accessible from outside this class
    private double radius;
    private String color;

    // 1st constructor, which sets both radius and color to default
    public Circle() {
        radius = 1.0;
        color = "red";
    }

    // 2nd constructor with given radius, but color default
    public Circle(double r) {
        radius = r;
        color = "red";
    }

    // A public method for retrieving the radius
    public double getRadius() {
        return radius;
    }

    // A public method for computing the area of circle
    public double getArea() {
        return radius*radius*Math.PI;
    }
}
```

Circle
-radius:double = 1.0 -color:String = "red"
+Circle() +Circle(radius:double) +getRadius():double +getArea():double

Compile "Circle.java". Can you run the Circle class? Why? This Circle class does not have a `main()` method. Hence, it cannot be run directly. This Circle class is a "building block" and is meant to be used in another program.

Let us write a *test program* called `TestCircle` which uses the Circle class, as follows:

```
public class TestCircle {       // save as "TestCircle.java"
    public static void main(String[] args) {
        // Declare and allocate an instance of class Circle called c1
        // with default radius and color
        Circle c1 = new Circle();
        // Use the dot operator to invoke methods of instance c1.
        System.out.println("The circle has radius of "
            + c1.getRadius() + " and area of " + c1.getArea());

        // Declare and allocate an instance of class circle called c2
        // with the given radius and default color
        Circle c2 = new Circle(2.0);
        // Use the dot operator to invoke methods of instance c2.
        System.out.println("The circle has radius of "
            + c2.getRadius() + " and area of " + c2.getArea());
    }
}
```

Now, run the `TestCircle` and study the results.

TRY:

- Constructor:** Modify the class Circle to include a third constructor for constructing a Circle instance

with the given radius and color.

```
// Construtor to construct a new instance of Circle with the given radius and color
public Circle (double r, String c) {.....}
```

Modify the test program TestCircle to construct an instance of Circle using this constructor.

2. **Getter:** Add a getter for variable color for retrieving the color of a Circle instance.

```
// Getter for instance variable color
public String getColor() {.....}
```

Modify the test program to test this method.

3. **public vs. private:** In TestCircle, can you access the instance variable radius directly (e.g., `System.out.println(c1.radius)`); or assign a new value to radius (e.g., `c1.radius=5.0`)? Try it out and explain the error messages.
4. **Setter:** Is there a need to change the values of radius and color of a Circle instance after it is constructed? If so, add two public methods called *setters* for changing the radius and color of a Circle instance as follows:

```
// Setter for instance variable radius
public void setRadius(double r) {
    radius = r;
}

// Setter for instance variable color
public void setColor(String c) { ..... }
```

Modify the TestCircle to test these methods, e.g.,

```
Circle c3 = new Circle();    // construct an instance of Circle
c3.setRadius(5.0);          // change radius
c3.setColor(...);           // change color
```

5. **Keyword "this":** Instead of using variable names such as r (for radius) and c (for color) in the methods' arguments, it is better to use variable names radius (for radius) and color (for color) and use the special keyword "this" to resolve the conflict between instance variables and methods' arguments. For example,

```
// Instance variable
private double radius;

// Setter of radius
public void setRadius(double radius) {
    this.radius = radius;    // "this.radius" refers to the instance variable
                             // "radius" refers to the method's argument
}
```

Modify ALL the constructors and setters in the Circle class to use the keyword "this".

6. **Method toString():** Every well-designed Java class should contain a public method called `toString()` that returns a short description of the instance (in a return type of String). The `toString()` method can be called explicitly (via `instanceName.toString()`) just like any other method; or implicitly through `println()`. If an instance is passed to the `println(anInstance)` method, the `toString()` method of that instance will be invoked implicitly. For example, include the following `toString()` methods to the Circle class:

```
public String toString() {
    return "Circle: radius=" + radius + " color=" + color;
}
```

Try calling `toString()` method explicitly, just like any other method:

```
Circle c1 = new Circle(5.0);
System.out.println(c1.toString()); // explicit call
```

`toString()` is called implicitly when an instance is passed to `println()` method, for example,

```
Circle c2 = new Circle(1.2);
System.out.println(c2.toString()); // explicit call
System.out.println(c2);           // println() calls toString() implicitly, same as above
System.out.println("Operator '+' invokes toString() too: " + c2); // '+' invokes toString() too
```

1.2 Exercise: The Author and Book Classes

A class called `Author` is designed as shown in the class diagram. It contains:

- Three private instance variables: `name (String)`, `email (String)`, and `gender (char)` of either 'm' or 'f';
- One constructor to initialize the `name`, `email` and `gender` with the given values;

Author
-name:String -email:String -gender:char
+Author(name:String, email:String, gender:char) +getName():String +getEmail():String +setEmail(email:String):void +getGender():char +toString():String

```
public Author (String name, String email, char gender) {.....}
```

(There is no default constructor for `Author`, as there are no defaults for `name`, `email` and `gender`.)

- public getters/setters: `getName()`, `getEmail()`, `setEmail()`, and `getGender()`;
(There are no setters for `name` and `gender`, as these attributes cannot be changed.)
- A `toString()` method that returns "*author-name (gender) at email*", e.g., "Tan Ah Teck (m) at ahTeck@somewhere.com".

Write the `Author` class. Also write a *test program* called `TestAuthor` to test the constructor and public methods. Try changing the `email` of an author, e.g.,

```
Author anAuthor = new Author("Tan Ah Teck", "ahteck@somewhere.com", 'm');
System.out.println(anAuthor); // call toString()
anAuthor.setEmail("paul@nowhere.com")
System.out.println(anAuthor);
```


A class called `Book` is designed as shown in the class diagram. It contains:

- Four private instance variables: `name (String)`, `author (of the class Author you have just created, assume that each book has one and only one author)`, `price (double)`, and `qtyInStock (int)`;
- Two constructors:

```
public Book (String name, Author author, double price) {...}
```

```
public Book (String name, Author author, double price,
            int qtyInStock) {...}
```

- public methods
getName(),
getAuthor(),
getPrice(),
setPrice(),

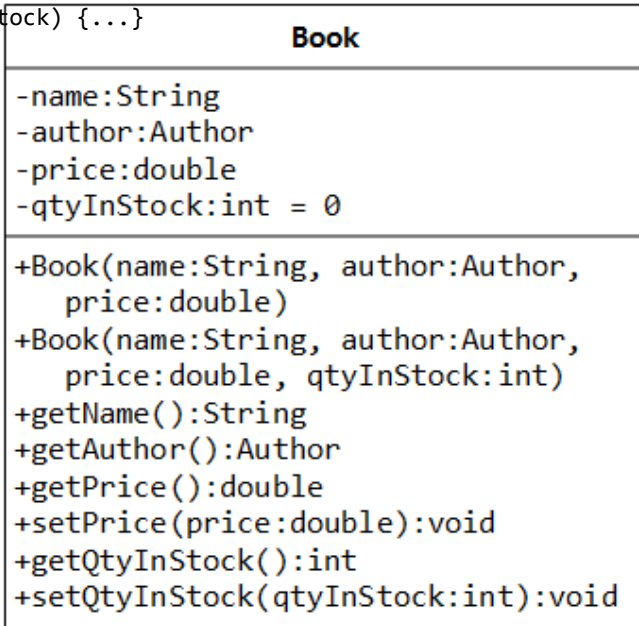

getQtyInStock(), setQtyInStock().

- toString() that returns *"book-name' by author-name (gender) at email"*.
(Take note that the Author's toString() method returns *"author-name (gender) at email"*.)

Write the class Book (which uses the Author class written earlier). Also write a test program called TestBook to test the constructor and public methods in the class Book. Take Note that you have to construct an instance of Author before you can construct an instance of Book. E.g.,

```
Author anAuthor = new Author(.....);
Book aBook = new Book("Java for dummy", anAuthor, 19.95, 1000);
// Use an anonymous instance of Author
Book anotherBook = new Book("more Java for dummy", new Author(.....), 29.95, 888);
```

Take note that both Book and Author classes have a variable called name. However, it can be differentiated via the referencing instance. For a Book instance says aBook, aBook.name refers to the name of the book; whereas for an Author's instance say auAuthor, anAuthor.name refers to the name of the author. There is no need (and not recommended) to call the variables bookName and authorName.

TRY:

- Printing the name and email of the author from a Book instance. (Hint: aBook.getAuthor().getName(), aBook.getAuthor().getEmail()).
- Introduce new methods called getAuthorName(), getAuthorEmail(), getAuthorGender() in the Book class to return the name, email and gender of the author of the book. For example,

```
public String getAuthorName() { ..... }
```

1.3 Exercise: The MyPoint Class

A class called MyPoint, which models a 2D point with x and y coordinates, is designed as shown in the class diagram. It contains:

- Two instance variables x (int) and y (int).
- A "no-argument" (or "no-arg") constructor that construct a point at (0, 0).

- A constructor that constructs a point with the given x and y coordinates.
- Getter and setter for the instance variables x and y.
- A method setXY() to set both x and y.
- A toString() method that returns a string description of the instance in the format "(x, y)".
- A method called distance(int x, int y) that returns the distance from *this* point to another point at the given (x, y) coordinates.
- An overloaded distance(MyPoint another) that returns the distance from *this* point to the given MyPoint instance another.

MyPoint
-x:int = 0 -y:int = 0
+MyPoint() +MyPoint(x:int, y:int) +getX():int +setX(x:int):void +getY():int +setY(y:int):void +setXY(x:int, y:int):void +toString():String +distance(x:int, y:int):double +distance(another:MyPoint):double

You are required to:

1. Write the code for the class MyPoint. Also write a test program (called TestMyPoint) to test all the methods defined in the class.

Hints:

```
// Overloading method distance()
public double distance(int x, int y) { // this version takes two ints as arguments
    int xDiff = this.x - x;
    int yDiff = .....
    return Math.sqrt(xDiff*xDiff + yDiff*yDiff);
}

public double distance(MyPoint another) { // this version takes a MyPoint instance as argument
    int xDiff = this.x - another.x;
    .....
}

// Test program
MyPoint p1 = new MyPoint(3, 0);
MyPoint p2 = new MyPoint(0, 4);
.....
// Testing the overloaded method distance()
System.out.println(p1.distance(p2)); // which version?
System.out.println(p1.distance(5, 6)); // which version?
.....
```

2. Write a program that allocates 10 points in an array of MyPoint, and initializes to (1, 1), (2, 2), ... (10, 10).

Hints: You need to allocate the array, as well as each of the ten MyPoint instances.

```
MyPoint[] points = new MyPoint[10]; // Declare and allocate an array of MyPoint
for (.....) {
    points[i] = new MyPoint(...); // Allocate each of MyPoint instances
}
```

Notes: Point is such a common entity that JDK certainly provided for in all flavors.

1.4 Exercise: The MyCircle Class

A class called MyCircle, which models a circle with a center (x, y) and a radius, is designed as shown in the class

diagram. The `MyCircle` class uses an instance of `MyPoint` class (created in the previous exercise) as its center.

The class contains:

- Two private instance variables: `center` (an instance of `MyPoint`) and `radius` (int).
- A constructor that constructs a circle with the given center's (x, y) and radius.
- An overloaded constructor that constructs a `MyCircle` given a `MyPoint` instance as center, and radius.
- Various getters and setters.
- A `toString()` method that returns a string description of this instance in the format "Circle @ (x, y) radius=r".
- A `getArea()` method that returns the area of the circle in double.

MyCircle
-center:MyPoint -radius:int = 1
+MyCircle(x:int, y:int, radius:int) +MyCircle(center:MyPoint, radius:int) +getRadius():int +setRadius(radius:int):void +getCenter():MyPoint +setCenter(center:MyPoint):void +getCenterX():int +getCenterY():int +setCenterXY(x:int, y:int):void +toString():String +getArea():double

Write the `MyCircle` class. Also write a test program (called `TestMyCircle`) to test all the methods defined in the class.

1.5 Exercise: The `MyTriangle` Class

A class called `MyTriangle`, which models a triangle with 3 vertices, is designed as follows. The `MyTriangle` class uses three `MyPoint` instances (created in the earlier exercise) as the three vertices.

The class contains:

- Three private instance variables `v1`, `v2`, `v3` (instances of `MyPoint`), for the three vertices.
- A constructor that constructs a `MyTriangle` with three points `v1=(x1, y1)`, `v2=(x2, y2)`, `v3=(x3, y3)`.
- An overloaded constructor that constructs a `MyTriangle` given three instances of `MyPoint`.
- A `toString()` method that returns a string description of the instance in the format "Triangle @ (x1, y1), (x2, y2), (x3, y3)".
- A `getPerimeter()` method that returns the length of the perimeter in double. You should use the `distance()` method of `MyPoint` to compute the perimeter.
- A method `printType()`, which prints "equilateral" if all the three sides are equal, "isosceles" if any two of the three sides are equal, or "scalene" if the three sides are different.

MyTriangle
-v1:MyPoint -v2:MyPoint -v3:MyPoint
+MyTriangle(x1:int,y1:int,x2:int,y2:int, x3:int,y3:int) +MyTriangle(v1:MyPoint,v2:MyPoint,v3:MyPoint) +toString():String +getPerimeter():double

Write the `MyTriangle` class. Also write a test program (called `TestMyTriangle`) to test all the methods defined in the class.

1.6 Exercise: The MyComplex class

A class called `MyComplex`, which models complex numbers $x+yi$, is designed as shown in the class diagram. It contains:

- Two instance variable named `real(double)` and `imag(double)` which stores the real and imaginary parts of the complex number respectively.
- A constructor that creates a `MyComplex` instance with the given real and imaginary values.
- Getters and setters for instance variables `real` and `imag`.
- A method `setValue()` to set the value of the complex number.
- A `toString()` that returns `"(x + yi)"` where `x` and `y` are the real and imaginary parts respectively.
- Methods `isReal()` and `isImaginary()` that returns true if this complex number is real or imaginary, respectively. Hint:

```
return (imag == 0); // isReal()
```

- A method `equals(double real, double imag)` that returns true if *this* complex number is equal to the given complex number of (real, imag).
- An overloaded `equals(MyComplex another)` that returns true if *this* complex number is equal to the given `MyComplex` instance `another`.
- A method `magnitude()` that returns the magnitude of this complex number.

```
magnitude(x+yi) = Math.sqrt(x2 + y2)
```


- Methods `argumentInRadians()` and `argumentInDegrees()` that returns the argument of this complex number in radians (in double) and degrees (in int) respectively.

```
arg(x+yi) = Math.atan2(y, x) (in radians)
```

Note: The `Math` library has two arc-tangent methods, `Math.atan(double)` and `Math.atan2(double, double)`. We commonly use the `Math.atan2(y, x)` instead of `Math.atan(y/x)` to avoid division by zero. Read the documentation of `Math` class in package `java.lang`.

- A method `conjugate()` that returns a new `MyComplex` instance containing the complex conjugate of this instance.

```
conjugate(x+yi) = x - yi
```

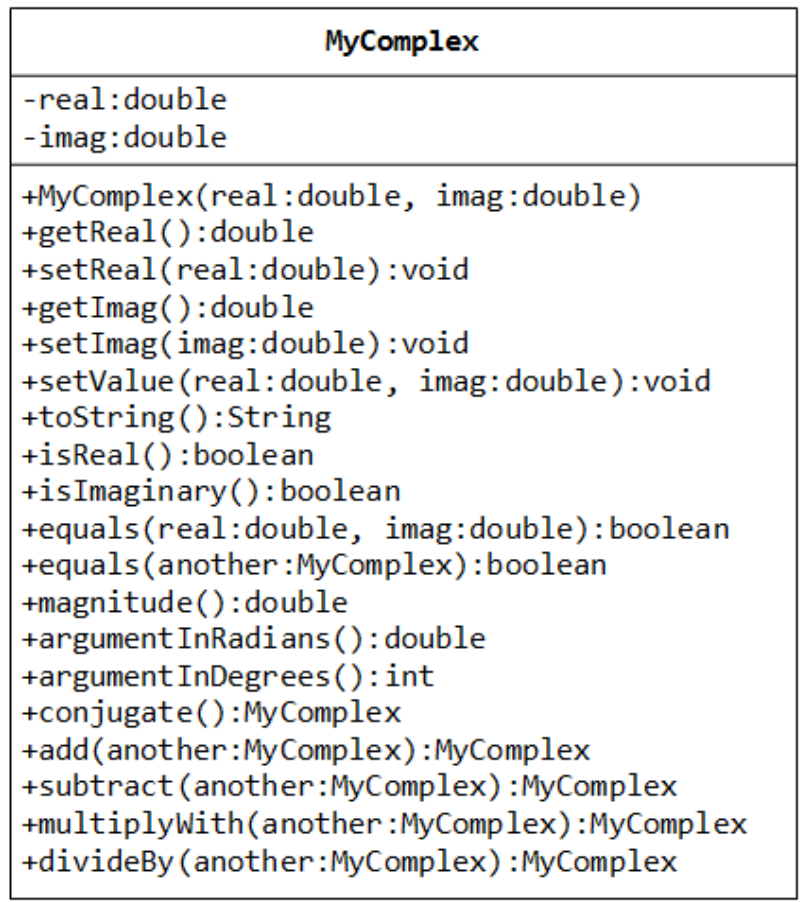

Hint:

```
return new MyComplex(real, -imag); // construct a new instance and return the constructed instance
```

- Methods `add(MyComplex another)` and `subtract(MyComplex another)` that adds and subtract this instance with the given `MyComplex` instance `another`, and returns a new `MyComplex` instance containing the result.

$$(a + bi) + (c + di) = (a+c) + (b+d)i$$

$$(a + bi) - (c + di) = (a-c) + (b-d)i$$

- Methods `multiplyWith(MyComplex another)` and `divideBy(MyComplex another)` that multiplies and divides this instance with the given `MyComplex` instance `another`, keep the result in this instance, and returns this instance.

$$(a + bi) * (c + di) = (ac - bd) + (ad + bc)i$$

$$(a + bi) / (c + di) = [(a + bi) * (c - di)] / (c^2 + d^2)$$

Hint:

```
return this; // return "this" instance
```

You are required to:

- Write the `MyComplex` class.
- Write a test program to test all the methods defined in the class.
- Write an application called `MyComplexApp` that uses the `MyComplex` class. The application shall prompt the user for two complex numbers, print their values, check for real, imaginary and equality, and carry out all the arithmetic operations.

```
Enter complex number 1 (real and imaginary part): 1.1 2.2
Enter complex number 2 (real and imaginary part): 3.3 4.4
```

```
Number 1 is: (1.1 + 2.2i)
(1.1 + 2.2i) is NOT a pure real number
(1.1 + 2.2i) is NOT a pure imaginary number
```

```
Number 2 is: (3.3 + 4.4i)
(3.3 + 4.4i) is NOT a pure real number
(3.3 + 4.4i) is NOT a pure imaginary number
```


```
(1.1 + 2.2i) is NOT equal to (3.3 + 4.4i)
(1.1 + 2.2i) + (3.3 + 4.4i) = (4.4 + 6.6000000000000005i)
(1.1 + 2.2i) - (3.3 + 4.4i) = (-2.1999999999999997 + -2.2i)
```

Take note that there are a few flaws in the design of this class, which was introduced solely for teaching purpose:

- Comparing doubles in `equal()` using `"=="` may produce unexpected outcome. For example, `(2.2+4.4)==6.6` returns `false`. It is common to define a small threshold called `EPSILON` (set to about 10^{-8}) for comparing floating point numbers.
- The method `add()`, `subtract()`, and `conjugate()` produce new instances, whereas `multiplyWith()` and `divideBy()` modify this instance. There is inconsistency in the design (introduced for teaching purpose).
- Unusual to have both `argumentInRadians()` and `argumentInDegrees()`.

1.7 Exercise: The MyPolynomial Class

A class called `MyPolynomial`, which models polynomials of degree- n (see equation), is designed as shown in the class diagram.

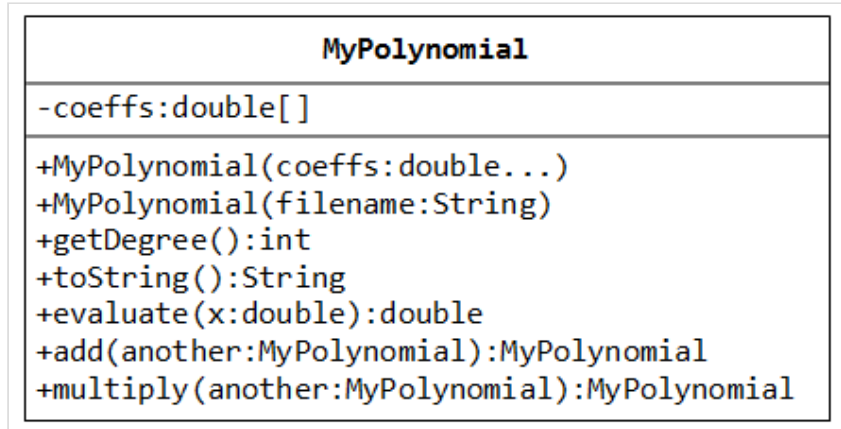

$$c_n x^n + c_{n-1} x^{n-1} + \dots + c_1 x + c_0$$

The class contains:

- An instance variable named `coeffs`, which stores the coefficients of the n -degree polynomial in a double array of size $n+1$, where c_0 is kept at index 0.
- A constructor `MyPolynomial(coeffs:double...)` that takes a variable number of doubles to initialize the `coeffs` array, where the first argument corresponds to c_0 . The three dots is known as *varargs* (variable number of arguments), which is a new feature introduced in JDK 1.5. It accepts an array or a sequence of comma-separated arguments. The compiler automatically packs the comma-separated arguments in an array. The three dots can only be used for the last argument of the method.

Hints:

```
public class MyPolynomial {
    private double[] coeffs;
    public MyPolynomial(double... coeffs) { // varargs
        this.coeffs = coeffs;             // varargs is treated as array
    }
    .....
}

// Test program
// Can invoke with a variable number of arguments
MyPolynomial p1 = new MyPolynomial(1.1, 2.2, 3.3);
MyPolynomial p1 = new MyPolynomial(1.1, 2.2, 3.3, 4.4, 5.5);
// Can also invoke with an array
Double coeffs = {1.2, 3.4, 5.6, 7.8}
MyPolynomial p2 = new MyPolynomial(coeffs);
```

- Another constructor that takes coefficients from a file (of the given filename), having this format:

```
Degree-n(int)
c0(double)
c1(double)
.....
.....
cn-1(double)
cn(double)
(end-of-file)
```

Hints:

```
public MyPolynomial(String filename) {
    Scanner in = null;
```

```
try {
    in = new Scanner(new File(filename)); // open file
} catch (FileNotFoundException e) {
    e.printStackTrace();
}
int degree = in.nextInt(); // read the degree
coeffs = new double[degree+1]; // allocate the array
for (int i=0; i<coeffs.length; ++i) {
    coeffs[i] = in.nextDouble();
}
}
```

- A method `getDegree()` that returns the degree of this polynomial.
- A method `toString()` that returns " $c_nx^n+c_{n-1}x^{(n-1)}+...+c_1x+c_0$ ".
- A method `evaluate(double x)` that evaluate the polynomial for the given x, by substituting the given x into the polynomial expression.
- Methods `add()` and `multiply()` that adds and multiplies this polynomial with the given `MyPolynomial` instance `another`, and returns a new `MyPolynomial` instance that contains the result.

Write the `MyPolynomial` class. Also write a test program (called `TestMyPolynomial`) to test all the methods defined in the class.

Question: Do you need to keep the degree of the polynomial as an instance variable in the `MyPolynomial` class in Java? How about C/C++? Why?

1.8 Exercise: Using JDK's BigInteger Class

Recall that primitive integer type `byte`, `short`, `int` and `long` represent 8-, 16-, 32-, and 64-bit signed integers, respectively. You cannot use them for integers bigger than 64 bits. Java API provides a class called `BigInteger` in a package called `java.math`. Study the API of the `BigInteger` class (Java API \Rightarrow From "Packages", choose "java.math" " From "classes", choose "BigInteger" " Study the constructors (choose "CONSTR") on how to construct a `BigInteger` instance, and the public methods available (choose "METHOD"). Look for methods for adding and multiplying two `BigIntegers`.

Write a program called `TestBigInteger` that:

- [illegible]

Hints:

```
import java.math.BigInteger
public class TestBigInteger {
    public static void main(String[] args) {
        BigInteger i1 = new BigInteger(...);
        BigInteger i2 = new BigInteger(...);
        System.out.println(i1.add(i2));
        .....
    }
}
```

1.9 Exercise: The MyTime Class

A class called `MyTime`, which models a time instance, is designed as shown in the class diagram.

It contains the following private instance variables:

- `hour`: between 0 to 23.
- `minute`: between 0 to 59.
- `second`: between 0 to 59.

The constructor shall invoke the `setTime()` method (to be described later) to set the instance variable.

It contains the following public methods:


- `setTime(int hour, int minute, int second)`: It shall check if the given hour, minute and second are valid before setting the instance variables.

(Advanced: Otherwise, it shall throw an

`IllegalArgumentException` with the message "Invalid hour, minute, or second!".)

- Setters `setHour(int hour)`, `setMinute(int minute)`, `setSecond(int second)`: It shall check if the parameters are valid, similar to the above.
- Getters `getHour()`, `getMinute()`, `getSecond()`.
- `toString()`: returns "HH:MM:SS".
- `nextSecond()`: Update this instance to the next second and return this instance. Take note that the `nextSecond()` of 23:59:59 is 00:00:00.
- `nextMinute()`, `nextHour()`, `previousSecond()`, `previousMinute()`, `previousHour()`: similar to the above.

Write the code for the `MyTime` class. Also write a test program (called `TestMyTime`) to test all the methods defined in the `MyTime` class.

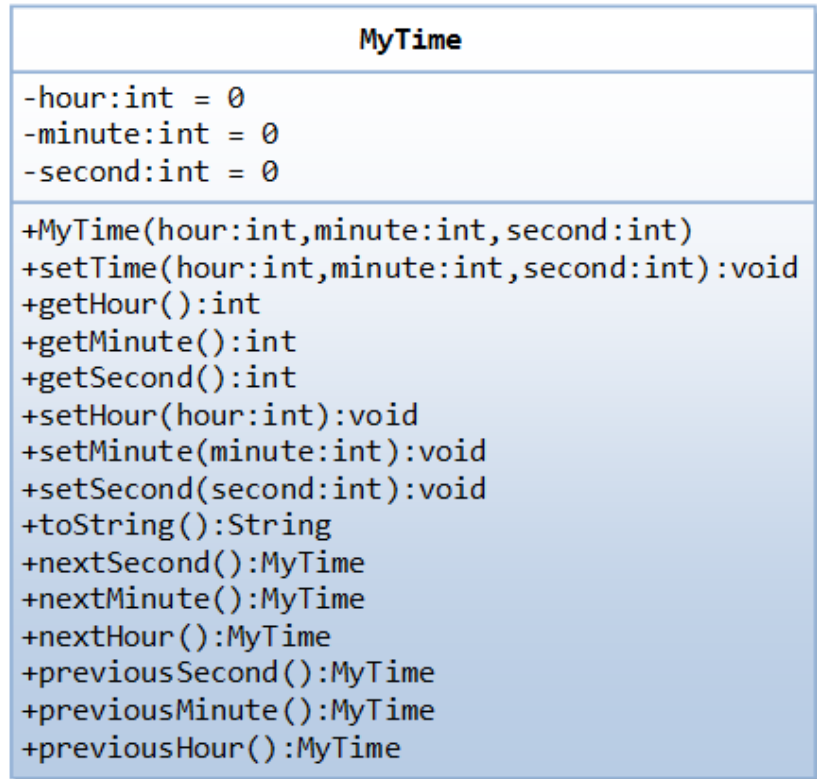

1.10 Exercise: The MyDate Class

A class called `MyDate`, which models a date instance, is defined as shown in the class diagram.

The `MyDate` class contains the following private instance variables:


- `year (int)`: Between 1 to 9999.
- `month (int)`: Between 1 (Jan) to 12 (Dec).
- `day (int)`: Between 1 to 28|29|30|31, where the last day depends on the month and whether it is a leap year for Feb (28|29).

It also contains the following private static variables (drawn with underlined in the class diagram):

- `strMonths (String[])`, `strDays (String[])`, and `dayInMonths (int[])`: static variables, initialized as shown, which are used in the methods.

The MyDate class has the following public static methods (drawn with underlined in the class diagram):

- `isLeapYear(int year)`: returns true if the given year is a leap year. A year is a leap year if it is divisible by 4 but not by 100, or it is divisible by 400.
- `isValidDate(int year, int month, int day)`: returns true if the given year, month, and day constitute a valid date. Assume that year is between 1 and 9999, month is between 1 (Jan) to 12 (Dec) and day shall be between 1 and 28|29|30|31 depending on the month and whether it is a leap year on Feb.
- `getDayOfWeek(int year, int month, int day)`: returns the day of the week, where 0 for Sun, 1 for Mon, ..., 6 for Sat, for the given date. Assume that the date is valid. Read the [earlier exercise on how to determine the day of the week](#) (or Wiki "Determination of the day of the week").

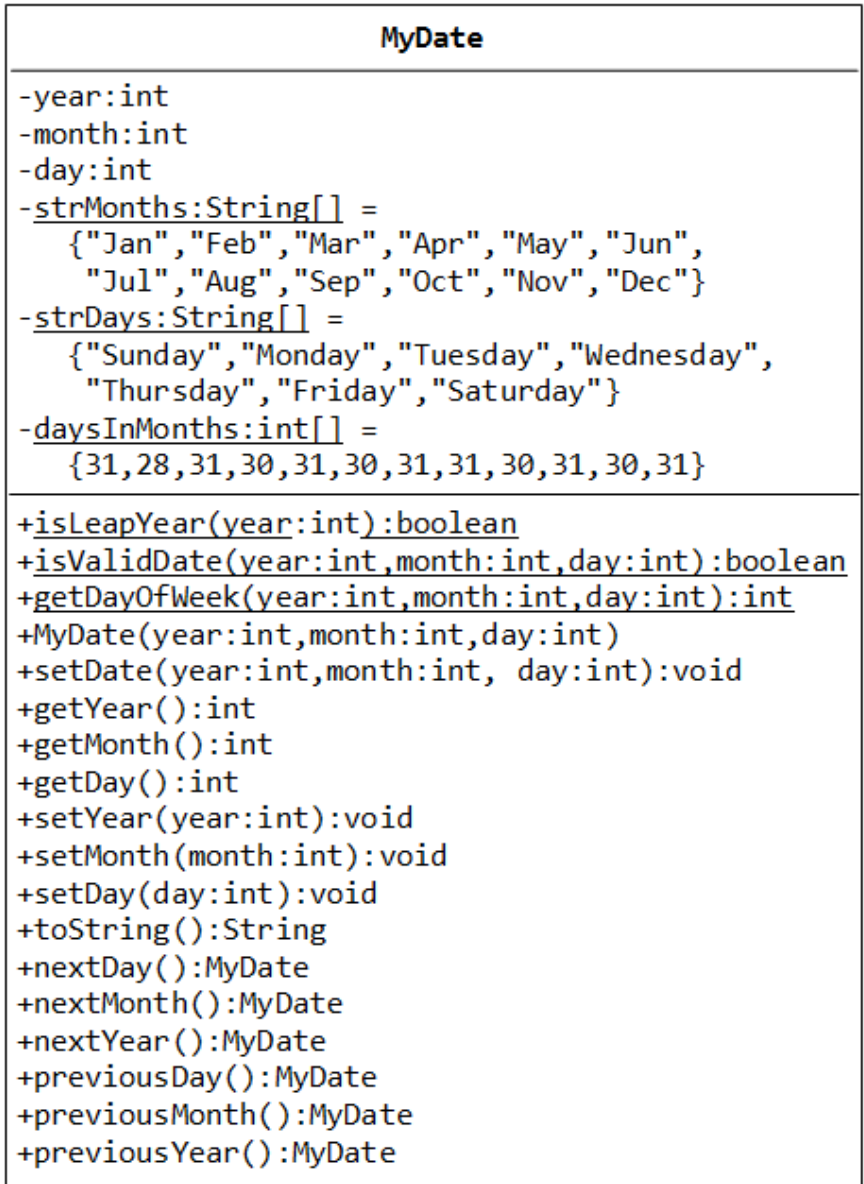

The MyDate class has one constructor, which takes 3 parameters: year, month and day. It shall invoke `setDate()` method (to be described later) to set the instance variables.

The MyDate class has the following public methods:

- `setDate(int year, int month, int day)`: It shall invoke the static method `isValidDate()` to verify that the given year, month and day constitute a valid date.
(Advanced: Otherwise, it shall throw an `IllegalArgumentException` with the message "Invalid year, month, or day!".)
- `setYear(int year)`: It shall verify that the given year is between 1 and 9999.
(Advanced: Otherwise, it shall throw an `IllegalArgumentException` with the message "Invalid year!".)
- `setMonth(int month)`: It shall verify that the given month is between 1 and 12.
(Advanced: Otherwise, it shall throw an `IllegalArgumentException` with the message "Invalid month!".)
- `setDay(int day)`: It shall verify that the given day is between 1 and `dayMax`, where `dayMax` depends on the month and whether it is a leap year for Feb.
(Advanced: Otherwise, it shall throw an `IllegalArgumentException` with the message "Invalid month!".)
- `getYear()`, `getMonth()`, `getDay()`: return the value for the year, month and day, respectively.

- `toString()`: returns a date string in the format "xxxday d mmm yyyy", e.g., "Tuesday 14 Feb 2012".
- `nextDay()`: update this instance to the next day and return this instance. Take note that `nextDay()` for 31 Dec 2000 shall be 1 Jan 2001.
- `nextMonth()`: update this instance to the next month and return this instance. Take note that `nextMonth()` for 31 Oct 2012 shall be 30 Nov 2012.
- `nextYear()`: update this instance to the next year and return this instance. Take note that `nextYear()` for 29 Feb 2012 shall be 28 Feb 2013.
(Advanced: throw an `IllegalArgumentException` with the message "Year out of range!" if year > 9999.)
- `previousDay()`, `previousMonth()`, `previousYear()`: similar to the above.

Write the code for the `MyDate` class.

Use the following test statements to test the `MyDate` class:

```
MyDate d1 = new MyDate(2012, 2, 28);
System.out.println(d1);           // Tuesday 28 Feb 2012
System.out.println(d1.nextDay()); // Wednesday 29 Feb 2012
System.out.println(d1.nextDay()); // Thursday 1 Mar 2012
System.out.println(d1.nextMonth()); // Sunday 1 Apr 2012
System.out.println(d1.nextYear()); // Monday 1 Apr 2013

MyDate d2 = new MyDate(2012, 1, 2);
System.out.println(d2);           // Monday 2 Jan 2012
System.out.println(d2.previousDay()); // Sunday 1 Jan 2012
System.out.println(d2.previousDay()); // Saturday 31 Dec 2011
System.out.println(d2.previousMonth()); // Wednesday 30 Nov 2011
System.out.println(d2.previousYear()); // Tuesday 30 Nov 2010

MyDate d3 = new MyDate(2012, 2, 29);
System.out.println(d3.previousYear()); // Monday 28 Feb 2011

// MyDate d4 = new MyDate(2099, 11, 31); // Invalid year, month, or day!
// MyDate d5 = new MyDate(2011, 2, 29); // Invalid year, month, or day!
```

Write a test program that tests the `nextDay()` in a loop, by printing the dates from 28 Dec 2011 to 2 Mar 2012.

1.11 Exercise: Book and Author Classes Again - An Array of Objects as an Instance Variable

In the [earlier exercise](#), a book is written by one and only one author. In reality, a book can be written by one or more author. Modify the `Book` class to support one or more authors by changing the instance variable `authors` to an `Author` array. Reuse the `Author` class written earlier.

Notes:

- The constructors take an array of `Author` (i.e., `Author[]`), instead of an `Author` instance.
- The `toString()` method shall return "book-name by *n* authors", where *n* is the number of authors.
- A new method `printAuthors()` to print the names of all the authors.

You are required to:

1. Write the code for the `Book` class. You shall re-use the `Author` class written earlier.
2. Write a test program (called `TestBook`) to test the `Book` class.


Hints:

```
// Declare and allocate an array of Authors
```

```
Author[] authors = new Author[2];
authors[0] = new Author("Tan Ah Teck", "AhTeck@somewhere.com", 'm');
authors[1] = new Author("Paul Tan", "Paul@nowhere.com", 'm');
```

```
// Declare and allocate a Book instance
```

```
Book javaDummy = new Book("Java for Dummy", authors, 19.99, 99);
System.out.println(javaDummy); // toString()
System.out.print("The authors are: ");
javaDummy.printAuthors();
```

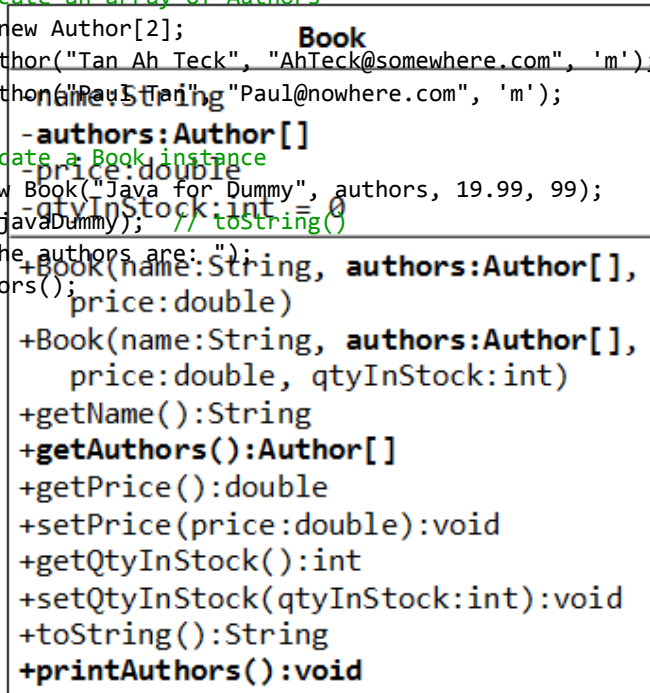

1.12 Exercise: Book and Author Classes Once More - A Fixed-length Array of Objects as an Instance Variable

In the above exercise, the number of authors cannot be changed once a Book instance is constructed.

Suppose that we wish to allow the user to add more authors (which is really unusual but presented here for academic purpose).


We shall remove the authors from the constructors, and add a new method called `addAuthor()` to

add the given Author instance to this Book.

We also need to pre-allocate an Author array, with a fixed length (says 5 - a book is written by 1 to 5 authors), and use another instance variable `numAuthors` (int) to keep track of the actual number of authors.

You are required to:

1. Modify your Book class to support this new requirement.

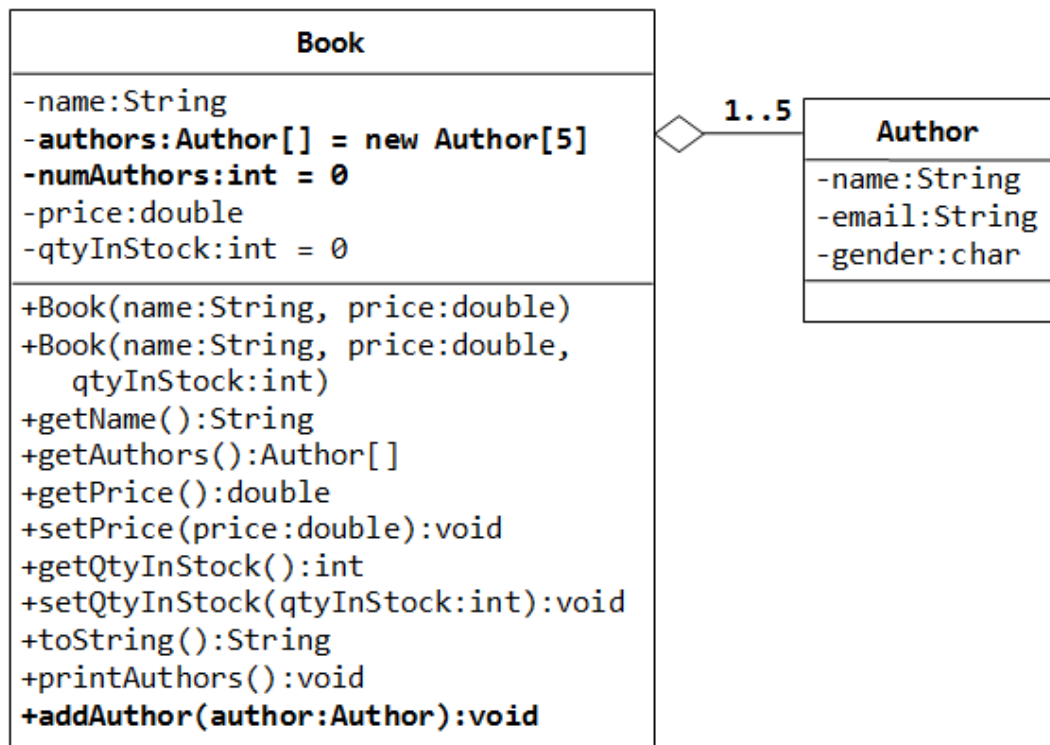

Hints:

```

public class Book {
    // private instance variable
    private Author[] authors = new Author[5]; // declare and allocate the array
                                              // BUT not the element's instance

    private int numAuthors = 0;

    .....
    .....

    public void addAuthor(Author author) {
        authors[numAuthors] = author;
        ++numAuthors;
    }
}

// Test program
Book javaDummy = new Book("Java for Dummy", 19.99, 99);
System.out.println(javaDummy); // toString()
System.out.print("The authors are: ");
javaDummy.printAuthors();

javaDummy.addAuthor(new Author("Tan Ah Teck", "AhTeck@somewhere.com", 'm'));
javaDummy.addAuthor(new Author("Paul Tan", "Paul@nowhere.com", 'm'));
System.out.println(javaDummy); // toString()
System.out.print("The authors are: ");
javaDummy.printAuthors();

```

2. Try writing a method called `removeAuthorByName(authorName)`, that remove the author from this Book instance if `authorName` is present. The method shall return true if it succeeds.

```
boolean removeAuthorByName(String authorName)
```

Advanced Note: Instead of using a fixed-length array in this case, it is better to be a dynamically allocated array (e.g., `ArrayList`), which does not have a fixed length.

1.13 Exercise: Bouncing Balls - Ball and Container Classes


A class called `Ball` is designed as shown in the class diagram.

The `Ball` class contains the following private instance variables:


- `x`, `y` and `radius`, which represent the ball's center (`x`, `y`) co-ordinates and the radius, respectively.
- `xDelta` (Δx) and `yDelta` (Δy), which represent the displacement (movement) per step, in the `x` and `y` direction respectively.

The `Ball` class contains the following public methods:

- A constructor which accepts `x`, `y`, `radius`, `speed`, and `direction` as arguments. For user friendliness, user specifies `speed` (in pixels per step) and `direction` (in degrees in the range of $(-180^\circ, 180^\circ]$). For the internal

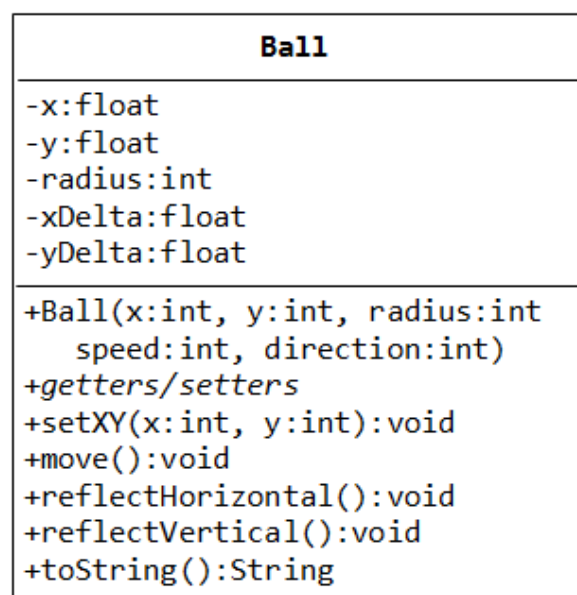

operations, the speed and direction are to be converted to $(\Delta x, \Delta y)$ in the internal representation. Note that the y-axis of the Java graphics coordinate system is inverted, i.e., the origin $(0, 0)$ is located at the top-left corner.

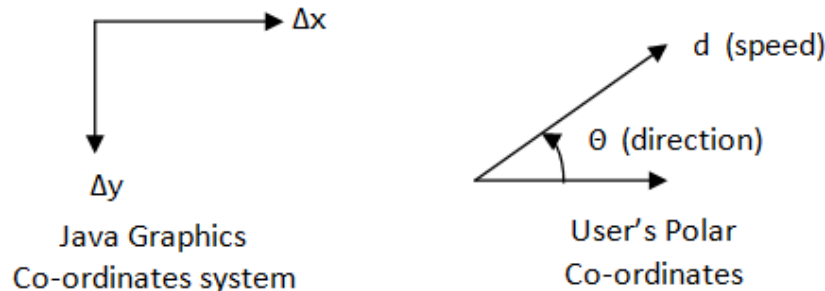

$$\Delta x = d \times \cos(\theta)$$

$$\Delta y = -d \times \sin(\theta)$$

- Getter and setter for all the instance variables.
- A method `move()` which move the ball by one step.

```
x += Δx
y += Δy
```

- `reflectHorizontal()` which reflects the ball horizontally (i.e., hitting a vertical wall)

```
Δx = -Δx
Δy no changes
```

- `reflectVertical()` (the ball hits a horizontal wall).


```
Δx no changes
Δy = -Δy
```

- `toString()` which prints the message "Ball at (x, y) of velocity $(\Delta x, \Delta y)$ ".

Write the `Ball` class. Also write a test program to test all the methods defined in the class.

A class called `Container`, which represents the enclosing box for the ball, is designed as shown in the class diagram. It contains:

- Instance variables $(x1, y1)$ and $(x2, y2)$ which denote the top-left and bottom-right corners of the rectangular box.
- A constructor which accepts (x, y) of the top-left corner, width and height as argument, and converts them into the internal representation (i.e., $x2 = x1 + \text{width} - 1$). Width and height is used in the argument for safer operation (there is no need to check the validity of $x2 > x1$ etc.).
- A `toString()` method that returns "Container at $(x1, y1)$ to $(x2, y2)$ ".
- A boolean method called `collidesWith(Ball)`, which check if the given `Ball` is outside the bounds of the container box. If so, it invokes the `Ball`'s `reflectHorizontal()` and/or `reflectVertical()` to change the

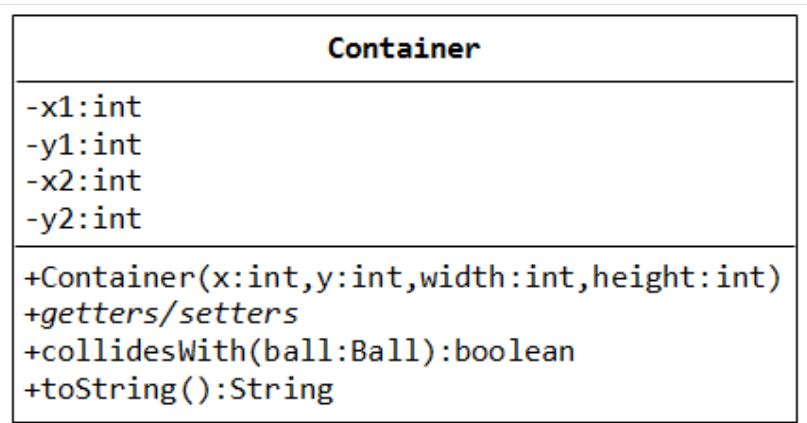

movement direction of the ball, and returns true.

```
public boolean collidesWith(Ball ball) {
    if (ball.getX() - ball.getRadius() <= this.x1 ||
        ball.getX() - ball.getRadius() >= this.x2) {
        ball.reflectHorizontal();
        return true;
    }
    .....
}
```

Use the following statements to test your program:

```
Ball ball = new Ball(50, 50, 5, 10, 30);
Container box = new Container(0, 0, 100, 100);
for (int step = 0; step < 100; ++step) {
    ball.move();
    box.collidesWith(ball);
    System.out.println(ball); // manual check the position of the ball
}
```

1.14 Exercise: Ball and Player

[TODO]

2. Exercises on Inheritance


2.1 Exercise: The Circle and Cylinder Classes

In this exercise, a subclass called Cylinder is derived from the superclass Circle as shown in the class diagram (where an arrow pointing up from the subclass to its superclass). Study how the subclass Cylinder invokes the superclass' constructors (via super() and super(radius)) and inherits the variables and methods from the superclass Circle.

You can reuse the Circle class that you have created in the previous exercise. Make sure that you keep "Circle.class" in the same directory.

```
public class Cylinder extends Circle { //save as "Cylinder.java"
    private double height; // private variable

    // Constructor with default color, radius and height
    public Cylinder() {
        super(); // call superclass no-arg constructor
        height = 1.0;
    }
    // Constructor with default radius, color but given height
    public Cylinder(double height) {
        super(); // call superclass no-arg constructor Circle()
        this.height = height;
    }
}
```

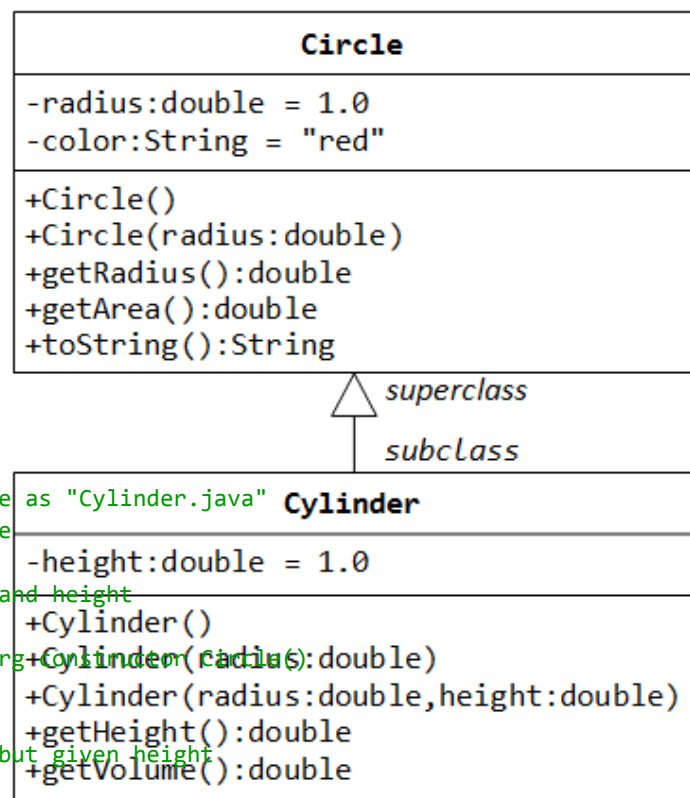

```

}
// Constructor with default color, but given radius, height
public Cylinder(double radius, double height) {
    super(radius); // call superclass constructor Circle(r)
    this.height = height;
}

// A public method for retrieving the height
public double getHeight() {
    return height;
}

// A public method for computing the volume of cylinder
// use superclass method getArea() to get the base area
public double getVolume() {
    return getArea()*height;
}
}

```

Write a test program (says TestCylinder) to test the Cylinder class created, as follow:

```

public class TestCylinder { // save as "TestCylinder.java"
    public static void main (String[] args) {
        // Declare and allocate a new instance of cylinder
        // with default color, radius, and height
        Cylinder c1 = new Cylinder();
        System.out.println("Cylinder:"
            + " radius=" + c1.getRadius()
            + " height=" + c1.getHeight()
            + " base area=" + c1.getArea()
            + " volume=" + c1.getVolume());

        // Declare and allocate a new instance of cylinder
        // specifying height, with default color and radius
        Cylinder c2 = new Cylinder(10.0);
        System.out.println("Cylinder:"
            + " radius=" + c2.getRadius()
            + " height=" + c2.getHeight()
            + " base area=" + c2.getArea()
            + " volume=" + c2.getVolume());

        // Declare and allocate a new instance of cylinder
        // specifying radius and height, with default color
        Cylinder c3 = new Cylinder(2.0, 10.0);
        System.out.println("Cylinder:"
            + " radius=" + c3.getRadius()
            + " height=" + c3.getHeight()
            + " base area=" + c3.getArea()
            + " volume=" + c3.getVolume());
    }
}

```

Method Overriding and "Super": The subclass Cylinder inherits getArea() method from its superclass Circle. Try *overriding* the getArea() method in the subclass Cylinder to compute the surface area ($=2\pi \times \text{radius} \times \text{height} + 2 \times \text{base-area}$) of the cylinder instead of base area. That is, if getArea() is called by a Circle instance, it returns the area. If getArea() is called by a Cylinder instance, it returns the surface area of the cylinder.

If you override the getArea() in the subclass Cylinder, the getVolume() no longer works. This is because the

`getVolume()` uses the *overridden* `getArea()` method found in the same class. (Java runtime will search the superclass only if it cannot locate the method in this class). Fix the `getVolume()`.

Hints: After overriding the `getArea()` in subclass `Cylinder`, you can choose to invoke the `getArea()` of the superclass `Circle` by calling `super.getArea()`.

TRY:


Provide a `toString()` method to the `Cylinder` class, which overrides the `toString()` inherited from the superclass `Circle`, e.g.,

```
@Override
public String toString() {    // in Cylinder class
    return "Cylinder: subclass of " + super.toString() // use Circle's toString()
        + " height=" + height;
}
```

Try out the `toString()` method in `TestCylinder`.

Note: `@Override` is known as *annotation* (introduced in JDK 1.5), which asks compiler to check whether there is such a method in the superclass to be overridden. This helps greatly if you misspell the name of the `toString()`. If `@Override` is not used and `toString()` is misspelled as `ToSting()`, it will be treated as a new method in the subclass, instead of overriding the superclass. If `@Override` is used, the compiler will signal an error. `@Override` annotation is optional, but certainly nice to have.

2.2 Exercise: Superclass Shape and its subclasses Circle, Rectangle and Square

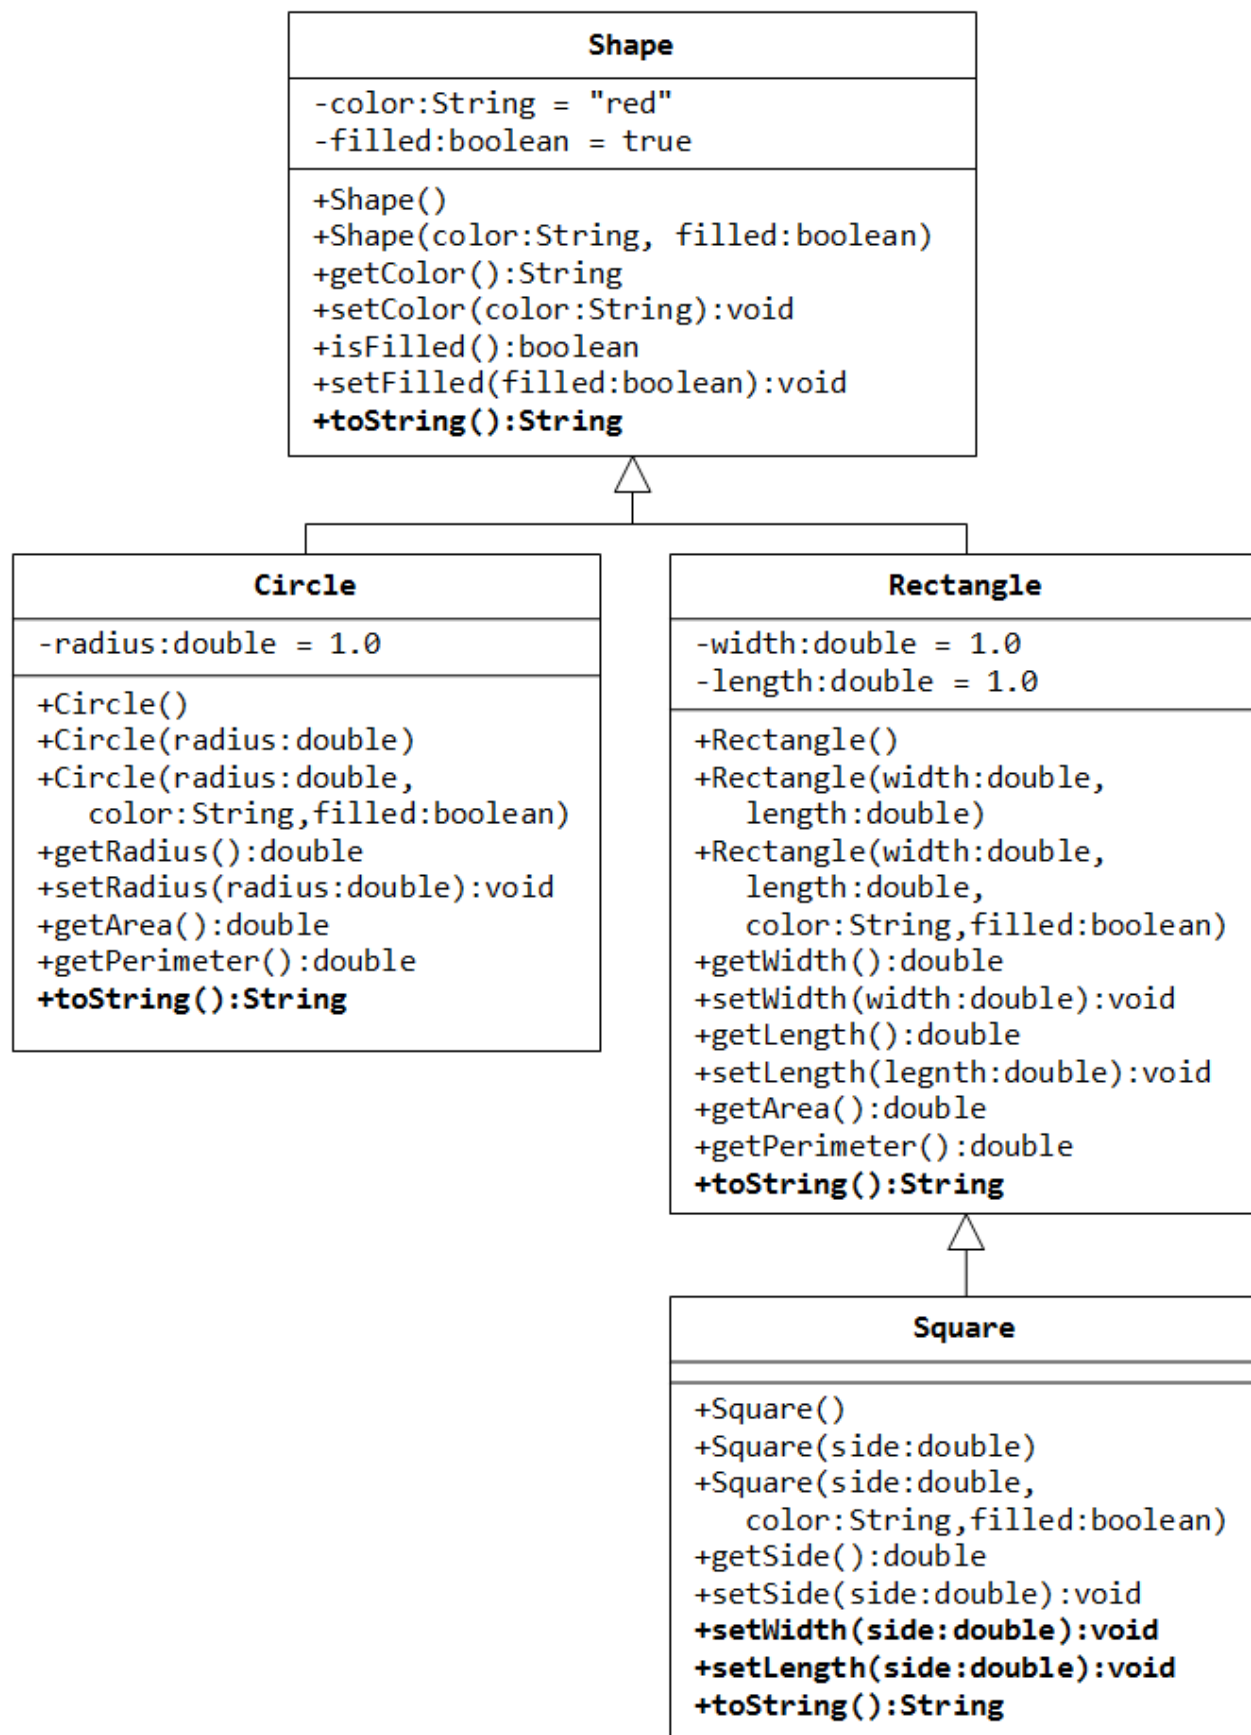

Write a superclass called Shape (as shown in the class diagram), which contains:

- Two instance variables color (String) and filled (boolean).
- Two constructors: a no-arg (no-argument) constructor that initializes the color to "green" and filled to

true, and a constructor that initializes the color and filled to the given values.

- Getter and setter for all the instance variables. By convention, the getter for a boolean variable xxx is called isXXX() (instead of getXxx() for all the other types).
- A toString() method that returns "A Shape with color of xxx and filled/Not filled".

Write a test program to test all the methods defined in Shape.

Write two subclasses of Shape called Circle and Rectangle, as shown in the class diagram.

The Circle class contains:

- An instance variable radius (double).
- Three constructors as shown. The no-arg constructor initializes the radius to 1.0.
- Getter and setter for the instance variable radius.
- Methods getArea() and getPerimeter().
- Override the toString() method inherited, to return "A Circle with radius=xxx, which is a subclass of yyy", where yyy is the output of the toString() method from the superclass.

The Rectangle class contains:

- Two instance variables width (double) and length (double).
- Three constructors as shown. The no-arg constructor initializes the width and length to 1.0.
- Getter and setter for all the instance variables.
- Methods getArea() and getPerimeter().
- Override the toString() method inherited, to return "A Rectangle with width=xxx and length=zzz, which is a subclass of yyy", where yyy is the output of the toString() method from the superclass.

Write a class called Square, as a subclass of Rectangle. Convince yourself that Square can be modeled as a subclass of Rectangle. Square has no instance variable, but inherits the instance variables width and length from its superclass Rectangle.

- Provide the appropriate constructors (as shown in the class diagram). Hint:

```
public Square(double side) {  
    super(side, side); // Call superclass Rectangle(double, double)  
}
```

- Override the toString() method to return "A Square with side=xxx, which is a subclass of yyy", where yyy is the output of the toString() method from the superclass.
- Do you need to override the getArea() and getPerimeter()? Try them out.
- Override the setLength() and setWidth() to change both the width and length, so as to maintain the square geometry.

3. Exercises on Composition vs Inheritance

They are two ways to reuse a class in your applications: *composition* and *inheritance*.

3.1 Exercise: The Point and Line Classes

Let us begin with *composition* with the statement "a line composes of two points".

Complete the definition of the following two classes: Point and Line. The class Line composes 2 instances of class Point, representing the beginning and ending points of the line. Also write test classes for Point and Line (says TestPoint and TestLine).

```
public class Point {
    // Private variables
    private int x;    // x co-ordinate
    private int y;    // y co-ordinate

    // Constructor
    public Point (int x, int y) {.....}

    // Public methods
    public String toString() {
        return "Point: (" + x + "," + y + ")";
    }

    public int getX() {.....}
    public int getY() {.....}
    public void setX(int x) {.....}
    public void setY(int y) {.....}
    public void setXY(int x, int y) {.....}
}
```

```
public class TestPoint {
    public static void main(String[] args) {
        Point p1 = new Point(10, 20);    // Construct a Point
        System.out.println(p1);
        // Try setting p1 to (100, 10).
        .....
    }
}
```

```
public class Line {
    // A line composes of two points (as instance variables)
    private Point begin;    // beginning point
    private Point end;      // ending point

    // Constructors
    public Line (Point begin, Point end) {    // caller to construct the Points
        this.begin = begin;
        .....
    }
    public Line (int beginX, int beginY, int endX, int endY) {
        begin = new Point(beginX, beginY);    // construct the Points here
        .....
    }

    // Public methods
    public String toString() { ..... }

    public Point getBegin() { ..... }
    public Point getEnd() { ..... }
    public void setBegin(.....) { ..... }
    public void setEnd(.....) { ..... }

    public int getBeginX() { ..... }
    public int getBeginY() { ..... }
    public int getEndX() { ..... }
```

```

public int getEndY() { ..... }

public void setBeginX(.....) { ..... }
public void setBeginY(.....) { ..... }
public void setBeginXY(.....) { ..... }
public void setEndX(.....) { ..... }
public void setEndY(.....) { ..... }
public void setEndXY(.....) { ..... }

public int getLength() { ..... } // Length of the line
                                   // Math.sqrt(xDiff*xDiff + yDiff*yDiff)
public double getGradient() { ..... } // Gradient in radians
                                   // Math.atan2(yDiff, xDiff)
}

```


```

public class TestLine {
    public static void main(String[] args) {
        Line l1 = new Line(0, 0, 3, 4);
        System.out.println(l1);


        Point p1 = new Point(...);
        Point p2 = new Point(...);
        Line l2 = new Line(p1, p2);
        System.out.println(l2);
        ...
    }
}

```

The class diagram for *composition* is as follows (where a diamond-hollow-head arrow pointing to its constituents):



Instead of *composition*, we can design a Line class using inheritance. Instead of "a line composes of two points", we can say that "a line is a point extended by another point", as shown in the following class diagram:

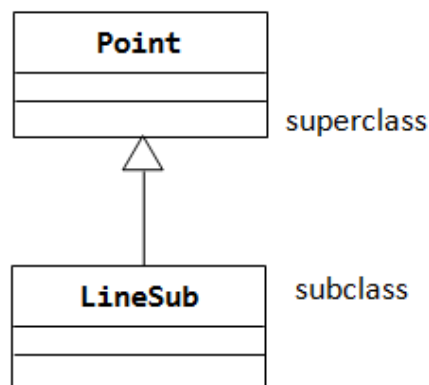

Let's re-design the Line class (called LineSub) as a subclass of class Point. LineSub inherits the starting point from its superclass Point, and adds an ending point. Complete the class definition. Write a testing class called TestLineSub to test LineSub.

```

public class LineSub extends Point {
    // A line needs two points: begin and end.
    // The begin point is inherited from its superclass Point.
    // Private variables

```

```

Point end;                // Ending point

// Constructors
public LineSub (int beginX, int beginY, int endX, int endY) {
    super(beginX, beginY);    // construct the begin Point
    this.end = new Point(endX, endY); // construct the end Point
}
public LineSub (Point begin, Point end) { // caller to construct the Points
    super(begin.getX(), begin.getY());    // need to reconstruct the begin Point
    this.end = end;
}

// Public methods
// Inherits methods getX() and getY() from superclass Point
public String toString() { ... }

public Point getBegin() { ... }
public Point getEnd() { ... }
public void setBegin(...) { ... }
public void setEnd(...) { ... }

public int getBeginX() { ... }
public int getBeginY() { ... }
public int getEndX() { ... }
public int getEndY() { ... }

public void setBeginX(...) { ... }
public void setBeginY(...) { ... }
public void setBeginXY(...) { ... }
public void setEndX(...) { ... }
public void setEndY(...) { ... }
public void setEndXY(...) { ... }


public int getLength() { ... } // Length of the line
public double getGradient() { ... } // Gradient in radians
}

```

Summary: There are two approaches that you can design a line, composition or inheritance. "A line composes two points" or "A line is a point extended with another point". Compare the Line and LineSub designs: Line uses *composition* and LineSub uses *inheritance*. Which design is better?

3.2 Exercise: Circle and Cylinder using Composition

Try rewriting the Circle-Cylinder of the previous exercise using *composition* (as shown in the class diagram) instead of *inheritance*. That is, "a cylinder is composed of a base circle and a height".

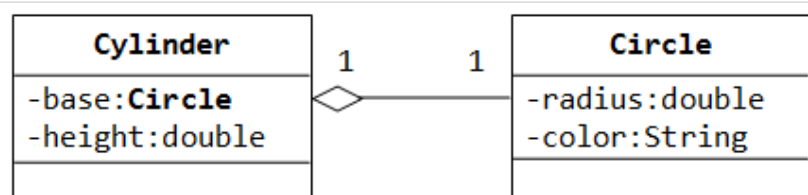

```

public class Cylinder {
    private Circle base; // Base circle, an instance of Circle class
    private double height;

    // Constructor with default color, radius and height
    public Cylinder() {
        base = new Circle(); // Call the constructor to construct the Circle
        height = 1.0;
    }
}

```


```
.....  
}
```

Which design (inheritance or composition) is better?

4. Exercises on Polymorphism, Abstract Classes and Interfaces

4.1 Exercise: Abstract Superclass Shape and Its Concrete Subclasses

Rewrite the superclass Shape and its subclasses Circle, Rectangle and Square, as shown in the class diagram.

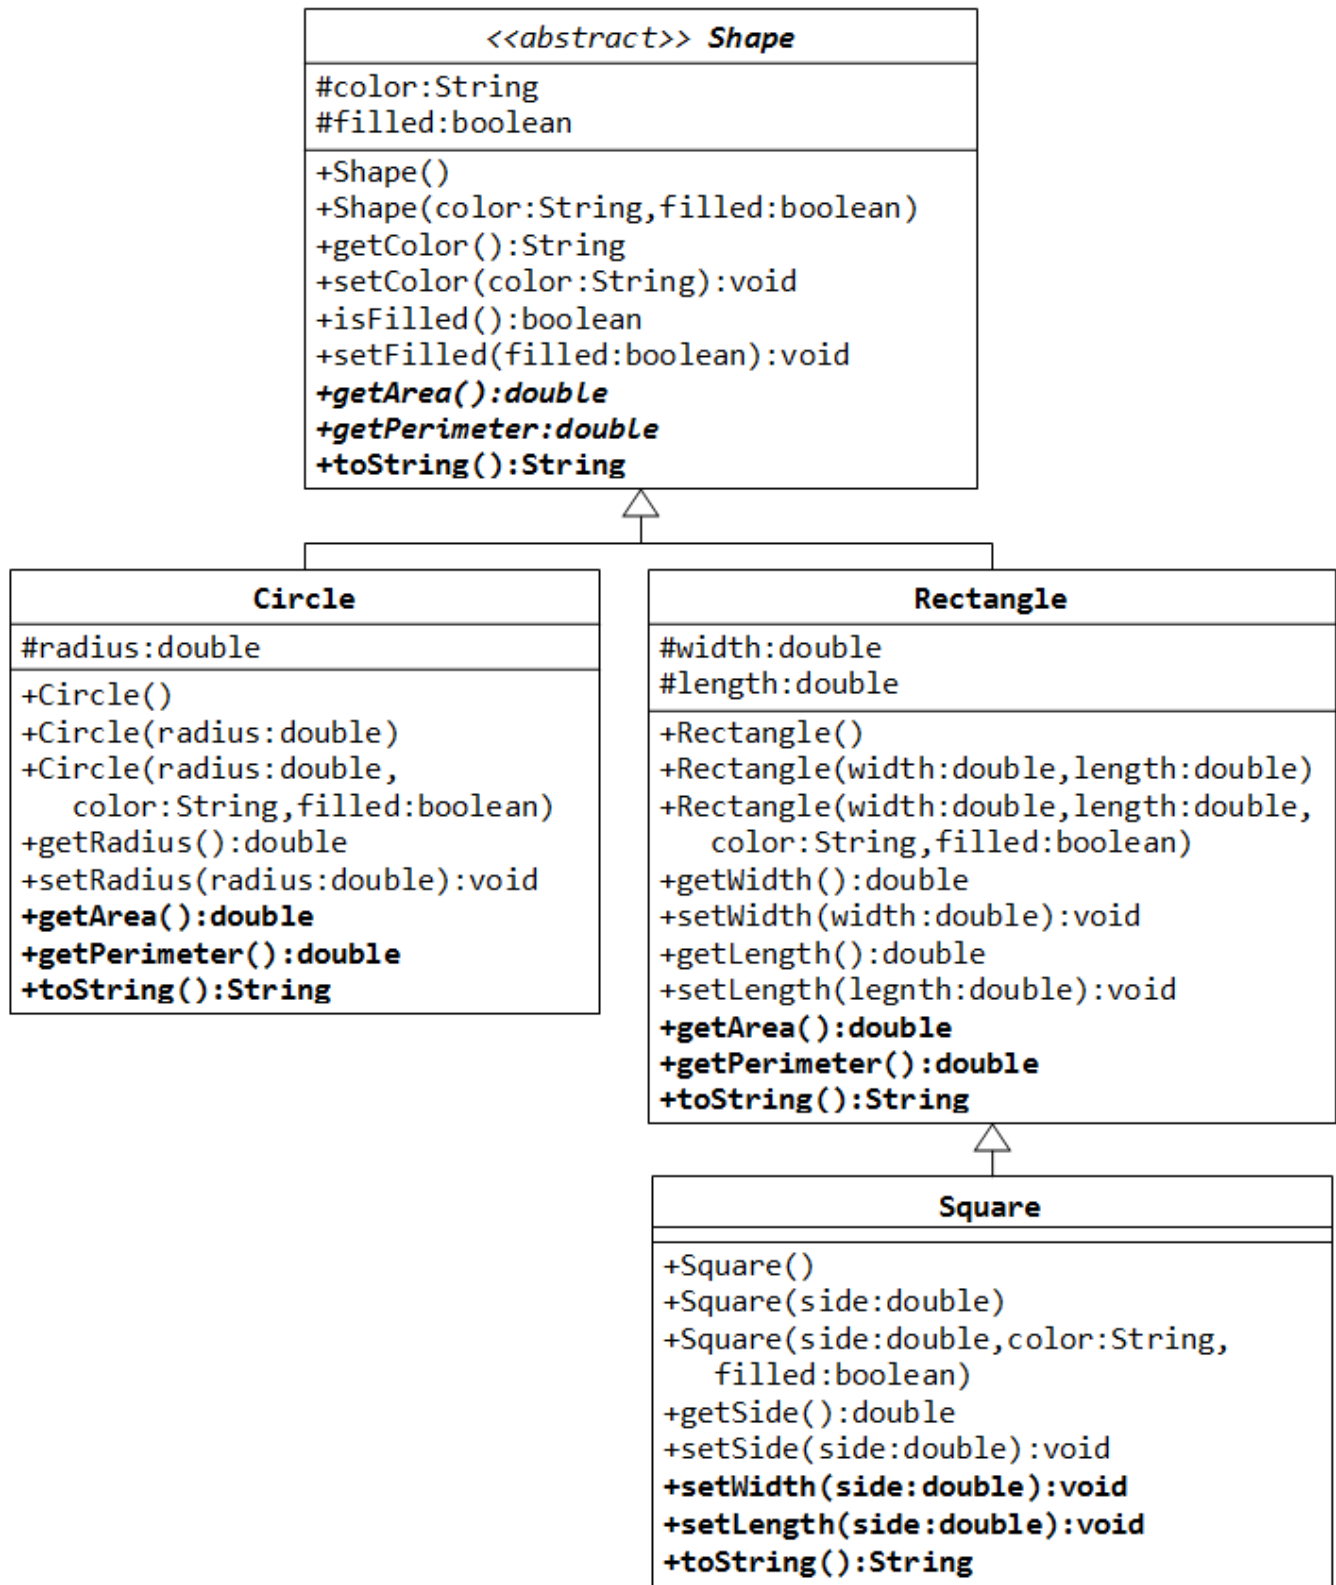

In this exercise, Shape shall be defined as an abstract class, which contains:

- Two protected instance variables color(String) and filled(boolean). The protected variables can be accessed by its subclasses and classes in the same package. They are denoted with a '#' sign in the class diagram.
- Getter and setter for all the instance variables, and toString().
- Two abstract methods getArea() and getPerimeter() (shown in italics in the class diagram).

The subclasses Circle and Rectangle shall *override* the abstract methods `getArea()` and `getPerimeter()` and provide the proper implementation. They also *override* the `toString()`.

Write a test class to test these statements involving polymorphism and explain the outputs. Some statements may trigger compilation errors. Explain the errors, if any.

```
Shape s1 = new Circle(5.5, "RED", false); // Upcast Circle to Shape
System.out.println(s1);                  // which version?
System.out.println(s1.getArea());         // which version?
System.out.println(s1.getPerimeter());    // which version?
System.out.println(s1.getColor());
System.out.println(s1.isFilled());
System.out.println(s1.getRadius());

Circle c1 = (Circle)s1;                  // Downcast back to Circle
System.out.println(c1);
System.out.println(c1.getArea());
System.out.println(c1.getPerimeter());
System.out.println(c1.getColor());
System.out.println(c1.isFilled());
System.out.println(c1.getRadius());

Shape s2 = new Shape();

Shape s3 = new Rectangle(1.0, 2.0, "RED", false); // Upcast
System.out.println(s3);
System.out.println(s3.getArea());
System.out.println(s3.getPerimeter());
System.out.println(s3.getColor());
System.out.println(s3.getLength());

Rectangle r1 = (Rectangle)s3; // downcast
System.out.println(r1);
System.out.println(r1.getArea());
System.out.println(r1.getColor());
System.out.println(r1.getLength());

Shape s4 = new Square(6.6); // Upcast
System.out.println(s4);
System.out.println(s4.getArea());
System.out.println(s4.getColor());
System.out.println(s4.getSide());

// Take note that we downcast Shape s4 to Rectangle,
// which is a superclass of Square, instead of Square
Rectangle r2 = (Rectangle)s4;
System.out.println(r2);
System.out.println(r2.getArea());
System.out.println(r2.getColor());
System.out.println(r2.getSide());
System.out.println(r2.getLength());

// Downcast Rectangle r2 to Square
Square sq1 = (Square)r2;
System.out.println(sq1);
System.out.println(sq1.getArea());
System.out.println(sq1.getColor());
System.out.println(sq1.getSide());
System.out.println(sq1.getLength());
```

What is the usage of the abstract method and abstract class?

4.2 Exercise: Polymorphism

Examine the following codes and draw the class diagram.

```
abstract public class Animal {  
    abstract public void greeting();  
}
```

```
public class Cat extends Animal {  
    @Override  
    public void greeting() {  
        System.out.println("Meow!");  
    }  
}
```

```
public class Dog extends Animal {  
    @Override  
    public void greeting() {  
        System.out.println("Woof!");  
    }  
  
    public void greeting(Dog another) {  
        System.out.println("Wooooooooooof!");  
    }  
}
```

```
public class BigDog extends Dog {  
    @Override  
    public void greeting() {  
        System.out.println("Woow!");  
    }  
  
    @Override  
    public void greeting(Dog another) {  
        System.out.println("Woooooowwwww!");  
    }  
}
```

Explain the outputs (or error) for the following test program.

```
public class TestAnimal {  
    public static void main(String[] args) {  
        // Using the subclasses  
        Cat cat1 = new Cat();  
        cat1.greeting();  
        Dog dog1 = new Dog();  
        dog1.greeting();  
        BigDog bigDog1 = new BigDog();  
        bigDog1.greeting();  
  
        // Using Polymorphism  
        Animal animal1 = new Cat();  
        animal1.greeting();  
        Animal animal2 = new Dog();  
        animal2.greeting();  
        Animal animal3 = new BigDog();  
        animal3.greeting();  
    }  
}
```



```

Animal animal4 = new Animal();


// Downcast
Dog dog2 = (Dog)animal2;
BigDog bigDog2 = (BigDog)animal3;
Dog dog3 = (Dog)animal3;
Cat cat2 = (Cat)animal2;
dog2.greeting(dog3);
dog3.greeting(dog2);
dog2.greeting(bigDog2);
bigDog2.greeting(dog2);
bigDog2.greeting(bigDog1);
    }
}

```

4.3 Exercise: Interface Movable and its implementations MovablePoint and MovableCircle

Suppose that we have a set of objects with some common behaviors: they could move up, down, left or right. The exact behaviors (such as how to move and how far to move) depend on the objects themselves. One common way to model these common behaviors is to define an *interface* called *Movable*, with abstract methods `moveUp()`, `moveDown()`, `moveLeft()` and `moveRight()`. The classes that implement the *Movable* interface will provide actual implementation to these abstract methods.

Let's write two concrete classes - *MovablePoint* and *MovableCircle* - that implement the *Movable* interface.

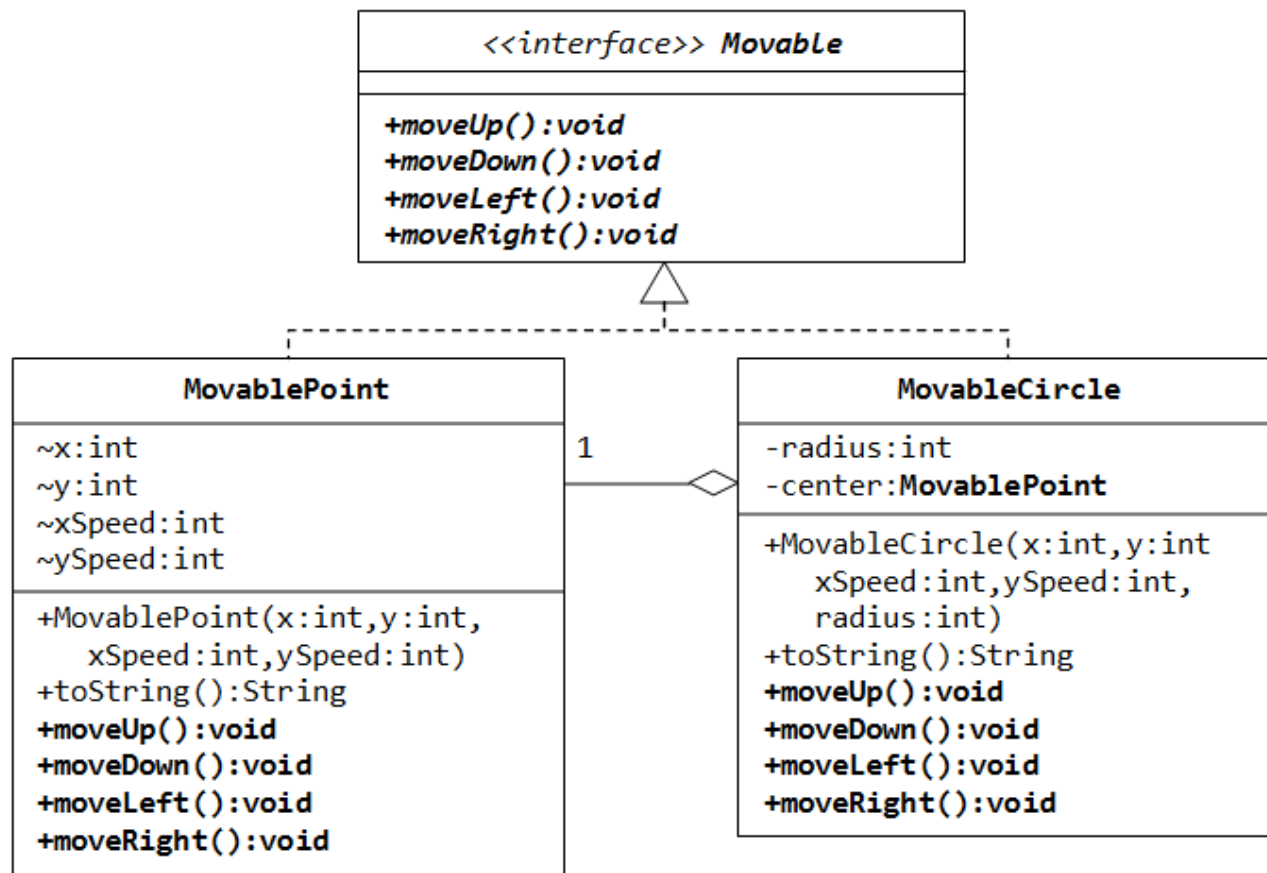

The code for the interface *Movable* is straight forward.

```

public interface Movable { // saved as "Movable.java"
    public void moveUp();
}

```

```

    .....
}

```

For the `MovablePoint` class, declare the instance variable `x`, `y`, `xSpeed` and `ySpeed` with package access as shown with `'~'` in the class diagram (i.e., classes in the same package can access these variables directly). For the `MovableCircle` class, use a `MovablePoint` to represent its center (which contains four variable `x`, `y`, `xSpeed` and `ySpeed`). In other words, the `MovableCircle` composes a `MovablePoint`, and its radius.

```

public class MovablePoint implements Movable { // saved as "MovablePoint.java"
    // instance variables
    int x, y, xSpeed, ySpeed;    // package access

    // Constructor
    public MovablePoint(int x, int y, int xSpeed, int ySpeed) {
        this.x = x;
        .....
    }
    .....

    // Implement abstract methods declared in the interface Movable
    @Override
    public void moveUp() {
        y -= ySpeed;    // y-axis pointing down for 2D graphics
    }
    .....
}

```

```

public class MovableCircle implements Movable { // saved as "MovableCircle.java"
    // instance variables
    private MovablePoint center;    // can use center.x, center.y directly
                                    // because they are package accessible
    private int radius;

    // Constructor
    public MovableCircle(int x, int y, int xSpeed, int ySpeed, int radius) {
        // Call the MovablePoint's constructor to allocate the center instance.
        center = new MovablePoint(x, y, xSpeed, ySpeed);
        .....
    }
    .....

    // Implement abstract methods declared in the interface Movable
    @Override
    public void moveUp() {
        center.y -= center.ySpeed;
    }
    .....
}

```

Write a test program and try out these statements:


```

Movable m1 = new MovablePoint(5, 6, 10);    // upcast
System.out.println(m1);
m1.moveLeft();
System.out.println(m1);

Movable m2 = new MovableCircle(2, 1, 2, 20); // upcast
System.out.println(m2);
m2.moveRight();
System.out.println(m2);


```

Write a new class called `MovableRectangle`, which composes two `MovablePoints` (representing the top-left and bottom-right corners) and implementing the `Movable` Interface. Make sure that the two points has the same speed.

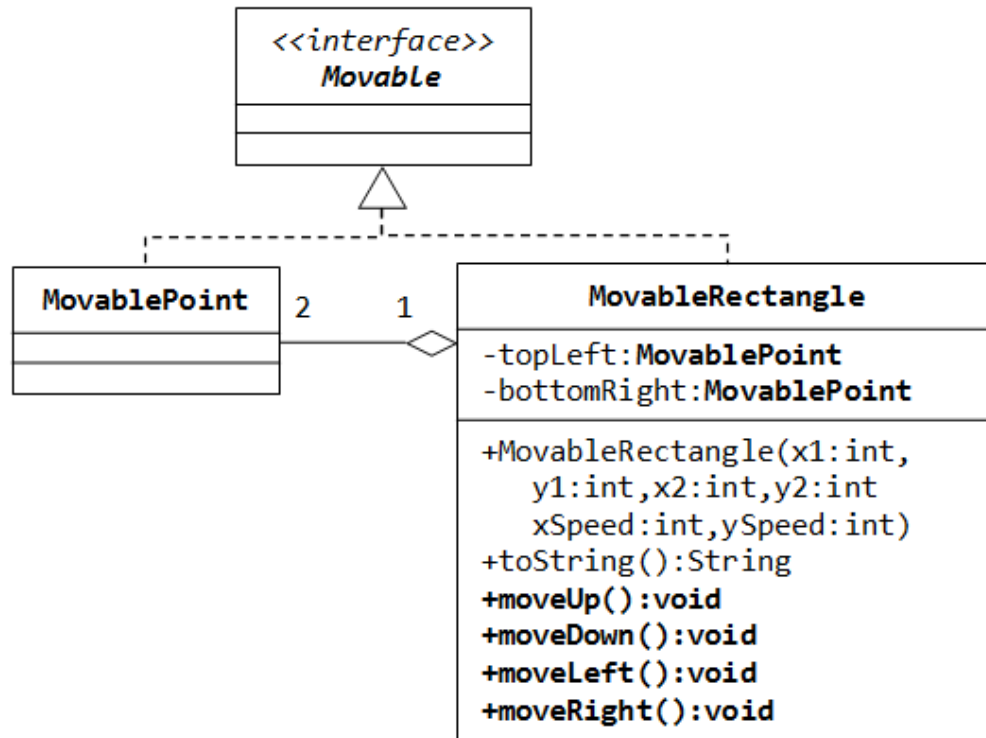

What is the difference between an interface and an abstract class?

4.4 Exercise: Interfaces `GeometricObject` and `Resizable`

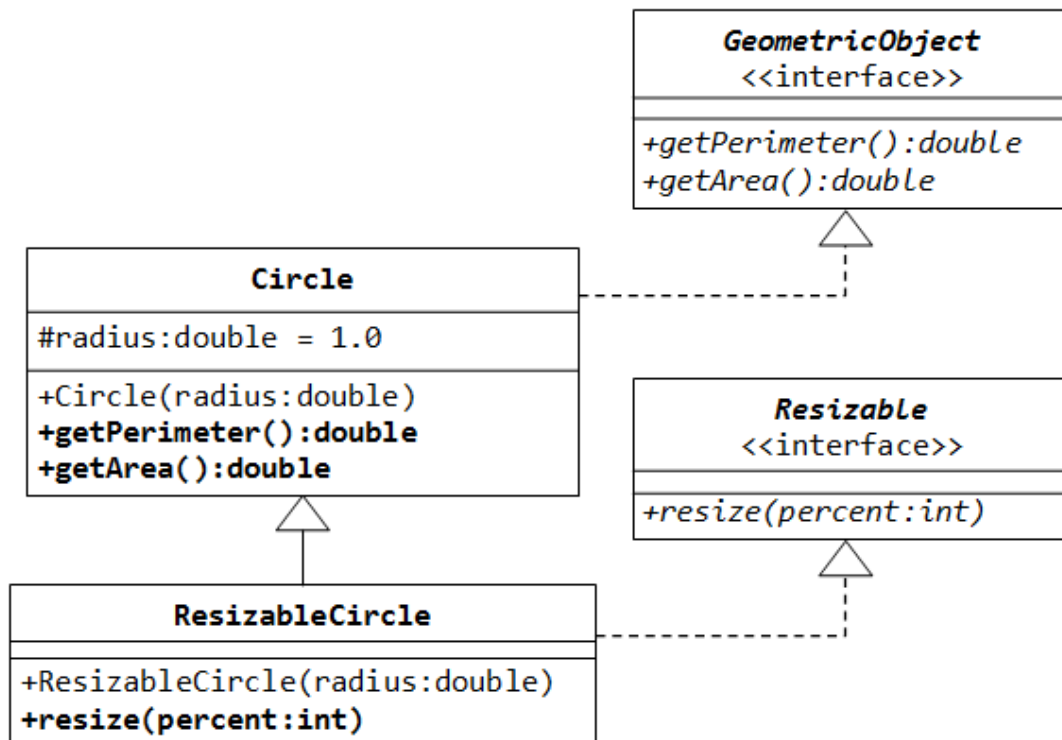

1. Write the interface called `GeometricObject`, which declares two abstract methods: `getPerimeter()` and `getArea()`, as specified in the class diagram.

Hints:

```
public interface GeometricObject {
    public double getPerimeter();
    .....
}
```

- Write the implementation class `Circle`, with a protected variable `radius`, which implements the interface `GeometricObject`.

Hints:

```
public class Circle implements GeometricObject {
    // Private variable
    .....

    // Constructor
    .....

    // Implement methods defined in the interface GeometricObject
    @Override
    public double getPerimeter() { ..... }

    .....
}
```

- Write a test program called `TestCircle` to test the methods defined in `Circle`.
- The class `ResizableCircle` is defined as a subclass of the class `Circle`, which also implements an interface called `Resizable`, as shown in class diagram. The interface `Resizable` declares an abstract method `resize()`, which modifies the dimension (such as `radius`) by the given percentage. Write the interface `Resizable` and the class `ResizableCircle`.

Hints:

```
public interface Resizable {
    public double resize(...);
}
```

```
public class ResizableCircle extends Circle implements Resizable {

    // Constructor
    public ResizableCircle(double radius) {
        super(...);
    }

    // Implement methods defined in the interface Resizable
    @Override
    public double resize(int percent) { ..... }
}
```


- Write a test program called `TestResizableCircle` to test the methods defined in `ResizableCircle`.

5. More Exercises on OOP

5.1 Exercise: The Discount System

You are asked to write a discount system for a beauty saloon, which provides services and sells beauty products. It


offers 3 types of memberships: Premium, Gold and Silver. Premium, gold and silver members receive a discount of 20%, 15%, and 10%, respectively, for all services provided. Customers without membership receive no discount. All members receives a flat 10% discount on products purchased (this might change in future). Your system shall consist of three classes: Customer, Discount and Visit, as shown in the class diagram. It shall compute the total bill if a customer purchases \$x of products and \$y of services, for a visit. Also write a test program to exercise all the classes.

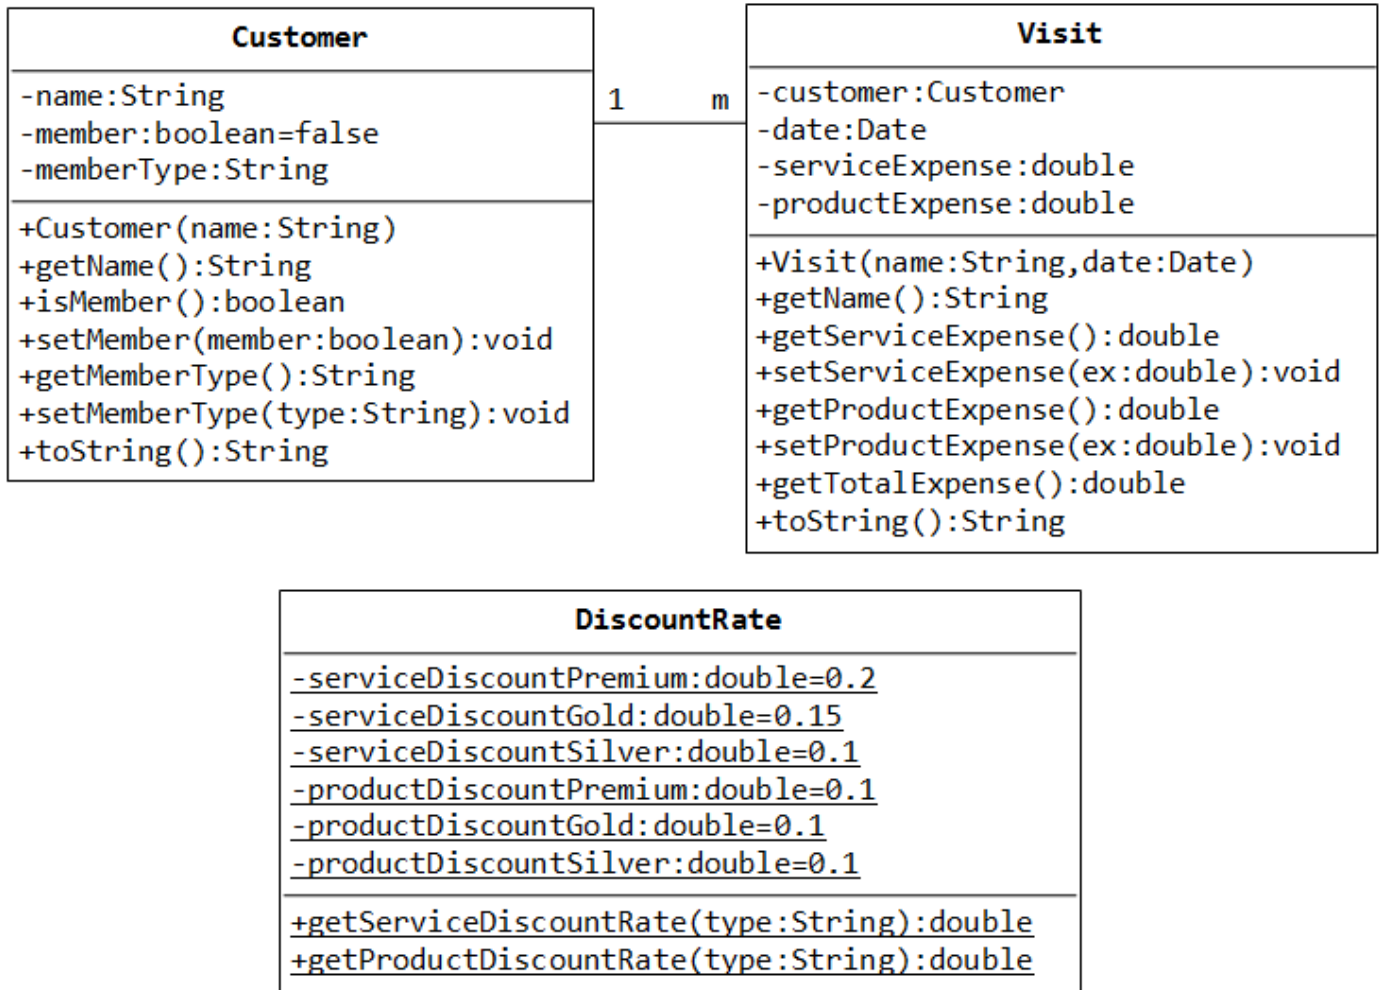

The class DiscountRate contains only static variables and methods (underlined in the class diagram).

5.2 Exercise: Polyline of Points with ArrayList

A polyline is a line with segments formed by points. Let's use the ArrayList (dynamically allocated array) to keep the points, but upcast to List in the instance variable. (Take note that array is of fixed-length, and you need to set the initial length).

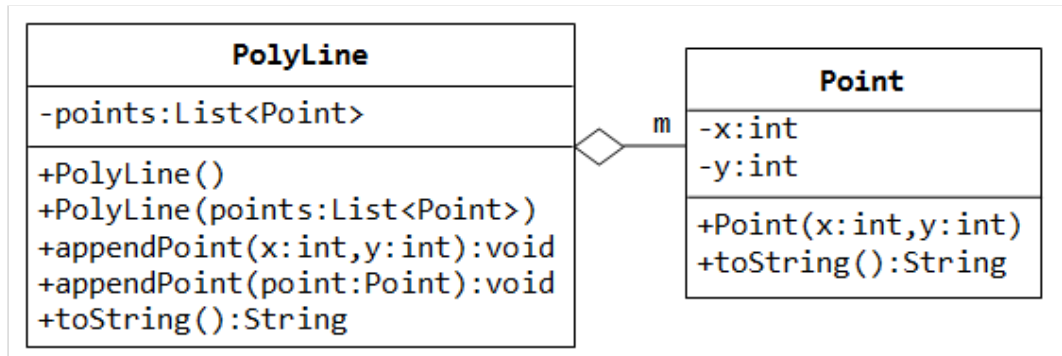

```
public class Point {
```

```

private int x;
private int y;

public Point(int x, int y) { ..... }
public String toString() { ..... }
}

```

```

import java.util.*;
public class PolyLine {
    private List<Point> points = new ArrayList<Point>();
    // Allocate an ArrayList of Points and upcast to List

    public PolyLine() { } // default constructor

    public PolyLine(List<Point> points) {
        this.points = points;
    }

    // Append a point at (x, y) to the end of this polyline
    public void appendPoint(int x, int y) {
        Point newPoint = new Point(x, y);
        points.add(newPoint);
    }

    // Append a point instance to the end of this polyline
    public void appendPoint(Point point) {
        points.add(point);
    }

    // return (x1,y1)(x2,y2)(x3,y3)....
    public String toString() {
        StringBuilder sb = new StringBuilder();
        for (Point aPoint : points) {
            sb.append(aPoint.toString());
        }
        return sb.toString();
    }
}

```

```

public class TestPolyLine {
    public static void main(String[] args) {
        PolyLine l1 = new PolyLine();
        System.out.println(l1); // empty
        l1.appendPoint(new Point(1, 1));
        l1.appendPoint(2, 2);
        l1.appendPoint(3, 3);
        System.out.println(l1); // (1,1)(2,2)(3,3)
    }
}

```

6. Exercises on Data Structure and Algorithm

6.1 Exercise: MyIntStack

A stack is a first-in-last-out queue. Write a program called MyIntStack, which uses an array to store the contents, restricted to int.

Write a test program.



```
1 public class MyIntStack {
2     private int[] contents;
3     private int tos; // Top of the stack
4
5     // constructors
6     public MyIntStack(int capacity) {
7         contents = new int[capacity];
8         tos = -1;
9     }
10
11     public void push(int element) {
12         contents[++tos] = element;
13     }
14
15     public int pop() {
16         return contents[tos--];
17     }
18
19     public int peek() {
20         return contents[tos];
21     }
22
23     public boolean isEmpty() {
24         return tos < 0;
25     }
26
27     public boolean isFull() {
28         return tos == contents.length - 1;
29     }
30 }
```

Try:

1. Modify the push() method to throw an IllegalStateException if the stack is full.
2. Modify the push() to return true if the operation is successful, or false otherwise.
3. Modify the push() to increase the capacity by reallocating another array, if the stack is full.

Exercise (Nodes, Link Lists, Trees, Graphs):

[TODO]

- Study the existing open source codes, including JDK.
- Specialized algorithms, such as shortest path.

Exercise (Maps):

[TODO]

- Representation of map data.
- Specialized algorithms, such as shortest path.

Exercise (Matrix Operations for 3D Graphics):

[TODO]

- Study the existing open source codes, including JDK's 2D Graphics and JOGL's 3D Graphics.
- Efficient and specialized codes for 3D Graphics (4D matrices). Handle various primitive types such as `int`, `float` and `double` efficiently.

Latest version tested: JDK 1.7.3

Last modified: May, 2012

Feedback, comments, corrections, and errata can be sent to Chua Hock-Chuan (ehchua@ntu.edu.sg) | [HOME](#)