

# CS151 Intro to Data Structures

Doubly LinkedLists

# Announcements

- HW01 and Lab02 due Friday
  - Expandable Array
- lab today will be on linked lists

# Warm up

```
public int mystery() {  
    int sum = 0;  
    Node cur = head.next;  
  
    while (cur != null) {  
        Node temp = cur.next;  
        while (temp != null) {  
            if (cur.data < temp.data) {  
                sum += cur.data;  
            } else if (cur.data == temp.data) {  
                return -1;  
            }  
            temp = temp.next;  
        }  
        cur = cur.next;  
    }  
    return sum;  
}
```


1. At a high level, what does this method do conceptually?
2. What is the return value if the linked list contains  $[3 \rightarrow 7 \rightarrow 2 \rightarrow 7]$ ?
3. What is the return value linked list contains  $[5 \rightarrow 4 \rightarrow 3 \rightarrow 2 \rightarrow 1]$ ?
4. What is the time complexity of this method?

# Outline

- LinkedLists review
- Fancy LinkedLists (Doubly Linked Lists)


# Linked List

- A linked list is a lists of objects (**nodes**)
- The **nodes** form a linear sequence
- Linked lists are typically unbounded, that is, they can grow infinitely.

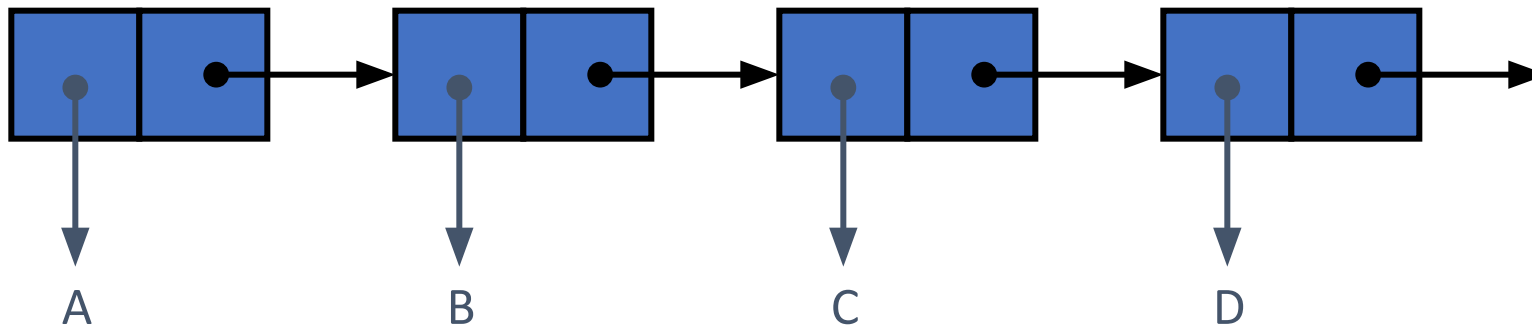

# A node


```
public class Node<T> {  
    private T data;  
    private Node next;  
}
```

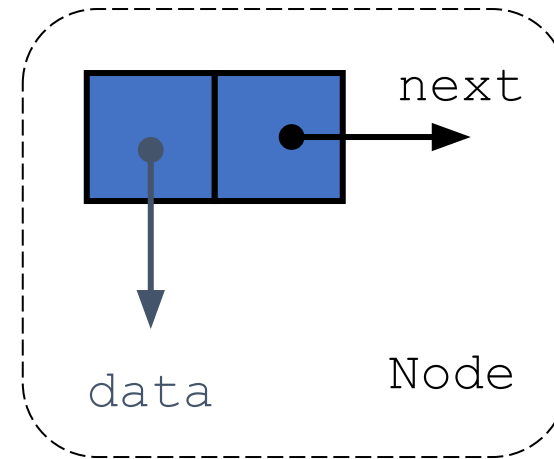

# Linked List

How might we loop over all of the elements of a linked list?

```
public class Node<T> {  
    private T data;  
    private Node next;  
}
```

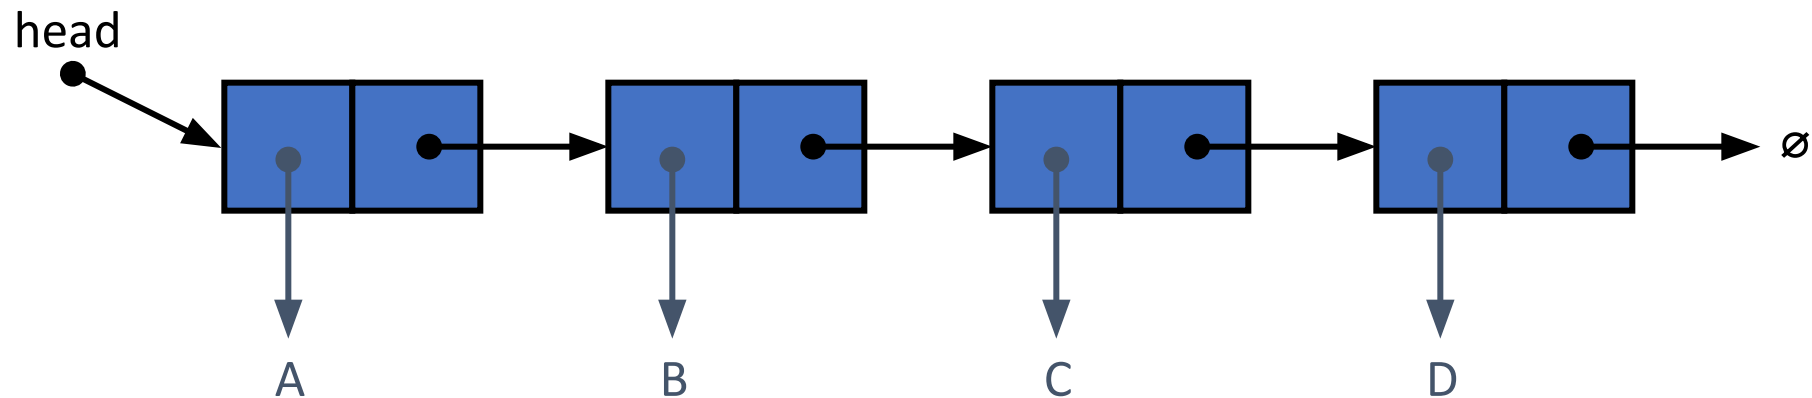


# Linked List Operations

- Access
- Insertion
- Removal



# Access Operation

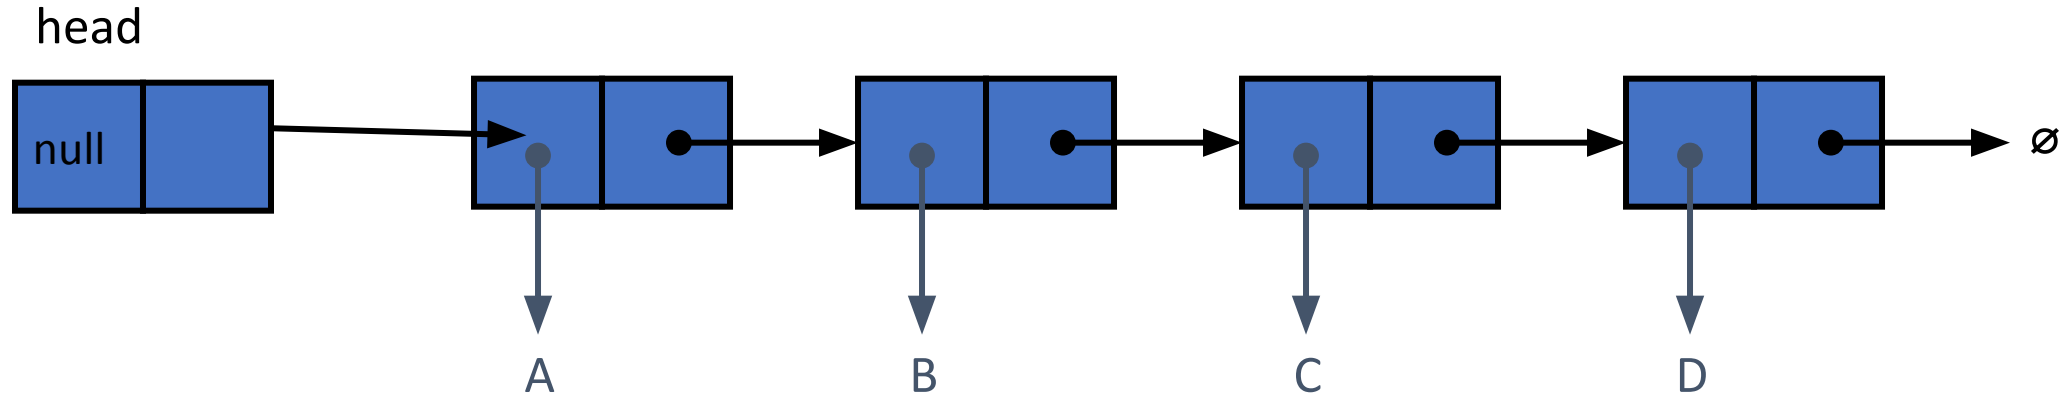

- Check if the head node is what you are looking for
- Iterate through nodes:
  - Stop when found
  - Otherwise return null



# Access Operation

- Computational Complexity?
  - $O(n)$

# Insert Operation

- Computational complexity?
  - Insert at head?
    - $O(1)$
  - Insert at tail?
    - $O(n)$
  - Insert at arbitrary location? (middle of list)
    - $O(n)$


# Remove Operation `remove("B")`

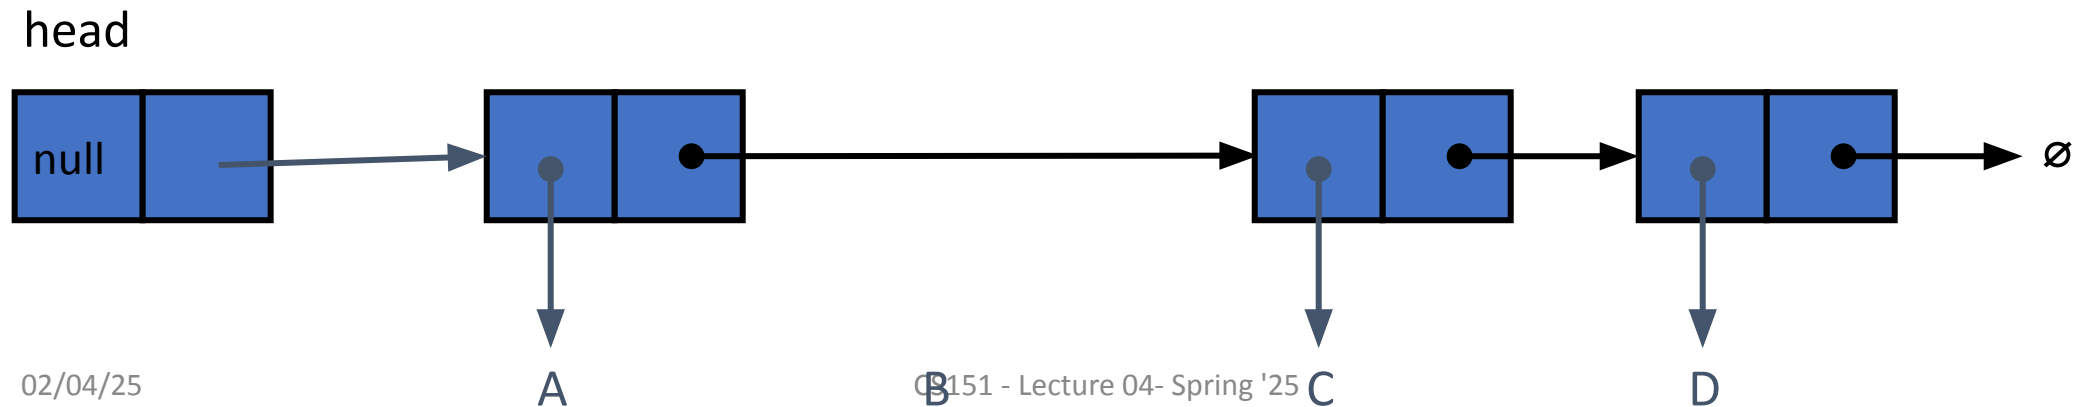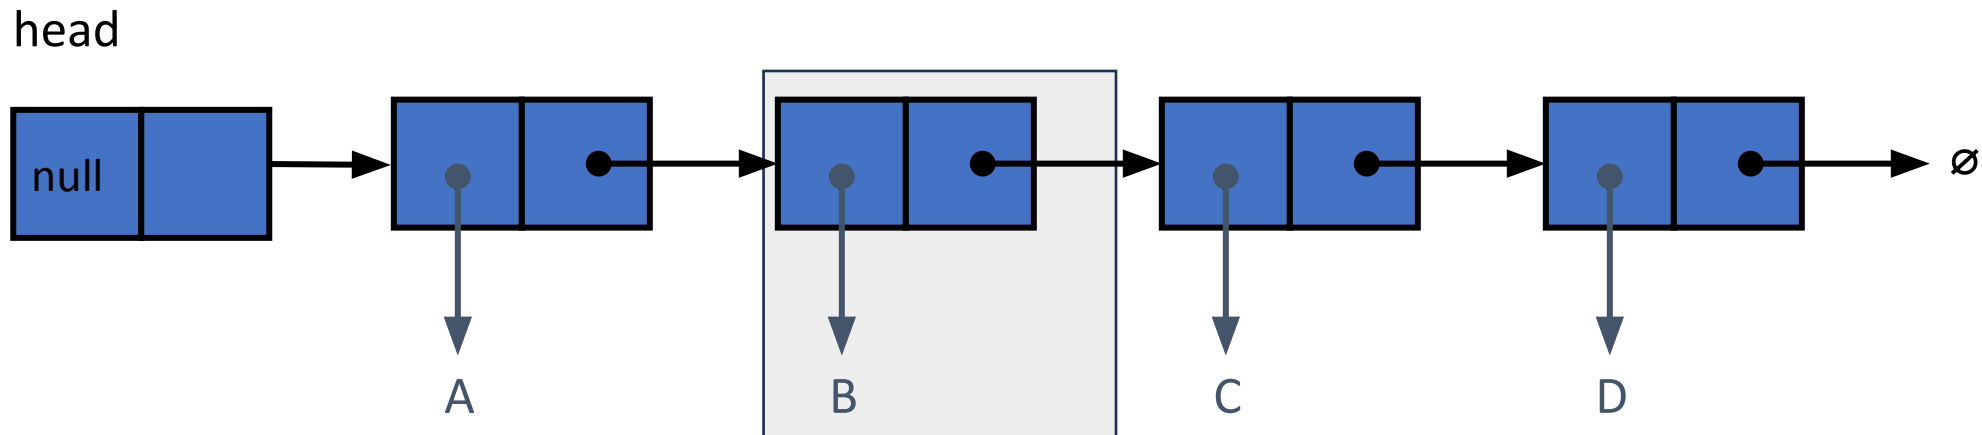


# Doubly Linked Lists

# A node


```
public class Node<T> {  
    private T data;  
    private Node next;  
    private Node prev;  
}
```

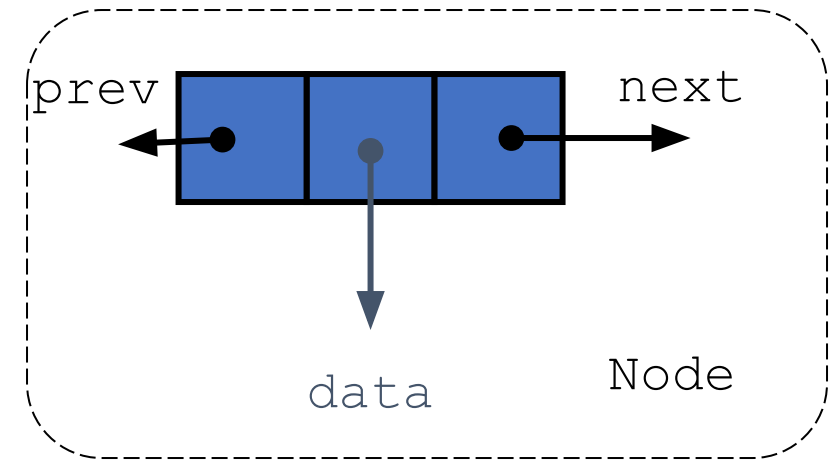

# Doubly Linked List

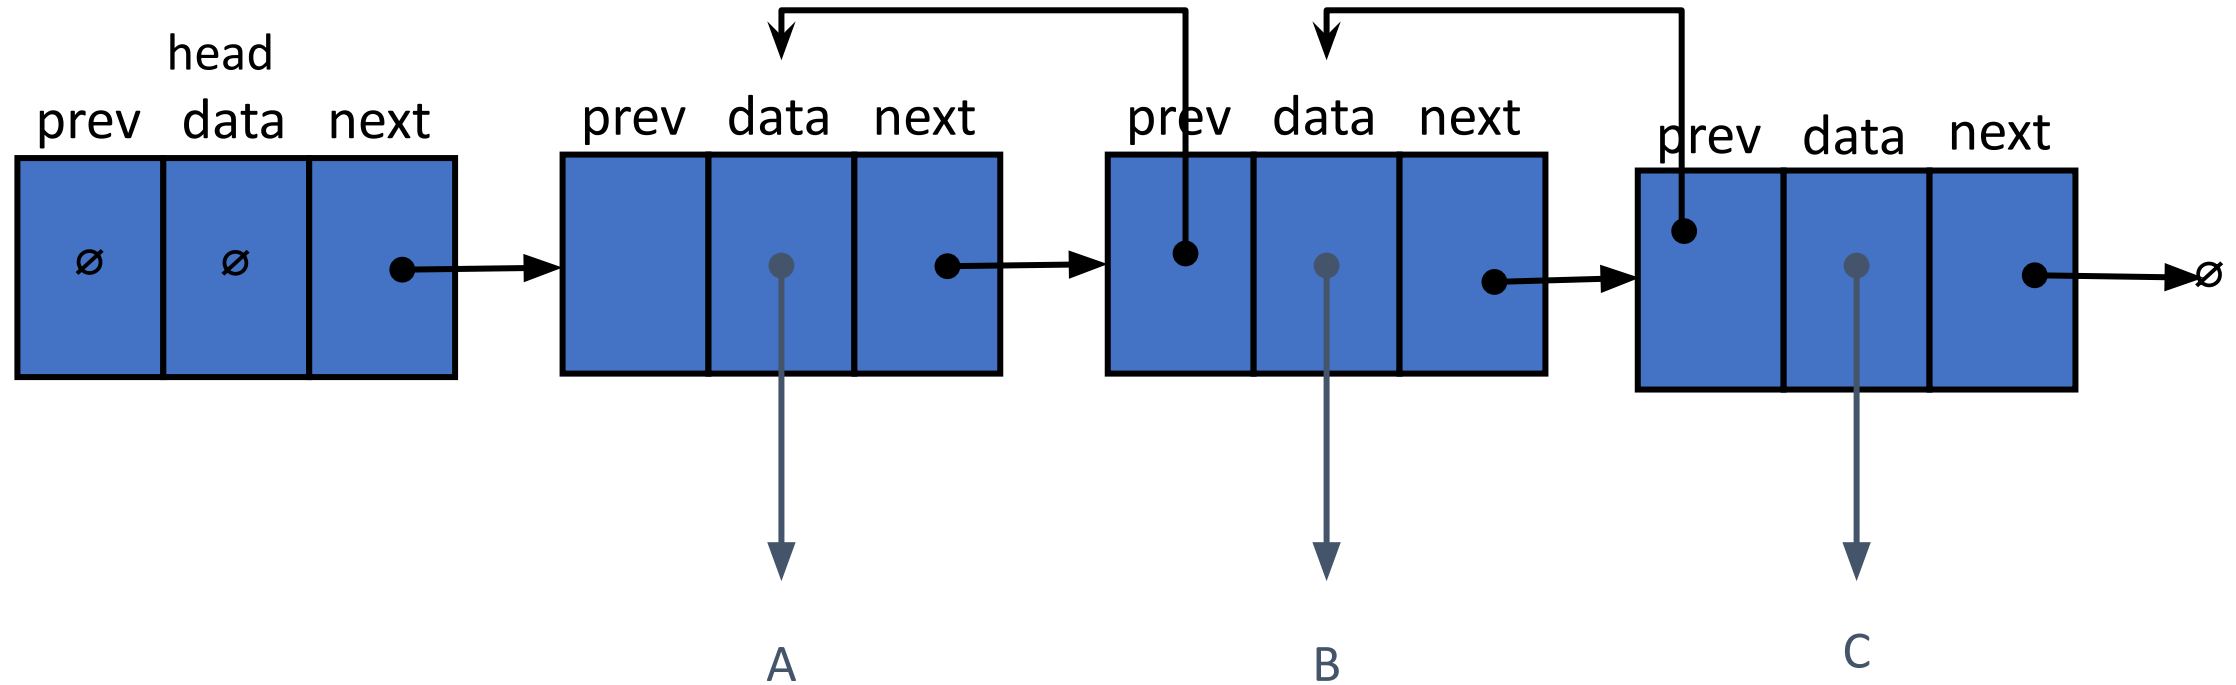

# Doubly Linked List

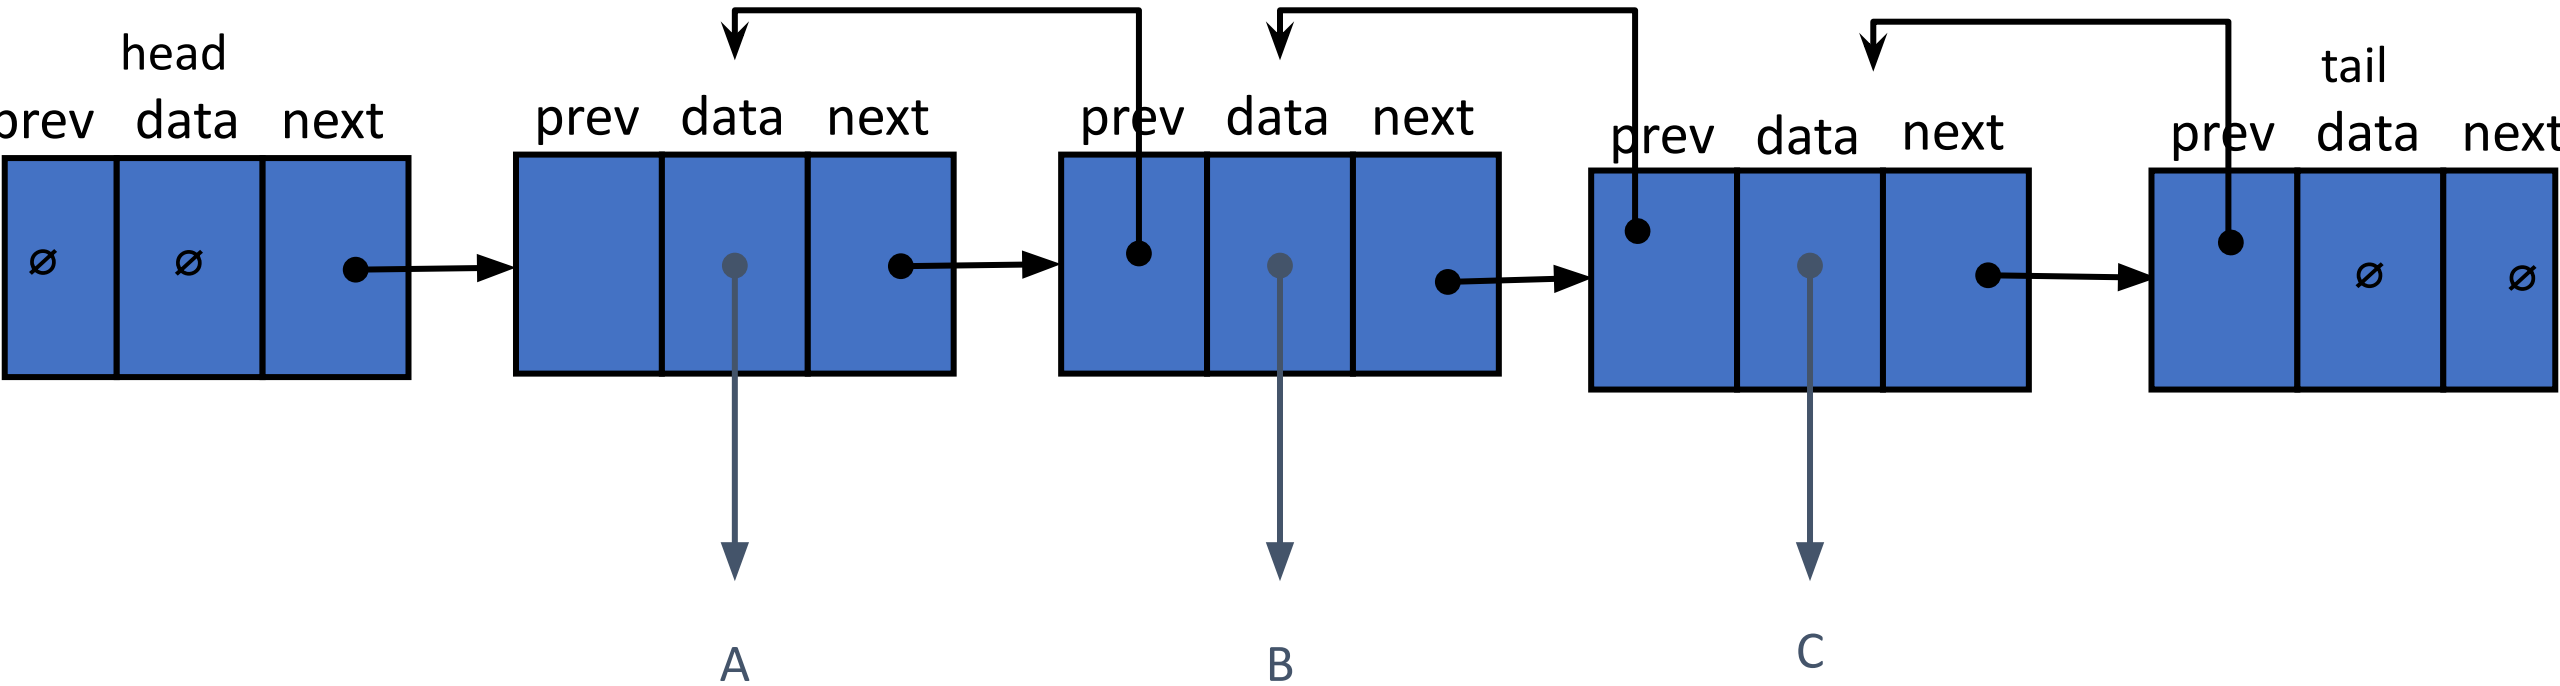



# Lab today: Doubly Linked Lists

You'll be implementing a SLL and DLL

`insertSortedAlpha`: inserted into the list in alphabetically sorted order

How would you implement `insertSorted` with numeric values?

# Comparing Strings in Java

`compareTo()` method is used to compare two strings lexicographically.

```
int result = str1.compareTo(str2);
```

It compares two strings character by character based on their Unicode values.  
The method returns:

- 0 if `str1` is equal to `str2`
- A **negative value** if `str1` is lexicographically smaller than `str2`
- A **positive value** if `str1` is lexicographically greater than `str2`

# ASCII Table

Dec	Hex	Oct	Char	Dec	Hex	Oct	Char	Dec	Hex	Oct	Char	Dec	Hex	Oct	Char
0	0	0		32	20	40	[space]	64	40	100	@	96	60	140	`
1	1	1		33	21	41	!	65	41	101	A	97	61	141	a
2	2	2		34	22	42	"	66	42	102	B	98	62	142	b
3	3	3		35	23	43	#	67	43	103	C	99	63	143	c
4	4	4		36	24	44	\$	68	44	104	D	100	64	144	d
5	5	5		37	25	45	%	69	45	105	E	101	65	145	e
6	6	6		38	26	46	&	70	46	106	F	102	66	146	f
7	7	7		39	27	47	'	71	47	107	G	103	67	147	g
8	8	10		40	28	50	(	72	48	110	H	104	68	150	h
9	9	11		41	29	51	)	73	49	111	I	105	69	151	i
10	A	12		42	2A	52	*	74	4A	112	J	106	6A	152	j
11	B	13		43	2B	53	+	75	4B	113	K	107	6B	153	k
12	C	14		44	2C	54	,	76	4C	114	L	108	6C	154	l
13	D	15		45	2D	55	-	77	4D	115	M	109	6D	155	m
14	E	16		46	2E	56	.	78	4E	116	N	110	6E	156	n
15	F	17		47	2F	57	/	79	4F	117	O	111	6F	157	o
16	10	20		48	30	60	0	80	50	120	P	112	70	160	p
17	11	21		49	31	61	1	81	51	121	Q	113	71	161	q
18	12	22		50	32	62	2	82	52	122	R	114	72	162	r
19	13	23		51	33	63	3	83	53	123	S	115	73	163	s
20	14	24		52	34	64	4	84	54	124	T	116	74	164	t
21	15	25		53	35	65	5	85	55	125	U	117	75	165	u
22	16	26		54	36	66	6	86	56	126	V	118	76	166	v
23	17	27		55	37	67	7	87	57	127	W	119	77	167	w
24	18	30		56	38	70	8	88	58	130	X	120	78	170	x
25	19	31		57	39	71	9	89	59	131	Y	121	79	171	y
26	1A	32		58	3A	72	:	90	5A	132	Z	122	7A	172	z
27	1B	33		59	3B	73	;	91	5B	133	[	123	7B	173	{
28	1C	34		60	3C	74	<	92	5C	134	\	124	7C	174	
29	1D	35		61	3D	75	=	93	5D	135	]	125	7D	175	}
30	1E	36		62	3E	76	>	94	5E	136	^	126	7E	176	~
31	1F	37		63	3F	77	?	95	5F	137	_	127	7F	177	

# Case Sensitivity

`compareTo()` is case-sensitive

```
"Apple".compareTo("apple")
```

returns a negative value since 'A' has a lower Unicode value than 'a'.

# Summary

- Doubly Linked Lists
  - nodes have a prev field
  - tail dummy node
- get, insert, and remove
  - $O(n)$  operations
  - Need to take special care for .prev fields
- Use more memory than SLLs, but allow for backward traversal