CS151 Intro to Data Structures

Midterm Review

Announcements

Exam in class Thursday

Exam in lab Thursday

OH Today 3-5pm Park 259

Exam Format

- Format:
  - 11 points T/F questions
  - 8 points reading and understanding code
  - 51 points open ended programming
    - I won’t be harsh on syntax grading
      - I won’t try to compile your code :)
    - Be careful with types! You’ll get points deducted if you code doesn’t type check
- Tips:
  - For the coding portion, DRAW! It will help you

Topics

Data Structures

- Arrays
- Expandable Arrays
- Stacks
- Queues
- Linked Lists
- deques

Other concepts:

- Generics
- Iterators
- Big-O analysis
- OOP & Inheritance
- Interfaces

Practice Problems (T/F)

1. A Linked list of 5 elements uses more memory than a java array of the same 5 elements
   a. TRUE

2. If an exception occurs in a catch block, it will be handled gracefully and will not crash the program
   a. FALSE

3. Binary search on a sorted linked list can be implemented in O(logn) time
   a. FALSE

4. A stack with O(1) push, pop, and peek operations can be implemented with either a linked list or an array
   a. TRUE

5. A dequeue is a FIFO data structure. An element cannot be removed until the elements which have been added before it have been removed.
   a. FALSE

Practice Problems (reading code)

```
/**
* @precondition: ll contains at least 1 element.
*/
public static int mystery(LinkedList<Integer> ll) {
    int count = 0;
    Node n = ll.head.next;
    Node n2 = n.next;

    while (n != null && n2 != null) {
        if (n.data.equals(n2.data)) {
            return count;
         } else {
            count += 1;
        }
        n = n.next;
         n2 = n2.next;
     }
     return count;
}
```


0. What does this code do?

1. What is the runtime complexity in the best case? Use big o notation. Give an example input that would achieve this runtime.


2. What is the runtime complexity in the worst case? Use big o notation. Give an example input that would achieve this runtime.


Practice Problems - Coding Question

`rearrangeEvenOdd` modify the linked list in such a way that nodes with even indices (0, 2, 4, ...) appear before nodes with odd indices (1, 3, 5, ...). Ensure that the rearrangement is done in-place.

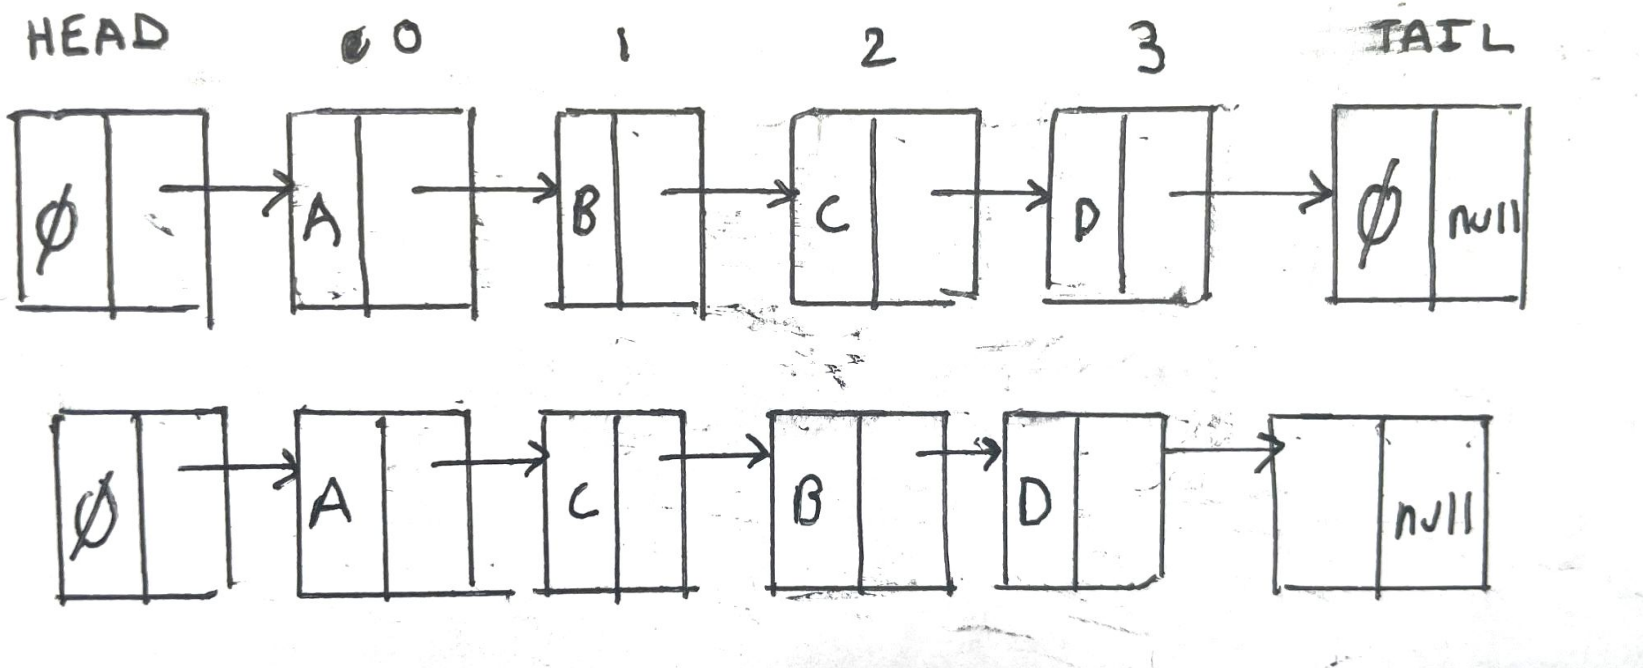

Coding Question - Linked Lists

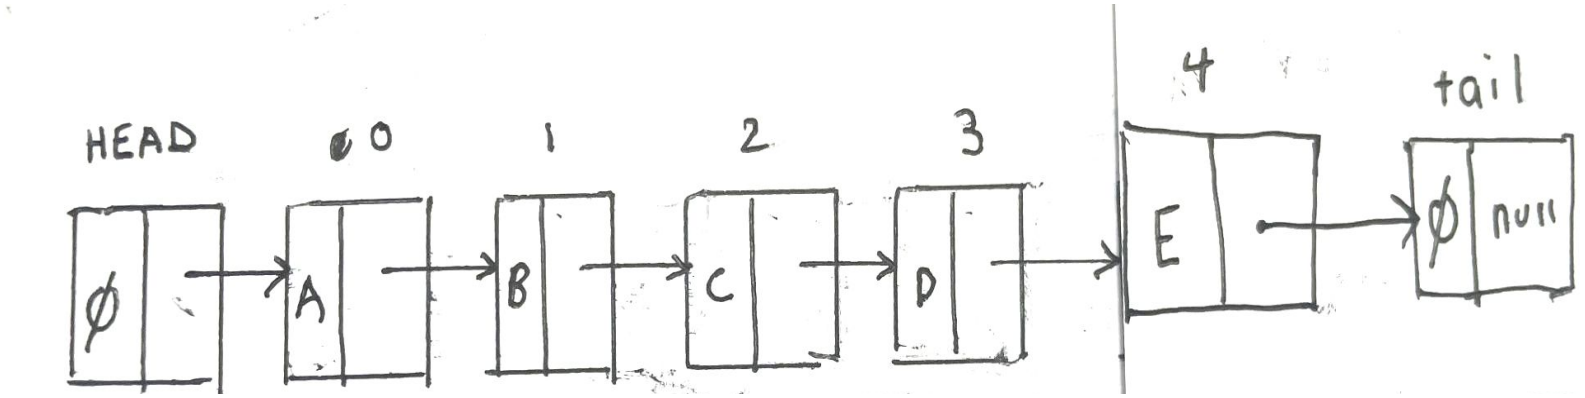

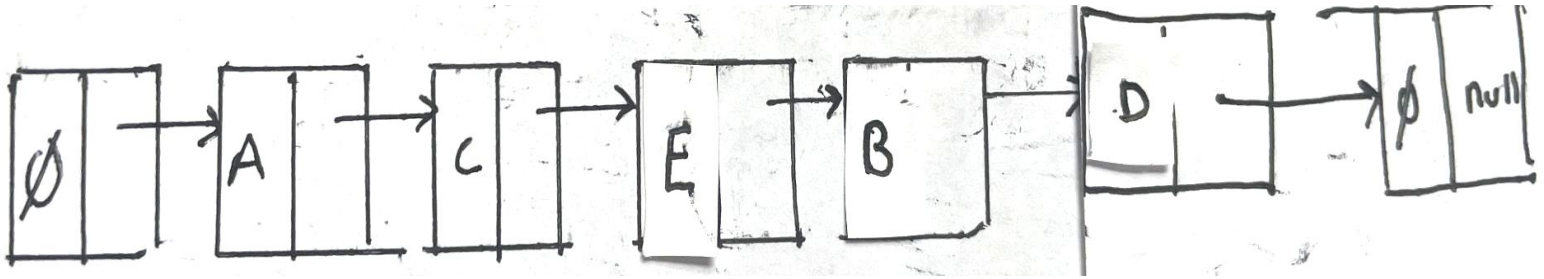

Coding Question - Linked Lists

Edge cases!

Head -> Tail

Head -> A -> Tail

Head -> A -> B -> Tail

Do we handle these?

Coding Question - Linked Lists

Runtime complexity?

Memory complexity?

Coding Question - Stacks

You are given a string containing a combination of square brackets [ ], curly braces { }, and parentheses ( ). **Use a stack** to determine if the input string is valid in terms of bracket balancing.

"[{ }]" => True
"[{] }" => False
"{ [( )] }" => True
"{ [( ]) }" => False
"[{ }]]" => False

Coding Question #2

Runtime complexity?

Memory complexity?

Coding Question 3:

name,	**intensity,**	**kind**
splash,	50,	water
fireball,	100,	fire
ignite,	15,	fire
terraform,	20,	earth

Design four classes: `water`, `fire`, `earth`, and `spell`.
Write a method **`castSpells`** takes two `Spells` and returns a `int` indicating which spell won

Water always beats fire regardless of intensity

Otherwise, compare intensity

Circular Queue Review

- Many ways to design a circular queue
  - ArrayDeque (Lecture 11)
    - f and r markers. f points to the first element. r points to the last element.
    - initialized at f=0, r=n-1
    - empty: (r+1)%n == f
    - full: (r+2)%n == f
    - capacity is n-1
    - enqueue: r = (r+1)%n; a[r] = x
    - dequeue: x = a[f]; f = (f+1)%n

Circular Queue Review

- Many ways to design a circular queue
  - Quiz specification:
    - f and r markers. f points to the first element, r points to the next open slot
    - initialized at r = f = 0
    - empty condition?
    - full condition?
    - capacity?
    - enqueue?
    - dequeue?
- Trace