


a Pre-registration timeline

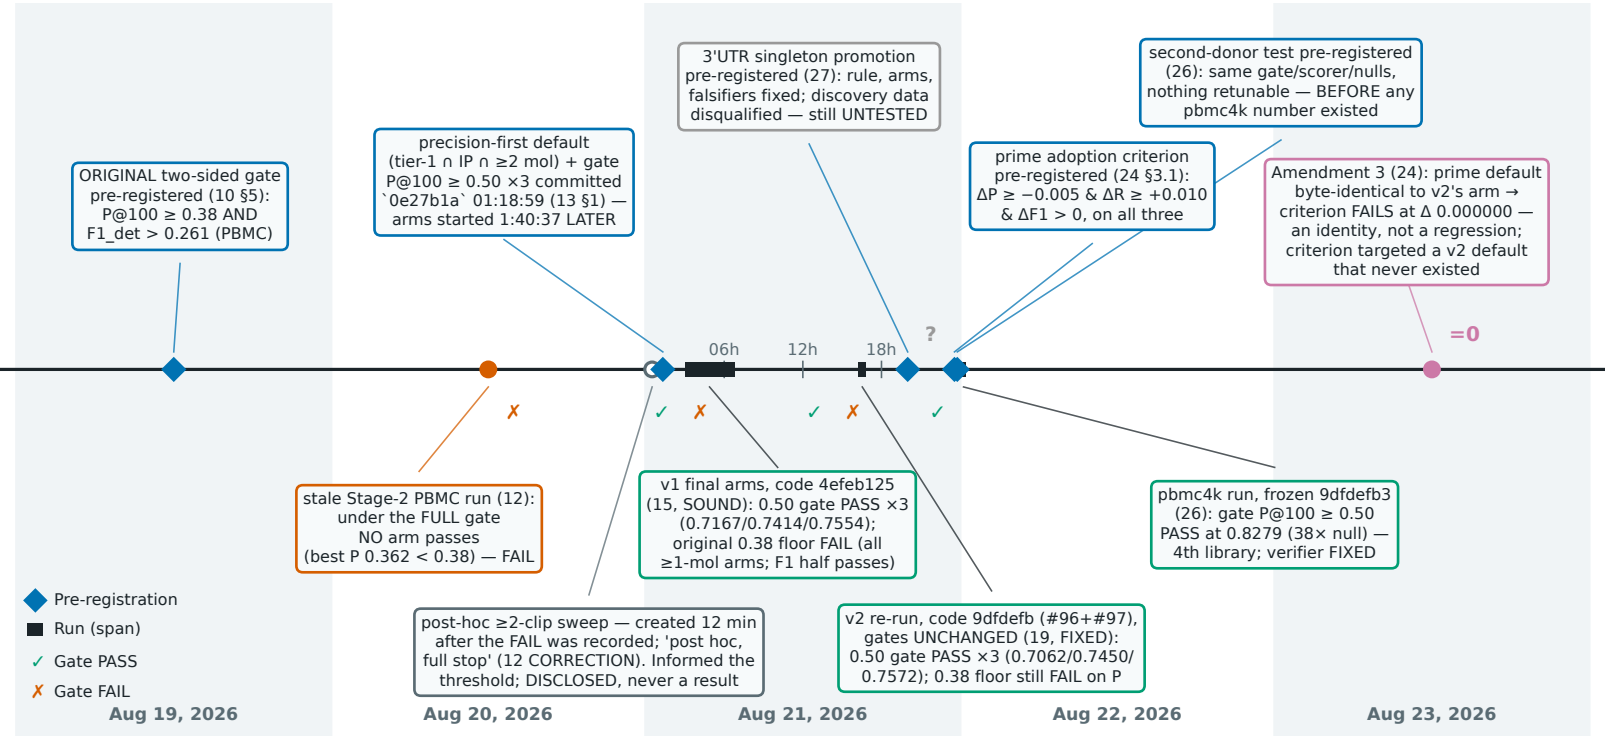

b Every pre-registered gate and every outcome

ORIGINAL two-sided gate — $P@100 \geq 0.38$ AND $F1_{det} > 0.261$, PBMC ≥ 1 -molecule output (10 \$5, 2026-08-19)		
Stage-2 run 2026-08-20 (stale; 12)	both tiers n 377,236: P 0.188 / F1 0.235; tier-1 n 197,410: P 0.308 / F1 0.290; tier-1+IP n 142,400: P 0.362 / F1 0.290 — 'under the full gate, NO arm passes'	FAIL
V1 final run 2026-08-21 (15 \$2)	tier-1 ≥ 1 mol no-IP n 222,955: P 0.3032 / F1 0.3001; IP arm n 161,595: P 0.3546 / F1 0.3013	F1 pass / P FAIL
V2 re-run 2026-08-21 (19 \$2)	tier-1 ≥ 1 mol no-IP n 222,955: P 0.3032 (byte-identical to v1); IP arm n 167,565: P 0.3520 / F1 0.3046	F1 pass / P FAIL
PRECISION-FIRST default gate — $P@100 \geq 0.50$ on PBMC AND both mice (13 \$1; commit '0e27b1a' 01:18:59, 1:40:37 before the arms)		
V1 final run 2026-08-21 (15 \$1)	0.7167 / 0.7414 / 0.7554 (n 44,394 / 25,991 / 26,164)	PASS x3
V2 re-run 2026-08-21, gates unchanged (19 \$1)	0.7062 / 0.7450 / 0.7572 (n 46,524 / 26,255 / 26,526)	PASS x3
pbmc4k second donor 2026-08-22 (26 \$6, same gate)	0.8279 (n 20,672; 38x its genic-shuffle null) — the 4th library	PASS
PRIME adoption criterion — $\Delta P \geq -0.005$ & $\Delta R \geq +0.010$ & $\Delta F1_{det} > 0$ on all three datasets, default vs default (24 \$3.1, 2026-08-21; all prime numbers EXPLORATORY per \$3.4)		
Prime default vs v2 default (Amendment 3, 2026-08-23)	prime's default output byte-identical to v2's manuscript arm on all four libraries → every Δ exactly 0.000000 — an identity, not a regression; the criterion was written against a v2 default that never existed (--ip-filter-mode default is 'annotate')	FAIL (identity)
3'UTR SINGLETON promotion — R2 arm; no precision loss with a recall gain, deciding evidence = testis mouse 2 + non-discovery data (27 \$1/\$3, 2026-08-21; Rule T)		
Confirmatory evaluation	NOT RUN — discovery-set numbers are labelled 'DISCOVERY SET — not evidence'; the promotion ships behind a flag, default OFF, until 27 \$3 passes	PENDING