



a What PeakATail does, step by step

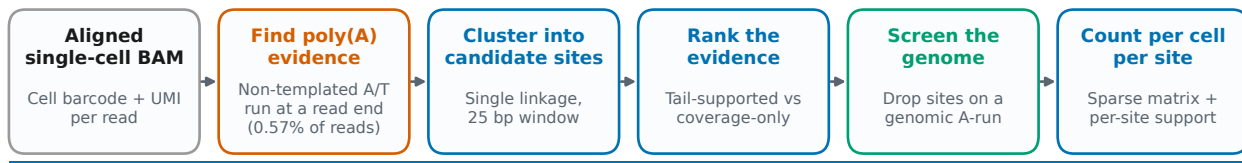


`ema run`

One command produces the sites and the count matrix.

Two flags set the operating point: `--polya-min-umis` (tail molecules required) and `--ip-filter` (genome screen).

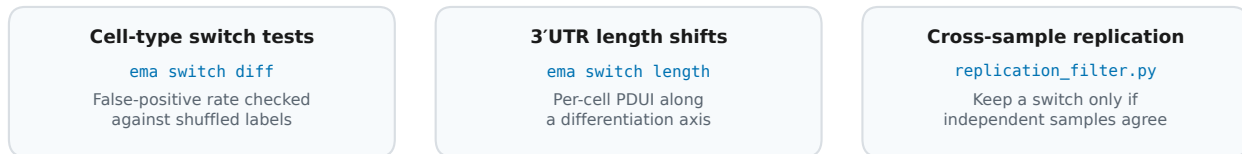

b Why a call is trusted: the evidence decides

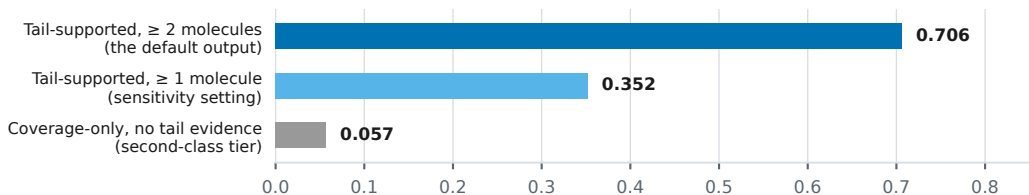


Atlas-agreement precision @100 bp

A site earns its place from molecules that carry the tail, not from a bump in coverage.

The three classes are reported separately, so a user chooses the operating point rather than inheriting ours.

PBMC 10k v3 shown. The default keeps 46,524 sites.

c What the tool delivers

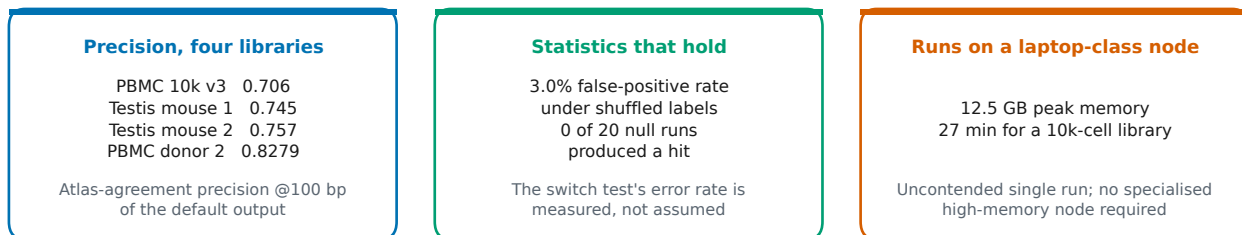

d The result the tool is built for

15,942 cell-type polyadenylation switches replicated across 12 patients of a lung-tumour cohort

and none replicated in any of ten label-shuffle null runs of the same pipeline

A switch counts only when independent patients agree on it in the same direction, and any patient disagreeing vetoes the call.