
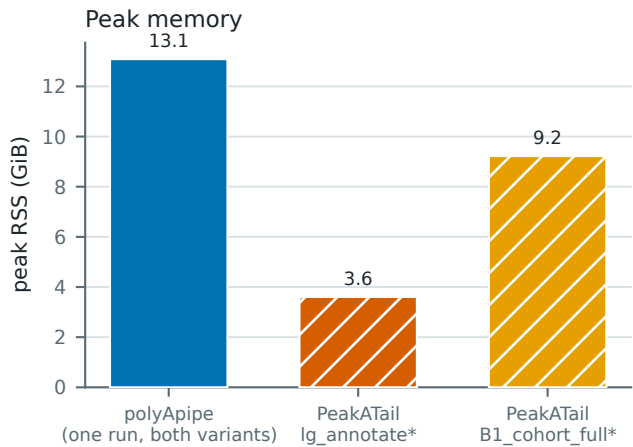
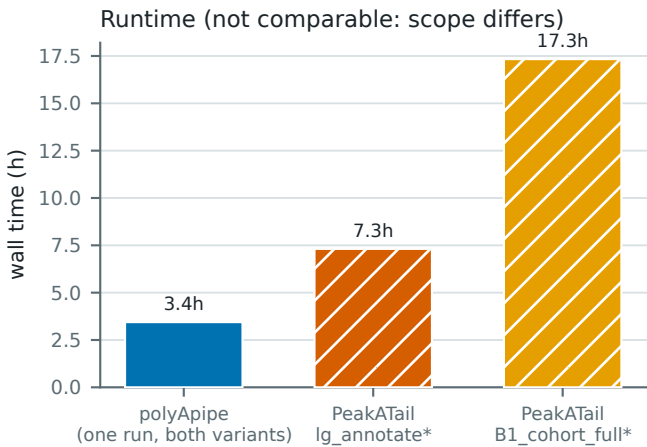
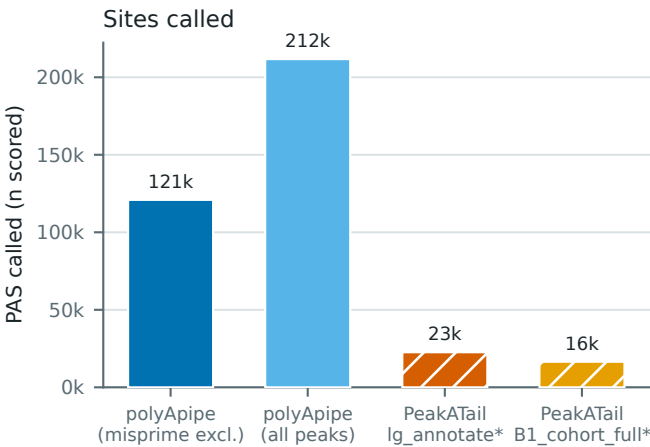
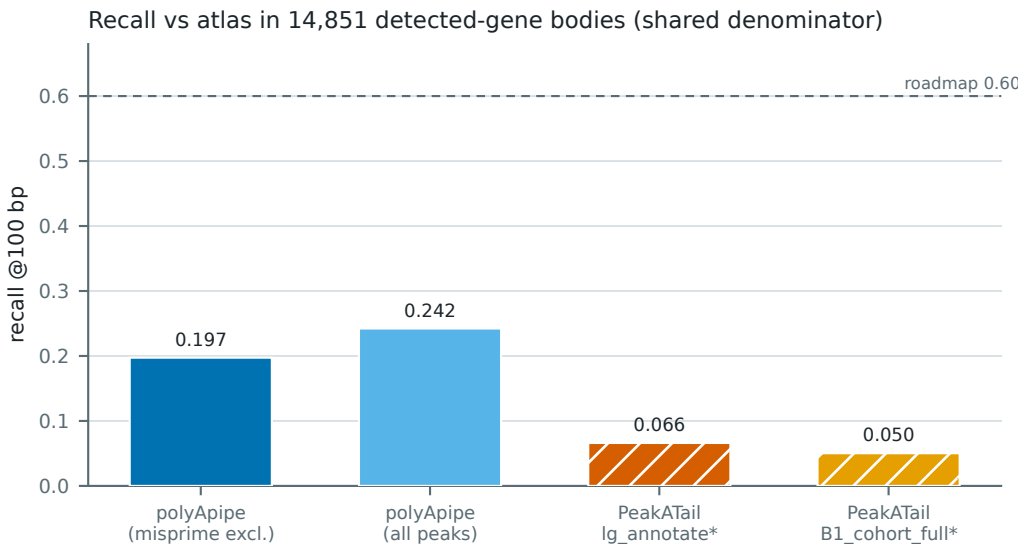


Tool benchmark -- RUNNING comparison (1 external tool in)

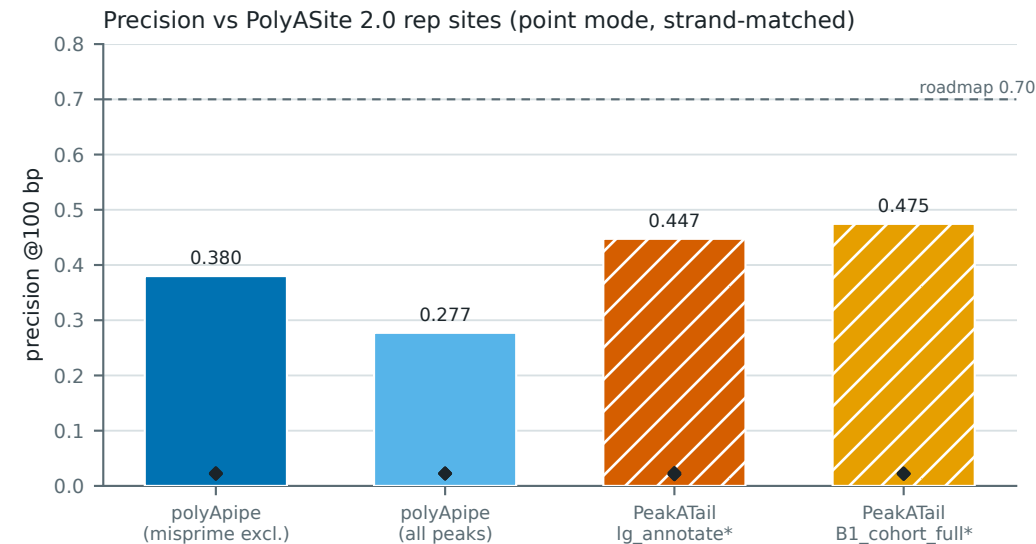

polyAipe (misprime excl.) PeakATail lg_annotate ◆ genic-shuffle null (3 seeds)
polyAipe (all peaks) PeakATail B1_cohort_full * provisional (Laughney cohort)

CAVEATS: PeakATail bars (*) are PROVISIONAL -- scored on the Laughney cohort, not pbmc_10k_v3; the matched CellRanger pbmc_10k_v3 PeakATail run is still in progress. polyAipe scored on pbmc_10k_v3 (CellRanger BAM). Cross-dataset precision/recall differences partly reflect dataset depth/composition, not tool quality alone.
Runtime/RSS scope differs: polyAipe = PAS calling + per-cell counting (/usr/bin/time, one run for both variants); PeakATail = full pipeline incl. clustering/differential (5 s process sampling, may miss subprocess peaks). Recall denominator identical for all tools: 285,220 PolyASite 2.0 rep sites in the 14,851 Laughney-detected genes (recall flavor b of benchmark_curated.py).