



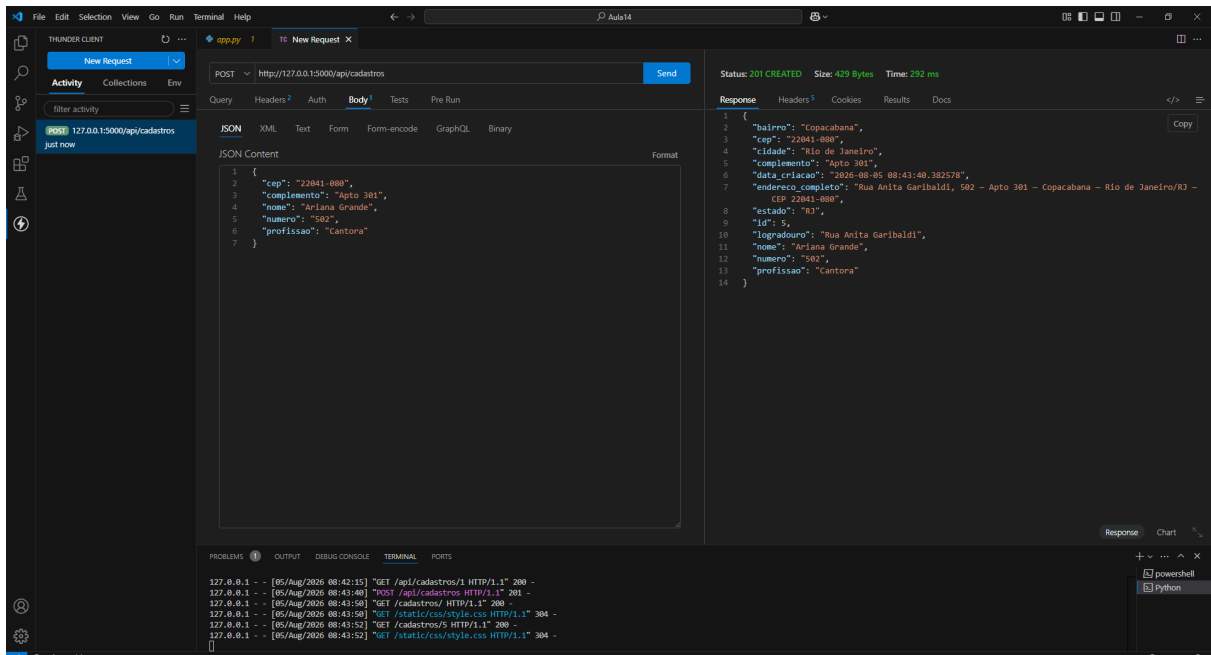

ADD_PESSOA2

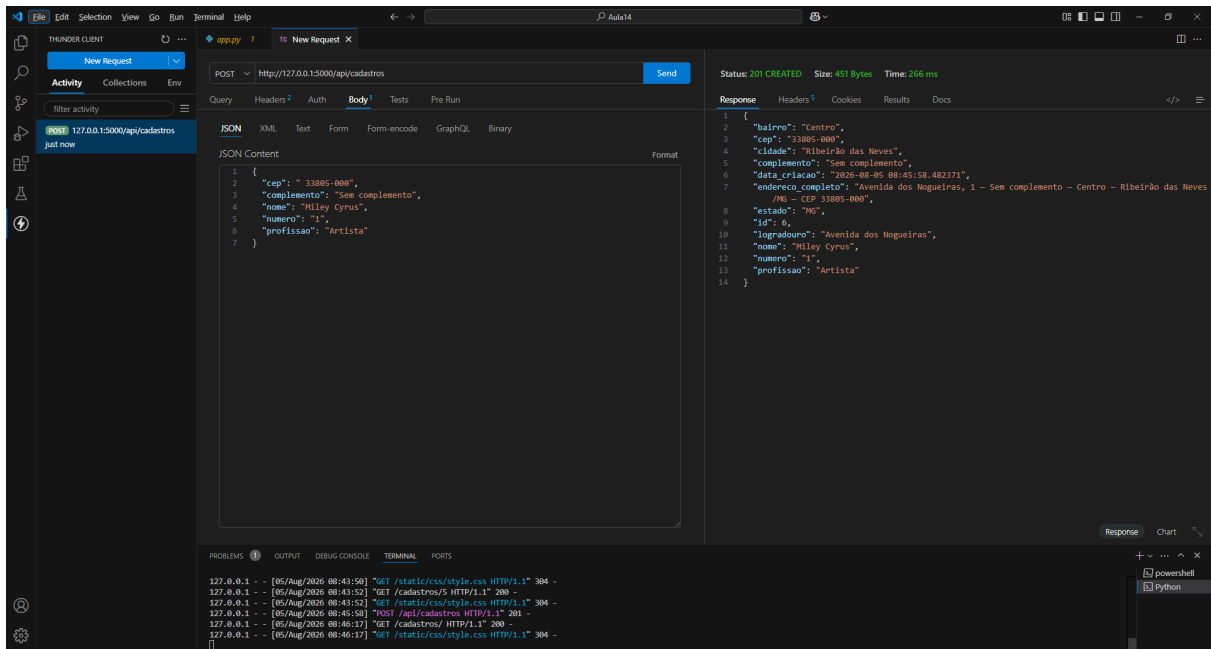

ATUALIZAR_PESSOA

The screenshot shows the Thunder Client interface with a PUT request to `http://127.0.0.1:5000/api/cadastros/1`. The request body is a JSON object representing a person's data. The response is a 200 OK status with a JSON body containing the updated record.

Request:

```
PUT http://127.0.0.1:5000/api/cadastros/1
```

Request Body (JSON):

```
{  "cep": "38431-228",  "complemento": "Sem complemento",  "nome": "Clebinho",  "numero": "223",  "profissao": "Professor de Geografia"}
```

Response (JSON):

```
{  "bairro": "Bela Vista",  "cep": "38431-228",  "cidade": "São Paulo",  "complemento": "Sem complemento",  "data_criacao": "2026-07-02 19:26:50.426128",  "endereco_completo": "Avenida Paulista, 223 - Sem complemento - Bela Vista - São Paulo/SP - CEP: 38431-228",  "estado": "SP",  "id": 1,  "logradouro": "Avenida Paulista",  "nome": "Clebinho",  "numero": "223",  "profissao": "Professor de Geografia"}
```

The bottom panel shows the terminal output with logs for the PUT request and other GET requests to the API.

APAGAR

The screenshot shows the Thunder Client interface with a DELETE request to `http://127.0.0.1:5000/api/cadastros/2`. The response is a 404 NOT FOUND status, indicating that the record was not found.

Request:

```
DELETE http://127.0.0.1:5000/api/cadastros/2
```

Response (JSON):

```
{  "erro": "Cadastro não encontrado"}
```

The bottom panel shows the terminal output with logs for the DELETE request and other GET requests to the API.