

AI ACCELERATOR PROGRAM USE CASE - MULTI-AGENT AI ASSISTANT

JERRY - STEP-BY-STEP WORKBOOK

What you will build

You will build **Jerry**, a multi-agent workflow in **n8n**. A **Master Orchestrator Agent** routes each request to an **Email Agent**, **Calendar Agent**, or **Meetings Agent**.

API Key: To be added

Before you start

1. Open your **n8n** workspace and click **Create Workflow**.
2. Keep your **OpenAI**, **Gmail**, **Google Calendar**, and **Fireflies** credentials ready.
3. Use your **own credentials and account values** wherever this workbook shows a placeholder.
4. Keep the workflow **unpublished** until all tests pass.


Security: The Fireflies API key is intentionally replaced with **YOUR_FIREFLIES_API_KEY**.



Part 1 - Build the Master Orchestrator


Step 1: Add Chat Trigger

1. Click the **+** button on the canvas and search for **Chat**.
2. Select **On New Chat Event**.
3. Leave **Options** unchanged.

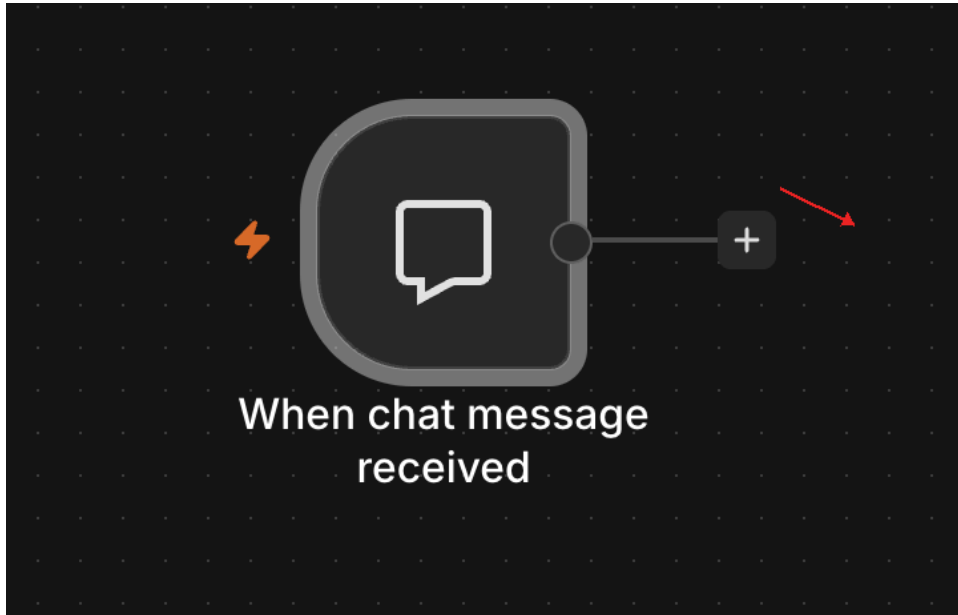

Step 2: Add Master Orchestrator Agent

1. Click the **+** output of the Chat Trigger.
2. Search for **AI Agent** and select it.
3. Rename the node to **Master Orchestrator Agent**.
4. Confirm the Chat Trigger is connected to the agent using the **main** connection.

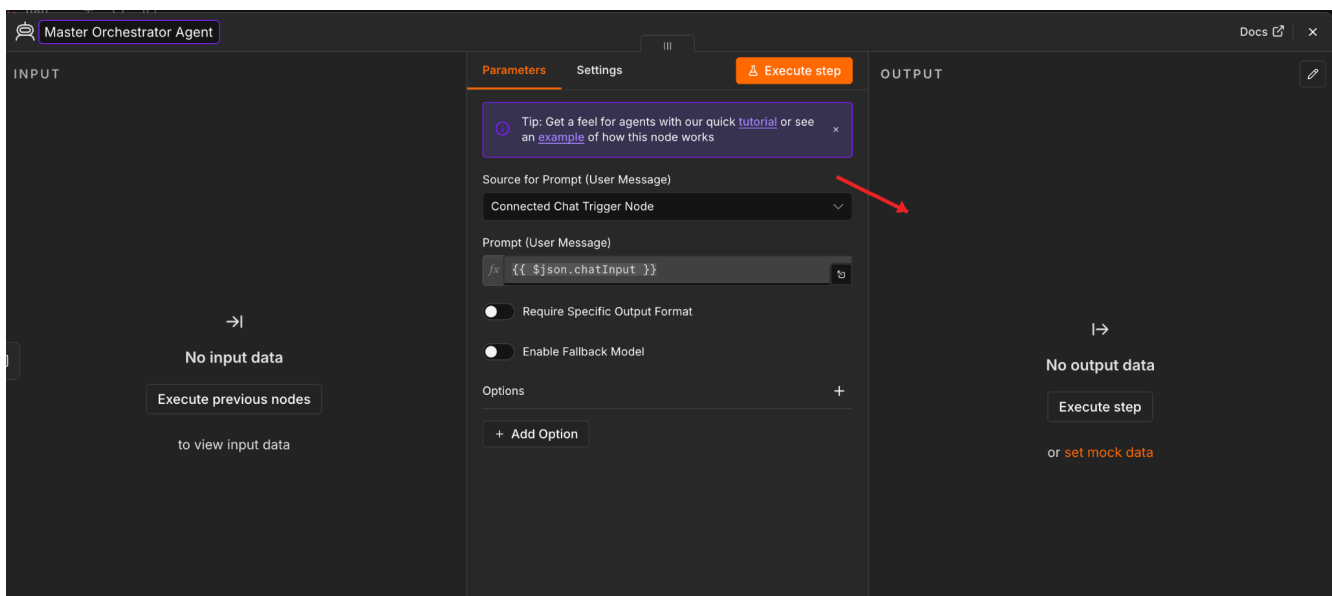


Step 3: Configure the Master Orchestrator Agent

1. Open **Master Orchestrator Agent**.
2. Under **Options**, add **System Message**.
3. Paste the system message below.

Paste this System Message

You are a master orchestrator who handles all things email, Cal, and meetings.


1. If a user queries related to emails, direct that particular request to the email agent and proceed ahead.
2. If the user request is related to the calendar, direct that to the calendar agent and proceed ahead.
3. If the user request is related to the meetings agent, direct that to the meetings agent and proceed ahead.
4. If the user request is either related to email, calendar or meetings, or a combination of them, then call the appropriate agents in the order of priority. Use the reasoning as per the user request and proceed ahead.

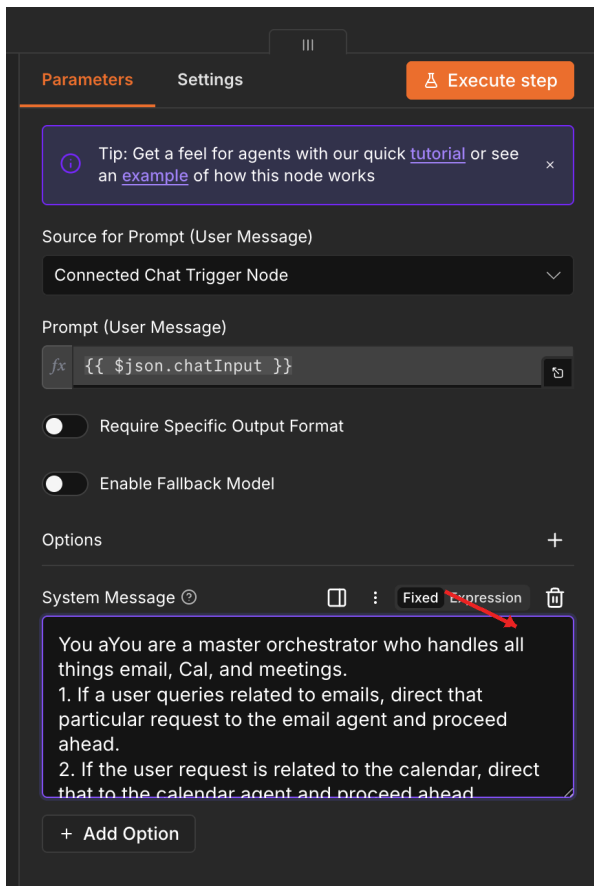


The screenshot shows the 'Parameters' tab of the AI Accelerator interface. At the top, there are tabs for 'Parameters' and 'Settings', and an 'Execute step' button. A tip box at the top left says: 'Tip: Get a feel for agents with our quick [tutorial](#) or see an [example](#) of how this node works'. Below this, the 'Source for Prompt (User Message)' is set to 'Connected Chat Trigger Node'. The 'Prompt (User Message)' field contains the expression: `{{ $json.chatInput }}`. There are two toggle switches: 'Require Specific Output Format' and 'Enable Fallback Model', both of which are currently turned off. Below the toggles is an 'Options' section with a plus sign. Under 'Options', there is a 'System Message' field with a plus icon, a 'Fixed Expression' button (highlighted with a red arrow), and a trash icon. The 'System Message' field contains the text: 'You aYou are a master orchestrator who handles all things email, Cal, and meetings. 1. If a user queries related to emails, direct that particular request to the email agent and proceed ahead. 2. If the user request is related to the calendar, direct that to the calendar agent and proceed ahead.' At the bottom of the 'Options' section is a '+ Add Option' button.

Step 4: Add Master OpenAI Chat Model

1. Click the **+** below the Master Agent **Chat Model** port.
2. Select **OpenAI Chat Model**.
3. Choose your **OpenAI credentials**. (Add the API key given in the beginning of the workbook)
4. Set **Model** to **gpt-5-mini**.
5. Leave **Built-in Tools** and **Options** unchanged.

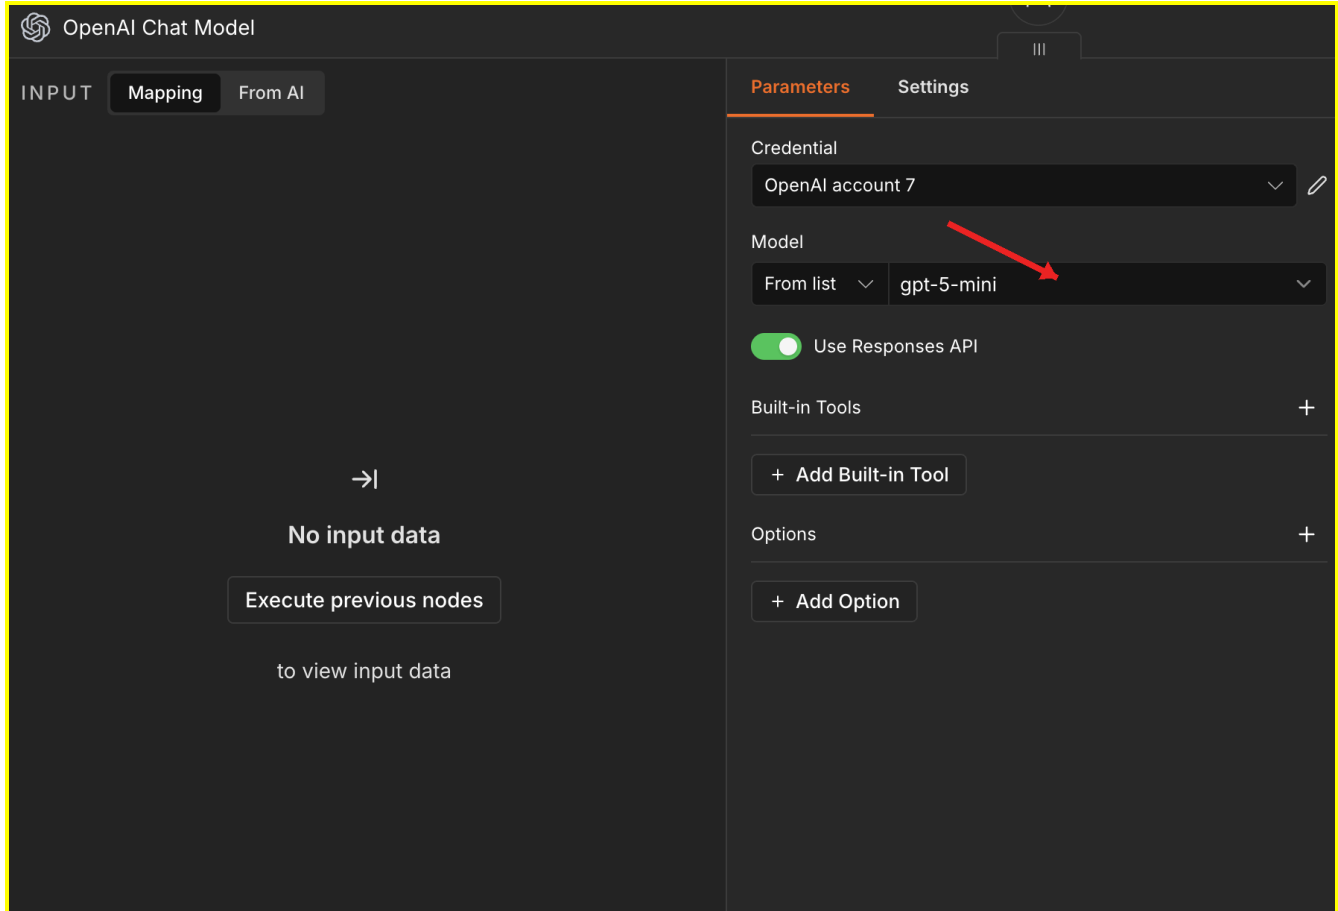**Step 5: Add Master Simple Memory**


1. Click the **+** below the Master Agent **Memory** port.
2. Select **Simple Memory**.
3. Leave the node at its **default settings**.

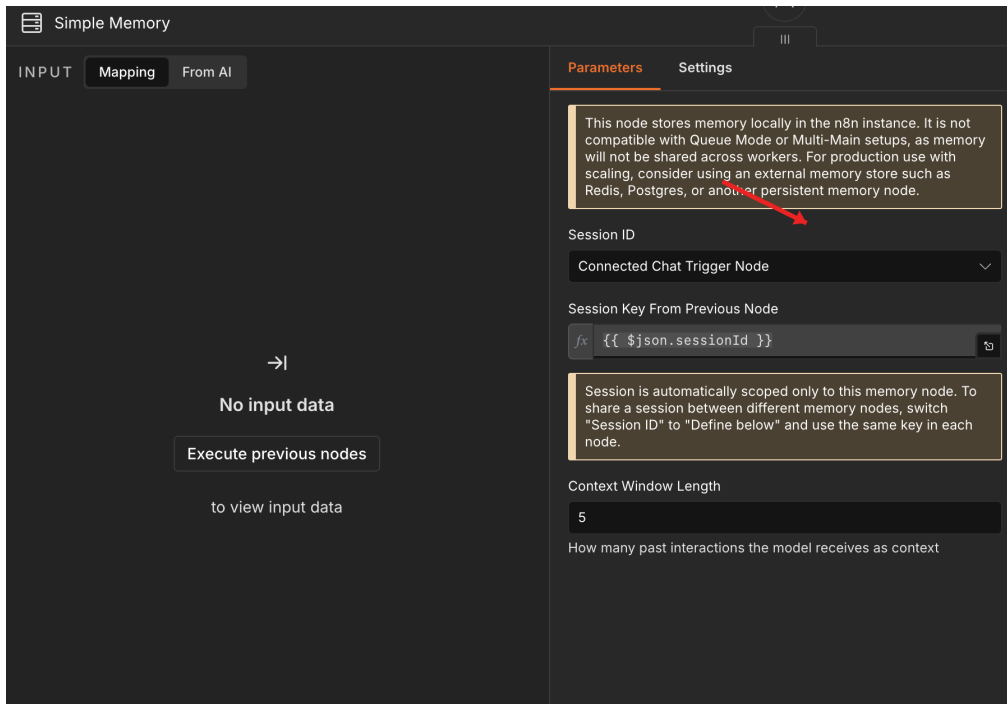

Part 2 - Build the Email Agent

Step 6: Add Email Agent

1. Click the **+** below the Master Agent **Tool** port.
2. Select **AI Agent Tool**.
3. Rename it to **Email Agent**.
4. Set **Prompt (User Message)** to **From AI**.

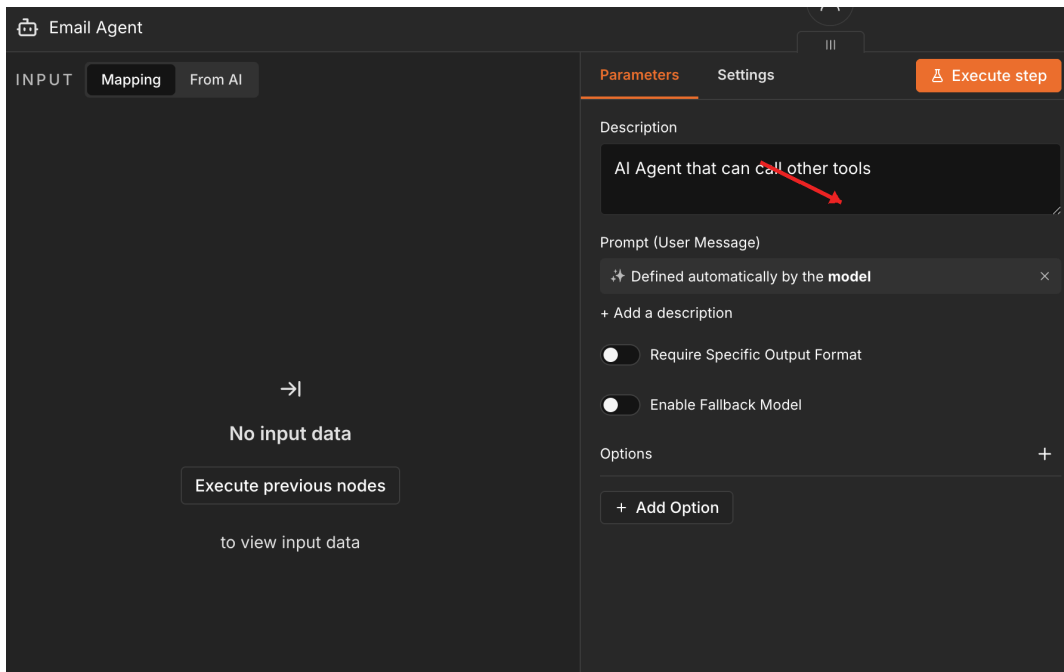

Step 7: Configure the Email Agent

1. Open **Email Agent** and add a **System Message** under Options.
2. Paste the system message below.

Paste this System Message

```
You are an expert email assistant who can do all things email.  
1. If a user inquires to fetch or get an email, use the Get Many Messages Gmail tool and  
   proceed further.  
2. If a user asks to send an email or compose an email, use the Send an email tool and  
   proceed further.  
3. If the user asks to create a draft or spin up a message faster, always use the Create  
   a Draft tool and proceed further.  
4. If the user either asks to reply or delete:  
   a. First use the Get many messages tool to read the inbox.  
   b. Select the email in focus and extract its Message ID.  
   c. Use that Message ID in the reply or delete tool.
```

Email Agent

INPUT Mapping From AI

No input data

Execute previous nodes

to view input data

Parameters Settings Execute step

Description

AI Agent that can call other tools

Prompt (User Message)

Defined automatically by the model

+ Add a description

Require Specific Output Format

Enable Fallback Model

Options

System Message


Fixed Expression

You are a helpYou are an expert email assistant who can do all things email.
 1. If a user inquires to fetch or get an email, use the Get Many Messages Gmail tool and proceed further.
 2. If a user asks to send an email or compose an email, use the Send an email tool and proceed further.
 3. If the user asks to create a draft or spin up a...

+ Add Option

Step 8: Add Email Agent model and memory


1. Add a separate **OpenAI Chat Model** from the Email Agent **Chat Model** port.
2. Choose your OpenAI credential and set **Model = gpt-5-mini**.
3. Add a separate **Simple Memory** from the Email Agent **Memory** port.

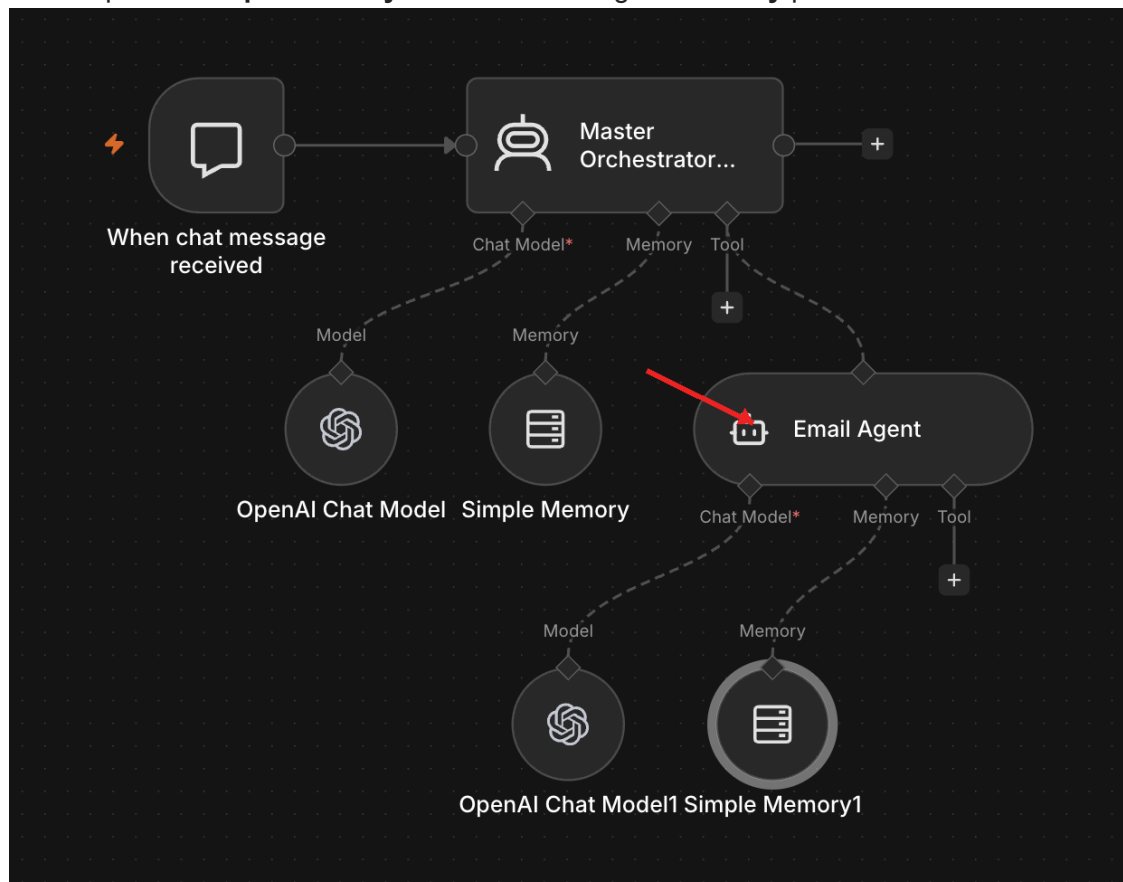

Part 3 - Add the Gmail Tools


Step 9: Add Get many messages in Gmail

1. From the Email Agent **Tool** port, add the **Gmail tool**.
2. Choose your **Gmail credentials**.
3. Set **Tool Description**- **Set Automatically** and **Resource** - **Message** and **Operation** - **Get Many**
4. Set **Return All** to **From AI**.
5. Leave **Filters** empty.
6. Rename the node **Get many messages in Gmail**.

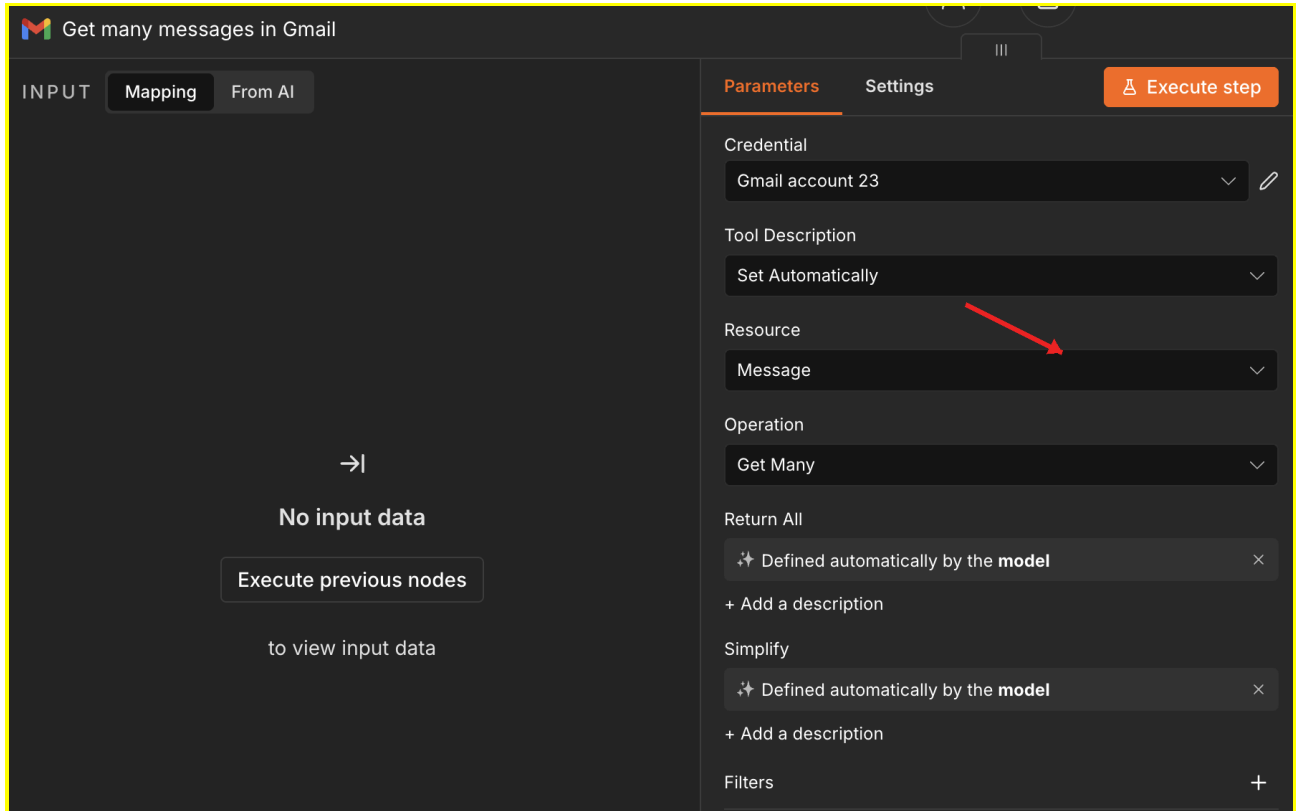


Step 10: Add Send a message in Gmail

1. From the Email Agent **Tool** port, select + and add Gmail **Tool**.
2. Choose your **Gmail Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Message**.
5. Set **Operation** - **Send**.
6. Set **To** - Defined automatically by the model (**From AI**).
7. Set **Subject** - Defined automatically by the model (**From AI**).
8. Set **Message** - Defined automatically by the model (**From AI**).
9. Set **Email Type** - **Text**.
10. Under **Options**, turn **Append Attribution** - **Off**.
11. Rename the node **Send a message in Gmail**.

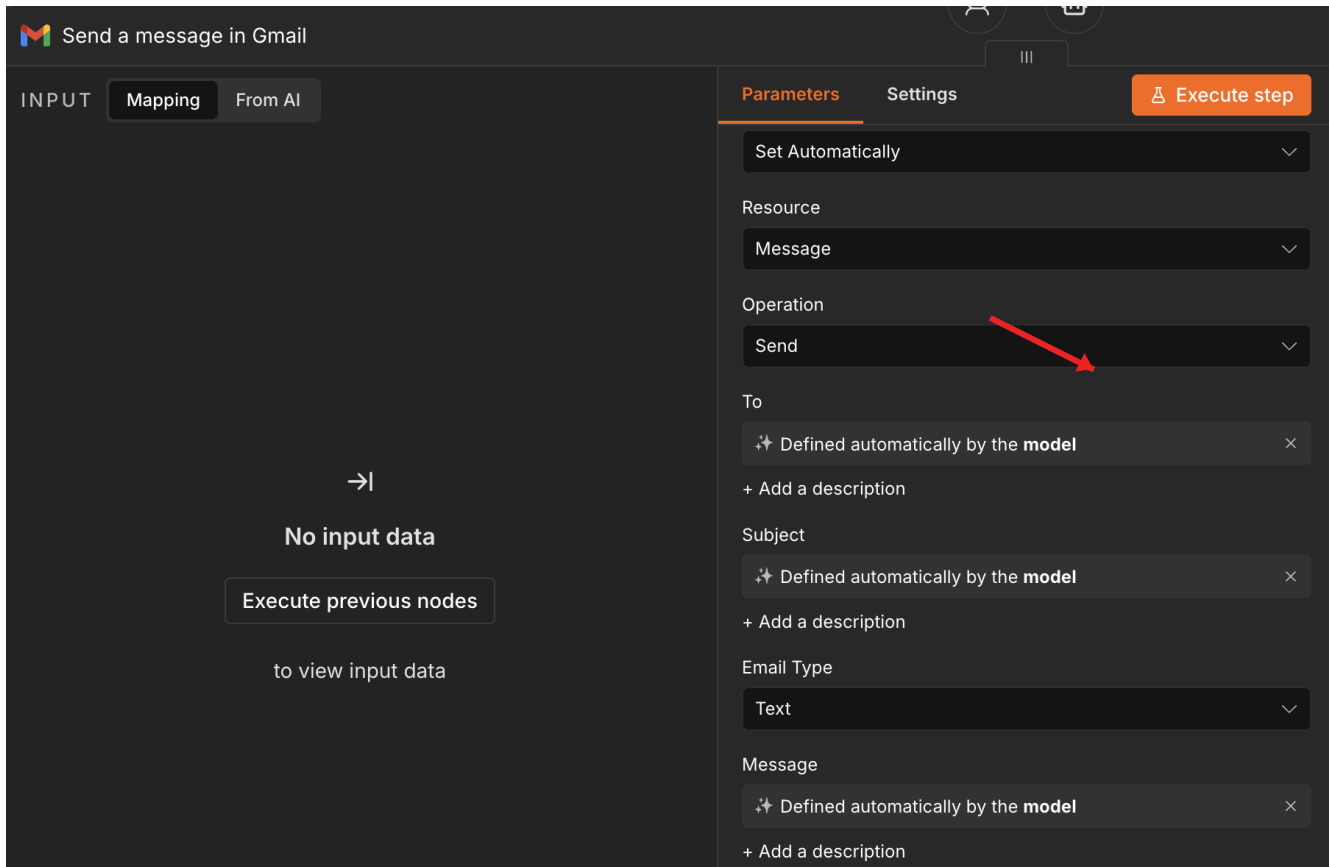


Step 11: Add Create a draft in Gmail

1. From the Email Agent Tool port, select + and add Gmail Tool.
2. Choose your **Gmail Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Draft**.
5. Set **Operation** - **Create**.
6. Set **Subject** - Defined automatically by the model (**From AI**).
7. Set **Message** - Defined automatically by the model (**From AI**).
8. Leave **Options** unchanged.
9. Rename the node **Create a draft in Gmail**.

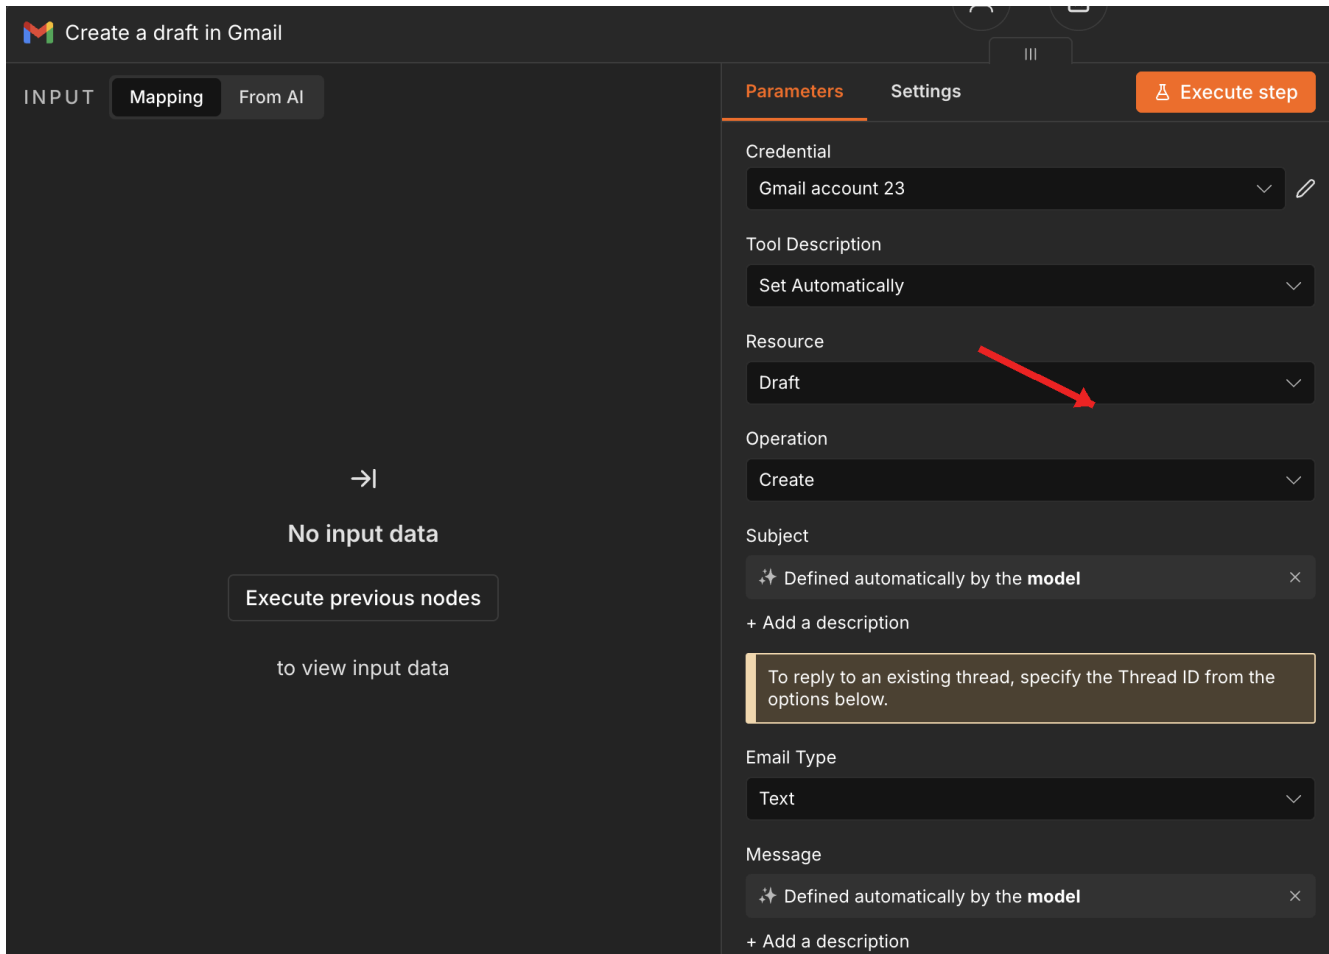

Step 12: Add Reply to a message in Gmail

1. From the Email Agent **Tool** port, select + and add Gmail **Tool**.
2. Choose your **Gmail Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Message**.
5. Set **Operation** - **Reply**.
6. Set **Message ID** - Defined automatically by the model (**From AI**).
7. Set **Message** - Defined automatically by the model (**From AI**).
8. Set **Email Type** - **Text**.
9. Leave **Options** unchanged.
10. Rename the node **Reply to a message in Gmail**.

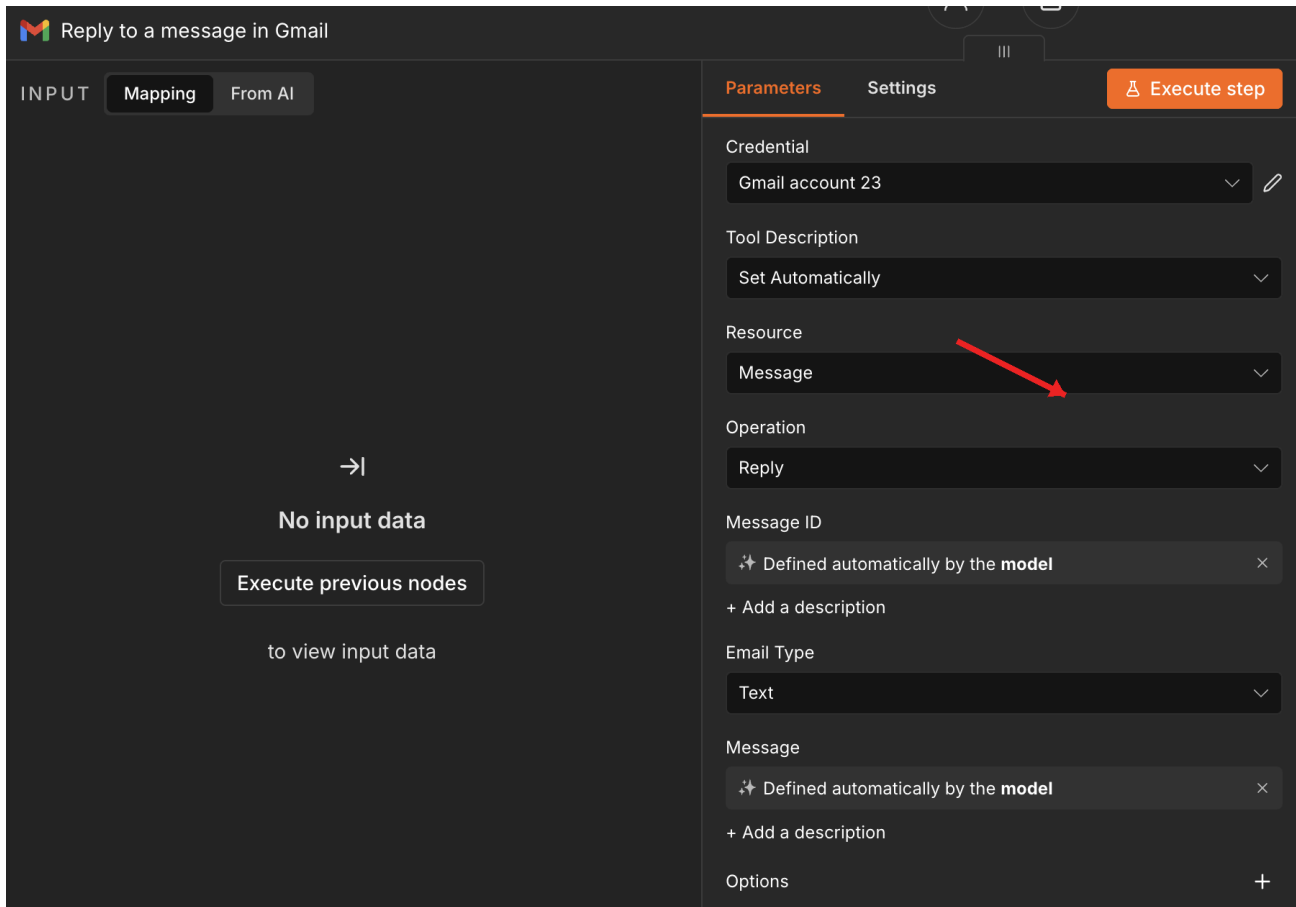

Step 13: Add Delete a message in Gmail

1. From the Email Agent **Tool** port, select + and add Gmail **Tool**.
2. Choose your **Gmail Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Message**.
5. Set **Operation** - **Delete**.
6. Set **Message ID** - Defined automatically by the model (**From AI**).
7. Rename the node **Delete a message in Gmail**.

Delete a message in Gmail

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings **Execute step**

Credential
Gmail account 23

Tool Description
Set Automatically


Resource
Message

Operation
Delete

Message ID
Defined automatically by the model

+ Add a description


Checkpoint: Email Agent must have exactly **five Gmail tools** connected: Get Many, Send, Draft, Reply, and Delete.

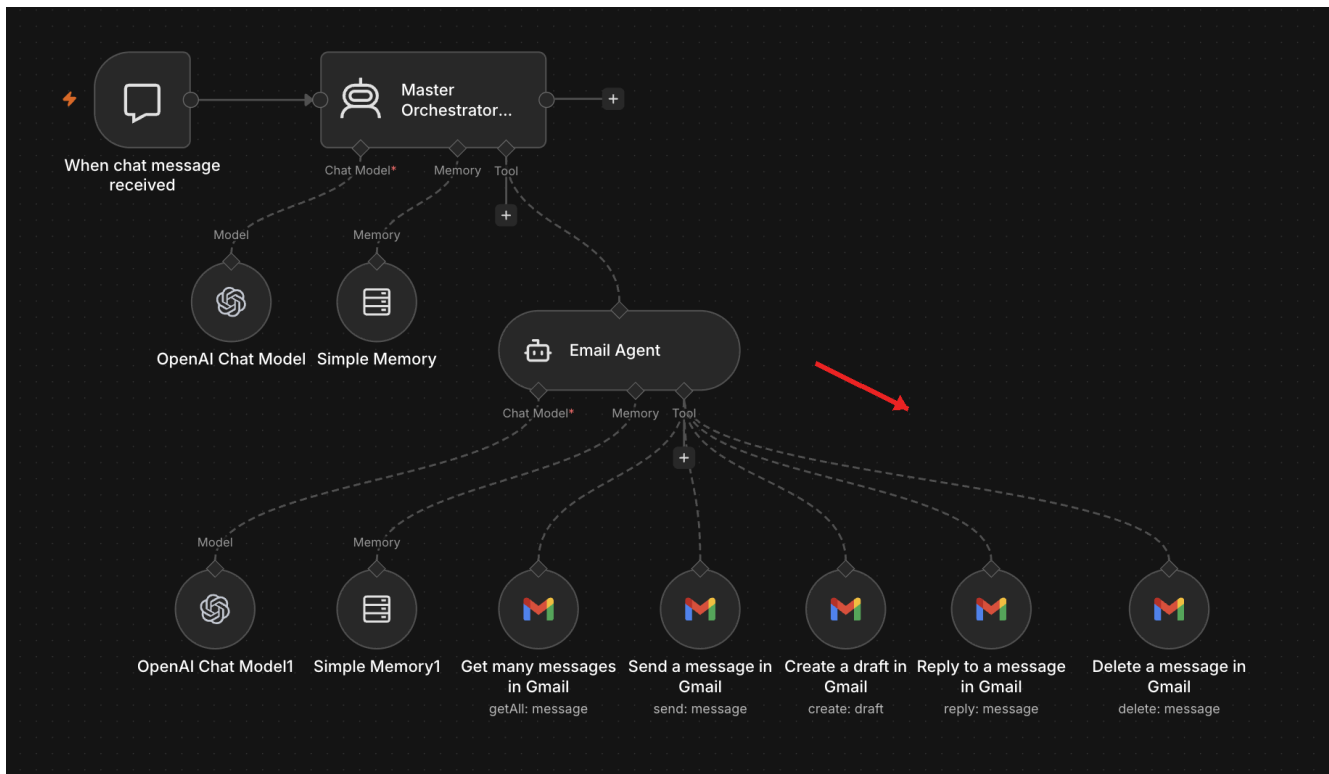

Part 4 - Build the Calendar Agent

Step 14: Add Calendar Agent

1. From the Master Orchestrator Agent Tool port, select +.
2. Select **AI Agent Tool**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Prompt (User Message)** - Defined automatically by the model (**From AI**).
5. Rename the node **Calendar Agent**.

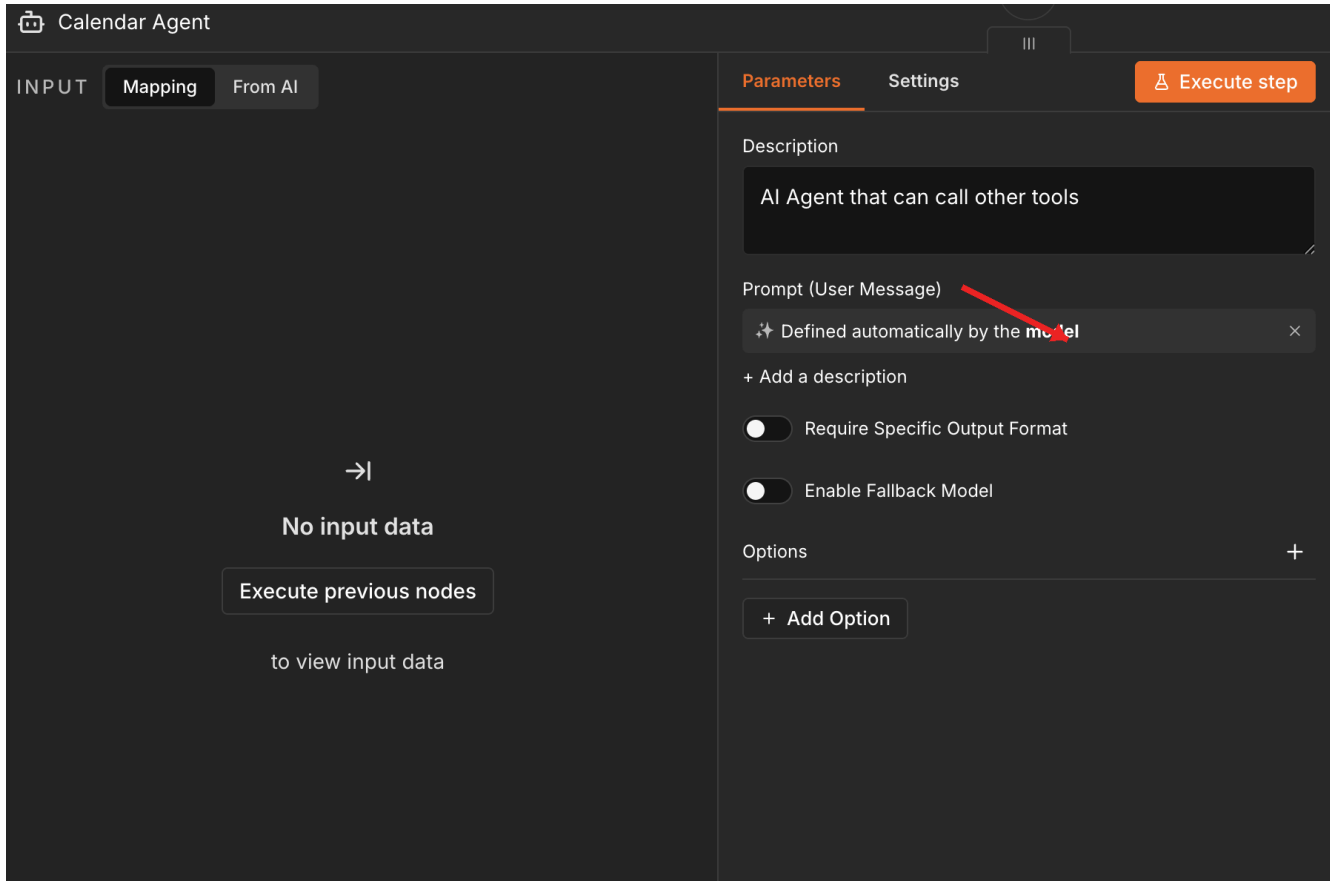

Step 15: Configure the Calendar Agent

1. Open the agent.
2. Set **Tool Description** - **Set Automatically**.
3. Set **Prompt (User Message)** - Defined automatically by the model (**From AI**).
4. Under **Options**, select Add Option - **System Message**.
5. Paste the **System Message** shown below.


Paste this System Message

```
You are an expert event assistant who can do all things events.
1. If a user inquires to fetch or get an event, use the Get Many Events tool and proceed further.
2. If a user asks to create an event, use the Create an event tool and proceed further.
3. If the user asks to get availability, always use the Check availability tool and proceed further.
4. If the user asks to update or delete an event:
```


- a. First use Get many events to read the calendar.
- b. Select the event in focus and extract its Event ID.
- c. Use that Event ID in the update or delete tool.

Step 16: Add Calendar Agent model and memory

1. From the **Calendar Agent Chat Model** port, select + and add OpenAI Chat **Model**.
2. Choose your **OpenAI Credential**.
3. Set **Model** - **gpt-5-mini**.
4. Leave **Built-in Tools** and **Options** unchanged.
5. From the **Calendar Agent Memory** port, select + and add Simple Memory.
6. Set **Session ID** - **Connected Chat Trigger Node**.
7. Leave the remaining Simple Memory settings unchanged.

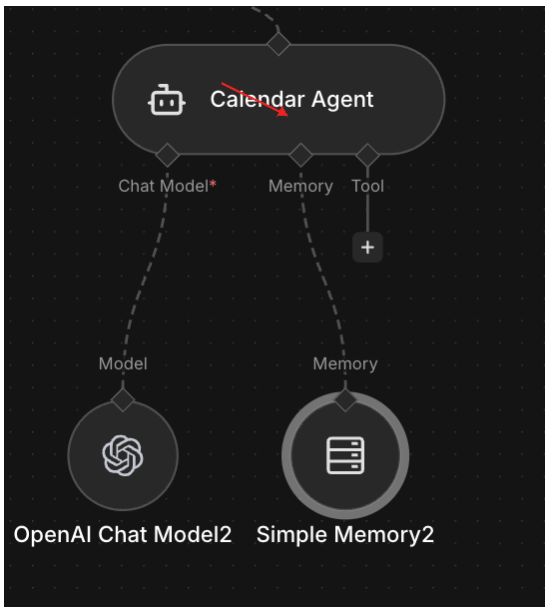**Part 5 - Add the Google Calendar Tools****Step 17: Add Get many events**

1. From the **Calendar Agent Tool** port, select + and add Google **Calendar Tool**.
2. Choose your **Google Calendar Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Event**.
5. Set **Operation** - **Get Many**.
6. Select your **Calendar**.
7. Set **Return All** - Defined automatically by the model (**From AI**).
8. Set **After** - Defined automatically by the model (**From AI**).
9. Set **Before** - Defined automatically by the model (**From AI**).
10. Leave **Options** unchanged.
11. Rename the node **Get many events in Google Calendar**.

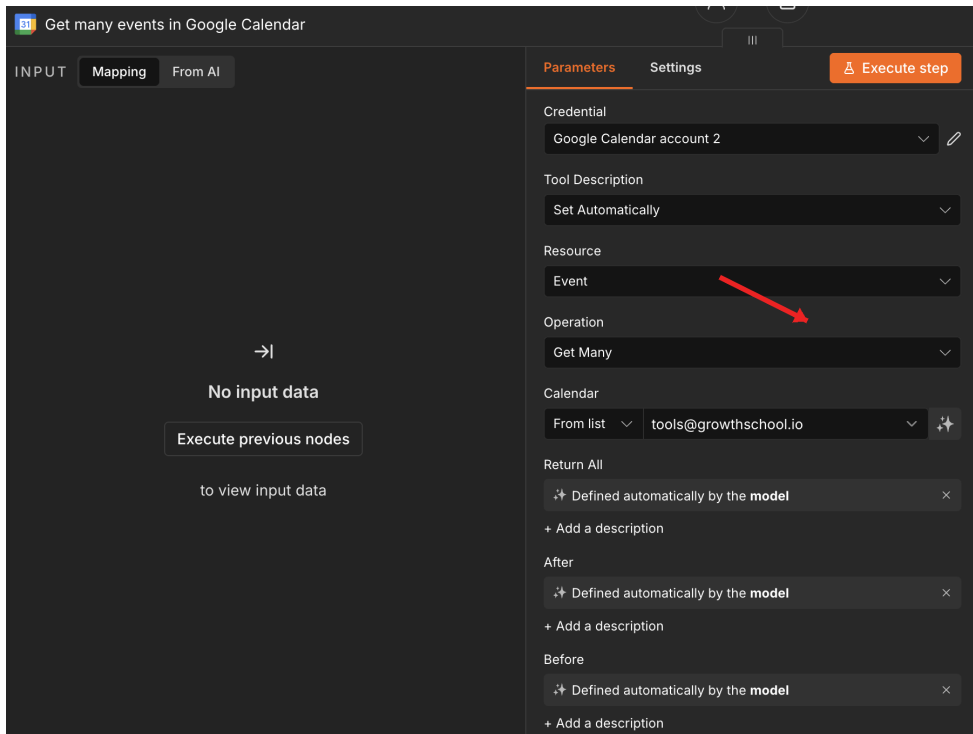

Step 18: Add Create an event

1. From the **Calendar Agent Tool** port, select + and add Google **Calendar Tool**.
2. Choose your **Google Calendar Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Event**.
5. Set **Operation** - **Create**.
6. Select your **Calendar**.
7. Set **Start** - Defined automatically by the model (**From AI**).
8. Set **End** - Defined automatically by the model (**From AI**).
9. Under **Additional Fields**, set **Description** - Defined automatically by the model (**From AI**).
10. Set **Summary** - Defined automatically by the model (**From AI**).
11. Rename the node **Create an event in Google Calendar**.

Create an event in Google Calendar

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings Execute step

Credential
Google Calendar account 2

Tool Description
Set Automatically

Resource
Event

Operation
Create

Calendar
From list tools@growthschool.io

Start
Defined automatically by the model

+ Add a description

End
Defined automatically by the model

+ Add a description

Create an event in Google Calendar

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings Execute step

Calendar
From list tools@growthschool.io

Start
Defined automatically by the model

+ Add a description

End
Defined automatically by the model

+ Add a description

Use Default Reminders
Defined automatically by the model

+ Add a description

Additional Fields

Description
Defined automatically by the model

+ Add a description

Summary
Defined automatically by the model

+ Add a description

+ Add Field

Step 19: Add Update an event

1. From the **Calendar Agent Tool** port, select + and add Google **Calendar Tool**.
2. Choose your **Google Calendar Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Event**.
5. Set **Operation** - **Update**.
6. Select your **Calendar**.
7. Set **Event ID** - Defined automatically by the model (**From AI**).
8. Leave **Update Fields** empty to match the supplied JSON.
9. Rename the node **Update an event in Google Calendar**.

Update an event in Google Calendar

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings Execute step

Credential
Google Calendar account 2

Tool Description
Set Automatically

Resource
Event

Operation
Update

Calendar
From list tools@growthschool.io

Event ID
Defined automatically by the model

+ Add a description


Use Default Reminders

Update Fields
+ Add Field

Step 20: Add Get availability

1. From the **Calendar Agent Tool** port, select + and add Google **Calendar Tool**.
2. Choose your **Google Calendar Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Calendar**.
5. Set **Operation** - **Availability**.
6. Select your **Calendar**.

7. Set **Start Time** - Defined automatically by the model (**From AI**).
8. Set **End Time** - Defined automatically by the model (**From AI**).
9. Leave **Options** unchanged.
10. Rename the node **Get availability in a calendar in Google Calendar**.

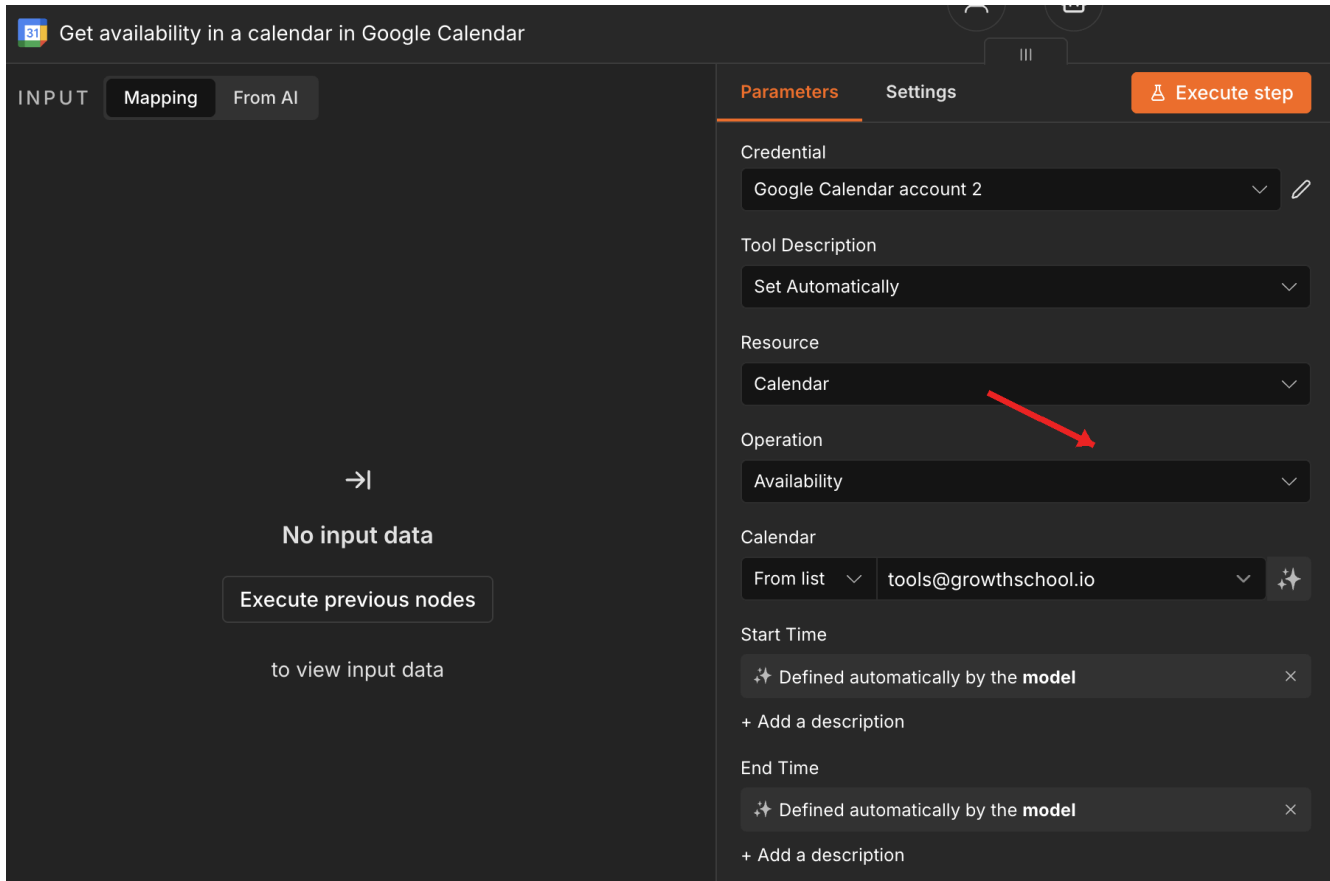

Step 21: Add Delete an event

1. From the **Calendar Agent Tool** port, select + and add Google **Calendar Tool**.
2. Choose your **Google Calendar Credential**.
3. Set **Tool Description** - **Set Automatically**.
4. Set **Resource** - **Event**.
5. Set **Operation** - **Delete**.
6. Select your **Calendar**.
7. Set **Event ID** - Defined automatically by the model (**From AI**).
8. Leave **Options** unchanged.
9. Rename the node **Delete an event in Google Calendar**.

31 Delete an event in Google Calendar

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings

Execute step

Credential

Google Calendar account 2

Tool Description

Set Automatically

Resource

Event

Operation

Delete

Calendar

From list tools@growthschool.io


Event ID

Defined automatically by the model

+ Add a description

Options

Checkpoint: Calendar Agent must have exactly **five Calendar tools** connected: Get Many, Create, Update, Availability, and Delete.

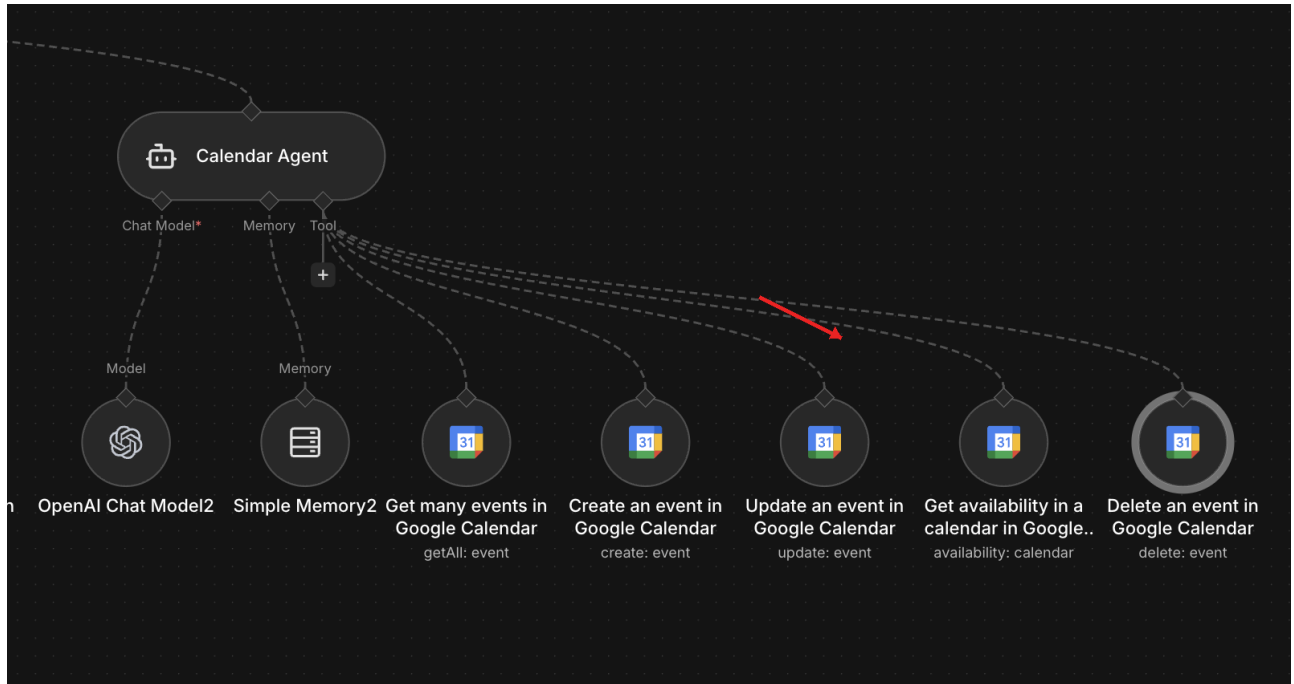

Part 6 - Build the Meetings Agent

Step 22: Add Meetings Agent

1. From the Master Orchestrator Agent **Tool** port, select +.
2. Select **AI Agent Tool**.
3. Set **Tool Description** - Set Automatically.
4. Set **Prompt (User Message)** - Defined automatically by the model (**From AI**).
5. Rename the node **Meetings Agent**.

Meetings Agent.

INPUT | Mapping | From AI

No input data

Execute previous nodes

Parameters | Settings | Execute step

Description: AI Agent that can call other tools

Prompt (User Message): Defined automatically by the model

+ Add a description

Require Specific Output Format: ☐

Enable Fallback Model: ☐

Options: + Add Option

Step 23: Configure the Meetings Agent


1. Open the agent.
2. Set **Tool Description** - **Set Automatically**.
3. Set **Prompt (User Message)** - Defined automatically by the model (**From AI**).
4. Under **Options**, select Add Option - **System Message**.
5. Paste the **System Message** shown below.

Paste this System Message

```
You are an expert meeting analysis agent.
1. First fetch the list of transcripts from Fireflies using Get list of transcripts.
2. Extract the required Transcript ID for the meeting in focus.
3. Use this format with Get the full transcript:
{
  "query": "query Transcript($transcriptId: String!) { transcript(id: $transcriptId) {
title id sentences { speaker_name text start_time end_time } summary { overview
action_items } } }",
  "variables": { "transcriptId": "place_extracted_transcript_id_here" }
}
```

Step 24: Add Meetings Agent model and memory

1. From the Meetings Agent Chat **Model** port, select + and add OpenAI Chat **Model**.
2. Choose your **OpenAI Credential**.
3. Set **Model** - **gpt-5-mini**.
4. Leave **Built-in Tools** and **Options** unchanged.
5. From the Meetings Agent Memory port, select + and add Simple Memory.
6. Set **Session ID** - **Connected Chat Trigger Node**.
7. Leave the remaining Simple Memory settings unchanged.

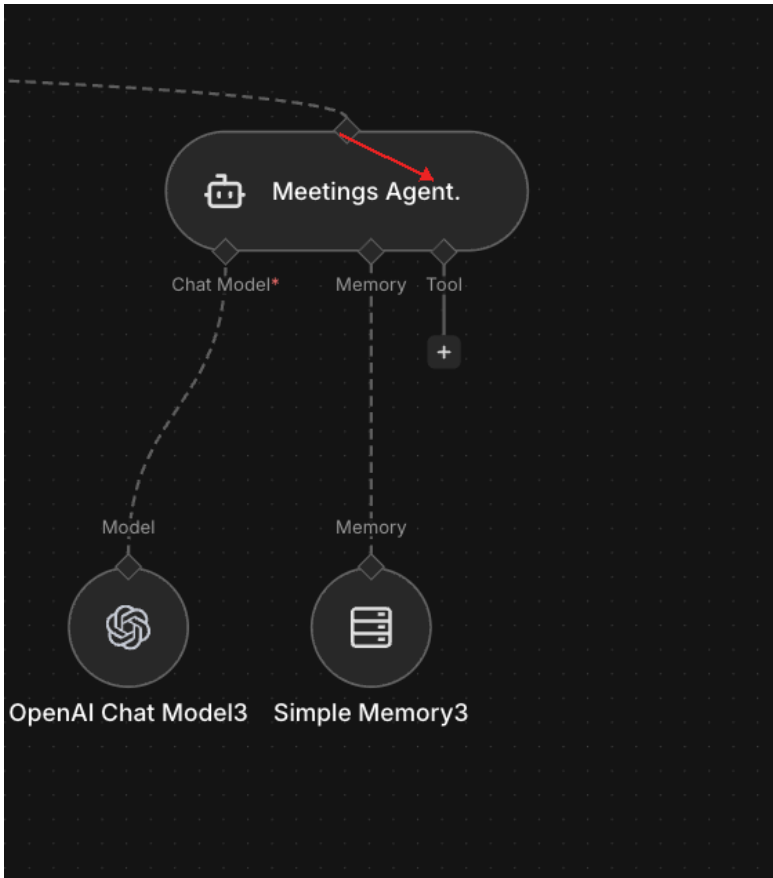

Part 7 - Add the Fireflies Tools


Step 25: Add Get list of transcripts

1. From the Meetings Agent **Tool** port, select **+** and add **HTTP Request Tool**.
2. Set **Tool Description** - **Set Automatically**.
3. Set **Method** - **POST**.
4. Set **URL** - <https://api.fireflies.ai/graphql>.
5. Set **Authentication** - **None**.
6. Turn **Send Headers** - **On**.
7. Under **Header Parameters**, set **Name** - **Authorisation**.
8. Set **Header Value** - **Bearer YOUR_FIREFLIES_API_KEY**.
9. Turn **Send Body** - **On**.
10. Set **Body Content Type** - **Form URLencoded**.
11. Set **Specify Body** - **Using Fields Below**.
12. Under **Body Parameters**, set **Name** - **query**.
13. Set **Value** - `{ transcripts(limit: 10) { id title date } }`.
14. Leave **Options** unchanged.
15. Rename the node **Get list of transcripts**.

Note - How to find your Fireflies API key:

1. Go to <https://app.fireflies.ai> and sign in.

2. Click Integrations.
3. Search for Fireflies API and open it.
4. Scroll down and copy your API key.
5. Store it securely and do not add it to learner screenshots or shared workflow files.

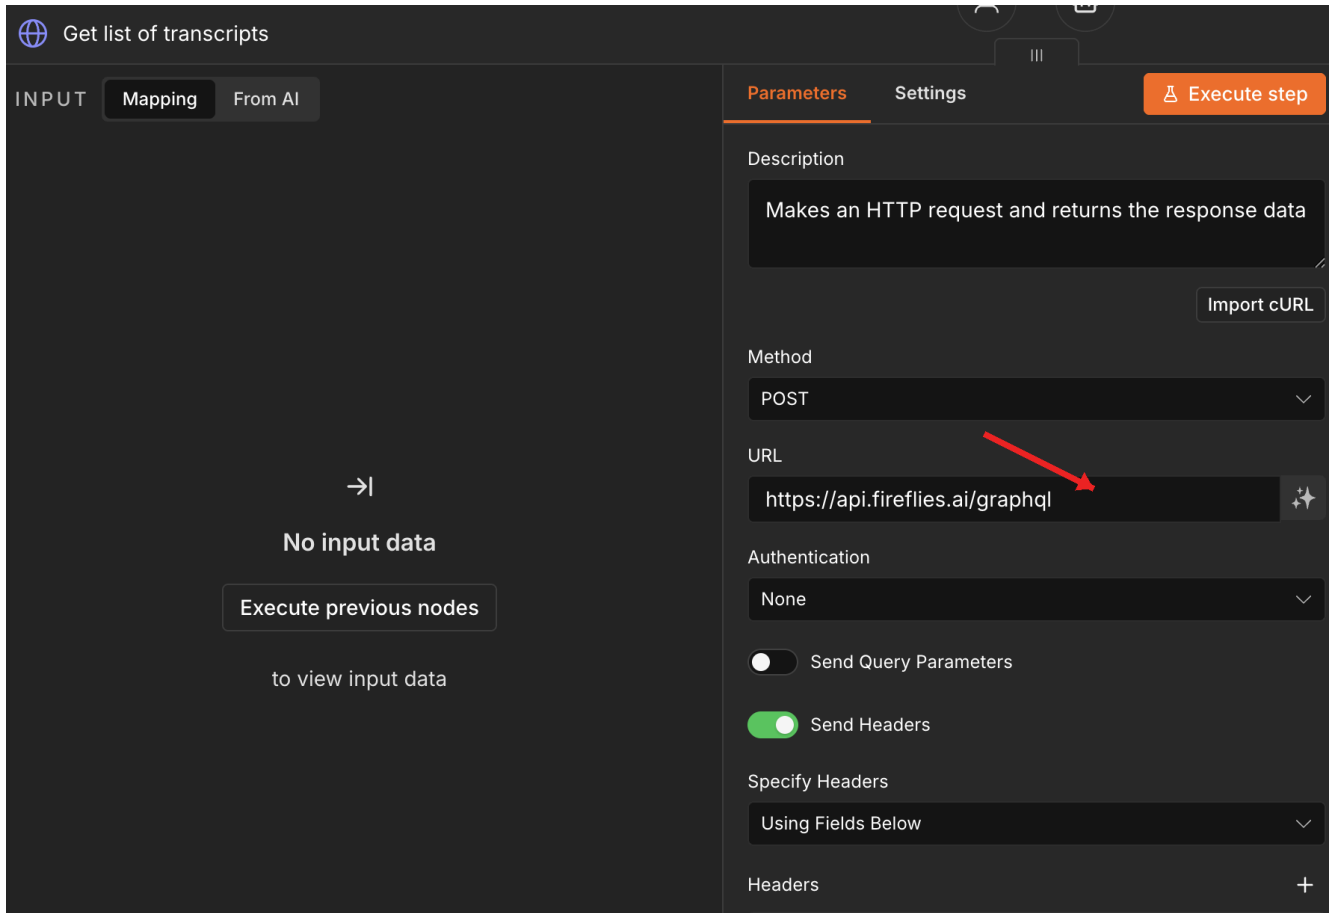

Get list of transcripts

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings Execute step

Authorization

Name Authorization

Value Bearer e3a7454d-37ed-4a5b-b13a-7f3088fd7

+ Add Header

☒ Send Body

Body Content Type JSON

Specify Body Using Fields Below

Body Parameters

query

Name query

Value { transcripts(limit: 10) { id title date } }

Step 26: Add Get the full transcript

1. From the Meetings Agent Tool port, select + and add another HTTP Request Tool.
2. Set **Tool Description** - Set Automatically.
3. Set **Method** - POST.
4. Set **URL** - https://api.fireflies.ai/graphql.
5. Set **Authentication** - None.
6. Turn **Send Headers** - On.
7. Under **Header Parameters**, set **Name** - Authorization.
8. Set **Header Value** - Bearer YOUR_FIREFLIES_API_KEY.
9. Turn **Send Body** - On.
10. Set **Body Content Type** - JSON.
11. Set **Specify Body** - Using JSON.
12. Set **JSON Body** - Defined automatically by the model (**From AI**).
13. Leave **Options** unchanged.
14. Rename the node **Get the full transcript**.

Get the full transcript.

INPUT Mapping From AI

→|

No input data

Execute previous nodes

to view input data

Parameters Settings

Execute step

Value

Bearer e3a7454d-37ed-4a5b-b13a-7f3088fd7.

+ Add Header

Send Body

Body Content Type

JSON

Specify Body

Using JSON

JSON

Defined automatically by the model

+ Add a description

Options


+ Add option

Optimize Response

Checkpoint: Meetings Agent must have exactly **two HTTP Request tools** connected..

Part 8 - Final Connection Check

1. Chat Trigger main output -> **Master Orchestrator Agent** main input.
2. Master **OpenAI Chat Model** -> Master **Chat Model** port.
3. Master **Simple Memory** -> Master **Memory** port.
4. **Email Agent**, **Calendar Agent**, and **Meetings Agent** -> Master **Tool** port.
5. Each specialist agent has its own **OpenAI gpt-5-mini model** and **Simple Memory**.
6. All five **Gmail tools** -> Email Agent **Tool** port.
7. All five **Google Calendar tools** -> Calendar Agent **Tool** port.
8. Both **Fireflies HTTP Request tools** -> Meetings Agent **Tool** port.

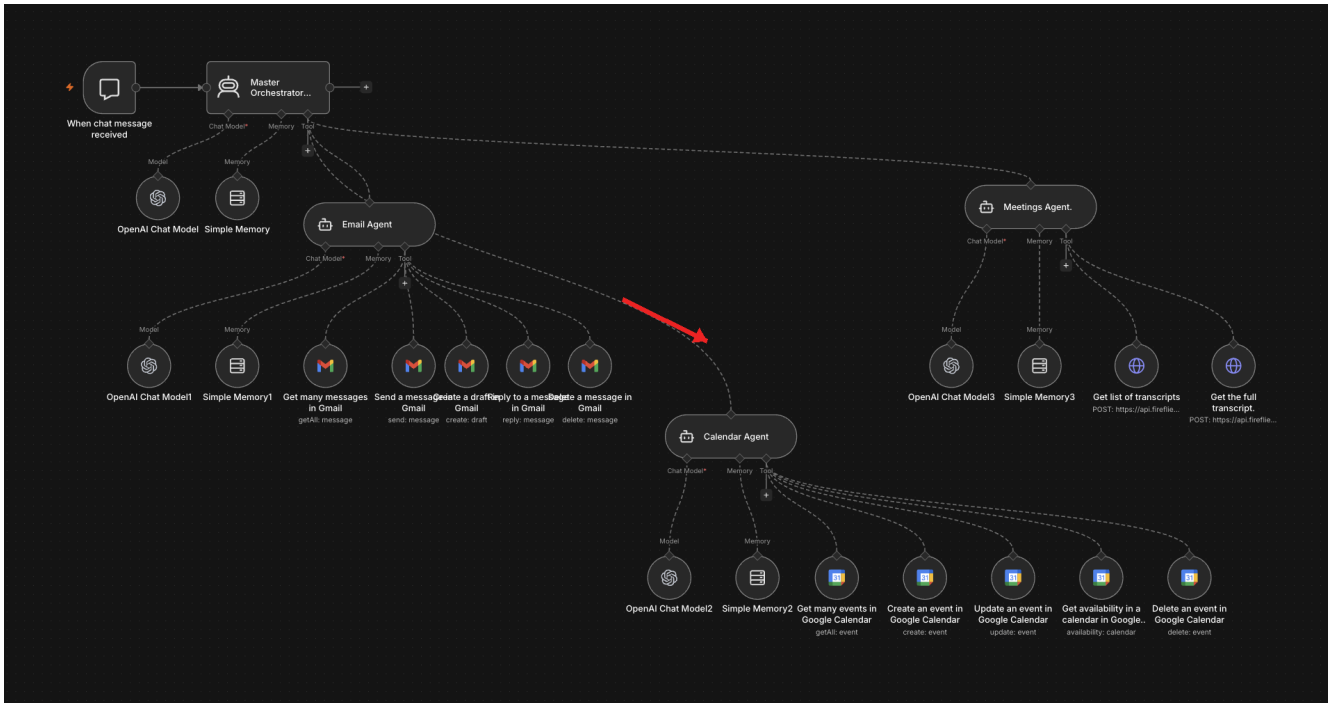

Part 9 - Test Jerry

Test 1: Email

1. Open **Chat** and enter: **Show me my latest emails.**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Test 2: Draft

1. Open **Chat** and enter: **Create a draft email to [recipient] with subject [subject].**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Test 3: Calendar

1. Open **Chat** and enter: **Show my events between [start] and [end].**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Test 4: Availability

1. Open **Chat** and enter: **Check my calendar availability between [start] and [end].**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Test 5: Meeting

1. Open **Chat** and enter: **List my latest Fireflies transcripts.**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Test 6: Transcript

1. Open **Chat** and enter: **Summarize the transcript titled [meeting title].**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Test 7: Combined

1. Open **Chat** and enter: **Find my meeting transcript, summarize the action items, and draft a follow-up email.**
2. Confirm the **correct specialist agent and tools** are called.
3. Check the **tool output** before moving to the next test.

Final check: Publish the workflow only after **all tests pass** and no credential or API-key errors remain.