

Scientific Python

Boris Nerot ¹

LabOratoire proCédés énergie bâtimEnt

February, 2024

v0.1

This work is licensed under CC BY-SA 4.0

¹boris.nerot@univ-smb.fr

Contents

I	General programming knowledge	9
1	Computer basics	11
1.1	Hardware	11
1.1.1	Main components	11
1.1.2	Typical configurations	13
1.1.3	Howto: compare two computers	13
1.2	Software	14
1.2.1	Operating systems (<i>OS</i>)	14
1.2.2	Processes	15
1.2.3	Programing language	15
2	Development basics	17
2.1	Variables types	17
2.1.1	Primitive variable types	17
2.1.2	Containers	17
2.1.3	Object oriented programming	18
2.2	Variable scope	19
2.2.1	Definition	19
2.2.2	Static and dynamic typing	19
2.3	Mutability	19
2.3.1	Copy and assignment	19
2.3.2	Equality and identity	19
3	Development steps	21
3.1	Identify your problem	21
3.1.1	Define the scientific goal	21
3.1.2	Choose the language	21
3.1.3	Define a development plan	22
3.2	Develop	23
3.2.1	Choose an IDE	23
3.2.2	Organize your working space	24
3.2.3	Universal development rules	24
3.3	Comment and documentation	26
3.3.1	Differences	26
3.3.2	Comment a code	26
3.3.3	Document a code	26

3.4	Example	29
3.4.1	Identify one's problem	29
3.4.2	Develop	30
II	Best of Python	35
4	Notebooks	37
4.1	Jupyter code	37
4.1.1	Presentation	37
4.1.2	Howto	37
4.1.3	Configuration	38
4.2	Jupyter markdown	40
4.2.1	Introduction	40
4.2.2	Main functionalities	40
4.2.3	Make the best of markdown	42
4.2.4	See also	42
5	Python basics	43
5.1	Control flow	43
5.1.1	<code>while</code> loop	43
5.1.2	<code>for</code> loop	44
5.1.3	<code>if</code> conditions	47
5.2	Print formatting	48
5.2.1	Introduction	48
5.2.2	Method 1: no formatting	48
5.2.3	Method 2: advanced formatting	48
5.3	Variable types	51
5.3.1	<code>list</code>	51
5.3.2	<code>set</code>	54
5.3.3	<code>tuple</code>	55
5.3.4	<code>dict</code>	56
5.3.5	<code>deque</code>	58
5.3.6	About slicing	58
5.3.7	Booleans	59
5.4	List comprehensions	60
5.4.1	Introduction	60
5.4.2	Exemples simples	60
5.4.3	Autres types de données	61
5.5	Function signature	63
5.5.1	unpacking	63
5.5.2	Function signature	64
5.6	OS interactions	69
5.6.1	File reading/writing	69
5.6.2	Files management	71
5.6.3	Run a system call	74
5.7	Decorators	76
5.7.1	Introduction	76

5.7.2	Simple example	76
5.7.3	Fictive use case	77
5.7.4	Conclusion	79
5.8	Date/time	80
5.8.1	Introduction	80
5.8.2	Timestamp	80
5.8.3	Time periods: <code>timedelta</code>	83
6	Handling exceptions	85
6.1	Exceptions	85
6.1.1	Introduction	85
6.1.2	Handle an exception	86
6.1.3	Raise an exception	88
6.1.4	Conclusion	89
6.2	Debugger	90
6.2.1	Introduction	90
6.2.2	Debugging using VSCode	90
6.3	Logging	95
6.3.1	About this notebook	95
6.3.2	Introduction	95
6.3.3	Exemple	95
III	Share one's code	99
7	Environments	101
7.1	Introduction	101
7.2	Anaconda	101
7.2.1	Introduction	101
7.2.2	Create an environment	101
7.2.3	Activate an environment	102
7.2.4	Important notes	103
8	Structuration	105
8.1	Imports	106
8.1.1	Introduction	106
8.1.2	Full import	106
8.1.3	Relative import	107
8.1.4	Good practices	107
8.2	Package structuration	109
8.2.1	Introduction	109
8.2.2	Example	109
8.2.3	Search for packages	111
8.2.4	Add some content to <code>__init__</code>	112
8.2.5	Take away	114
9	Documentation	115
9.1	Documentation writing	116
9.1.1	Introduction	116

9.1.2	Setting up the needed tools	116
9.1.3	Create a docstring	117
9.1.4	Add some content to a docstring	118
9.2	Documentation generation	121
9.2.1	Introduction	121
9.2.2	Overview	121
9.2.3	Details	121
9.2.4	Result	124
9.2.5	Notes	125
IV	Scientific Python	127
10	Numpy	129
10.1	introduction	129
10.1.1	Presentation	129
10.1.2	When to use <code>numpy</code> ?	129
10.1.3	What not to do with <code>numpy</code> ?	129
10.2	Array	130
10.2.1	Introduction	130
10.2.2	Create an array	130
10.2.3	Important ideas: axis and dimension	131
10.2.4	Common operations	138
10.3	Basic	139
10.3.1	Conditions	139
10.3.2	Find out duplicate values	141
10.3.3	Element-wise maximum	142
10.3.4	Index of maximum	142
10.3.5	Vectorization of Python functions	143
10.3.6	Multi-variables functions	144
10.4	Random	146
10.4.1	Create random numbers	146
10.4.2	Create deterministic random	146
10.5	Data types	148
10.5.1	Data types	148
10.5.2	Working with <code>nan</code>	150
11	Pandas	151
11.1	Introduction	151
11.1.1	Introduction	151
11.1.2	Dataframe	151
11.1.3	Series	152
11.1.4	Access data	153
11.1.5	Modify index	156
11.1.6	Iteration	157
11.1.7	Basic operations	158
11.1.8	Manage <i>dtype</i>	160
11.2	IO	161

11.2.1	Introduction	161
11.2.2	Read a CSV file	161
11.2.3	Write a CSV file	162
11.2.4	Other file formats	162
11.3	Dates	163
11.3.1	Introduction	163
11.3.2	Useful functions	163
11.3.3	Indexing	165
11.3.4	<code>dt</code> accessor	166
11.3.5	<code>TimeDelta</code>	166
11.4	Strings	168
11.4.1	Introduction	168
11.4.2	Existing methods	168
11.4.3	Simple examples	169
11.4.4	Advanced: <i>regex</i>	170
11.5	Basic operations	173
11.5.1	Long and wide data format	173
11.5.2	Index swapping	175
11.5.3	Grouping data	179
11.5.4	Applying a rolling function	183
12	Matplotlib	185
12.1	Simple plot	185
12.1.1	Introduction	185
12.1.2	Simple plot	185
12.1.3	3D plots	187
12.1.4	Saving a figure	189
12.2	Complex figures	191
12.2.1	Introduction	191
12.2.2	Simple approach	191
12.2.3	Advanced approach	192
12.2.4	Notes	194
12.3	Customization	196
12.3.1	Introduction	196
12.3.2	Adding titles, labels, annotations,	196
12.3.3	Other customizations	200
12.3.4	Default parameters	201
12.3.5	Advice	202
12.4	Matplotlib backend	203
12.4.1	Introduction	203
12.4.2	Case study definition	203
12.4.3	<code>pandas</code>	204
12.4.4	<code>seaborn</code>	207
13	Typical problems	213
13.1	Introduction	213
13.1.1	Many kinds of scientific problems	213
13.1.2	Some dedicated libraries	213

13.1.3	Some very common problems	213
13.2	Function minimization	215
13.2.1	Case study definition	215
13.2.2	Code	215
13.2.3	Plot the result	217
13.3	Function differentiation	219
13.3.1	Case study definition	219
13.3.2	Key idea of <code>sympy</code>	219
13.3.3	Code	219
13.3.4	When to use <code>sympy</code>	221
13.4	Linear regression	222
13.4.1	Case study definition	222
13.4.2	Code	222

Part I

General programming knowledge

Chapter 1

Computer basics

1.1 Hardware

1.1.1 Main components

Memory

Description Used to store the data related to running softwares. Can be described by:

1. Capacity (GB): amount of stored data
2. Frequency (MHz) / generation: transfer speed
3. Format: tower/laptop
4. ...



Photos

CPU

Description Performs base operations (sum, division, etc...) using data stored in memory. Can be described by:

1. Number of cores
2. Operating frequency, generation, engraving width, supported instructions

3. *TDP* (W)
4. Cached memory
5. ...

Multithreading Idea: perform many tasks simultaneously on a same physical cores
 Chez Intel: *Hyper-Threading*.

$$\# \text{logical cores} = \# \text{physical cores} \times \frac{\# \text{threads}}{\# \text{physical core}}$$

Photos



CPU



CPU cooler

Storage

Description Save data on the long term. Can be described by:

1. Capacity (GB)
2. Reading/Writing speed, latency
3. Type
4. ...

Photos

GPU

Description Similar to GPU. Performs graphical operations and produces an image to display
 More broadly, performs some highly parallelizable tasks. Can be described by:

1. Memory: capacity (GB) and generation (i.e.: frequency)
2. External connectors

GPU and graphic card The word "GPU" describes the computation unit only (not the fans, memory, ...).



HDD



SSD (old technology)



SSD (new technology)

Integrated GPU For computers having small graphics needs, the GPU is a small unit dedicated to graphics integrated into the CPU.



Photos

1.1.2 Typical configurations

Component	Typical hardware properties	
	Personnal computer	Shared working station
Memory	8 GB	64-256 GB
CPU	4-8 logical cores 2GHz	16-128 logical cores 2-4 GHz
Disk	SSD 500 GB	HDD 10 TB SSD 1 TB
GPU	Integrated	2-8 GB memory

1.1.3 Howto: compare two computers

Before any comparison, first ask yourself about the software you want to run:

- Can it be parallelizable?
- Is it running on GPU or CPU?

- Does it need to write or read a lot of data from the disk?

Two computers can be compared using one of these two methods:

- Compare the date they were bought together with the price at that times
- Compare main characteristics:
 1. CPU: number of logical cores
(if a GPU exists: generation, memory capacity)
 2. CPU: frequency
 3. RAM: capacity

Some websites host a component comparator; typical result is an averaged score built from different categorical scores (ex: number of cores for a CPU).

1.2 Software

1.2.1 Operating systems (*OS*)

An operating system is a software that makes hardware resources available through interfaces. We usually make a distinction between low-level component of the OS (e.g.: kernel, handles the hardware) and those that provide applications the user can interact with.

Many OS

Main OS are:

- Windows (Microsoft)
- OS X (Apple)
- Linux

GUI and CLI

GUI : *Graphic User Interface*

Interface that describes software components using drawings. One can interact with a GUI mainly using a mouse.

CLI : *Command Line Interface*

Interface that describes software components using text. One can interact with a CLI using a keyboard.

GUI is built on the top of CLI The visual aspect rendered by a GUI is often a simplified version of what can be achieved using the CLI. In the background, most of GUI-related actions are translated to CLI commands at run time.


```

nerotb@Latitude-3510: ~
Fichier  Édition  Affichage  Rechercher  Terminal  Aide
nerotb@Latitude-3510:~$ ls -lh
total 52K
drwxr-xr-x 10 nerotb nerotb 4,0K oct. 20 10:43 Bureau
drwxr-xr-x 10 nerotb nerotb 4,0K sept. 26 17:10 Documents
drwxr-xr-x  2 nerotb nerotb 4,0K oct. 16 11:56 Images
drwxr-xr-x  2 nerotb nerotb 4,0K mars  1 2023 Modèles
drwxr-xr-x  2 nerotb nerotb 4,0K mars  1 2023 Musique
drwxr-xr-x  2 nerotb nerotb 4,0K mars  1 2023 Public
drwxr-xr-x 10 nerotb nerotb 20K oct. 18 15:49 Téléchargements
drwxrwxr-x  4 nerotb nerotb 4,0K mai 17 16:06 texmf
drwxr-xr-x  2 nerotb nerotb 4,0K mars  1 2023 Vidéos
nerotb@Latitude-3510:~$

```

1.2.2 Processes

A process is a set of instructions processed by the hardware as asked by a running software. Some processes create several threads that use all the available logical cores. Processes are identified using a *PID* (Process IDentifier).

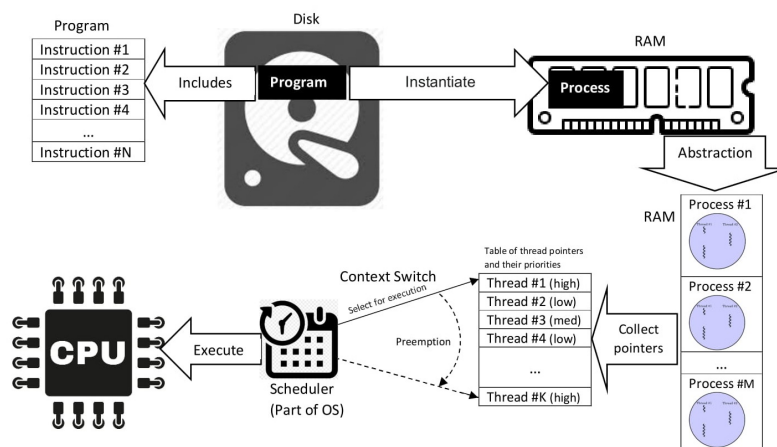

1.2.3 Programing language

[...] A programming language is a system of notation for writing computer programs.

A programming language is described by its syntax (form) and semantics (meaning).

It gets its basis from formal languages.

source: Wikipedia

Compiled vs interpreted

Compiled language A software written using a compiled language is directly translated into something the OS can handle. Examples of compiled languages: Fortran, C++

interpreted language A software written using an interpreted language is split into pieces that make a sense for a master language which handles the execution. Examples of interpreted languages: Python, Matlab

Chapter 2

Development basics

2.1 Variables types

Programming (often) consists in the definition of functions that handle variables. The type of a variable defines the operations one can perform on this variable. Hence, the choice of each variable type has some important consequences for the entire program. One must think about proper variable types *before* writing any code.

2.1.1 Primitive variable types


Primitive variable types are types already implemented by the language itself. Most common are:

- Int: integers can be signed (i.e. possibly negative) or unsigned (greater than only). In the second case they are often called UInt, for Unsigned Integer.
- Float: similare to integers, float values exist as different flavours: Float16, Float32, Float64 (sometimes also called Double). A float can store numbers with a decimal part.
- Char: character, a type than can store 1 byte.
- String: sequence of characters used to store text
- Bool: True/False

2.1.2 Containers

A container is a data structure that unites different variables for an easy reading and writing access. Most commons are:

- vectors/arrays: index-like access
- Stacks: LIFO access (*Last In First Out*)
- Queues: FIFO access (*First In First Out*)
- Dictionaries: key/values access. Each key is unique.
- set: set of unique values

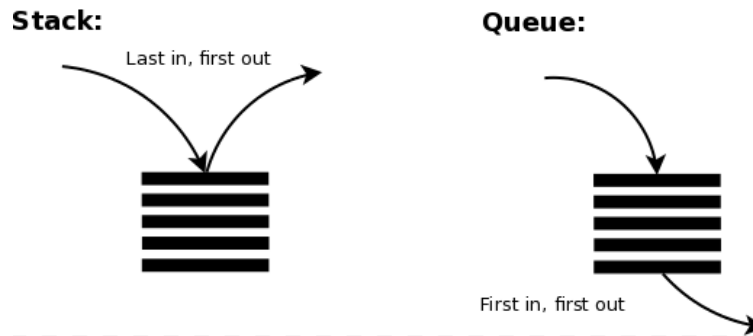

2.1.3 Object oriented programming

Definition

Some data types can handle references to different primitive variables in a common data structure. These variables are usually called **attributes**. **Object Oriented Programming** makes possible to define these types using **classes**. Each variable built from a class is called an **object**. It interacts with other variables through **methods**. **Inheritance** makes it possible for such a custom data type ($T2$) to have the properties (attributes, methods) of another one ($T1$).

Examples

First We can think about an **Official identity** type that stores the following information:


- Unique identifier: *Int*
- Name: *String*
- Height: *Float16*
- Parent(s) and siblings: containers of objects of type *Official identity*

One could also partly define **Official identity** from a type **Identity** (inheritance):

- Name: *String*

In that case, the “Name” attributed would be inherited from the parent object of type **Identity**. Then **Official identity** specifies **Identity**: every property of **Identity** is a property of **Official identity** (but not the other way).

Second In case of onheritance, one can **overload** some methods of the parent (see *park* in the example below)

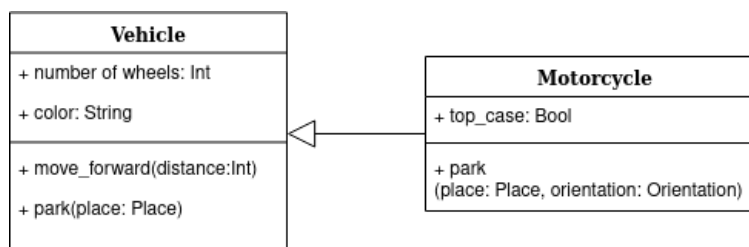

2.2 Variable scope

2.2.1 Definition

Each language defines different variable scope rules. These rules state whether a variable created in a scope A can be accessed from a scope B. These rules are related to:

- Control flow structures
- Functions
- Local code imports
- ...

These rules makes it possible to use a common variable name in different places in the code, to refer to different variables. **Shadowing** refers to the fact of reusing for a different purpose an already defined variable name

2.2.2 Static and dynamic typing

Static typing consists in the manual assignment of a type to a variable. This variable will keep this type until the end of its use. Dynamic typing let the compiler (or interpreter) chose the variable type during run time.

In both cases, the variable has a known type during execution.

2.3 Mutability

The mutability of an object refers to the possibility of modifying its properties.

2.3.1 Copy and assignment

The assignment of a mutable object to another variable might lead to unexpected results. Indeed:

- The in-depth copy of an object makes a full duplicate of this object. (Figure 2.3).
- Conversely, an assignment of a mutable object to a variable makes the variable reference the memory content of the object (Figure 2.4).



In the first case, a modification on the first variable has no effect on the second. In the second case, if first is modified then second is modified too.

There exists an intermediate copy level between assignment and in-depth copy: shallow copy. If 'b' is a shallow copy of 'a', 'b' has a different memory address than 'a' (different objects), yet references of 'b' to mutables objects are the one of 'a'.

2.3.2 Equality and identity

Some objects can be equal - i.e. same properties - withouth being the same - i.e. different memory address. The identity test makes it possible to check if 2 objets have the same identity. Using pseudo-code:

```
MyType var1 = MyType.constructor()  
MyType var2 = InDepthCopy(var1)
```

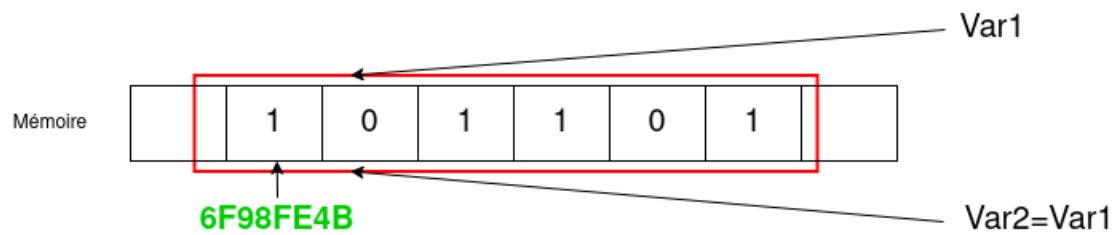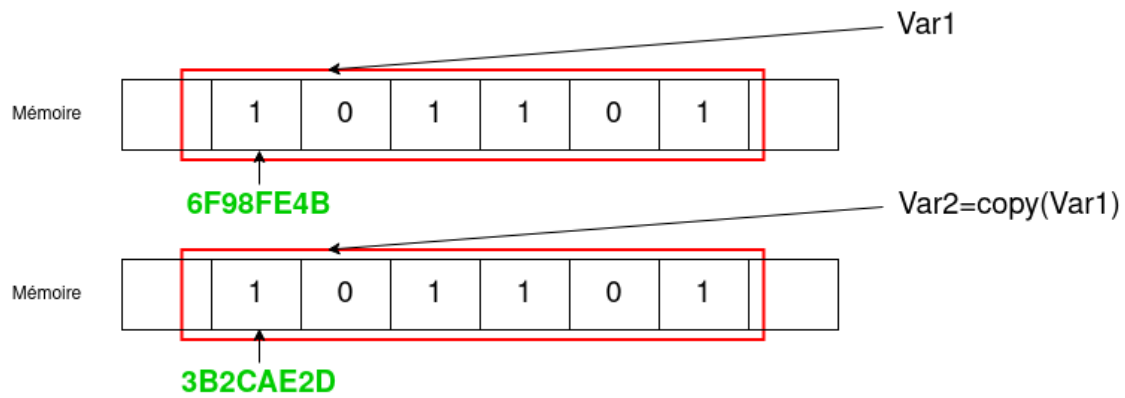

```
AreIdentical(var1, var2) # False
AreEqual(var1, var2)     # True
```

Chapter 3

Development steps

3.1 Identify your problem

3.1.1 Define the scientific goal

Before writing any code you must be able to answer the following questions:

- What is my code suppose to do?
If the code serves multiple purosses, split them in small independant units.
- What are the different ways to achieve this/theses goals?
Temporal dynamic simulation, mathmatcal optimisation, formal mathematical models, etc
...
- How reliable is my input data?
Another way to put it: to what extend the code errors can be due to things I have no control over.
- Is there a way for me to control:
 - the exactness of the results produced by the code
 - the determinism of the code (if any)

3.1.2 Choose the language

Various criteria must be taken into account in the choice of the programming language.

Open-source aspect

An open-source language is a language for which the content needed to improve or modify the language is available freely. Every one can contribute and use such a language.

These languages benefit from:

- A large community that can provide help
- The tracking of different versions and modifications of the language
- A pretty fast development cycle (time between two releases of the language)

Proprietary languages (in contrast with open-source languages) have the following drawbacks)

- Often very costly
- Code sharing made difficult because one must have bought the right tools
- Sometimes, partial documentation in order to protect an intellectual property

Running speed

Some languages are slower than other (sometimes up to 100 times slower). In many cases, slowness is the price to pay for a simpler syntax and fewer code lines. Regarding this running speed:

- It can often be **largely improved** using dedicated libraries.
- It depends on what you intend to do: different languages perform best in different problems.
- It depends on the compiler/interpreter

Without using dedicated libraries, popular languages can be sorted out according to their typical running speed **approximately**:

- | | | |
|----------|-----------|------|
| 1. C/C++ | 3. Matlab | 5. R |
| 2. Julia | 4. Python | |

Versatility

Do you need to . . .	Then: search for
Read/write files, manipulate strings Interact with existing codes and softwares Store and retrieve easily a lot of data into memory Perform a intensive computation	simple syntax dedicated libraries, large community easy type specification, simple syntax native language speed, dedicated libraries

Understandable by other people

Your code must be understandable by people:

- Who work in the same field
- Whose training is similar to yours

note: using a rare language can prevent people from trying to help you.

3.1.3 Define a development plan

Software development is a full time activity. Software development on “spare time” between two other activities (for instance: experimental activities) is error prone. **It is less time consuming to develop in an organized way rather than correct lack-of-attention errors afterwards.**

How to get organized:

- **Evaluate prior to any development** the time need for each development step.
If you exceed this time, this might mean that you are out of the scope of the step.

Step	Prior thoughts	Actions	Test
1. Meet the the primary purpose of the code.	Data structure.	Reading/Declaration of input parameters. Main content of the code. Simplified presentation of results.	Using a test case: Are the results correct? Does the running time seem compatible with all the cases to be treated?
2. Structure the code	Possible interactions with the code. Aspect of results.	Definition of functions/classes/structures Errors handling, progress log.	Resilience to parameters change, easy results exploitation.
3. Optimize the code	I/O importance in the problem, memory independence.	Benchmark Speed up: algorithmic, variable types.	Better ressources use, with same code functionalities.
4. Document the code for your own interest	Sections of the code subjected to change	1. Short comments for difficult sections 2. Short description at the top of the file	Try to understand the code 2 weeks later.
5. Document for other users of the code	Typical use cases of the code	Writing documentation in an iterative process: 1. Important content 2. Optionnal content (see 3.3.3)	Ask somebody to try your code.

- **Keep in mind the real aim of the code**

This makes it possible to distinguish what is useful from what is detail.

3.2 Develop

3.2.1 Choose an IDE

Definition

An *Integrated development environment* is a GUI software that facilitates software development by:

- Communicating with the compiler/interpreter.
- Highlighting some of the development errors before compilation.
- Speeding up code writing using plugins and keyboard shortcuts.

Support for advanced features (version control (*git*, *svn*), code suggestion) are sometimes available.

Examples

Some IDE are language specific, other are multi-languages. Some famous IDE:

- Eclipse
- Visual Studio
- Spyder
- Netbeans
- PyCharm

Les langages fermés (ex: Matlab, VBA) viennent avec leur propre IDE.

Notes

Don't lose times on optionnal time consuming tasks! For instance, proper formatting of a file is done automatically by the IDE.


3.2.2 Organize your working space

A working space is made of:

- Source files and compiled files
- Input data: in your case, all the content with a scientific meaning, used by the program
- Data produced by the program
- Documentation: automatically generated files (html, texte, tex, ...)
- Configuration files: every software-related parameters needed for execution on your computer

Some important rules:

- Store all the source files together. Do not duplicate them.
- Separate data from source.
- Avoid file paths with accentuation and special characters.

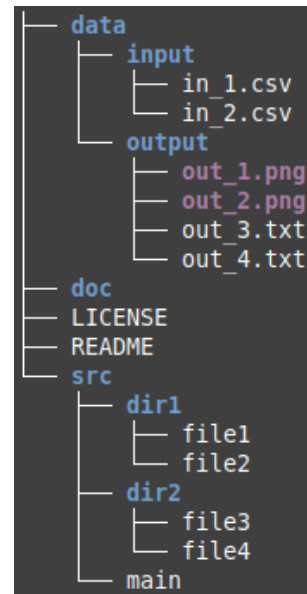

Suggestion of working space

3.2.3 Universal development rules

Each language has some specific mandatory rules. Yet there exists some common good practices:

Language

Code must be written in English language since:

- The syntax of the language is English.
- Scientific community communicates using English.
- Development problems are described in English on dedicated forums.

Naming conventions

Some rules must be respected:

- In most of the languages, do not use any accentuation or special character.
- CamelCase or snake_case
Same everywhere in the code.

camelCase

snake_case

nocase

Variables

In the common case, a variable name must be:

- Short (≤ 25 characters)
- Explicit
- Without any references to its type
- Using plural form if it's a container-like

Incorrect	Correct
myvar	dyn_viscosity
a_very_long_var	input_paths
temporaryArraySTRING	initialConditions

Global variables are written in UPPER_SNAKE_CASE.

In a software development process, an explicit variable name tells the user about the physical (or mathematical, etc ...) meaning of the variable. Each wisely-defined variable name represents a lot of saved time when using the code as it is understood with less effort. lit le code.

Functions and methods

The name of a function:

- **Starts with a verb** à l'impératif at the imperativ form.
- Does not mention the type of input or output data.

Indentation and spacing

Some languages have few constraints regarding indentation and spacing. In these cases:

- Do not exceed 100 characters as a length of code lines.
- Indent the same way instructions blocs that share the same structure, or let the IDE do it for you.

Nested code

Nested code is difficult to read. For instance, do not nest multiple calls to functions in a one-liner as follows:

```
Float32 solar_power = compute_solar_power(get_area(solar_panel),
    get_irradiance(
        download_weather(get_actual_time()))))
```

Instead, write as many lines as needed:

```
Float32 solar_area = get_area(solar_panel)
                        Time current_time = get_actual_time()
WeatherData Geneve_weather = download_weather(current_time)
Float32 Geneve_irradiance = get_irradiance(Geneve_weather)
Float32 solar_power = compute_solar_power(solar_area, Geneve_irradiance)
delete(solar_area, Geneve_weather, Geneve_irradiance)           # optional in most languages
```

Comments

Comments start with a special character or set of characters that is defined for each language. Yet, comment characters must not be inserted manually as:

- It is less readable (unwanted spaces at wrong places)

- It creates indentations error whenever you remove manually this comment sign
- Automatic removal by the IDE might not be possible

Instead, you must use the IDE shortcut for defining either line comments or block comments.

3.3 Comment and documentation

3.3.1 Differences

A comment is a short explanation in the code that helps any **developer** to understand a few instructions. A comment may be only temporary. A commented code is much simpler to understand.

A documentation is an exhaustive explanation for the **user** of the code. The documented parts of the code are the one that constitute its API.

3.3.2 Comment a code

A comment must be inserted at least in the following cases:

1. Bug to be corrected
2. Local code improvement needed
3. The way a difficult bug was solved Exemple:

```
UInt64 simulation_timestep = get_timestep() // UInt64 prevents overflow
```

4. Unusual instructions, yet needed. Exemple:

```
parse_request(parser=Parser.NO_DEFAULT, timeout=NULL) // default timeout (3 min)
                                                         // is too short
```

5. Reference to a scientific article or an important scientific methodology or result Exemple:

```
Array[Float32] fourier_coefs = adapted_fourier_transform() //cf DOI 04.52/j.fake.206.1815
```

This type of comments does not intend to replace an exhaustive scientific description of the code in a dedicated document.

6. Some parameters are specified or a section of code is made unavailable (i.e.: "commented out") Exemple:

```
Int8 thermal_diffusivity = 9 // get_thermal_properties() has to be fixed
```

Each IDE comes with specific keywords to make comments more readable. It is often the case of **fixme** (see 1) and **todo** (see 2).

3.3.3 Document a code

Content of a documentation

The documentation section of a function must give some information about the following points, from most to less important:

1. What the function does
2. Input parameters
 - types
 - what they describe
 - the set of expected values, if any
 - the default value, if any
 - physical unit, if any
3. Same for output parameters
4. Related functions
5. Detail of the operations achieved by the function
6. Complete scientific references
7. Use case examples of the function

Points 1 to 3 are mandatory. The other are optional yet recommended, in particular 7.

Note that writing the documentation of a code is an iterative process: going through the entire code reveals some bug to fix, before going further into the documentation.

Documentation: howto

Documentation writing The documentation is written into the code. It is often located:

- Either at the line before the function definition
- Or in the function body

A particular syntax is adopted to reference a component of the code (variable, function, ...) or the language (types, ...).

Documentation generation Each documentation block is then rendered in an easy-to-read format:

- HTML: if documentation is hosted on the web <https://about.readthedocs.com/>
- Latex/PDF: if documentation is shared locally

The built document is called the “API reference” because it makes it possible to entirely use the software according to its API. Some famous documentation builders are:

- Javadoc (Java)
- Doxygen (C, C++)
- Sphinx (Python)

```
def norm(x, ord=None, axis=None, keepdims=False):
    """
    Matrix or vector norm.

    This function is able to return one of eight different matrix norms,
    or one of an infinite number of vector norms (described below), depending
    on the value of the ``ord`` parameter.

    Parameters
    -----
    x : array_like
        Input array. If ``axis`` is None, ``x`` must be 1-D or 2-D, unless ``ord``
        is None. If both ``axis`` and ``ord`` are None, the 2-norm of
        ``x.ravel`` will be returned.
    ord : {non-zero int, inf, -inf, 'fro', 'nuc'}, optional
        Order of the norm (see table under ``Notes``). inf means numpy's
        ``inf`` object. The default is None.
```

linalg.norm(x, ord=None, axis=None, keepdims=False) [\[source\]](#)

Matrix or vector norm.

This function is able to return one of eight different matrix norms, or one of an infinite number of vector norms (described below), depending on the value of the **ord** parameter.

Parameters: x : *array_like*

Input array. If *axis* is None, x must be 1-D or 2-D, unless *ord* is None. If both *axis* and *ord* are None, the 2-norm of **x.ravel** will be returned.

ord : {*non-zero int, inf, -inf, 'fro', 'nuc'*}, optional

Order of the norm (see table under **Notes**). inf means numpy's **inf** object. The default is None.

Other than the API reference, the user can find on the web some special documentations to learn a programming language or a specific library:

- Getting started : suggestions of code and important concepts that cover most of development needs
- Tutorials: achieve very specific things with the tool you learn

3.4 Example

This part shows the different development steps applied to a fictive math problem (parts 3.1, 3.2, 3.3) Let's solve the following differential equation:

$$(E) \quad \ddot{\theta} + w_0^2 \sin \theta = 0 \quad (3.1)$$

Given:

- θ a time dependant function, with $t \in [0, 10]$
- initial conditions:

$$\theta_0 = \theta(0) = \frac{\pi}{8} \quad (3.2)$$

$$\theta_0 = \theta'(0) = 0 \quad (3.3)$$

- w_0^2 takes one of the following values:

$$w_0^2 \in \{0.05, 0.5, 5, 50, 500\} \quad (3.4)$$

3.4.1 Identify one's problem

Define the scientific goal

Our code must be able to:

1. Read a parameter file
2. Solve a differential equation using the parameters specified by the file
3. Plot and save a diagram presenting the solution to the equation

A discretization on t makes it possible to get a solution close to the formal one. Conversely, a formal resolution would be difficult with the sin.

The input data (w_0^2) is reliable since these are independant parameters of typical amplitude regarding this type of equations.

The exactness of the result will be evaluated using the approximation for small θ_0 values:

$$\theta : x \rightarrow \theta_0 \cos(w_0 x)$$

This problem is deterministic, and we shall check we get the same solution from one run to another either graphically or numerically.

Choose the language

This problem does not represent a heavy CPU task. Yet, discretization and numerically stable solving both require a dedicated library. *Julia* language is adapted to analytic maths problems, using dedicated libraries such as *SciML* (solving) and *Plots* (plotting). This language is a high-level language, hence dealing with data input/output will be easy.

Define a development plan

Table 3.3 is a suggestion of development plan.

note: Parameters reading from the disk is not priority and could take place at the second step only.

Step	Actions	Duration
1. meet the the primary purpose of the code.	read and store parameters values Define and solve the equation. Perform a quick draft plot of the solution.	1 hour
2. Structure the code	Build an API. Display some progress information for the user. Customize and save the results plot.	1 hour
3. Optimize the code	Profile and analyse the running time. Evaluate potential time savings. Speed up the code.	30 min
4. Document the code for your own interest	Description of every difficult instruction.	10 min
5. Document the code for other users of the code	Write documentation block of each function. Build as html.	30 min

3.4.2 Develop


Preparation

Choose an IDE Regarding Julia language, the largest community IDE is Visual Studio Code with the dedicated plugin.

Organize your working space

For instance, let's create 3 source files, one for each basic functionality. All of them are supervised by the file *main.jl*.

Yet, at step 1, (see Table 3.3), all of the code is in *main.jl*. Code structuration begins at step 2.



Actual structure of the working dir.

Development

Step 1: meet the the primary purpose Equation 3.1 is transformed into 2 equations of first order:


$$\begin{aligned}\dot{\theta}(t) &= \omega(t) \\ \dot{\omega}(t) &= -w_0^2 \theta(t)\end{aligned}$$

Let's call u the result vector:

$$u = \begin{bmatrix} \theta \\ \omega \end{bmatrix}$$

Below, a first version of the code for step 1.

```
src > main.jl > ...
1  #= reading parameters
2  helper doc: https://csv.juliadata.org/stable/reading.html#CSV.read =#
3  using CSV
4  using DataFrames
5  parameters_path = joinpath(pwd(), "data", "input", "parameters.csv")
6
7  all_params = CSV.read(parameters_path, DataFrame, header=false)
8  all_params = all_params[:, "Column1"]
9
10
11 #= solving equation for one value of w_0_2
12 helper doc: https://docs.sciml.ai/DiffEqDocs/stable/types/ode\_types/ =#
13 using DifferentialEquations
14 using Plots
15
16 w_0_2 = all_params[1]
17
18 function eq!(du, u, p, t)
19     du[1] = u[2]
20     du[2] = - p * u[1]
21 end
22 u0 = [π/8, 0]
23 tspan = (0.0, 10)
24 prob = ODEProblem(eq!, u0, tspan, w_0_2)
25
26 sol = solve(prob, Tsit5())
27
28
29 #= Plotting result =#
30 plot(sol, vars=1)
```

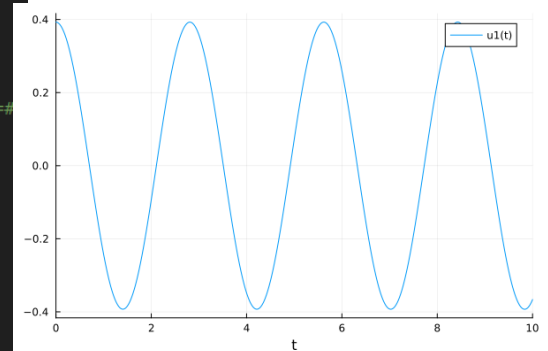

θ as a function of time - step 1

Code - step 1

Step 2: structure the code The following tasks are achieved:

- Split up of the code in dedicated files.
- Use of functions
- Check of parameters compliance
- Display of log messages
- Custom of the plot, disk save

See figures 3.2 and 3.3.

```
src > main.jl > ...
1 include("load_params.jl")
2 include("solve.jl")
3 include("plot.jl")
4
5
6 all_params = load_from_disk("parameters.csv")
7
8 results = Dict()
9 println()
10 for w_0_2 in all_params
11     sol = solve_inplace(w_0_2)
12     results[w_0_2] = sol
13 end
14
15 println("")
16 plot_custom(results, "first parameters set.png");
```

main.jl

```
src > load_params.jl > ...
1 #= reading parameters
2 helper doc: https://csv.julidata.org/stable/reading.html#CSV.read =#
3 using CSV
4 using DataFrames
5
6 function load_from_disk(file_name::String)
7     @info "Loading file" file_name
8     parameters_path = joinpath(pwd(), "data", "input", file_name)
9     all_params = CSV.read(parameters_path, DataFrame, header=false)
10    if isempty(all_params)
11        error("\nBad parameters: no values")
12    end
13    all_params = all_params[:, "Column1"]
14    if typeof(all_params) != Vector{Float64}
15        error("\nBad parameters: type error, expected floats")
16    end
17    all_params
18 end
```


load_params.jl

```
src > solve.jl > ...
1 #= solving equation
2 helper doc: https://docs.sciml.ai/DiffEqDocs/stable/types/ode\_types/ =#
3
4 using DifferentialEquations
5 using Plots
6
7
8
9 function solve_inplace(w_0_2::Float64)
10     function eq!(du, u, p, t)
11         du[1] = u[2]
12         du[2] = - p * u[1]
13     end
14     u0 = [π/8, 0]
15     tspan = (0.0, 10)
16     @info "Solving problem" w_0_2
17     prob = ODEProblem(eq!, u0, tspan, w_0_2)
18     sol = solve(prob, Tsit5())
19     return sol
20 end
```

solve.jl

```
src > plot.jl > ...
1 #= Plotting result =#
2 using Plots
3
4 function plot_custom(results, plot_name)
5     @info "Building figures"
6     results = collect(results)
7     nbr_solutions = length(results)
8     plots = []
9     for (w_0_2, sol) in results
10         pl = plot(sol, vars=1, label="w_0_2=$w_0_2", linewidth=1)
11         push!(plots, pl)
12     end
13     nbr_cols = div(nbr_solutions, 2) + 1
14     plot(plots..., layout=(2, nbr_cols), size=(800, 500), dpi=200)
15     save_path = joinpath(pwd(), "data", "output", plot_name)
16     savefig(save_path)
17 end
```


plot.jl

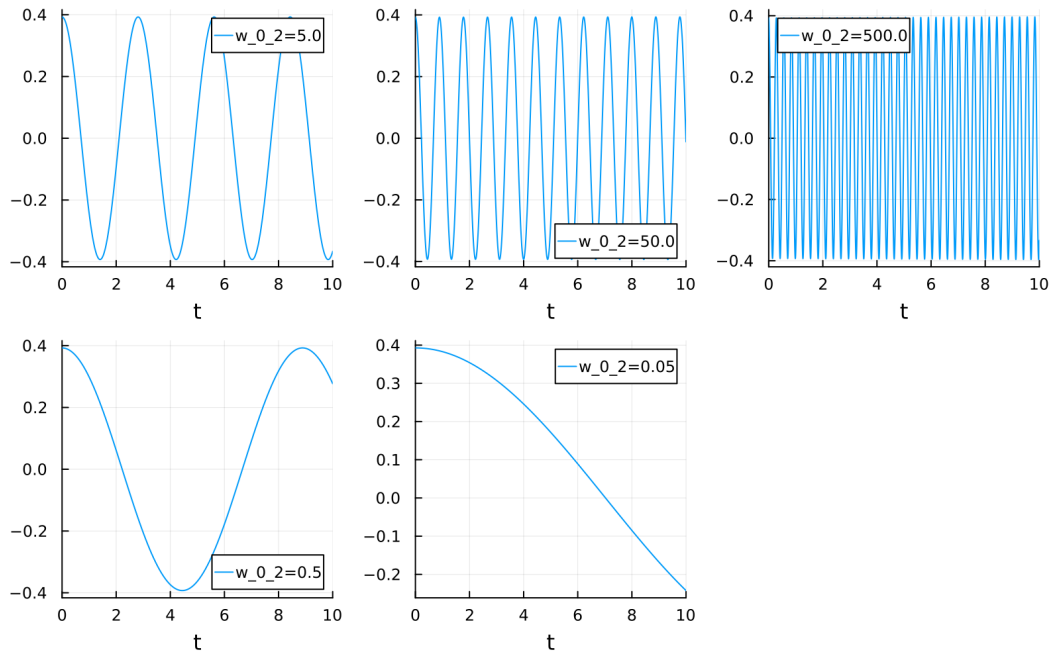

Step 3: optimize the code

Measure the running time: overview

Every language, IDE and operating system comes with **benchmarking and profiling tools**. For this problem, the macro `@benchmark` is used. it returns a total execution duration and an estimation of memory usage.

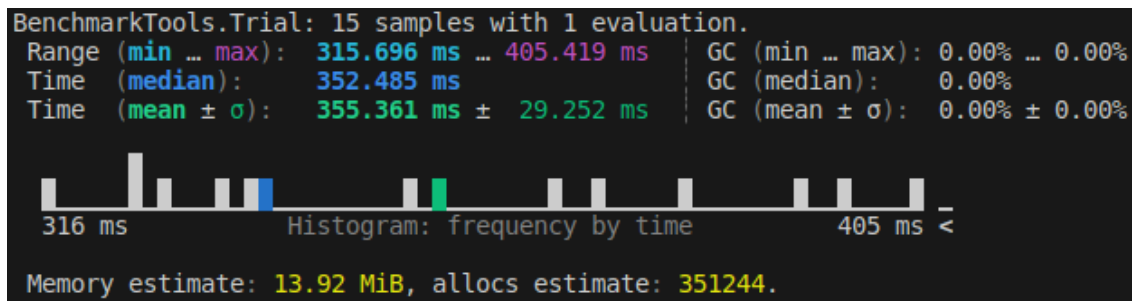

Results:

1. On average, the code runs takes 0.36s to run and uses 14 MiB of memory (*MiB=mebibyte*)
→ **Is-it too much?**
2. The standard deviation of running time is low.



Profile the running time

The macro `@profile` makes it possible to focus on time consuming sections of the code. Figure 3.4 shows a *FlameGraph* of this analysis.

solve_all	
plot_custom	plot_custom
plot##kw	savefig
#plot#186	savefig

Most of the running time comes from plotting and saving the results. This is an important part of the code that must be sped up. Two choices:

1. Specify some variable types to speed up code interpretation.
 - This is specific to Julia language
 - Saved time: 15%.
 - **does not alter functionalities of the code.**
2. Do not save the plot on disk.
 - Saved time: 30%.
 - **is a degradation of functionalities.**

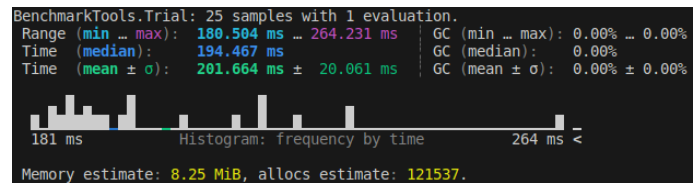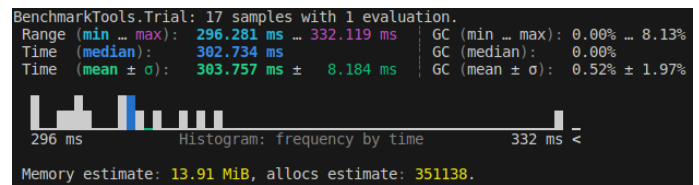

Step 4: document the code for your own interest Will be seen on a Python case.

Step 5: document the code for other users of the code Will be seen on a Python case.

Part II

Best of Python

Chapter 4

Notebooks

4.1 Jupyter code

4.1.1 Presentation

A **notebook** is a sort of interactive Python console where the code is contained within **cells**. each cell can be ran alone, but the memory (i.e. variables) is shared by all cells.

Output of each cell is printed below the cell. By default, the last evaluated statement of the cell is an output.

There are several pros of using **notebooks** at a development step:

- split heavy computation into small units that make sense
- access easily to variable values
- describe the scientific flow of your program using *markdown* (discussed hereafter)

4.1.2 Howto

```
[ ]: area = 100
    speed = 30

    print(area, speed)
```

```
[6]: flowrate = area * speed
    print(flowrate)
```

3000

Above: **flowrate** is displayed as **print** is used. Below: **flowrate** is returned, and thus displayed, as it is the last statement of the cell

```
[7]: flowrate
```

[7]: 3000

One can run nearly every Python code in a **notebook**:

- in script mode: global variables declared directly in any cell
- in function mode: functions are defined and called later on
- in object oriented mode: class and methods are defined

```
[8]: def compute_flowrate(area, speed):
      return area * speed
      compute_flowrate(1000, 30)
```

```
[8]: 30000
```

```
[9]: class Flowrate():
      def __init__(self, area, speed):
          self._area = area
          self._speed = speed
          self.compute()

      def compute(self):
          self._flowrate = self._area * self._speed

      def __repr__(self):
          return f"Instance 'Flowrate' with value: {self._flowrate:d}"

      Flowrate(100, 30)
```

```
[9]: Instance 'Flowrate' with value: 3000
```

Note: during the execution of a cell:

- the cell itself shows an asterisk `[*]`
- the black circle on the right hand side of the page is colored with black

4.1.3 Configuration

Files

notebooks files have an extension `.ipynb`: these files cannot be manually read (JSON format) and cannot be ran the same way a Python file (`.py`) is ran. Yet, most IDE have a support plugin for these files.

Kernel

The *Python* version used by the **notebook** depends either on the environment it is running in or on the configuration of the system. If several Python versions are available, one can choose which to use in the notebook by going to Kernel > Change kernel. The `nb_conda` plugins facilitates the discovery of existing *conda* environments.

Other **kernels** can be installed to code in other languages ([full list](#)).

Functionalities

Some helper functionalities in the development process are not natively available in a **notebook**:

Some of them are available using *plugins*.

4.2 Jupyter markdown

4.2.1 Introduction

A notebook cell can also contained text formatted in **markdown**. **markdown** is a language that makes it easy to structure a text. **markdown** has fewer features than *html* or *Latex* yet it is very adapted to a scientific context.

markdown benefits from a large community. A documentation [lies here](#).

4.2.2 Main functionalities

```
[ ]: A new line is inserted only if a blank line is added: line 1

line 2
```

A new line is inserted only if a blank line is added: line 1

line 2

```
[ ]: **bold** and *italic*

Same with: __bold__ and _italic_
```

bold and *italic*

Same with: **bold** and *italic*

```
[ ]: Items list:

- item 1
- item 2
```

Items list:

- item 1
- item 2

```
[ ]: Numbered list:

1. item 1
2. item 2
3. item 3
```

Numbered list:

1. item 1
2. item 2
3. item 3


```
[ ]: titles:
# Level 1
## Level 2
### Level 3
#### Etc...
```

titles:

Level 1

Level 2

Level 3

Etc...

```
[ ]: URL: [search engine](www.google.fr)
```

URL: [search engine](http://www.google.fr)

```
[ ]: Image: ![some elephants](figures/elephants.png)
```

Image:



```
[ ]: Reference to a software component, for instance the matplotlib library.
```

Reference to a software component, for instance the `matplotlib` library.

```
[ ]: Mathematical formulas are (mainly) written using the Latex commands :
```

```
- In-line mode:  $a_{3,4} = \sum_j b^j_{3,4} \times c^j_{4,5}$ 
- Block mode:

$$a_{3,4} = \sum_j b^j_{3,4} \times c^j_{4,5}$$

```

Mathematical formulas are (mainly) written using the Latex commands :

- In-line mode: $a_{3,4} = \sum_j b^j_3 \times c^j_4$

- Block mode:

$$a_{3,4} = \sum_j b_3^j \times c_4^j$$

4.2.3 Make the best of markdown

One can combine in the same **notebook** some cells of **markdown** and some cells of code. In a scientific approach, it is useful to give short explanations regarding what is computed.

For instance:

"[...] after the fit I compute the quadratic error:

$$\epsilon = \sum_i (\hat{y}_i - \bar{y}_i)^2$$

"

```
[4]: from numpy import sum, array

def sum_square(y_predicted, y_mean):
    return sum((y_predicted - y_mean)**2)

y_predicted = array([1,2,3])
sum_square(y_predicted, 0.5)
```

[4]: 8.75

One can easily convert a notebook into a Latex or PDF file. This is very hand to produce a scientific report where code has a major importance.

4.2.4 See also

markdown is one out of many languages of a similar type: the **markup languages**.

An interesting library is **pandoc** ([doc](#)): it converts content from a markup language to another.

Chapter 5

Python basics

5.1 Control flow

5.1.1 while loop

Code runs while a condition holds True.

```
[1]: i = 10
      j = 0
      while (j<5) or (i>6):
          print(f"i={i:<2}, j={j}")
          j += 1
          i -= 1 # i = i - 1
```

```
i=10, j=0
i=9 , j=1
i=8 , j=2
i=7 , j=3
i=6 , j=4
```

Operators **any** and **all** are used to process iterables of boolean values:

- **any** returns **True** when at least one value is **True**
- **all** returns **True** when all values are **True**

note: if **all** returns **True** then **any** returns also **True**.

```
[2]: data = [1, 2, 3, 4, 5]
      data_cond = [e > 3 for e in data]
      print(any(data_cond))
      print(all(data_cond))
```

```
True
False
```

```
[3]: data = [1, 2, 3, 4, 5]
      data_cond = [e > 0 for e in data]
      print(any(data_cond))
      print(all(data_cond))
```

True

True

note: beware of **while** loops that never come to an end!

5.1.2 for loop

for makes it possible to go through the values of any **iterable** object.

Lists

```
[4]: for k in [0, 1, 2, 3, 4]:
      print(k)
```

0

1

2

3

4

Generators-like

```
[5]: for k in range(5):
      print(k)
```

0

1

2

3

4

```
[6]: gen = (k//2 for k in range(0, 10, 2))
      for k in gen:
          print(k)
```

0

1

2

3

4

Dictionaries

Iteration is done on the keys of the dictionary:

```
[7]: dic = {"key1": "value1", "key2": "value2"}
     for k in dic:
         print(k)
```

```
key1
key2
```

If both keys and values are needed, one must use the `items()` method:

```
[8]: dic = {"key1": "value1", "key2": "value2"}
     for k, v in dic.items():
         print(k, v)
```

```
key1 value1
key2 value2
```

Indexes and values

The `enumerate` function applies to any object that can be iterated over. It returns both the index, and the value. In Python, **the first index is always 0**.

```
[9]: for idx, k in enumerate(["A", "B", "C"]):
     print(idx, k)
```

```
0 A
1 B
2 C
```

Group using zip

`zip` makes tuples by extracting an element from each iterable it is given, as long as at least one iterable has no more elements.

```
[2]: iter_1 = [1,2,3,4]      # longueur: 4
     iter_2 = "abcdefgh"    # longueur: 8
     for i, j in zip(iter_1, iter_2):
         print(i, j)
```

```
1 a
2 b
3 c
4 d
```

`break`

Get out of a control flow structure:

```
[11]: for k in range(5):
     print(f"k={k}")
```

```

if k == 3:
    break

```

```

k=0
k=1
k=2
k=3

```

If multiple control flow structure are ensted, **break** only exits the deepest level (innermost):

```

[3]: j = 0
    while (j < 5):
        print(f"\nj={j}", end="")
        for k in range(5):
            print(f", k={k}", end="")
            if k == 3:
                break
        j += 1

```

```

j=0, k=0, k=1, k=2, k=3

```

continue

Interrupt current iteration and go the next one.

```

[4]: j = 0
    while j < 5:
        j += 1
        if (j%3 == 0):
            continue
        print(f"j={j}")

```

```

j=1
j=2
j=4
j=5

```

else statement

The content of **else** is ran only and only if the previously ran control flow structure never met a **break**.

```

[14]: for k in range(5):
        if k > 15:
            break
    else:
        print("Values lower than 15")

```

```

Values lower than 15

```

5.1.3 if conditions

Keywords are:

- **if**: test whether a condition holds **True**, independantly from previous tests
- **elif**: (optional) test whether a condition holds **True** if and only if previous **if** and **elif** did not hold **True**
- **else**: (optional) code that mus

Keywords are:

- **if**: test whether a condition holds **True**, independantly from previous tests
- **elif**: (optional) test whether a condition holds **True** if and only if previous **if** and **elif** did not hold **True**
- **else**: (optional) code that is ran when the nearest **if** (and following **elseif** if any) did not hold **True**.

```
[15]: word = "abracadra"
      if "x" in word:
          print("'x' in word")
      if "a" in word:
          print("'a' in word")
      if "y" in word:
          print("'y' in word")
      elif len(word) < 5:
          print("Small word")
      else:
          print("Fallback to 'else'")
```

```
'a' in word
Fallback to 'else'
```

5.2 Print formatting

5.2.1 Introduction

There exists two ways to print a variable content:

1. Use it as an argument of `print`. `var = 5` `print("Var: ", var)` Then, the `__print__` method of instances is called.
2. Insert it in a string with special formatting option, and print this string.

5.2.2 Method 1: no formatting

This method is fully compliant with the **unpacking** technic:

```
[4]: data = "abcdefg"
      print(*data)
      print(*data, sep="/")
```

```
a b c d e f g
a/b/c/d/e/f/g
```

```
[2]: data = [1, 2, 3, 4]
      print(*data)
      print(*data, end="/")
```

```
1 2 3 4
1 2 3 4/
hello
```

5.2.3 Method 2: advanced formatting

Advanced formatting is interesting in a scientific approach because it presents the variable value according to its type. One can see [this tutorial](#) for specific use cases. Most of them are covered hereafter.

Key idea

Variable name is enclosed in curly brackets `{}` and a prefix `f` is added in front of the string.

```
[3]: var = 35.123456
      sentence = f"Value of 'var' is {var}"
      print(sentence)
```

```
Value of 'var' is {var}
```

Symbols `<`, `>` and `^` produces text-alignment: left, right and center. If any character precedes one of these symbols, the character is used in a **padding way**.

Floats

If the variable is to be printed as a float, an additional formatting using the `'f'` letter is used inside the curly brackets. One can specify:

- Number of decimal figures
- Minimal number of characters

```
[5]: var = 35.123456
      print(f"{var:<9.2f}")
      print(f"{var:_.<9.2f}")      # padding
      print(f"{var:_.>9.2f}")      # padding
      print(f"{var:._^9.2f}")      # padding
```

```
35.12
35.12_____
SSSS35.12
__35.12__
```

Scientific notation

Similar to float values representation, yet with letter 'e':

```
[8]: var = 35.123456
      print(f"{var:_.>9.2e}")
```

```
_3.51e+01
```

Percentages

Percentage mode involves the symbol '%': what is printed is the product of the variable by 100.

```
[9]: var = 0.35123456
      print(f"{var:_.>9.2%}")
```

```
___35.12%
```

Int

The total number of characters is specified.

```
[10]: var = 12356
       print(f"{var:0>9}")
```

```
000012356
```

Beware! For Python an integer that ends with . is a float!

Other ways to specify arguments

Positional arguments

```
[11]: data = range(5)
       print("third value = {2}".format(*data))
```

```
third value = 2
```

Named arguments

```
[12]: data = {"key1": 0, "key2": 1}
      print("'key1' = {key1}".format(**data))
```

```
'key1' = 0
```

Advanced: call str or repr

By default, the `__format__` method of instances is called. One can change to use:

- `str: {var!s}` (overload of `__str__`)
- `repr: {var!r}` (overload of `__repr__`)

```
[13]: class Fake(float):

      def __repr__(self):
          return "This is my Float (repr)\n"

      def __str__(self):
          return "This is my Float (str)\n"

      def __format__(self, *args, **kwargs):
          return super().__format__(f"{123456.32145:2.3f}")

var = Fake()
print(f"This is formatted: {var}")
print(f"This is printed: {var!s}")
print(f"This is represented: {var!r}")
```

```
This is formatted:
```

```
0.0
```

```
This is printed: This is my Float (str)
```

```
This is represented: This is my Float (repr)
```

5.3 Variable types

5.3.1 list

`list` are the most common data containers. They are:

- **mutable**: one can change their content by adding new elements or changing existing elements
- **indexable**: one can access the content of a list using an index, starting from **0**

All the operations done on a list are done **in place**. That means no other list is returned but the current instance is modified.

Appending content

1 at a time at the end of the list

```
[1]: var = [34, 23]
    var.append(1)
    var.append(2)
    var.append("b")
    print(var)
```

```
[34, 23, 1, 2, 'b']
```

1 at a time by position

```
[ ]: var.insert(3, "new")
    print(var)
```

Already stored in a list

```
[3]: var1 = [1, 2]
    var2 = [3, 4]
    var1.extend(var2)
    print(var1)
```

```
[1, 2, 3, 4]
```

Modifying content

```
[4]: var[0] = 3
    print(var)
```

```
[3, 23, 1, 'new', 2, 'b']
```

One can specify a **negative index**: -1 is the latest value of the list, -2 is the second to last, etc...

```
[5]: var = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
    print(var[-1])
    print(var[-3])
```

```
10
```

```
8
```

Note that you can go from negative to positive index using this simple trick:

```
[6]: positive_index = 3
      negative_index = -(len(var)-positive_index)
      positive_index2 = len(var)+negative_index
      print(var[positive_index])
      print(var[negative_index])
      print(var[positive_index2])
```

```
3
3
3
```

The `index` method returns the index (positive) of the first occurrence of an element. A lower and upper index can also be specified to look for a value at a particular location.

```
[7]: var.append(1)
      print(var)
      print(f"Index of first '1' value starting from index 0: {var.index(1)}")
      print(f"Index of first '1' value starting from index 0: {var.index(1, 4, len(var))}")
```

```
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 1]
Index of first '1' value starting from index 0: 1
Index of first '1' value starting from index 0: 11
```

Deleting content

At the end of the list

```
[8]: last = var.pop()
      print(f"Last value: {last}")
      print(var)
```

```
Last value: 1
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
```

Positional

```
[9]: var.remove(1)
      print(var)
```

```
[0, 2, 3, 4, 5, 6, 7, 8, 9, 10]
```

Sorting

With homogeneous data types Beware that sorting the variable is done in place.

```
[10]: var = [1, -6.7, 189]
       var.sort(reverse=True)
       print(var)
```

```
[189, 1, -6.7]
```

Using a custom sorting key A custom sorting key is a function that returns, for all elements of the list to sort, a value that can be compared to the other.

```
[11]: var = [56, "98", -102, "102.45"]
      var.sort(key=lambda key:float(key))
      print(var)
```

```
[-102, 56, '98', '102.45']
```

Advanced Sorting is done internally by a call to methods `__lt__` and `__gt__` of an instance. One can redefine these methods to sort elements on some relevant properties.

Below is an example of a custom object who internal value (used for the sorting process) depends on the order of creation of the instance (see `COUNTER`). The `__lt__` method is redefined using this value.

```
[12]: class Custom():
      COUNTER = 10
      def __init__(self):
          self.value = Custom.COUNTER
          Custom.COUNTER -= 1

      def __lt__(self, other):
          if not isinstance(other, Custom):
              raise NotImplementedError()
          return self.value < other.value

      def __repr__(self):
          return f"Custom ({self.value})"

var1 = Custom()
var2 = Custom()
var3 = Custom()
var = [var1, var2, var3]
print(var)
var.sort()
print(var)
```

```
[Custom (10), Custom (9), Custom (8)]
[Custom (8), Custom (9), Custom (10)]
```

Another way to sort data containers is the `sorted` function. Differently from method `.sort()`, it returns a new sorted list.

```
[13]: var = (3, 7, 2, 9, -4)
      sorted(var)
```

```
[13]: [-4, 2, 3, 7, 9]
```

Concatenation

Two lists can be concatenated using +.

```
[2]: var1 = [1, 2]
      var2 = [3, 4]

      print(var1)
      print(var2)
      print(var1 + var2)
```

```
[1, 2]
[3, 4]
[1, 2, 3, 4]
```

Conclusion

list are commonly used in Python. Yet they are neither always fitted to all use cases, nor the the most powerful solution.

5.3.2 set

set are data containers that can store a given value at most one time. They are not **mutable** and not **indexable**. Thus, **there is no guarantee for the insertion order to be preserved**.

```
[15]: var = {1, 2, 3}
      var.add(4)
      print(var)
      var.add(3)
      print(var)
```

```
{1, 2, 3, 4}
{1, 2, 3, 4}
```

One can perform unions, intersections and differences of **set** instances.

```
[16]: var1 = {1, 2, 3}
      var2 = {2, 3, 4}
      print(f"{'Union':<15}: {var1&var2}")
      print(f"{'Intersection':<15}: {var1|var2}")
      print(f"{'Difference 1':<15}: {var1-var2}")
      print(f"{'Difference 2':<15}: {var2-var1}")
```

```
Union          : {2, 3}
Intersection   : {1, 2, 3, 4}
Difference 1    : {1}
Difference 2    : {4}
```

Above, we used operators `&`, `|`, `-`: these are shortcuts for the dedicated methods. These methods can be showed using `dir`.

```
[17]: attrs = dir(var1)
      [attr for attr in attrs if not attr.startswith("__")]
```

```
[17]: ['add',
      'clear',
      'copy',
      'difference',
      'difference_update',
      'discard',
      'intersection',
      'intersection_update',
      'isdisjoint',
      'issubset',
      'issuperset',
      'pop',
      'remove',
      'symmetric_difference',
      'symmetric_difference_update',
      'union',
      'update']
```

5.3.3 tuple

tuple are similar to list, yet they are **immutable** (not **mutable**). Whenever it's possible tuple must be preferred over list.

```
[18]: var = (1, 2, 3)
      print(var)
```

```
(1, 2, 3)
```

Reminder, tuples are immutable:

```
[19]: var[2] = 5
```

```
-----
TypeError                                Traceback (most recent call last)
Cell In[19], line 1
----> 1 var[2] = 5

TypeError: 'tuple' object does not support item assignment
```

Important: what defines a tuple is not the parenthesis (...) but the comma ,.

```
[20]: var = (1)
      print(type(var))
      var = 1,
      print(type(var))
      var = 1, 2, 3
      print(type(var))
```

```
<class 'int'>
<class 'tuple'>
<class 'tuple'>
```

5.3.4 dict

Dictionaries makes it possible to store a **value** with a unique **key** as identifier.

```
[21]: var = {"one": 1, "two": 2, "three": 3}
      var
```

```
[21]: {'one': 1, 'two': 2, 'three': 3}
```

Keys and values are retrieved using dedicated methods. These methods return something similar to a list (but different):

```
[22]: keys = var.keys()
      print(keys)
      values = var.values()
      print(values)
```

```
dict_keys(['one', 'two', 'three'])
dict_values([1, 2, 3])
```

A call to `items` extract couples of (key, value).

```
[23]: items = var.items()
      print(items)
```

```
dict_items([('one', 1), ('two', 2), ('three', 3)])
```

One can read and modify a dictionary using any key.

```
[24]: var["one"] = "first"
      print(var)
      print(var["two"])
```

```
{'one': 'first', 'two': 2, 'three': 3}
2
```

Retrieving an element using brackets `[]` is internally done by a call to the `get` method. One can call explicitly the `get` method with a default value in case the key does not exist.


```
[25]: print(var.get("three", "Unknown!"))
      print(var.get("four", "Unknown!"))
```

```
3
Unknown!
```

Other methods are presented using `dir(dict)`.

```
[26]: attrs = dir(dict)
      [attr for attr in attrs if not attr.startswith("__")]
```

```
[26]: ['clear',
      'copy',
      'fromkeys',
      'get',
      'items',
      'keys',
      'pop',
      'popitem',
      'setdefault',
      'update',
      'values']
```

Recall that help is available on any Python object using `help`:

```
[38]: help(dict.popitem)
```

Help on method_descriptor:

```
popitem(self, /)
    Remove and return a (key, value) pair as a 2-tuple.

    Pairs are returned in LIFO (last-in, first-out) order.
    Raises KeyError if the dict is empty.
```

Notes

As for values of a **set**, keys of a dictionary must be **hashable**. Hence, a list cannot be a dictionary key.

In practice, most immutable objects are hashable.

```
[27]: var = {[1,2]: 5}
```

```
-----
TypeError                                Traceback (most recent call last)
Cell In[27], line 1
----> 1 var = {[1,2]: 5}
```

```
TypeError: unhashable type: 'list'
```

5.3.5 deque

A **deque** is kind of **list** that is optimized for fast values appending at both ends (beginning and end of the container). The speed up is observed mainly for very large containers.

deque thus have the following methods **appendleft**, **popleft** et **extendleft**.

```
[28]: from collections import deque
      d = deque([1, 2, 3, 4])
      d.popleft()
      print(d)
      d.appendleft(0)
      print(d)
      d.extendleft([-5, 63])
      print(d)
```

```
deque([2, 3, 4])
deque([0, 2, 3, 4])
deque([63, -5, 0, 2, 3, 4])
```

5.3.6 About slicing

slicing is a way to extract part of an indexable object (ex: **list**, **tuple**, **str**).

Slicing is done using brackets with a specific notation: **start:end+1:step** (last index is excluded). **step** is not mandatory (if none, it is assumed **step=1**) but if **step** is given then the two other must be given too.

Hereafter, a use case using a **list**.

```
[29]: var = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
      print(var[:5])      # the first 5 values
      print(var[5:])      # values from index 5 to the end
      print(var[1:5])     # values from index 1 to index 4
      print(var[1:5:2])   # values from index 1 to index 4, every 2 values
```

```
[0, 1, 2, 3, 4]
[5, 6, 7, 8, 9, 10]
[1, 2, 3, 4]
[1, 3]
```

Some negative indexers are also possible here, as long as **start** references an element located before end.

```
[30]: print(var[-3:])    # the last three values
      print(var[-6:8:2])  # values from index -6 to index 8, every 2 values
```

```
[8, 9, 10]
[5, 7]
```

This small trick reverse the container:

```
[31]: var = var[::-1]
      print(var)
```

```
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0]
```

slicing returns a **copy** of its argument, even when the argument is mutable.

```
[32]: var2 = var[:5]
      print(f"var: {var}\t\t var2: {var2}")
      var2[1] = 1000                                # modification
      print(f"var: {var}\t\t var2: {var2}")
```

```
var: [10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0]      var2: [10, 9, 8, 7, 6]
var: [10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0]      var2: [10, 1000, 8, 7, 6]
```

5.3.7 Booleans

Some values are interpreted as booleans in a **boolean context**, for instance an **if**.

Example: an empty data container has a value of **False** (**True** if it contains at least one element)

```
[33]: for var in ([], 0, None):
      if var:
          print(f"{var!s:<5} is interpreted as True")
      else:
          print(f"{var!s:<5} is interpreted as False")
```

```
[]    is interpreted as False
0     is interpreted as False
None  is interpreted as False
```

This is not the case outside of these contexts, unless using **type casting** toward a **bool** type.

```
[34]: print([] is False)           # False, since a list is not a bool, even empty
      print(bool([]) is False)     # True
```

```
False
True
```

5.4 List comprehensions

5.4.1 Introduction

list comprehensions are a way to define lists. Pros of using list comprehensions include:

1. does not pollute the current scope with unwanted variables:
2. takes only one line of code

Regarding 1, consider the following example.

```
[1]: var = []
    for k in range(5):
        var.append(k**2)

    print(k)
```

4

Variable `k` whose only purpose is to build the list still exists after the loop. This is dangerous in case the name `k` is used elsewhere with no initialization.

List comprehensions are made of:

- one or several **for** loops
- a value to fill the container with, possibly dependant from the indexes of the **for** loops
- (optional) a condition **if/then/else**

5.4.2 Exemples simples

Even integers

```
[2]: var = [2*k for k in range(10)]
    var
```

```
[2]: [0, 2, 4, 6, 8, 10, 12, 14, 16, 18]
```

Even integers that are multiple of 4.

```
[3]: var = [2*k for k in range(10) if not 2*k%4]
    var
```

```
[3]: [0, 4, 8, 12, 16]
```

Note that with a **else**, location of **if** is also modified.

```
[4]: var = [2*k if not 2*k%4 else 0 for k in range(10) ]
    var
```

```
[4]: [0, 0, 4, 0, 8, 0, 12, 0, 16, 0]
```

One can use existing other variables:

```
[5]: reference = {0: "val_2", 1: "val_1", 2: "val_1", 3: "val_2", 4: "val_1"}
      var = [reference[k] for k in range(5)]
      var
```

```
[5]: ['val_2', 'val_1', 'val_1', 'val_2', 'val_1']
```

5.4.3 Autres types de données

list comprehensions can be used with other data containers:

- generateur
- set
- dict
- etc...

Generators

A generator is a data container whose content is not stored into memory until it has to be retrieved. Retrieval is done either using a classical **for**, or the **next** method.

```
[6]: var = (letter.upper() for letter in "test" if letter != "e")
      var
```

```
[6]: <generator object <genexpr> at 0x7f77e76625e0>
```

```
[7]: print(next(var))
      print(next(var))
      print(next(var))
```

```
T
S
T
```

Sets

sets cannot contain duplicate values:

```
[8]: var = {k%5 for k in range(100)}
      var
```

```
[8]: {0, 1, 2, 3, 4}
```

Dictionaries

```
[9]: var = {k: 2*k+1 for k in range(5)}
      var
```

```
[9]: {0: 1, 1: 3, 2: 5, 3: 7, 4: 9}
```

5.5 Function signature

5.5.1 unpacking

Key idea

unpacking is a way to extract values from a data container into separate variables.

```
[1]: a, b, c = [1, 2, 3]
      print(a)
      print(b)
      print(c)
```

```
1
2
3
```

If the number of variables on left side of = is not the number of elements of the container, an error is raised:

```
[2]: a, b = [1, 2, 3]
```

```
-----
ValueError                                Traceback (most recent call last)
Cell In[2], line 1
----> 1 a, b = [1, 2, 3]

ValueError: too many values to unpack (expected 2)
```

One can forget about some specific elements using *.

```
[3]: var1, var2, var3, *unwanted, var4 = "abcdefg"
      print(var1, var2, var3, var4)
```

```
a b c g
```

Yet, in this case, there must be at most one unknown variable (one *)

```
[4]: a, *unwanted, c, *unwanted, g = "abcdefg"
```

```
Cell In[4], line 1
      a, *unwanted, c, *unwanted, g = "abcdefg"
      ^
SyntaxError: multiple starred expressions in assignment
```

Use cases

Unpacking can be used in the following situations:

- for loops
- permutationw with **no intermediate values**
- arguments passed to a function (see hereafter)

for loops:

```
[5]: for a, b, *_ in [(1, 2, 30),
                    (4, 5, 60, 42)]:
      print(a, b)
```

```
1 2
4 5
```

Permutations:

```
[6]: a = 5
      b = 6
      a, b = b, a
      print(a, b)
```

```
6 5
```

5.5.2 Function signature

Simple

A function signature presents the name and expected order of every argument of this function.

In a function call, these arguments are of two types:

- positional: their role is defined by the place they take in the arguments order
- named (*keyword arguments*, i.e. **kwargs**)

```
[7]: def f(a, b, c):
      print(f"`a`: {a}      `b`: {b}      `c`: {c}")

f(1, 2, 3)           # all positional
f(1, 2, c=5)         # some positional, some named
f(c=5, a=1, b=2)     # all named, order does not matter
```

```
`a`: 1      `b`: 2      `c`: 3
`a`: 1      `b`: 2      `c`: 5
`a`: 1      `b`: 2      `c`: 5
```

Named arguments are always placed **after** positional arguments.

```
[8]: f(1, b=2, 3)
```

```
Cell In[8], line 1
      f(1, b=2, 3)
      ^
```


SyntaxError: positional argument follows keyword argument

An argument cannot be specified both as positional and named:

```
[9]: f(1, a=1, b=2, c=5)
```

```
-----
TypeError                                Traceback (most recent call last)
Cell In[9], line 1
----> 1 f(1, a=1, b=2, c=5)

TypeError: f() got multiple values for argument 'a'
```

Default value

An argument can be absent from a function call if the function signature defines for this argument a default value. If this argument is given, default value is not taken into account.

```
[10]: def f2(a, b, c=3):
      print(f"`a`: {a}      `b`: {b}      `c`: {c}")

      f2(1, 2)
      f2(1, 2, 5)
```

```
`a`: 1      `b`: 2      `c`: 3
`a`: 1      `b`: 2      `c`: 5
```

It is common to assign a `None` value to optional arguments. Then the body of the function must contain a special treatment for this argument.

```
[11]: def f3(a, b, c=None):
      if c is None:
          c = 0
      return a + b + c

      print(f3(1, 2))
      print(f3(1, 2, 5))
```

```
3
8
```

Beware: default argument is defined only once (when the function is defined): if it **mutable**, it **will be modified from a call to another**

```
[12]: def f4(a, c=[0]):
      c.append(a)
      print(c)
```

```
f4(1)
f4(2)
f4(3)
```

```
[0, 1]
[0, 1, 2]
[0, 1, 2, 3]
```

Undetermined positional arguments: `*args`

A function can take an undetermined number of positional arguments with the syntax `*args`.

During a function call, all positional arguments undescribed by the function signature are gathered into a `tuple` and passed to the function using the name `args`.

```
[13]: def f5(a, b, *args):
        print(a, b, args)

f5(1, 2, 3, 4, 5)
f5(1, 2)
```

```
1 2 (3, 4, 5)
1 2 ()
```

Note that word “args” is only a convention.

```
[14]: def f6(a, b, *other_values):
        print(a, b, other_values)
```

Every argument following `*args` must be **named**.

```
[1]: def f7(a, *args, b):
        print(a, b, args)

f7(1, 3, 4, 5, b=2)
# f7(1, 3, 4, 5, 2)
```

```
1 2 (3, 4, 5)
```

That explains why only `**kwargs` comes after `*args`.

Undetermined keyword arguments: `**kwargs`

Similar to `*args`, `**kwargs` contains named arguments that are not defined by the function signature. Beware that the keys of `kwargs` are of type `str` (and the values are the passed variables).

```
[16]: def f8(a, b, **kwargs):
        print(a, " ", b, end=" ")
```

```

    print(kwargs.get("c", 0), end=" ")    # if no 'c' exists as a dict key,
    ↪ take 0
    print(kwargs.get("d", 0))

```

```

f8(1, 2)
f8(1, 2, c=3, d=5)
f8(1, 2, d=5)

```

```

1    2    0    0
1    2    3    5
1    2    0    5

```

One can also perform unpacking of dict-like variables.

In the example below, unpacking is used to deconstruct the dictionary into a group of named arguments, which are once again interpreted by the function:

- some are explicitly named
- other go to the **kwargs** variable

```

[17]: def f9(a, b, **kwargs):
        print(a, " ", b, end=" ")
        print(kwargs.get("c", 0), end=" ")
        print(kwargs.get("d", 0))

f9(1, 2)
f9(1, **{"b": 9, "c": 3, "d": 5})
f9(1, 2, **{"d": 5})

```

```

1    2    0    0
1    9    3    5
1    2    0    5

```

Advanced examples

```

[18]: def custom_sum(a, b, *args, **kwargs):
        weight = kwargs.get("weight", 1)    # get the value of
        ↪ 'weight' if exists, else 1
        print(a + b + sum([arg * weight for arg in args]))

custom_sum(1, 2)
custom_sum(1, 2, 3, 4)
custom_sum(1, 2, 3, 4, weight=2)
custom_sum(1, 2, weight=2)

```

```

3
10

```

17

3

Note: a force of ****kwargs** (and ***args**) is that it can be easily passed from a function call to another.

```
[19]: def advanced_function(a, b, *args, **kwargs):
      if kwargs.get("advanced") > 10:
          kwargs["weight"] = 1
      else:
          kwargs["weight"] = 0
      custom_sum(a, b, *args, **kwargs)

      advanced_function(1, 2, 3, 4, advanced=11, useless_kwarg=1000)
      advanced_function(1, 2, 3, 4, advanced=9, useless_kwarg=1000)
      advanced_function(*[1, 2, 3, 4], advanced=9, useless_kwarg=1000)
```

10

3

3

5.6 OS interactions

5.6.1 File reading/writing

Examples

Python is able to read and modify text files (and binary files, too) using the `open` function. In the example below, a file 'file.txt' was previously created on disk.

```
[1]: with open("file.txt") as f:
      line_1 = f.readline()
      line_2 = f.readline()

      print(line_1, line_2, sep="")
```

A new line
Another new line

By default, `open` opens the file:

- in **text mode**
- in **read only** mode: modifying the file is not possible

```
[2]: with open("file.txt") as f:
      new_line = f.write("A new line\nAnother new line\n")
```

```
-----
UnsupportedOperation                                Traceback (most recent call last)
Cell In[2], line 2
      1 with open("file.txt") as f:
----> 2     new_line = f.write("A new line\nAnother new line\n")

UnsupportedOperation: not writable
```

To edit the file, one can use one of the following options:

- 'w': write to the beginning of the file and existing content is removed!
- 'a': write at the end of the file, existing content is kept

```
[3]: with open("file.txt", "a") as f:
      new_line = f.write("A new line\nAnother new line\n")

      with open("file.txt") as f:
          print("Appending to existing file: ", end="")
          print(f.readlines())

      with open("file.txt", "w") as f:
          new_line = f.write("A new line\nAnother new line\n")
```

```
with open("file.txt") as f:
    print("Replacing content of existing file: ", end="")
    print(f.readlines())
```

Appending to existing file: ['A new line\n', 'Another new line\n', 'A new line\n', 'Another new line\n']

Replacing content of existing file: ['A new line\n', 'Another new line\n']

Note the following methods:

- **readline**: read a single line of a file. If several calls to **readline** are done, lines are displayed one after another.
- **readlines**: read all the lines of the file and store them into a list
- **write**: write a string in the file

Notes

\n is the universal character to describe a line break:

```
[4]: s = "This is a sentence.\nA"
      print(s[-3:])    # the last three characters are 'A',
                       # a new line and a dot '.':
                       # the new line is not made of 2 characters!
```

.
A

The **with** bloc is important: it makes sure file is open and closed in a clean way.

The other way to manage files is described here after: it is **deprecated** because if **f.close()** is never called then the file might be corrupted or damage the operating system.

```
[5]: f = open("file.txt")
      line_1 = f.readline()
      line_2 = f.readline()
      f.close()    # never forget this one!
      print(line_1, line_2, sep="")
```

A new line
Another new line

One can create an empty file:

```
[6]: with open("my_empty_file.txt", "w") as f:
      pass
```

5.6.2 Files management

Key ideas

A file path is the address of a file on the disk. In Python, the preferred way to handle file paths is to use the `pathlib` library (built in). It handles perfectly the differences of separators ('/' or '\') between different operating systems. `pathlib.Path` instances can handle both files **and** directories.

```
[7]: from pathlib import Path
path = Path("/this/is/my/path/a_file.txt")
print(path.name)      # file
print(path.parent)    # directory
print(path.suffix)    # file extension
```

```
a_file.txt
/this/is/my/path
.txt
```

The creation of a `Path` instance does not mean the corresponding path exists:

```
[8]: path.exists()
```

```
[8]: False
```

Yet, it can be used to create it:

```
[9]: if False:
    path.parent.mkdir(
        parents=True,      # if parents do not exist, they are
        ↪created ('this', 'is', 'my')
        exist_ok=True      # if the path already exists, it does
        ↪nothing and does not throw an error
    )
```

Absolute and relative file paths

An absolute path is a complete address of a file (or directory) on the disk. Using Linux, these paths start with '/' (root), using Windows they start with the drive name ('c:/', 'd:/', etc...).

```
[10]: path
```

```
[10]: PosixPath('/this/is/my/path/a_file.txt')
```

```
[11]: path.is_absolute()
```

```
[11]: True
```

```
[12]: relative_path = Path("path/relative/to/current/directory")
print(relative_path.is_absolute())
```

False

Conversely, relative paths are path defined starting from the current directory, which can be obtained using `Path.cwd()`. This directory is also called `'.'`. The parent of this directory is called `'..'`.

```
[13]: path1 = Path("./dir1/dir2/dir3/../../")
      path2 = Path("./dir1/")
      print(path1)
      print(path2)
```

```
dir1/dir2/dir3/../../
dir1
```

Two relative paths cannot be compared. One must first call the `resolve` method that returns an absolute path.

```
[14]: print(path1==path2)
      print(path1.resolve()==path2.resolve())
```

False

True

Some libraries do not accept `Path` instances... in this case one must use `str`.

```
[15]: if False:
      print(str(path1.resolve()))
```

Define complex paths

The `/` operator creates a single path from two paths. It can be used several times in a row:

```
[16]: base_path = Path("/my/project/is/in/a/very/deep/dir")
      data_path = base_path / "data" / "case_study"
      src_path = data_path / "../../src"
      file_path = data_path / "a_file.txt"
      print(base_path.resolve())
      print(data_path.resolve())
      print(src_path.resolve())
      print(file_path.resolve())
```

```
/my/project/is/in/a/very/deep/dir
/my/project/is/in/a/very/deep/dir/data/case_study
/my/project/is/in/a/very/deep/dir/src
/my/project/is/in/a/very/deep/dir/data/case_study/a_file.txt
```

Browse your files

Let's create a fictive files structure:

A/

1/


```

a/
  file_1.txt
  file_2.txt
b/
  file_1.txt
  file_2.txt
2/
a/
  file_1.txt
  file_2.txt
b/
  file_1.txt
  file_2.txt
useless_file.txt

```

A list of the files of a specific directory is available using the `iterdir` method of a `Path` instance describing this directory.

`iterdir` returns a generator. Below, it is transformed into a list for easier handling:

```
[17]: p = Path('A')
      print(p.iterdir())
      print(list(p.iterdir()))
```

```
<generator object Path.iterdir at 0x7f3fd41a46d0>
[PosixPath('A/2'), PosixPath('A/useless_file.txt'), PosixPath('A/1')]
```

One can also browse sub directories using the `walk` function of library `os` (built in).

```
[18]: import os
      for current_dir, subdirs, files in os.walk(p):
          print(f"{current_dir:<8}", subdirs, files)
```

```

A      ['2', '1'] ['useless_file.txt']
A/2    ['b', 'a'] []
A/2/b  [] ['file_1', 'file_2']
A/2/a  [] ['file_1', 'file_2']
A/1    ['b', 'a'] []
A/1/b  [] ['file_1', 'file_2']
A/1/a  [] ['file_1', 'file_2']

```

Note that:

- `os.walk` returns strings
- a method `Path.walk` exists for very recent version of python, and should be preferred over `os.walk` if available

Operations on files

Removal A file can be removed using `Path.unlink`. if it's a directory, then use `Path.rmdir`.

```
[19]: if False:
      p = Path('A/useless_file.txt')
      print("Existing files: ", list(p.parent.iterdir()))
      p.unlink()
      print("A file was removed: ", list(p.parent.iterdir()))
```

Move/copy To move or copy/paste a file, the `shutil` library must be used (built in).

Below, a file is moved to the same directory, but its name is changed:

```
[20]: import shutil
      source = Path('A/useless_file.txt')
      destination = Path('A/useless_file_new_name.txt')

      shutil.move(source, destination)
```

```
[20]: PosixPath('A/useless_file_new_name.txt')
```

Copy/paste:

```
[24]: shutil.move(destination, source)
      source = Path('A/useless_file.txt')
      destination = Path('A/useless_file_new_name.txt')

      shutil.copy2(source, destination)    # source file still exists
```

```
[24]: PosixPath('A/useless_file_new_name.txt')
```

Note: the copy of metadata (owner of the file, permissions, dates, etc...) might fail!

Take away

3 libraries can handle files:

- browse the disk, delete files and directories: use `pathlib` ([documentation](#)) in priority, else `os` ([documentation](#)).
- move, copy files and directories: use `shutil` ([documentation](#))

5.6.3 Run a system call

Introduction

The call to an external program from Python makes it possible to build complex scripts that involve several different software components.

The key idea is to define a command the same way one would define it in a terminal (Linux, OS X) or a *cmd* command line (Windows).

Example

One must use the `run` function of library `subprocess` (built in).

```
[22]: import subprocess
result = subprocess.run(args="mkdir a_new_dir",
                        shell=True,
                        capture_output=True,
                        check=True)

print(type(result))
print(result)
```

```
<class 'subprocess.CompletedProcess'>
CompletedProcess(args='mkdir a_new_dir', returncode=0, stdout=b'', stderr=b'')
```

Some explanations:

- `args` describes the command to run
- `shell=True` allows to specify `args` as a `str`. if `shell=False`, then `args` must be set to `['mkdir', 'a_new_dir']`
- `capture_output=True` stores the outputs of the command in the attributes `stdout` (standard output) and `stderr` (error output) of the instance returned by `run` (here this instance is `results`)
- `check=True` makes sure an error is raised if the system command (described by `args`) fails
- attribute `returncode` of `results` is 0 when the command **succeeds**

5.7 Decorators

5.7.1 Introduction

A **decorator** is a function that takes as input a function and returns a function. Using decorators is done in a generic manner: it can be applied quickly to existing functions to have them behave a bit differently.

5.7.2 Simple example

Complete syntax

Code

```
[33]: def custom_decorator(function):
        def new_function(*args, **kwargs):
            print(f"This message is printed because `{function.__name__}` was
↳ decorated using `custom_decorator`.")
            result = function(*args, **kwargs)
            return result
        return new_function

def basic_function(a, b):
    print(f"We are in `basic_function`: {a}, {b}")

new_function = custom_decorator(basic_function)
new_function(3, 4)
```

```
This message is printed because `basic_function` was decorated using
`custom_decorator`.
```

```
We are in `basic_function`: 3, 4
```

Explanation A new function `new_function` is defined in the body of `custom_decorator`. It achieves some work (`print`) and then call the function passed as an argument (`basic_function`). This new function is returned and can be stored in a variable.

Notes A decorator cannot easily modified what happens **inside** the function. Yet, it can modify the arguments it takes as input and the output it returns

Lighter syntax

The same can be achieved without using an intermediate `new_function` variable: the instruction `@decorator_name` is placed the line preceding the `def` keyword of a function to decorate.

```
[34]: @custom_decorator
def basic_function(a, b):
    print(f"We are in `basic_function`: {a}, {b}")

basic_function(3, 4)
```

This message is printed because ``basic_function`` was decorated using ``custom_decorator``.

We are in ``basic_function``: 3, 4

Internally, Python replaces `basic_function` by its decorated version.

5.7.3 Fictive use case

In the example below, a `prod`, a `sum` and a `pow` functions are defined. They perform the sum/product/iterative power of elements of the iterable they receive.

```
[35]: def sum_(var):  
        return sum(var)  
  
def prod_(var):  
    p = 1  
    for e in var:  
        p *= e  
    return p  
  
def pow_(var):  
    if var:  
        p = var[0]  
        for e in var[1:]:  
            p = p ** e  
        return p  
    else:  
        return 1
```

Now, we want these functions to return 0 whenever the result is negative. The common way is to modify these functions directly:

```
[36]: def sum2_(var):  
        s = sum(var)  
        return max(s, 0)  
  
def prod2_(var):  
    p = 1  
    for e in var:  
        p *= e  
    return max(p, 0)  
  
def pow2_(var):  
    if var:  
        p = var[0]  
        for e in var[1:]:  
            p = p ** e  
        return max(p, 0)  
    else:
```

```
return 1
```

But with these modifications, the body of the functions is modified and the functions do not do anymore what they were first intended to do. Hence, one could use an decorator:

```
[37]: def only_positive(func):
        def new_func(*args, **kwargs):
            result = func(*args, **kwargs)
            return max(result, 0)
        return new_func

    @only_positive
    def sum_(var):
        return sum(var)

    @only_positive
    def prod_(var):
        p = 1
        for e in var:
            p *= e
        return p

    @only_positive
    def pow_(var):
        if var:
            p = var[0]
            for e in var[1:]:
                p = p ** e
            return p
        else:
            return 1
```

```
[38]: var1 = [2, 3, 5]
        var2 = [-3, 5, 3]
        print(sum_(var), prod_(var), pow_(var))
        print(sum_(var2), prod_(var2), pow_(var2))
```

```
9 24 4096
5 0 0
```

Advanced

This is handy, but the functions are still modified a bit and we have to comment the decorator line to remove the special behavior.

Instead, we will define a **decorator with argument** to decide whether we want this special behavior to apply. To this purpose, `set_only_positive` is a function that returns a decorator, depending on whether we want (`positive=True`) or do not want (`positive=False`) to apply the special behaviour on the to-be-decorated function.

```
[39]: def set_only_positive(positive):
        if positive:
            return only_positive
        else:
            def no_decorator(func):
                return func
            return no_decorator

        @set_only_positive(True)
        def sum_(var):
            return sum(var)

        @set_only_positive(True)
        def prod_(var):
            p = 1
            for e in var:
                p *= e
            return p

        @set_only_positive(False)
        def pow_(var):
            if var:
                p = var[0]
                for e in var[1:]:
                    p = p ** e
                return p
            else:
                return 1
```

```
[40]: var1 = [2, 3, 5]
        var2 = [-3, 5, 3]
        print(sum_(var), prod_(var), pow_(var))
        print(sum_(var2), prod_(var2), pow_(var2))
```

```
9 24 4096
5 0 -14348907
```

5.7.4 Conclusion

Decorators are advanced features of the python language. In most cases, it can be replaced by (more ugly) simpler solutions. But they are very common in some common libraries, thus it is important to understand the meaning of the `@decorator` syntax.

5.8 Date/time

5.8.1 Introduction

Handling date, time and delays can be required in a scientific progress, especially in an experimental work. For instance:

- schedule data acquisition
- handle experimental databases

Python comes with the `datetime` library to address these issues. Scientific oriented libraries such as `numpy` and `pandas` have a different, **but compatible**, implementation of date/time management.

5.8.2 Timestamp

A timestamp is an accurate description of a moment in time.

`date`

The `date` library (built in) is used to describe accurately a date: year, month, day of month.

```
[1]: from datetime import date
     d1 = date(2023, 3, 1)
     print(d1.day, d1.month, d1.year)
```

```
1 3 2023
```

The current date is obtained using `date.today()`.

```
[2]: d2 = date.today()
     print(d2.day, d2.month, d2.year)
```

```
21 2 2024
```

As many Python objects, dates can be **compared**:

```
[3]: if d1 < d2:
     print(f"{d1} is anterior of {d2}")
     else:
     print(f"{d1} is posterior of {d2}")
```

```
2023-03-01 is anterior of 2024-02-21
```

Yet, there is no meaning to do the sum of two dates:

```
[4]: d1 + d2
```

```
-----
TypeError
```

```
Traceback (most recent call last)
```

```
Cell In[4], line 1
```

```
----> 1 d1 + d2
```



```
TypeError: unsupported operand type(s) for +: 'datetime.date' and 'datetime.date'
```

A `datetime` instance comes with its own representation:

```
[5]: d1
```

```
[5]: datetime.date(2023, 3, 1)
```

To get a string representation, one must use `date.strftime`, i.e. ‘string from time’. This method takes as an argument the wanted **format**. This format must be specified following the special characters [described here](#).

```
[6]: print(d1.strftime("%d %B, %Y (%A)"))    # custom representation
      print(d1.strftime("%x"))              # official representation for your_
      ↪country
```

```
01 March, 2023 (Wednesday)
03/01/23
```

Without using `strftime`, the previously introduced formatting methods (using `f'{{var}}'`) can be used:

```
[7]: print(f"The event happened on the {d1:%d}th of {d1:%B} {d1:%Y}.")
```

```
The event happened on the 01th of March 2023.
```

```
time
```

Following the same idea, python can describe an exact hour: from hour to microseconds:

```
[8]: from datetime import time
      t1 = time(13, 34, 28, microsecond=156545)
      print(t1)
      print(t1.second)
```

```
13:34:28.156545
28
```

Comparison of `time` instances is also possible:

```
[9]: t2 = time(11, 14, 54)
      print(t2.microsecond)
      print(t2 < t1)
```

```
0
True
```

But won't work between date and time instances:

```
[10]: d1 < t2
```

```

-----
TypeError                                Traceback (most recent call last)
Cell In[10], line 1
----> 1 d1 < t2

TypeError: '<' not supported between instances of 'datetime.date' and 'datetime.
↪time'

```

Formatting is possible too:

```
[11]: print(t2.strftime('%I:%M %p, %S seconds'))
      print(f'It is currently {t2:%I}:{t2:%M} {t2:%p} (and {t2:%S} seconds)')
```

```

11:14 AM, 54 seconds
It is currently 11:14 AM (and 54 seconds)

```

`datetime`

`datetime` objects bring together the functionalities of both `date` and `time` objects (still with a microsecond resolution). beware of not mistaking the `datetime` module (the one of `date` and `time`) and its submodule `datetime` (siblings of `date` and `time`).

```
[1]: from datetime import datetime

     now = datetime.now()
     print(now.strftime("%H:%M:%S:%f in %B %Y"))
```

```
16:44:10:142280 in February 2024
```

Feature: a `datetime` instance can be built from a `str` using the `strptime` function (which is **not** `strftime`):

```
[13]: var = datetime.strptime("16:50:24:194724 in January 2029", "%H:%M:%S:%f in %B_
      ↪%Y")
      var
```

```
[13]: datetime.datetime(2029, 1, 1, 16, 50, 24, 194724)
```

Note that there are some limits to the creation of dates:

```
[14]: from datetime import MINYEAR, MAXYEAR
      print(MINYEAR, MAXYEAR)
```

```
1 9999
```

Thus, be careful when your experimental data acquisition may last longer than 8000 years.

5.8.3 Time periods: timedelta

A time period describes the temporal length of an event. It can be represented by objects of type `timedelta`:

```
[15]: from datetime import timedelta
      dt = timedelta(days=1, seconds=2, microseconds=3, milliseconds=4, minutes=5,
      ↪hours=6, weeks=7)
      dt
```

```
[15]: datetime.timedelta(days=50, seconds=21902, microseconds=4003)
```

```
[16]: print('Total number of seconds: ', dt.total_seconds())
```

```
Total number of seconds: 4341902.004003
```

Parameters can be **negative**. In the example below, a duration of 55 minutes is equal to a duration of 1 hour minus 5 minutes.

```
[17]: dt1 = timedelta(minutes=55)
      dt2 = timedelta(hours=1, minutes=-5)
      dt1 == dt2
```

```
[17]: True
```

One can subtract, sum and even divide these instances:

```
[18]: dt1 = timedelta(days=1, seconds=2, microseconds=3, milliseconds=4, minutes=5,
      ↪hours=6, weeks=7)
      dt2 = timedelta(days=41, seconds=265, microseconds=123, milliseconds=41,
      ↪minutes=51, hours=6, weeks=7)
      print('Sum:          ', dt1 + dt2)
      print('Difference: ', dt1 - dt2)
      ratio = dt2 / dt1
      print(f'Division:    {ratio:.2f} ({type(ratio)})')
```

```
Sum:          140 days, 13:00:27.045126
Difference:   -41 days, 23:09:36.962880
Division:     1.80 (<class 'float'>)
```

Important: a date (or datetime) instance can be added to a `timedelta` instance to get a new date (or datetime).

```
[19]: print(d1, dt1, d1 - dt1, type(d1 - dt1), sep="\n")
```

```
2023-03-01
50 days, 6:05:02.004003
2023-01-10
<class 'datetime.date'>
```

```
[20]: print(var, dt1, var + dt1, type(var + dt1), sep="\n")
```

```
2029-01-01 16:50:24.194724  
50 days, 6:05:02.004003  
2029-02-20 22:55:26.198727  
<class 'datetime.datetime'>
```

Chapter 6

Handling exceptions

6.1 Exceptions

6.1.1 Introduction

Some run time errors can be anticipated. They must be dealt with using dedicated code instructions: that is called **exceptions handling**.

An exception is a Python object that tells the user about an error occurring at a specific instruction. These exceptions are of several types since they describe several different problems: type errors (`TypeError`), index errors (`IndexError`), ...

```
[1]: s = "a string"
      s / 5
```

```
-----
TypeError                                Traceback (most recent call last)
Cell In[1], line 2
      1 s = "a string"
----> 2 s / 5

TypeError: unsupported operand type(s) for /: 'str' and 'int'
```

```
[4]: var = [0, 1, 2, 3]
      var[4]
```

```
-----
IndexError                                Traceback (most recent call last)
Cell In[4], line 2
      1 var = [0, 1, 2, 3]
----> 2 var[4]

IndexError: list index out of range
```

A message exhibits the problematic instruction in what is called a **Traceback**. A **Traceback** is a list of code instructions concerned by the exception, going from most recent call to a function (the problematic one) to oldest call.

```
[5]: def f1(a, b):
      return a / b

      def f2(a, b):
          f1(a, b)

      def f3(a, b):
          f2(a, b)

      f3(1, 0)
      print("Not executed")
```

```
-----
ZeroDivisionError                                Traceback (most recent call last)
Cell In[5], line 10
      7 def f3(a, b):
      8     f2(a, b)
--> 10 f3(1, 0)
      11 print("Not executed")

Cell In[5], line 8, in f3(a, b)
      7 def f3(a, b):
----> 8     f2(a, b)

Cell In[5], line 5, in f2(a, b)
      4 def f2(a, b):
----> 5     f1(a, b)

Cell In[5], line 2, in f1(a, b)
      1 def f1(a, b):
----> 2     return a / b

ZeroDivisionError: division by zero
```

6.1.2 Handle an exception

If nothing particular is done, an exception is **blocking** for the running code and the process is terminated. To prevent this termination, one must use a **try** code block:

If an instruction fails in **try**, an exception is raised (as usual) but is not blocking: the content of **except** is ran instead:

```
[6]: def f1(a, b):
      try:
          return a / b
      except ZeroDivisionError as e:
          print("`b` was 0, met the following exception: ", e)

def f2(a, b):
    f1(a, b)

def f3(a, b):
    f2(a, b)

f3(1, 0)
print("Executed")
```

`b` was 0, met the following exception: division by zero

Executed

Notes:

- **Whenever it's possible**, one must specify the type of exception to 'catch' (here `ZeroDivisionError`). Yet, it is also possible to only write `except:` in order to catch all types of exceptions.
- The syntax `as e` store the exception instance (an instance of type `ZeroDivisionError`) in variable `e`.
- Several `except` can follow each other to catch different types of exceptions or define several exceptions types in one `except` (see examples below).

```
[7]: def f1(a, b):
      try:
          a / b
          b[5]
      except ZeroDivisionError as e:
          print("`b` was 0, met the following exception: ", e)
      except TypeError as e:
          print(f"`b` was of type {type(b)}, met the following exception: ", e)

def f2(a, b):
    f1(a, b)

def f3(a, b):
    f2(a, b)

f3(1, 0)
f3(0, 1)
```

`b` was 0, met the following exception: division by zero

`b` was of type `<class 'int'>`, met the following exception: `'int' object is not subscriptable`

```
[8]: def f1(a, b):
      try:
          a / b
          b[5]
      except (ZeroDivisionError, TypeError) as e:
          print(e)
      f1(0, 1)
```

`'int' object is not subscriptable`

The `try` code section must include as few instructions as possible (so that unpredicted errors won't be covered by `except`).

Thus, the `else` section is used: instructions in `else` are executed if risky code in `try` runs with no exception. Put differently: `else` is not ran if `except` is ran.

```
[9]: def f1(a, b):
      try:
          x = a / b
      except (ZeroDivisionError, TypeError) as e:
          print(e)
      else:
          y = 2 * x + 5
          return y
      f1(5, 2)
```

```
[9]: 10.0
```

Note: another clause exists: `finally`. Instructions in `finally` will be executed just before `try` terminates (i.e. before an exception is raised within `try`, or after the very last instruction of `try`). It is useful for some advanced cases.

6.1.3 Raise an exception

It is possible to create a code interruption depending on certain conditions. In this case, with use the `raise` statement. In the example below, a `ValueError` is raised whenever the acquired value is negative. This error is caught in using a dedicated `except`.

```
[7]: from random import randint

def sensor_reading(only_valid_data=True):
    # fake real-time data acquisition
    new_value = randint(-1, 10)
    if new_value < 0 and only_valid_data:
        raise ValueError(f"Sensor default, got negative value {new_value}.")
```



```
    return new_value

def data_acquisition(replacement_value):
    data = []
    for k in range(20):
        try:
            new_value = sensor_reading()
        except ValueError as e:
            print(f"Time step {k}: ", e)
            new_value = replacement_value
        data.append(new_value)
    return data

data_acquisition(0)
```

Time step 10: Sensor default, got negative value -1.

Time step 15: Sensor default, got negative value -1.

```
[7]: [9, 10, 0, 10, 2, 5, 9, 3, 7, 1, 0, 5, 10, 7, 9, 0, 1, 10, 2, 10]
```

6.1.4 Conclusion

`try/except` is a powerful way to handle expected errors, i.e. errors that will likely happen and that need a special treatment.

6.2 Debugger

6.2.1 Introduction

Key idea

In a development process, the developer can encounter some unpredictable and unwanted errors. These can be:

- classical Python exceptions, as introduced previously
- inconsistent scientific results that suggest a code error

The *debugger* is a tool that makes solving these problems an easier task. Using the debugger, one can pause running code at some given instructions, called *breakpoints*. Whenever a breakpoint is encountered, the user can:

- observe the some variable values (local or global variables)
- evaluate some new expressions using these variables
- enter the details of the breakpoint and run these instructions one after another
- resume the execution until a new breakpoint is met

Execution is **always** paused **before** the breakpoint, as if breakpoint occurred at the end of the previous instruction.

Howto

The native debugger of Python is a library called `pdb`. Whenever the `set_trace` method is used to declare breakpoints, execution falls back to debug mode.

Yet, `pdb` is not handy, and a much better debugger integration is done within recent IDE. In this part, the debugger of *Visual Studio Code* is introduced.


6.2.2 Debugging using VSCode

Set some *breakpoints*

Let's focus on the following code:


```
to_debug.py > ...
1
2 def f1(a, b, c):
3     print("Entering f1")
4     a = min(a, 5)
5     print("After first instruction")
6     d = a * b + c
7     print("After second instruction")
8     idx = 0
9     while d < 100:
10         d += 1
11         f2(a, d)
12         idx += 1
13     print("Exiting f1")
14
15
16 def f2(a, d):
17     print("Entering f2")
18     e = a ** (d%5)
19     f3()
20     print(f"Conditionnal breakpoint: `e`>50")
21     print("Exiting f2")
22
23
24 def f3():
25     print("Entering f3")
26     print("Still in f3")
27     print("Exiting f3")
28
29
30 f1(7, 8, 4)
```

By a left clic in the margin, 4 breakpoints were defined (red dots). At lines 4, 9 and 19 are normal breakpoints. Line 20 is a conditional breakpoint: a breakpoint that is activated is and only if `e>50`.

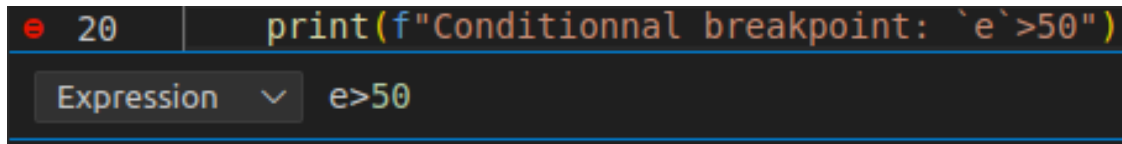


Launch the debugger

Unfold the menu at the right hand side of the page and clic on 'Debug Python file':

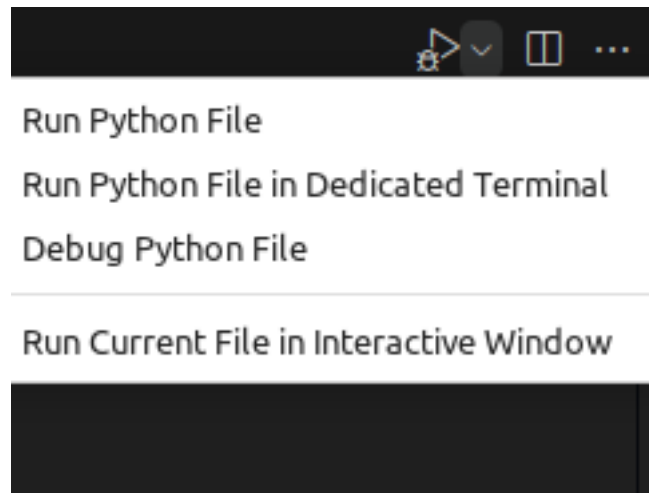

A new toolbar is printed at the top:




From left to right:

- *Continue*: resume execution until next breakpoint
- *Step over*: run one instruction after another. If the instruction is a function call, execution is paused only at breakpoints of the called function.
- *Step into*: run one instruction after another. If the instruction is a function call, execution is paused at every instruction of this call, no matter the presence of breakpoints or not.
- *Step out*: get out of a previously issued *step into* by executing every instruction without pausing, until the end of the function
- *Stop*: exit debug mode

Debug tools

At every moment, local **variables** (for instance, the variables defined in the function currently inspected) are showed in a pannel on the left hand side. Their value change in real time as execution goes on.


Similar to panel **variables** is panel **watch**: one can define custom Python expressions involving variables. These expressions are also updated as the execution goes on.

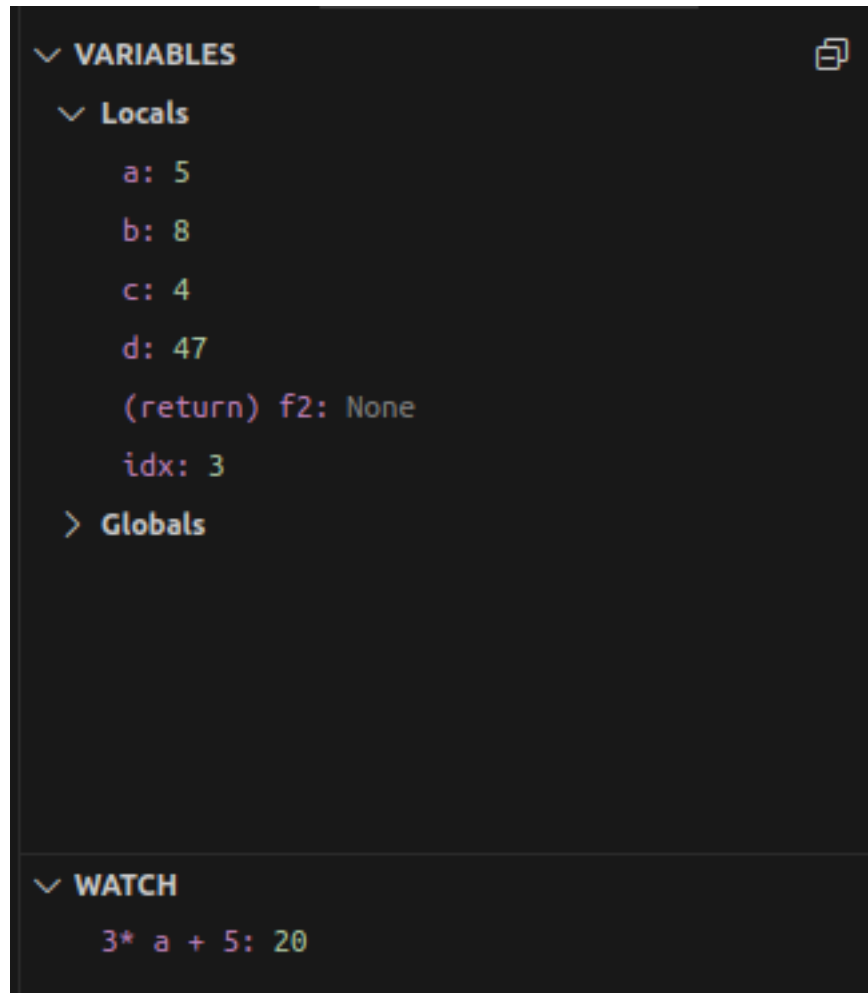

A right clic on a variable shows options to:

- copy the variable value
- explicitly set this value

Yet, these options are more accessible in the **DEBUG CONSOLE**, at the bottom of the window:

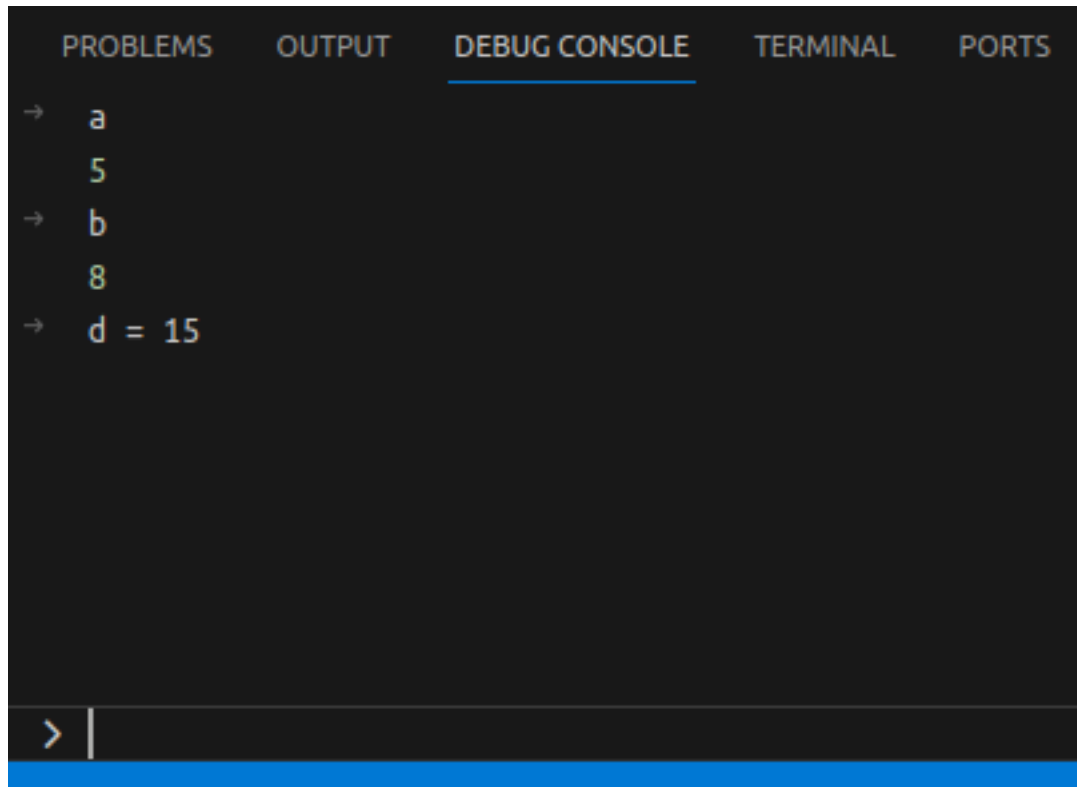

Execution

As usual, outputs of the execution are visible in the **TERMINAL** tab, next to **DEBUG CONSOLE**.

```
Entering f1
After first instruction
After second instruction
Entering f2
Entering f3
Still in f3
Exiting f3
Conditionnal breakpoint: `e`>50
Exiting f2
```

Important notes

There is not return trip in debug mode: the execution of an instruction cannot be undone.

For this reason, breakpoints must be carefully placed **before** the problematic section. Usually, setting less than 5 breakpoints is enough to debug, as functions *Step over* and *Step into* are pretty powerful.

6.3 Logging

6.3.1 About this notebook

Avoid running again the cells of this notebook.

6.3.2 Introduction

A running code can be monitored using carefully placed **print** statements. Yet, this solution does not allow to choose:

- Whether or not the messages must be printed during an execution. To do this, one must comment out or uncomment the **print** statements.
- Where are the messages printed: standard output (terminal) and/or files(s) on disk.

The **logging** library solves these problems.

6.3.3 Exemple

Setting up a logger

```
[1]: import logging

def define_logger(base_level):
    logger = logging.getLogger()
    logger.setLevel(base_level)

    overview_handler = logging.StreamHandler()
    overview_handler.setLevel(logging.INFO)
    logger.addHandler(overview_handler)

    problem_handler = logging.StreamHandler()
    problem_handler.setLevel(logging.WARNING)
    logger.addHandler(problem_handler)

    return logger

logger = define_logger(base_level=logging.INFO)
```

The **logger** is the base object used to write messages. When it receives a message whose level is higher than **base_level**, the **logger** shares it with its **handler** instances. here, 2 handlers are defined:

- **overview_handler** will write messages whose level is at least **INFO**. **INFO** messages describe simply what is going on in the code.
- **problem_handler** will write messages whose level is at least **WARNING**. **WARNING** messages tell the user about a small problem.

Both these handlers publish their messages in the output console ("**StreamHandler**").

Then, what is the levels hierarchy? It is given in [the documentation page of the logging library](#):

<code>logging.DEBUG</code>	10
<code>logging.INFO</code>	20
<code>logging.WARNING</code>	30
<code>logging.ERROR</code>	40
<code>logging.CRITICAL</code>	50

These levels are internally represented as integers, but one must use the syntax `logging[...]` instead.

Using a logger

Using the previous example regarding data acquisition:

```
[2]: from random import randint
    from time import sleep

    def sensor_reading(only_valid_data=True):
        # fake real-time data acquisition
        sleep(1)
        new_value = randint(-10, 10)
        if new_value < 0 and only_valid_data:
            raise ValueError(f"Sensor default, got negative value {new_value}.")
        return new_value

    def data_acquisition(logger, replacement_value=0):
        data = []
        for k in range(5):
            try:
                new_value = sensor_reading()
```



```

        logger.info(f"Time step {k}: good value: {new_value}")

    except ValueError as e:
        new_value = replacement_value
        logger.warning(f"Time step {k}: bad value was replaced with_
↪{replacement_value}")

    data.append(new_value)
    return data

```

```
[3]: data_acquisition(logger, 0)
```

```

Time step 0: good value: 9
Time step 1: bad value was replaced with 0
Time step 1: bad value was replaced with 0
Time step 2: good value: 1
Time step 3: good value: 5
Time step 4: good value: 4

```

```
[3]: [9, 0, 1, 5, 4]
```

In the output console (*Stream*), we can notice two different behaviours:

- whenever acquisition succeeds ($\text{value} \geq 0$), a message with level `logging.INFO` is printed. Among the two defined handlers, only `overview_handler` prints this message since the level of `problem_handler` (`logging.WARNING`) is higher than `logging.INFO`.
- whenever acquisition fails, both handlers print the failure message because it is published with a level `logging.WARNING`. Thus this message is printed two times.

Advanced features

Defining two handlers having the same output is not that interesting. hereafter, the `overview_handler` is modified so that its messages are written to a file.

Moreover, some information are added to the logged messages. This is done using a `__Formatter__` object:

- The time stamp of message production
- The level of the message

The information that can be added to each message are described in the [documentation](#). Note that the `style` argument tells that the formatting syntax is `{}` (see `fmt` argument).

```

[2]: import logging

def define_logger2(base_level):
    logger = logging.getLogger()
    logger.setLevel(base_level)
    formatter = logging.Formatter(fmt='{asctime} :: {levelname} :: {message}',

```

```

        datefmt='%H:%M',
        style='{')

    overview_handler = logging.FileHandler("overview_log.txt", mode="w")
    overview_handler.setLevel(logging.INFO)
    overview_handler.setFormatter(formatter)
    logger.addHandler(overview_handler)

    problem_handler = logging.StreamHandler()
    problem_handler.setLevel(logging.WARNING)
    problem_handler.setFormatter(formatter)
    logger.addHandler(problem_handler)

    return logger

logger2 = define_logger2(base_level=logging.INFO)

```

```
[3]: data_acquisition(logger2, 0)
```

```
19:38 :: WARNING :: Time step 0: bad value was replaced with 0
```

```
[3]: [0, 1, 2, 6, 8]
```

```
[6]: with open("overview_log.txt", "r") as file:
      content = file.read()
      print(content)
```

```

19:38 :: WARNING :: Time step 0: bad value was replaced with 0
19:38 :: INFO :: Time step 1: good value: 1
19:38 :: INFO :: Time step 2: good value: 2
19:38 :: INFO :: Time step 3: good value: 6
19:38 :: INFO :: Time step 4: good value: 8

```

We can notice that:

- The console output is limited to messages having a level `logging.WARNING`.
- The file *overview_log.txt* contains both levels of messages.

Part III

Share one's code

Chapter 7

Environments

7.1 Introduction

A *Python* installation basically consists in:

- the *Python* executable itself: `bin` directory
- the default packages included within Python
- the third party packages installed by the user: `lib/*/site-packages` directory

Whenever one installs a new package, others are updated first and then it is downloaded and installed.

Thus, there exists a risk to break the compatibility with previous packages. Moreover, default Python installation is - regarding Linux - a system-wide installation: if some components are modified there exists some instability risks.

For these reasons, the preferred way is to create an environment as soon as a new Python project is started. The simplest way is to use environments managers such as ***Anaconda***.

7.2 Anaconda

7.2.1 Introduction

Anaconda is a software that manages Python environments. The software comes with a graphical interface (Anaconda Navigator) but the preferred way is to use the command line: faster, more stable. The document is [accessible here](#).

Hereafter, all commands must be ran in a command line.

7.2.2 Create an environment

the first step is to install Anaconda (or Miniconda, a smaller alternative). Once installed, an environment can be created using a command similar to this one:

```
conda create -n myenv python=3.11 scipy=0.17.3 astroid babel
```

We can notice :

- the environment name ('myenv')
- the Python version (3.11)
- packages to be installed, with some specified versions

Instead of specifying a name, one can specify a location of the new environment:

```
conda create --prefix ./envs python=3.11
```

7.2.3 Activate an environment

Activating an environment is telling the computer that everything that relates to Python must be ran within the environment.

Using the command line

In a command prompt, `conda info --envs` gives a list of available environments.

A star `*` shows the currently activated environment. By default, it is the 'base' environment, i.e. the one that comes with Anaconda installation. The 'base' environment must **never be used**.

Let's activate `myenv`:

```
conda activate myenv
```

'myenv' is showed in parenthesis (instead of 'base'). Once activated, we can manage this environment:

- list current packages: `conda list`.
- install new packages: `conda install` ([complete documentation](#)).

We can also:

- start a new interactive session:
 - `python` is the standard Python interpreter
 - `ipython` if the magic Python interpreter, with extended commands and friendly interface (install needed)
- run a Python file: `python my_program.py`.

Using Vscode

If the environment is not automatically detected, it can be chosen using the **Select interpreter** interpreter tool (using `Ctrl+Maj+P`). In this tool, one can specify the executable Python path (bin directory of the environment).

Duplicate an environment

Environment duplication makes it possible to work in the same conditions on several different computers (for instance, a personal computer and a working station). Yet, it works best when all computers have the same operating system.

From computer 1 ... Once the environment is activated:

```
conda list --explicit > spec-file.txt
```

This command exports to a file (`spec-file.txt`) all the details of the environment.

... to computer 2

```
conda create --name same_env_computer_2 --file spec-file.txt
```

This command install an environment following specifications of `spec-file.txt`.

7.2.4 Important notes

- Anaconda is not only a Python packages manager: a conda environment can handle other softwares and successfully isolate them from the remaining of the operating system.
- Regarding Python, only some packages can be installed using Anaconda:
 1. some packages exist only on the [official Python package repository](#), called **PyPi**. Those must be installed using **pip**.

In a conda environment, it is strongly unrecommend to mix conda and pip packages (though it's possible). The preferred procedure is:

- whenever it's possible, install the conda version of the package
 - install the pip version when there is no other choice
 - try to avoid conda packages after some pip packages were installed
- 2. some packages exist only as source code that can be retrieved from shared platforms such as GitHub or GitLab
- Anaconda is not the only way to handle Python environments. Another way is using the [venv module](#). Pros include:
 - compatible with pip
 - lighter than conda

Yet, managing venv environments is slightly less intuitive than conda environments.

Chapter 8

Structuration

8.1 Imports

8.1.1 Introduction

The code of large Python projects is spread among several files. One must be able to use within a file the software components stored in another file.

Python handles imports by replacing the idea of file by the idea of **module**. A set of modules constitutes a **package**.

In this part, the `numpy` package is used to demonstrate the various import methods.

8.1.2 Full import

With the keyword `import`, a package (group of subpackages and modules) or a module is placed into the local memory space.

We can make use of the module. For instance, list its attributes using the `dir` function.

```
[1]: import numpy
      dir(numpy)[:10]
```

```
[1]: ['ALLOW_THREADS',
      'AxisError',
      'BUFSIZE',
      'CLIP',
      'ComplexWarning',
      'DataSource',
      'ERR_CALL',
      'ERR_DEFAULT',
      'ERR_IGNORE',
      'ERR_LOG']
```

It is handy to associate a shorter name to the imported module: this is called an **alias**.

```
[2]: import numpy as np
      dir(np)[:10]
```

```
[2]: ['ALLOW_THREADS',
      'AxisError',
      'BUFSIZE',
      'CLIP',
      'ComplexWarning',
      'DataSource',
      'ERR_CALL',
      'ERR_DEFAULT',
      'ERR_IGNORE',
      'ERR_LOG']
```

The components that can be imported are available as a hierarchy from the root package (here: `numpy`):

```
[7]: import numpy.random.bit_generator
      type(numpy.random.bit_generator)
```

```
[7]: module
```

8.1.3 Relative import

Using `from ... import ...`, some specific components are placed to the local memory space. These components can be:

- variables
- classes
- functions
- modules

```
[2]: from numpy.random import randint
```

8.1.4 Good practices

Import only the needed content

Importing Python objects can be unnecessarily time-consuming. Thus, relative imports must be preferred over absolute imports so that only needed components are imported.

```
[5]: from numpy import log, sqrt
      from numpy.random import rand
```

Choose the import name wisely

If a chosen alias is also an existing variable name, the variable reference will be lost (shadowing):

```
[6]: rd = 5
      print(rd)
      from numpy.random import randint as rd
      print(rd)
```

```
5
<built-in method randint of numpy.random.mtrand.RandomState object at
0x7f1ea0513b40>
```

Move all imports to the beginning of the file

For clarity purpose, in an ideal world, all imports must be placed at the beginning of the file and be sorted:

1. By origin:

1. Built-in packages: `os`, `sys`, `pathlib`, etc...
2. Third-party packages from internet: `pandas`, `numpy`, `matplotlib`, etc...

3. Your local packages or modules

2. By alphabetical order

n.b.: some IDE order the imports automatically.

Example of sorted imports:

```
[7]: from os import getcwd, lstat
    from time import sleep

    from pandas import DataFrame, Interval

    # from mypackage.mymodule import a, b, c
```

8.2 Package structuration

8.2.1 Introduction


To import some content, Python must know:

- which directory is a package
- where to find such directories

Hereafter is presented a simple methodology to access some Python code that is stored elsewhere on the disk.

8.2.2 Example

Let's focus on the following files structure:

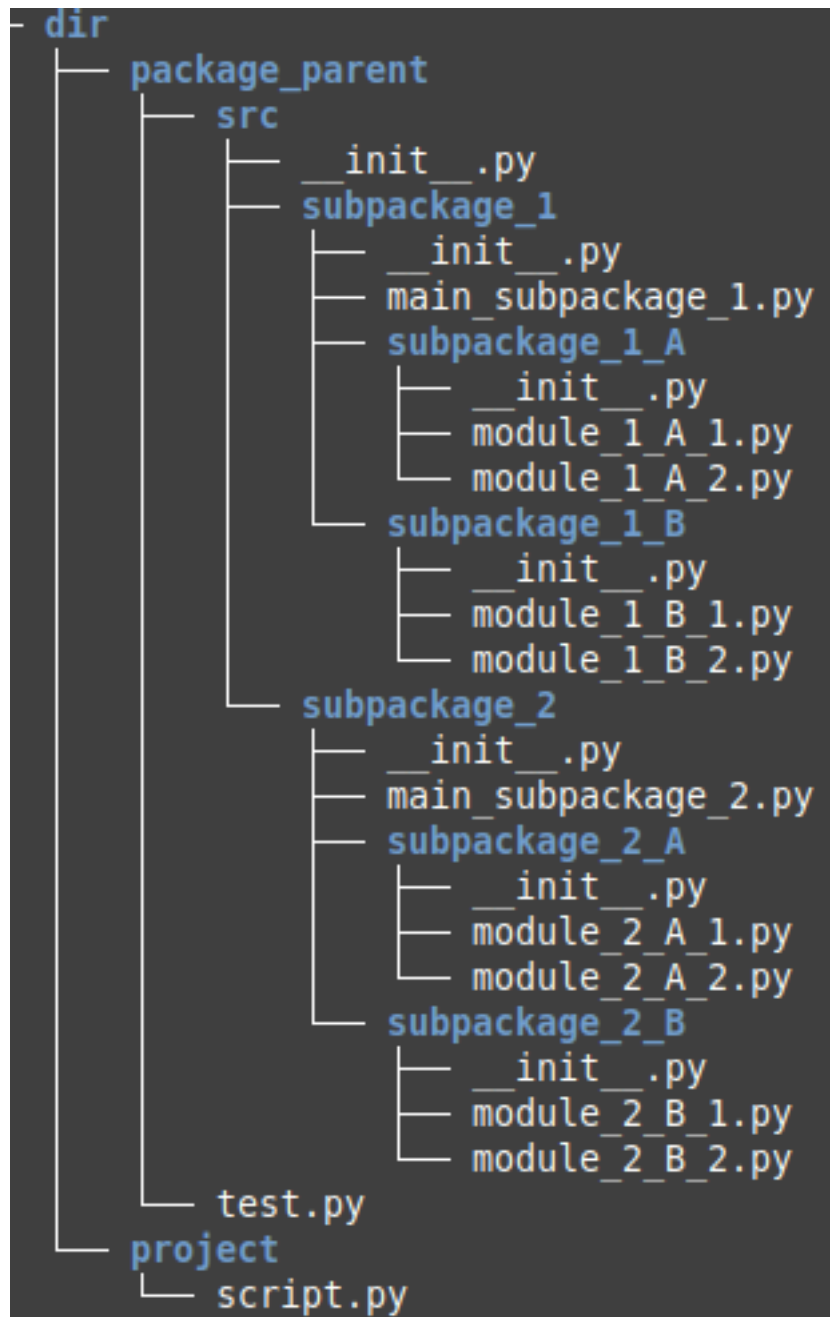

There are two directories sharing the same parent:

- **package_parent**: hosts the **src** directory which contains a Python package.

In **src**, the first `__init__.py` file tells Python that directory **src** is a **package**. The other `__init__.py` files define a subpackages whose name are the directory they are in (**subpackage_1**, **subpackage_1_A**, etc...). The other `*.py` files are those containing useful code. They are called **modules**. Each of them is filled with:

- a **print** that tells about the file name
- a variable **var**

- `project`: a fictive Python project that contains a Python file

8.2.3 Search for packages

When importing a package, Python looks for it:

- in the current directory
- in files described in the `sys.path` list

Thus, the import of `src` from the `project` directory (for instance in `script.py`) will fail as current directory (`project`) is not the one of the package (`package_parent`).

```
[1]: import os
      os.chdir(r'dir/project')
      import src
```

```
-----
ModuleNotFoundError                                Traceback (most recent call last)
Cell In[1], line 3
      1 import os
      2 os.chdir(r'dir/project')
----> 3 import src

ModuleNotFoundError: No module named 'src'
```

Note: the term used in the exception is `module`, not `package`, but the principle remains similar

Let's move to `package_parent`:

```
[2]: os.chdir(r'../package_parent/')
      import src
```

I am `__init__` of package

Import succeeded. Yet, changing current directory is not a good solution to access packages. **The preferred way is to modify the `sys.path` variable.** The path is inserted at first position:

```
[3]: os.chdir(r'../project')      # back to a dir different than the one compatible
      ↪with import of `src`
      from sys import path
      from pathlib import Path
      path.insert(0, str(Path('../package_parent/').resolve()))
```

Then the import is running smoothly:

```
[4]: %reset -f --aggressive
      import src
```

culling sys module...

I am `__init__` of package

Note: in Python console, packages/modules are never imported twice. Thus, for explanation purpose, the magic function `reset -f` is used here to erase all the memory content, included imports, so that we can experience a second import. Usually, this is not necessary (and `--aggressive` must not be used).

8.2.4 Add some content to `__init__`

When importing a module, one can access its components:

```
[5]: %reset -f --aggressive
from src.subpackage_1.subpackage_1_A import module_1_A_1
module_1_A_1.var
```

```
culling sys module...
I am __init__ of package
I am __init__ of subpackage_1
I am __init__ of subpackage_1_A
I am module_1_A_1
```

```
[5]: 1
```

Conversely, when importing a package 'my_package', with an empty `__init__.py` file, modules or subpackages that are contained in 'my_package' are not imported. In the code snippet below, access to a module of 'package' ('module_1_B_1') is impossible:

```
[6]: %reset -f --aggressive
import src.subpackage_1.subpackage_1_B as package
package.module_1_B_1.var
```

```
culling sys module...
I am __init__ of package
I am __init__ of subpackage_1
I am __init__ of subpackage_1_B
I am __init__ of subpackage_1_A
I am module_1_A_1
```

```
-----
AttributeError                                Traceback (most recent call last)
Cell In[6], line 3
      1 get_ipython().run_line_magic('reset', '-f --aggressive')
      2 import src.subpackage_1.subpackage_1_B as package
----> 3 package.module_1_B_1.var

AttributeError: module 'src.subpackage_1.subpackage_1_B' has no attribute_
↳ 'module_1_B_1'
```

Suppose we add some additionnal content to `module_1_A_1`:

```
print("I am module_1_A_1")
```



```
var = 1
```

```
def new_func():
    print("I am `new_func`")
```

To import this content when importing `subpackage_1_A`, the file `src/subpackage_1/subpackage_1_A/__init__.py` is completed with:

```
print("I am __init__ of subpackage_1_A")
useless_var = 10
from .module_1_A_1 import var
from .module_1_A_1 import new_func as imported_func
```

Then, back to our project, the import of module content does not fail:

```
[7]: %reset -f --aggressive
import src.subpackage_1.subpackage_1_A as package
print(package.useless_var)
print(package.var)
package.imported_func()
```

```
culling sys module...
I am __init__ of package
I am __init__ of subpackage_1
I am __init__ of subpackage_1_A
I am module_1_A_1
10
1
I am `new_func`
```

Explanation: `import src.subpackage_1.subpackage_1_A as package` executed the instructions contained in the `__init__` file of `subpackage_1_A`. These instructions make available some content of `module_1_A_1`.

The syntax `.[module_name]` tells Python to search for a module in the current package.

Yet, the search is possible in siblings packages or parent packages using the `..` syntax. For instance, let's import the same components but from `module_1_B_1.py` by modifying `src/subpackage_1/subpackage_1_B/__init__.py`:

```
print("I am __init__ of subpackage_1_B")
from ...subpackage_1.subpackage_1_A import imported_func
```

```
[8]: %reset -f --aggressive
import src.subpackage_1.subpackage_1_B as package
package.imported_func()
```

```
culling sys module...
I am __init__ of package
I am __init__ of subpackage_1
I am __init__ of subpackage_1_B
I am __init__ of subpackage_1_A
```

```
I am module_1_A_1  
I am `new_func`
```

Note: one can also use the `from module import *` syntax to import everything from a module pour importer tout le contenu du module:

```
print("I am __init__ of subpackage_1_B")  
from ...subpackage_1.subpackage_1_A import *
```

Yet, this syntax must be avoided.

8.2.5 Take away

Packages and modules

- a module is a `*.py` file within a package
- a package is a directory containing an `__init__.py` file
- file `__init__.py` is ran when the package is imported
- some content to be imported can be added to `__init__.py` files using the `.`, `..`, `...` (etc...) syntax to browse sibling subpackages
- a content is never imported twice

`sys.path`

- Modifying `sys.path` is a way to access some Python code stored elsewhere on the disk.
- One must **never** copy/paste package directories to make import easier.

Chapter 9

Documentation

9.1 Documentation writing

9.1.1 Introduction


Documenting a code consists in writing *docstrings*. *Docstrings* are special strings attached to a code section that have special meaning for the interpreter. They are what is displayed using the `help` function.

In this part, the `src` package introduced previously is documented using VSCode.

9.1.2 Setting up the needed tools

A plugin is needed to write proper docstrings: [autoDocstring](#) (Nils Werner).

A docstring contains some important information (attributes, types, explanations) that must be formatted in a consistent way. Several formatting mode exist, but a common one is the `numpy` formatting mode.

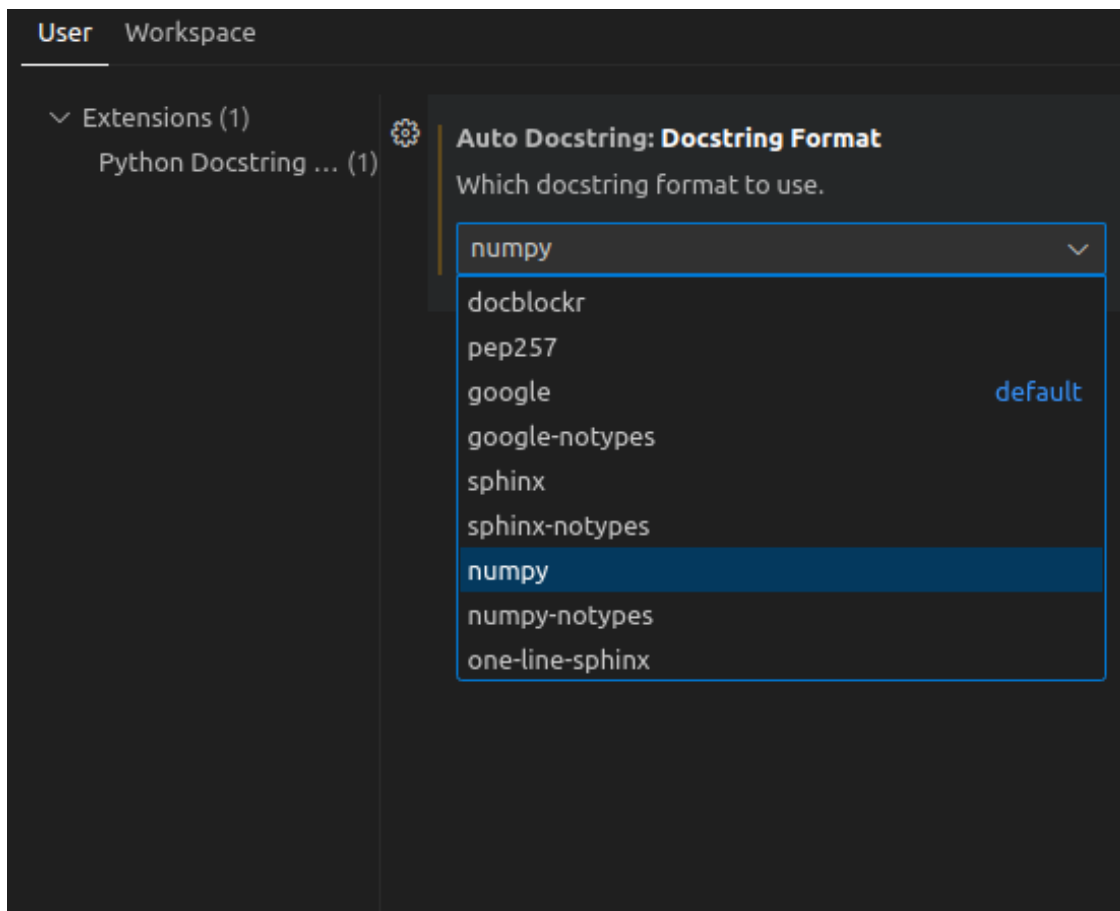

This format follows [these rules](#). A quick overview is shown here after:

```
[1]: def abc(a: int, c = [1,2]):  
      """_summary_
```

```
Parameters
-----
a : int
    _description_
c : list, optional
    _description_, by default [1,2]

Returns
-----
_type_
    _description_

Raises
-----
AssertionError
    _description_
"""
if a > 10:
    raise AssertionError("a is more than 10")

return c
```

9.1.3 Create a docstring

One can create docstrings for **modules**, **functions**, **classes** and **methods**:

1. Place the carret immediately after the definition line (ex: **def** or **class**)
2. write `"""`
3. press **enter**


```

1 print("I am module_2_A_1")
2 var = 1
3
4 def documented_function(a, b, c=50, mode='sum'):
5     """Compute either the sum or the product of its arguments,
6     depending on parameter `mode`.
7
8     Parameters
9     -----
10    a : float
11        first parameter of the operation
12    b : float
13        second parameter of the operation
14    c : float, optional
15        third parameter of the operation, by default 50
16    mode : {'sum', 'product'}
17        operation to run on `a`, `b` and `c`
18
19    Returns
20    -----
21    float
22        The result of operation described by `mode`
23
24    Raises
25    -----
26    ValueError
27        If mode is not one of 'sum' or 'product'
28    """
29    if mode == 'sum':
30        return a + b + c
31    else:
32        if mode != 'product':
33            raise ValueError(f"`mode` be either
34                               'product' or 'sum',
35                               got {mode}")
36        else:
37            return a * b * c

```

Notes: all references to a software element (variable, module, function and classes) must be quoted with ‘ *backticks* ‘.

An iterative process

It is very common to discover weaknesses in the code while writing docstrings:

- possibility of erroneous scientific results
- inconsistent code from one component to another

- instability risk
- ...

For these reasons, the preferred way of writing documentation is first documenting all the components without any detail, and then go further when additional information is needed.

9.2 Documentation generation

9.2.1 Introduction

What is doc generation for?

Once docstrings are written, documentation can be read in two ways:

1. In interactive mode using the `help` function.
2. In a dedicated document making simpler the large scale diffusion of the code.

This part presents the second way. Such a dedicated document is built from the docstrings in `*.py` files.

When to generate documentation?

Documentation generation must be done when the code API is stable. Recall that the API is all the functions, classes and methods that makes it possible to use the code without caring about its internal behaviour.

9.2.2 Overview

There are 3 main steps to doc generation.


1. Analysis of Python code to extract the docstrings. Conversion of these docstrings in documentation files with extension `.rst`.
2. Definition of a structure for the final documentation: table of contents, sections, etc. . .
3. Documentation generation in 2 common formats:
 - html
 - pdf

9.2.3 Details

Setting up the tools

All the doc generation proces can be done using `sphinx`, which is itself a Python package [that can be installed using conda or pip](#). be careful to install `sphinx` in the environment used by the Python project.

Let's document the following package:

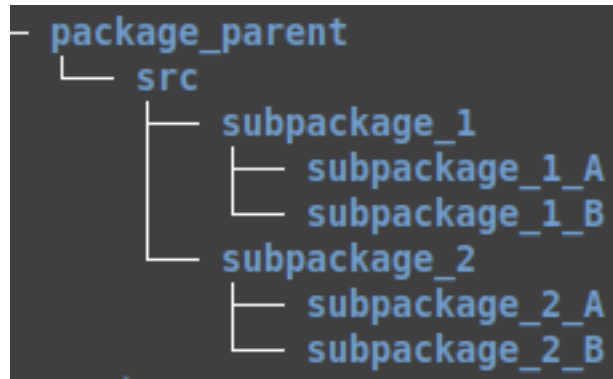

Here is the documentation environment set up process:


1. Open a command prompt in directory 'package_parent'
2. Move to a new 'doc' directory
3. Run `sphinx-quickstart`

Some files are created in 'doc':

- `conf.py`: contains `sphinx` configuration for the project (step 1 et 3 décrites described in part 'Overview').
- `index.rst`: structure of the final documentation (step 2).

This is a *reStructuredText* file (*markup language*).

Working directory is now:

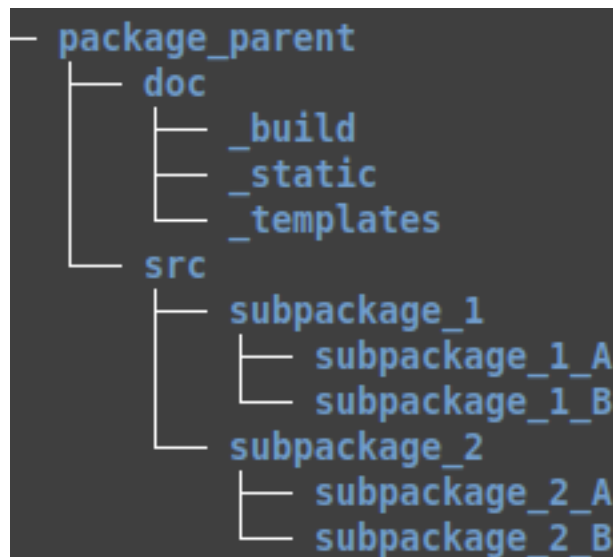

And 'doc' directory:

```
— _build
— conf.py
— index.rst
— make.bat
— Makefile
— _static
— _templates
```

Step 1: Converting docstrings

To have Sphinx understand the *numpy* docstring format, the *napoleon* plugin is needed. This is configured in `conf.py`:

```
[1]: extensions = ['sphinx.ext.napoleon']
```

Then conversion can be done. Let's move to `doc` directory and run:

```
sphinx-apidoc -o source/ ../src/
```

What happens:

- directory `../src/` is the one that contains the first `__init__.py` telling Sphinx where to look for the package.
- directory `source` is created and contains `rst` files.

```
— source
  — modules.rst
  — src.rst
  — src.subpackage_1.rst
  — src.subpackage_1.subpackage_1_A.rst
  — src.subpackage_1.subpackage_1_B.rst
  — src.subpackage_2.rst
  — src.subpackage_2.subpackage_2_A.rst
  — src.subpackage_2.subpackage_2_B.rst
```

Step 2: Defining a structure

Let's order the `rst` file using the `index.rst` file:

```

3  You can adapt this file completely to your liking, but it should at least
4  contain the root `toctree` directive.
5
6  Welcome to my_package's documentation!
7  =====
8
9  .. toctree::
10     :maxdepth: 2
11     :caption: Contents:
12     Here is a short description for our doc page.
13
14  source/src.subpackage_2.subpackage_2_A.rst|

```

note: an introduction to `rst` language is available [here](#).

Step 3: Generating documentation

Documentation is generated using the `html` format (the one that describes web pages).

When generating the documentation, `sphinx` must run the code. Indeed, as stated in the `rst` files of the `source` directory, `sphinx` will look for a package entitled `src`.

Thus a modification of `conf.py` is needed:

```

from sys import path
path.insert(0, r'/absolute/path/to/dir/package_parent')


```


Then, back to command prompt in the `doc` directory:

```
sphinx-build -M html . _build/.
```

9.2.4 Result

HTML documentation is opened using `doc/_build/html/index.html`.

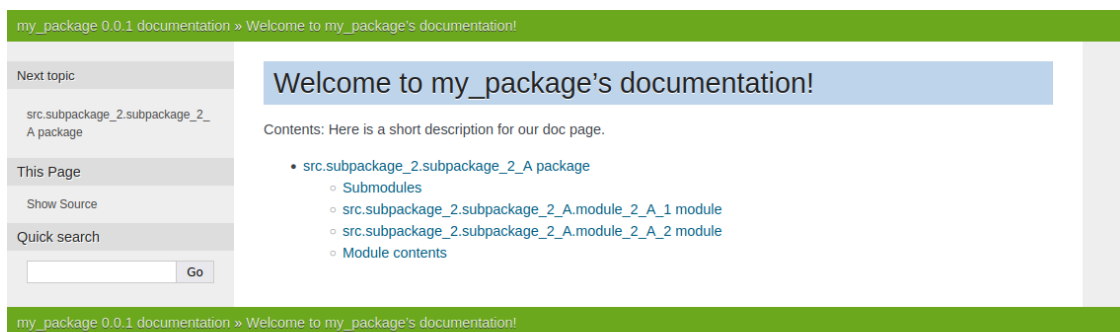

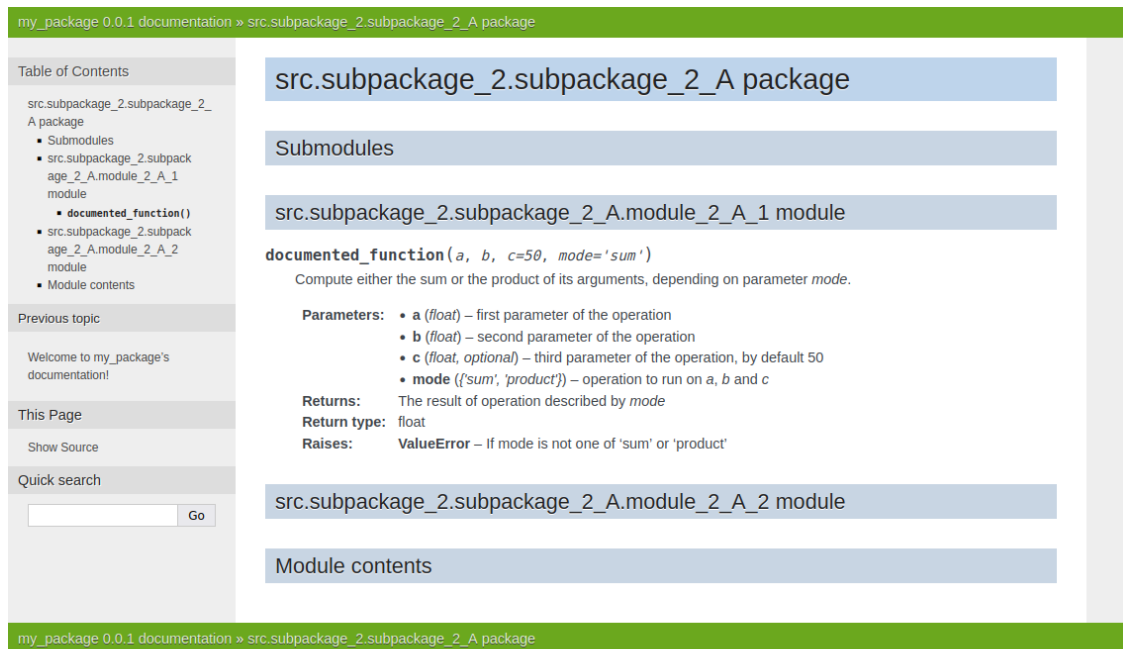

© Copyright 2024, Nerot Boris. Created using [Sphinx](#) 7.2.6.

9.2.5 Notes

HTML customization

HTML documentation can be customized. For instance, one can change the theme by modifying the `conf.py` file:

```
html_theme = 'nature'.
```

All customisation options are described [here](#).

PDF production

A PDF generation is also possible using `latex`:

- `sphinx-build -M pdf . _build/`
- `cd _build/latex/`
- `make`

That process requires a valid Latex installation.

Part IV

Scientific Python

Chapter 10

Numpy

10.1 introduction

10.1.1 Presentation

`numpy` is a Python package used in scientific computing. It handles numerical values with a mathematical approach.

`numpy` is **much faster** than native Python since most of `numpy` code is written in C (10 to 100 times faster).

`numpy` is stable, it benefits from a large online community.

10.1.2 When to use `numpy`?

You must use `numpy` for projects relying on large homogeneous data (i.e. same type data) or specific mathematical operations.

10.1.3 What not to do with `numpy`?

`numpy` is fast. Yet, one must avoid looping using `numpy`. In this part, some major `numpy` functions are presented, part of them make looping unnecessary.

10.2 Array

10.2.1 Introduction

An *array* is a numpy object (whose type is `numpy.ndarray`). It is similar to Python lists but suited for mathematical operations.

```
[2]: import numpy as np
      var = [1, 2, 3]
      print(type(var))
      arr = np.array([1, 2, 3])
      print(type(arr))
```

```
<class 'list'>
<class 'numpy.ndarray'>
```

10.2.2 Create an array

One can create an array from an iterable (ex: list, see above) or use dedicated `numpy` functions:

```
[15]: print(np.ones(5))
      print(np.arange(2, 42, 5))      # similar to `range`
      print(np.zeros(5))
```

```
[1.  1.  1.  1.  1.]
[ 2  7 12 17 22 27 32 37]
[0.  0.  0.  0.  0.]
```

Functions `linspace` and `logspace` define regularly spaced values in a linear space or logarithmic space.

Using `linspace`: the difference between two consecutive elements is constant:

```
[73]: arr = np.linspace(1, 10, 5)
      print(arr)
      print(arr[1]-arr[0])
      print(arr[2]-arr[1])
```

```
[ 1.    3.25  5.5   7.75 10. ]
2.25 2.25
```

Using `logspace`: the ratio of two consecutive elements is constant:

```
[74]: arr = np.logspace(1, 10, 5)
      print(arr)
      print(arr[1]/arr[0])
      print(arr[2]/arr[1])
```

```
[1.00000000e+01 1.77827941e+03 3.16227766e+05 5.62341325e+07
 1.00000000e+10]
```

```
177.82794100389228
177.82794100389225
```

10.2.3 Important ideas: axis and dimension

Introduction

Usually, the length of an iterable is its number of elements, given by the length function `len`. For an array, there may be **more than one dimension**. Below is a 2-dimensionnal array:

- 2 lines
- 3 columns

```
[3]: arr = np.array([[1, 2, 3], [4, 5, 6]])
      print(arr)
      print(arr.ndim)
```

```
[[1 2 3]
 [4 5 6]]
2
```

The shape of this array is (2, 3) because:

- it has 2 elements along dimension 1
- it has 3 elements along dimension 2

```
[4]: print(arr.shape)
```

```
(2, 3)
```

Instead of “dimension”, `numpy` uses the term “**axis**”.

Modify the shape

`shape` gives the actual size of an `array`. But one can change this shape using `reshape`:

```
[76]: arr = arr.reshape((3, 2))    # 3 rows, 2 columns: still 6 elements,
                                     # hence reshape is possible
      print(arr)
```

```
[[1 2]
 [3 4]
 [5 6]]
```

If you don’t want several dimensions, the `flatten` method will return all elements along one dimension.

```
[5]: arr2 = arr.flatten()
      print(arr2)           # all values along a single dimension
```

```
[1 2 3 4 5 6]
```

Note that `flatten` returns a copy, hence if `arr2` is modified `arr` will remain the same.

```
[6]: arr2[3] = 100           # resulting array is modified
      print(arr)           # this does not change original array
```

```
[[1 2 3]
 [4 5 6]]
```

Conversely, `ravel` performs the same than `flatten` but uses the same underlying data:

```
[78]: arr2 = arr.ravel()
      print(arr2)           # all values along a single dimension
      arr2[3] = 100        # resulting array is modified
      print(arr)           # this changes the original array because data is shared
                           ↪ in memory
```

```
[1 2 3 4 5 6]
[[ 1  2]
 [ 3 100]
 [ 5  6]]
```

Handle axes

Axes of a multidimensionnal array start from 0 (and goes to `ndim-1`). One can index an array following a specific axis the same way it is done for lists.

```
[8]: arr = np.zeros((5, 5))
      print(arr)
      arr[2:4, 1:3] = 99    # same value for some indexes
      print(arr)
      arr[1:3, 2:3] = [[34], [35]] # an iterable of the same shape as the modified
      ↪ subarray (shape (2, 1))
      print(arr)
```

```
[[0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0.]]
[[ 0.  0.  0.  0.  0.]
 [ 0.  0.  0.  0.  0.]
 [ 0. 99. 99.  0.  0.]
 [ 0. 99. 99.  0.  0.]
 [ 0.  0.  0.  0.  0.]]
[[ 0.  0.  0.  0.  0.]
 [ 0.  0. 34.  0.  0.]
 [ 0. 99. 35.  0.  0.]
 [ 0. 99. 99.  0.  0.]
 [ 0.  0.  0.  0.  0.]]
```

Let's create a 3-dimensionnal array:

- axis 0 has 4 éléments
- axis 1 has 3 éléments
- axis 2 has 2 éléments

```
[9]: arr = np.arange(4 * 3 * 2).reshape((4, 3, 2))
      print(arr)
```

```
[[[ 0  1]
   [ 2  3]
   [ 4  5]]
```

```
 [[ 6  7]
  [ 8  9]
 [10 11]]
```

```
[[12 13]
 [14 15]
 [16 17]]
```

```
[[18 19]
 [20 21]
 [22 23]]]
```

Let's extract the elements whose coordinates match:

- 0, 1 or 3 on first axis
- 2 on second axis
- whatever on third axis

```
[10]: arr[[0, 1, 3], 2, :]
```

```
[10]: array([[ 4,  5],
            [10, 11],
            [22, 23]])
```

Many numpy methods take an optional argument **axis** to specify where the mathematical operation must be performed.

For instance, let's compute a mean over axis 1.

```
[12]: result = arr.mean(axis=1)
      result
```

```
[12]: array([[ 2.,  3.],
            [ 8.,  9.],
            [14., 15.],
            [20., 21.]])
```

```
[13]: arr
```

```
[13]: array([[[ 0,  1],
              [ 2,  3],
              [ 4,  5]],

            [[ 6,  7],
              [ 8,  9],
              [10, 11]],

            [[12, 13],
              [14, 15],
              [16, 17]],

            [[18, 19],
              [20, 21],
              [22, 23]])
```

Above, using `axis=1`, numpy takes the mean of all elements whose coordinates are all equal, except for axis 1.

Hence, `result[2, 1]` (3rdrow, 1st column) is the mean of:

- `arr[2, 0, 1]` (13)
- `arr[2, 1, 1]` (15)
- `arr[2, 2, 1]` (17)

Concatenate some arrays

`np.concatenate` gather different arrays into a single instance. Their dimensions must be compatible:

```
[14]: arr1 = np.arange(16).reshape((2, 8))
      arr2 = np.arange(16, 32).reshape((2, 8))
      print(arr1)
      print(arr2)
```

```
[[ 0  1  2  3  4  5  6  7]
 [ 8  9 10 11 12 13 14 15]]
[[16 17 18 19 20 21 22 23]
 [24 25 26 27 28 29 30 31]]
```

```
[15]: print(np.concatenate([arr1, arr2], axis=0))    # shape of axis 0 is increased (i.
      ↪e: more elements)
```

```
[[ 0  1  2  3  4  5  6  7]
 [ 8  9 10 11 12 13 14 15]
 [16 17 18 19 20 21 22 23]
 [24 25 26 27 28 29 30 31]]
```

```
[16]: print(np.concatenate([arr1, arr2], axis=1))    # shape of axis 1 is increased (i.
      ↪e: more elements)
```

```
[[ 0  1  2  3  4  5  6  7 16 17 18 19 20 21 22 23]
 [ 8  9 10 11 12 13 14 15 24 25 26 27 28 29 30 31]]
```

One can also gather arrays along a new dimension, using `np.stack`.

```
[14]: arr1 = np.arange(16)
      arr2 = np.arange(16, 32)
      print(arr1)
      print(arr2)
```

```
[ 0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15]
[16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31]
```

```
[15]: print(np.stack([arr1, arr2], axis=0))           # `arr1` and `arr2` can be accessed
      ↪ along axis 0
```

```
[[ 0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15]
 [16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31]]
```

```
[16]: print(np.stack([arr1, arr2], axis=1))           # `arr1` and `arr2` can be accessed
      ↪ along axis 1
```

```
[[ 0 16]
 [ 1 17]
 [ 2 18]
 [ 3 19]
 [ 4 20]
 [ 5 21]
 [ 6 22]
 [ 7 23]
 [ 8 24]
 [ 9 25]
[10 26]
[11 27]
[12 28]
[13 29]
[14 30]
[15 31]]
```

Split some arrays

You want to define different variables for some parts of an array? Use `np.split`.

```
[22]: arr = np.arange(16).reshape((2, 8))
      print(arr)
```

```
[[ 0  1  2  3  4  5  6  7]
 [ 8  9 10 11 12 13 14 15]]
```

Let's split `arr` along axis 1. `np.split` takes a list of indexes to specify where to split. By giving `[2, 4, 5]`, 4 sub arrays are defined, having these coordinates along axis 1:

- `[0, 2[`
- `[2, 4[`
- `[4, 5[`
- `[5, 8[`

```
[29]: sub1, sub2, sub3, sub4 = np.split(arr, [2, 4, 5], axis=1)
      print(sub1, sub2, sub3, sub4, sep='\n')
```

```
[[0 1]
 [8 9]]
[[ 2  3]
 [10 11]]
[[ 4]
 [12]]
[[ 5  6  7]
 [13 14 15]]
```

A different way is to ask for a fixed number of sub arrays, for instance 4.

```
[30]: sub1, sub2, sub3, sub4 = np.split(arr, 4, axis=1)
      print(sub1, sub2, sub3, sub4, sep='\n')
```

```
[[0 1]
 [8 9]]
[[ 2  3]
 [10 11]]
[[ 4  5]
 [12 13]]
[[ 6  7]
 [14 15]]
```

Modify dimensions

It may happen that an array has only one element along a specific axis. One can delete this dimensions using `np.squeeze`.

```
[5]: arr = np.arange(24).reshape((6, 1, 4))
      print(arr)
      print(arr.shape)

      arr = np.squeeze(arr, axis=1)
      print(arr)
      print(arr.shape)
```

```
[[[ 0  1  2  3]]
 [[ 4  5  6  7]]
```



```

[[ 8  9 10 11]]

[[12 13 14 15]]

[[16 17 18 19]]

[[20 21 22 23]]
(6, 1, 4)
[[ 0  1  2  3]
 [ 4  5  6  7]
 [ 8  9 10 11]
 [12 13 14 15]
 [16 17 18 19]
 [20 21 22 23]]
(6, 4)

```

Conversely, one can add dimensions using `np.expand_dims`.

```

[7]: arr = np.arange(24).reshape((6, 4))
      print(arr)
      print(arr.shape)

      arr = np.expand_dims(arr, axis=1)
      print(arr)
      print(arr.shape)

```

```

[[ 0  1  2  3]
 [ 4  5  6  7]
 [ 8  9 10 11]
 [12 13 14 15]
 [16 17 18 19]
 [20 21 22 23]]
(6, 4)
[[[ 0  1  2  3]]

 [[ 4  5  6  7]]

 [[ 8  9 10 11]]

 [[12 13 14 15]]

 [[16 17 18 19]]

 [[20 21 22 23]]]
(6, 1, 4)

```

10.2.4 Common operations

Contrary to lists, numpy arrays handle mathematical operations in a simple way.

```
[18]: arr = np.arange(5)
```

```
[19]: arr + arr
```

```
[19]: array([0, 2, 4, 6, 8])
```

Operations on arrays are done *element wise*.

```
[13]: print(arr * arr)          # product
      print(arr ** 2)           # power
      print(np.exp(arr))        # some function
      print((5*arr+9) % 14)      # modulo
```

```
[1 4 9]
[1 4 9]
[ 2.71828183  7.3890561 20.08553692]
[ 0  5 10]
[ True  True False]
```

Note that you can perform matrix multiplication using @

```
[22]: arr = np.array([[1, 2, 3], [4, 5, 6]])          # shape is (2, 3)
      arr2 = np.array([[5, 6, 7, 8], [7, 8, 9, 10], [8, 9, 10, 11]]) # shape is (3, 4)
      arr @ arr2                                         # shape is (2, 4)
```

```
[22]: array([[ 43,  49,  55,  61],
              [103, 118, 133, 148]])
```

10.3 Basic

operations

10.3.1 Conditions

Numpy arrays can be created according to a (boolean) condition.

For instance, let's define a set of temperature values (°C).

```
[3]: import numpy as np
     T = np.array([25, 27, 29, 24, 26, 18, 32])
```

Let's extract temperatures above 25°C:

```
[4]: print(T > 25)
     print(T[T > 25])
```

```
[False  True  True False  True False  True]
[27 29 26 32]
```

One can replace these values using `np.where`:

- whenever the condition holds True, replace the value with 30
- whenever the condition holds False, keep the value

```
[5]: np.where(T>25, 30, T)
```

```
[5]: array([25, 30, 30, 24, 30, 18, 30])
```

Advanced: note that `np.where` returns a copy of the object

Let's suppose now there are several temperature series:

```
[6]: T = np.stack([T, T+1, T-3])
     T
```

```
[6]: array([[25, 27, 29, 24, 26, 18, 32],
           [26, 28, 30, 25, 27, 19, 33],
           [22, 24, 26, 21, 23, 15, 29]])
```

Let's replace the values of each serie for which the maximum is not 33°C. Hence, maximum of T along axis 1 is calculated (since series are stacked along axis 0).

```
[7]: max_ = T.max(axis=1)
     print(max_)
```

```
[32 33 29]
```

Then the condition is defined:

```
[8]: cond = max_ == 33
      print(cond)
```

```
[False  True False]
```

And it is used in `np.where`.

```
[37]: np.where(cond, T, 0)
```

```
-----
ValueError                                Traceback (most recent call last)
Cell In[37], line 1
----> 1 np.where(cond, T, 0)

File <__array_function__ internals>:200, in where(*args, **kwargs)

ValueError: operands could not be broadcast together with shapes (3,) (3,7) ()
```

Error! The condition `cond` does not have the same shape than replacing values (`T` and `0`) Hence `numpy` cannot handle the condition.

This is because the maximum calculation removed one dimension. But this can be prevented using `keepdims=True`:

```
[9]: max_ = T.max(axis=1, keepdims=True)
      print(max_)                                # shape of dimension 1 is 1 instead of 7
      ↪ (because max value is kept),              # but at least this dimension is kept
```

```
[[32]
 [33]
 [29]]
```

```
[10]: cond = max_ == 33
      np.where(cond, T, 0)
```

```
[10]: array([[ 0,  0,  0,  0,  0,  0,  0],
             [26, 28, 30, 25, 27, 19, 33],
             [ 0,  0,  0,  0,  0,  0,  0]])
```

Similarly: using `np.any`, one can look for series for which **at least one** value meets a criterium:

```
[11]: cond = (T >= 32).any(axis=1, keepdims=True)
      np.where(cond, T, 0)
```

```
[11]: array([[25, 27, 29, 24, 26, 18, 32],
             [26, 28, 30, 25, 27, 19, 33],
             [ 0,  0,  0,  0,  0,  0,  0]])
```

With `np.all`, all values must satisfy the criterium:

```
[55]: cond = (T < 32).all(axis=1, keepdims=True)
      np.where(cond, T, 0)
```

```
[55]: array([[ 0,  0,  0,  0,  0,  0,  0],
             [ 0,  0,  0,  0,  0,  0,  0],
             [22, 24, 26, 21, 23, 15, 29]])
```

10.3.2 Find out duplicate values

`np.unique` eliminates values that occur several times:

```
[12]: rng = np.random.default_rng(42)
      arr = rng.integers(0, 2, (12, 3))
      arr
```

```
[12]: array([[0, 1, 1],
             [0, 0, 1],
             [0, 1, 0],
             [0, 1, 1],
             [1, 1, 1],
             [1, 1, 0],
             [1, 0, 1],
             [0, 0, 1],
             [1, 1, 0],
             [1, 1, 0],
             [0, 0, 0],
             [1, 1, 0]])
```

```
[13]: np.unique(arr, axis=0)      # there exists duplicated values along axis 0
```

```
[13]: array([[0, 0, 0],
             [0, 0, 1],
             [0, 1, 0],
             [0, 1, 1],
             [1, 0, 1],
             [1, 1, 0],
             [1, 1, 1]])
```

```
[14]: np.unique(arr, axis=1)      # no duplicated values along axis 1
```

```
[14]: array([[0, 1, 1],
             [0, 0, 1],
             [0, 1, 0],
             [0, 1, 1],
             [1, 1, 1],
             [1, 1, 0],
```

```
[1, 0, 1],
[0, 0, 1],
[1, 1, 0],
[1, 1, 0],
[0, 0, 0],
[1, 1, 0]])
```

```
[88]: np.unique(arr)           # no other values than 0 and 1 in the array
```

```
[88]: array([0, 1])
```

10.3.3 Element-wise maximum

`np.maximum` can calculate the maximum of several arrays **element-wise**. This is very different from `np.max` that takes the maximum value of a single array.

```
[15]: v1 = np.array([1, 2, 3, 4])
      v2 = np.array([3, 2, 1, 0])
```

```
[16]: _ = np.maximum(v1, v2)           # a new array is created to store the result
      print(_)
```

```
[3 2 3 4]
```

Advanced: `np.maximum` is one of the `numpy` function that can allocate memory in an already-defined variable. This is done using parameter `out`. This is useful to modify the content of a variable that has already been passed to several different functions.

```
[18]: out = np.full(4, 1000)          # an array of shape (4,) with constant value 1000
      out
```

```
[18]: array([1000, 1000, 1000, 1000])
```

```
[19]: _ = np.maximum(v1, v2, out=out)
      print(_ is out)                # the result of np.maximum is stored in the
      ↪ already defined `out`
      out
```

```
True
```

```
[19]: array([3, 2, 3, 4])
```

10.3.4 Index of maximum

Let's suppose `T` is an array with 1000 values. One can determine the index of the maximum value of `T` using `np.argmax`.

```
[20]: T = np.sin(np.linspace(0, np.pi, 1000)) * 10
```

On peut trouver le pas de temps pour lesquels la température est maximale.

```
[21]: np.argmax(T)
```

```
[21]: 499
```

10.3.5 Vectorization of Python functions

Some Python operations have no meaning for `numpy`.

For instance, the function below is running fine for usual Python scalars:

```
[23]: def f(a, b):
      if a < b:
          return a + b
      else:
          return a * b

      f(3, 5)
```

```
[23]: 8
```

But it does not work with `numpy` arrays as comparison of 2 arrays using `<` is unclear for `numpy`: it does not know if the condition must be met for all elements (`numpy.all`) or at least one (`numpy.any`):

```
[24]: arr1, arr2 = np.split(np.random.randint(1, 5, 16), 2)
      print(arr1)
      print(arr2)
      f(arr1, arr2)
```

```
[3 2 3 2 4 3 3 2]
[2 3 3 3 2 3 2 2]
```

```
-----
ValueError                                Traceback (most recent call last)
```

```
Cell In[24], line 4
```

```
    2 print(arr1)
```

```
    3 print(arr2)
```

```
----> 4 f(arr1, arr2)
```

```
Cell In[23], line 2, in f(a, b)
```

```
    1 def f(a, b):
```

```
----> 2     if a < b:
```

```
    3         return a + b
```

```
    4     else:
```

```
ValueError: The truth value of an array with more than one element is ambiguous.
↳ Use a.any() or a.all()
```

In this case, we want `f` to be applied element-wise. Thus best choice is to use `np.where`:

```
[26]: np.where(arr1 < arr2, arr1 + arr2 , arr1 * arr2)
```

```
[26]: array([6, 5, 9, 5, 8, 9, 6, 4])
```

Another way is to use the `np.vectorize` function that make `f` element-wise for `numpy` arrays:

```
[27]: vectorized_f = np.vectorize(f)
      vectorized_f(arr1, arr2)
```

```
[27]: array([6, 5, 9, 5, 8, 9, 6, 4])
```

Advanced: beware, `np.vectorize`:

- is a bad choice for performance
- define a function that makes hypotheses regarding data type on the first call

10.3.6 Multi-variables functions

Let's define a 3-variables function.

```
[39]: def f(a, b, c):
      return (a + b) ** c

      f(2, 3, 4)
```

```
[39]: 625
```

The function must be evaluated on the following values:

```
[40]: A = (2, 3, 4)
      B = (4, 5)
      C = (5, 6)
```

Method 1

First choice is define several loops:

```
[41]: results = {}
      for a in A:
          for b in B:
              for c in C:
                  results[(a, b, c)] = f(a, b, c)
      print(results)
```

```
{(2, 4, 5): 7776, (2, 4, 6): 46656, (2, 5, 5): 16807, (2, 5, 6): 117649, (3, 4, 5): 16807, (3, 4, 6): 117649, (3, 5, 5): 32768, (3, 5, 6): 262144, (4, 4, 5): 32768, (4, 4, 6): 262144, (4, 5, 5): 59049, (4, 5, 6): 531441}
```

This solution is **very slow**.

Method 2

Instead, let's use `np.meshgrid` to create some evaluation grid:

```
[42]: aa, bb, cc = np.meshgrid(A, B, C)
```

Then vectorize the `f` function and apply the vectorized version on the grid:

```
[43]: vectorized_f = np.vectorize(f)
      results = vectorized_f(aa, bb, cc)
      print(results)
```

```
[[[ 7776  46656]
   [ 16807  117649]
   [ 32768  262144]]
```

```
[[ 16807  117649]
 [ 32768  262144]
 [ 59049  531441]]]
```

Results are the same as with method 1 but presented in a different way:

- along axis 2 (`axis=2`), values change according to `C`, with `a` and `b` being constant
- along axis 1 (`axis=1`), values change according to `B`, with `a` and `c` being constant
- along axis 0 (`axis=0`), values change according to `A`, with `b` and `c` being constant

Let's understand what is performed by `np.meshgrid` using a simpler 2D example:

```
[47]: aa, bb = np.meshgrid(A, B)
      print(aa)
      print(bb)
```

```
[[2 3 4]
 [2 3 4]]
[[4 4 4]
 [5 5 5]]
```

`aa` and `bb` are two arrays of shape `(len(B), len(A))`. `aa` contains the values of `A`, repeated as many times as needed (`len(B)` times). Same for `bb`.

Using values of both `aa` and `bb` gives an exhaustive grid to evaluate a 2D function.

```
[48]: np.stack([aa, bb], axis=-1)
```

```
[48]: array([[2, 4],
            [3, 4],
            [4, 4]],

           [[2, 5],
            [3, 5],
            [4, 5]])]
```

10.4 Random

10.4.1 Create random numbers

The `random` subpackage of `numpy` can be used to generate random numbers:

- float values in $[0, 1[$
- integers

```
[2]: import numpy.random as npr
```

```
[6]: npr.random((2, 5))
```

```
[6]: array([[0.81766694, 0.14319621, 0.24420405, 0.79485374, 0.36446199],
           [0.62801431, 0.16768836, 0.31869047, 0.91741838, 0.48900763]])
```

```
[7]: npr.randint(1, 10, (8, 3))    # (8, 3) integers in [1, 10[ (10 excluded)
```

```
[7]: array([[2, 1, 8],
           [4, 8, 4],
           [2, 6, 2],
           [1, 9, 2],
           [7, 7, 9],
           [1, 1, 8],
           [9, 9, 1],
           [4, 4, 2]])
```

Random numbers can also be generated following specific statistical distribution:

```
[8]: print(npr.uniform(0, 5, (3, 4)))           # uniform probability of a
        ↪ number in [0, 5],
                                           # with shape (3, 4)
print(npr.normal(loc=0, scale=5, size=(3, 4)))  # normal probability with mu=0
        ↪ and std=5,
                                           # with shape=(3, 4)
```

```
[[1.99681708 2.79904736 2.17633328 1.49729344]
 [4.11716777 4.92349861 0.21887788 0.75476233]
 [2.885842   1.27164751 3.66103527 1.56154697]]
[[ 7.26234311 -4.04165132 -0.50045676  1.06735817]
 [-3.21492431  0.59875201  4.56122662 -5.31195884]
 [-1.54579796 -5.27946634  4.55081793  1.30889338]]
```

10.4.2 Create deterministic random

The scientific approach needs reproducible computation steps. Whenever these steps imply random number generation, this can lead to problems: values differ from one execution to another.

```
[9]: my_physical_variable = npr.random(4)
      print(my_physical_variable)
```

```
[0.49496843 0.075648 0.99441966 0.66990802]
```

```
[10]: my_physical_variable = npr.random(4)
      print(my_physical_variable)
```

```
[0.44128815 0.48055089 0.03025358 0.06241068]
```

Fortunately, **one can create reproducible random**, i.e. a way to get the same random values whenever the code is ran.

To this purpose, one must define a random number generator and **initialize it** with the same initial *state* for all executions:

```
[11]: rng = npr.default_rng(42)
      my_physical_variable = rng.random(4)
      print(my_physical_variable)
```

```
[0.77395605 0.43887844 0.85859792 0.69736803]
```

```
[12]: rng_new = npr.default_rng(42)
      my_physical_variable = rng_new.random(4)
      print(my_physical_variable)
```

```
[0.77395605 0.43887844 0.85859792 0.69736803]
```

```
[66]: rng_new = npr.default_rng(65)      # different seed
      my_physical_variable = rng_new.random(4)
      print(my_physical_variable)
```

```
[0.04739149 0.51822218 0.37485856 0.22867852]
```

Note that:

- defining the initial state returns a new instance that must be used to generate random numbers
- using this instance provides reproducible random numbers generation
- a different initial state gives different random numbers

10.5 Data types

10.5.1 Data types

What is a data type

The data type of an array gives `numpy` some information on how to deal with this array. Most common data types are:

- `int_`
- `float_`
- `str_`
- `bool_`

These types are a bit different from the ones of Python. They can be accessed using the `dtype` attribute (whereas Python type is given by `type(...)`) A numpy array is always of type `numpy.ndarray`, but the dtype depends on its content:

```
[2]: import numpy as np
      arr = np.array([1, 2, 3])
      print(type(arr))
      print(arr.dtype)
```

```
<class 'numpy.ndarray'>
int64
```

Use data types

Automatically assigned data type In most cases, `numpy` will choose a dtype automatically. The chosen dtype is the one compatible with all the elements of the array.

```
[3]: np.array([1, 2, 3]).dtype
```

```
[3]: dtype('int64')
```

If one of the integer has a '.', Python thinks it's a float (even though decimal part is 0):

```
[4]: np.array([1, 2, 3.]).dtype
```

```
[4]: dtype('float64')
```

If some non-numeric values exist, the dtype is non-numeric and mathematical operations are impossible:

```
[5]: arr = np.array(['azerty', 45, 98])
      print(arr.dtype)
      arr.sum()
```

```
<U21
```

```

-----
UFuncTypeError                                Traceback (most recent call last)
Cell In[5], line 3
      1 arr = np.array(['azerty', 45, 98])
      2 print(arr.dtype)
----> 3 arr.sum()

File ~/Documents/5-Donnees_techniques/Python/310_base/lib/python3.10/site-packages/
↳ numpy/core/_methods.py:49, in _sum(a, axis, dtype, out, keepdims, initial,
↳ where)
      47 def _sum(a, axis=None, dtype=None, out=None, keepdims=False,
      48             initial=_NoValue, where=True):
--> 49     return umr_sum(a, axis, dtype, out, keepdims, initial, where)

UFuncTypeError: ufunc 'add' did not contain a loop with signature matching types
↳ (dtype('<U21'), dtype('<U21')) -> None

```

Change data type One can change the data type using `astype`, by specifying one of these:

- a numpy dtype: object or string
- a Python type for which equivalent dtype exists in numpy

```

[12]: arr = np.array([1, 2, 3])
      print(arr.dtype)
      arr = arr.astype(np.float_) # numpy dtype, specified as an object
      print(arr.dtype)

```

```

int64
float64

```

```

[11]: arr = arr.astype(int) # python type
      print(arr.dtype)

```

```

int64
complex128

```

```

[13]: arr = arr.astype('complex') # numpy dtype, specified as a string
      print(arr.dtype)

```

```

complex128

```

Modifying the *dtype* can change the data:

```

[6]: np.array([1, 2, 3.65]).astype(int)

```

```

[6]: array([1, 2, 3])

```

casting is sometimes possible, for instance regarding boolean values:

```
[18]: np.array([1, 2, 0]).astype(bool)
```

```
[18]: array([ True,  True, False])
```

10.5.2 Working with nan

Definition

nan means ‘not a number’. A **nan** value (`np.nan`) is used to describe:

- a missing or unknown value
- the result of an impossible mathematical operation

You must never deal with `np.nan` using equality tests (`==`): the preferred way is to use dedicated functions of `numpy`.

nan propagation

As `np.inf` (infinite), **nan** values propagate in mathematical operations:

```
[7]: arr = np.arange(16).reshape((4,4)).astype(float)
     arr[1, 2] = np.nan
     arr
```

```
[7]: array([[ 0.,  1.,  2.,  3.],
           [ 4.,  5., nan,  7.],
           [ 8.,  9., 10., 11.],
           [12., 13., 14., 15.]])
```

```
[8]: arr.sum(axis=1)
```

```
[8]: array([ 6., nan, 38., 54.])
```

`numpy.isnan()` returns a boolean describing which value is a **nan**. With `numpy.where` replacement is possible:

```
[9]: cond = np.isnan(arr)
     arr[cond] = 0
     arr.sum(axis=1)
```

```
[9]: array([ 6., 16., 38., 54.])
```

Chapter 11

Pandas

11.1 Introduction

11.1.1 Introduction

numpy limitations

numpy does not allow to:

- assign custom labels to data
- perform common database-like operations
- import/export easily data from the disk

About pandas

pandas is a “data analysis and manipulation tool”. In the backend, **pandas** relies on **numpy**, which makes it fast for many operations.

pandas presents 2 different data containers:

- **DataFrame**: similar to a 2D numpy array with:
 - rows and columns labels
 - possibly heterogeneous data
- **Series**: similar to a 1D numpy array

pandas and notebooks

pandas objects have a pretty representation in notebooks: instead of printing them, just call them as the last statement of the cell.

11.1.2 Dataframe

```
[1]: import pandas as pd
import numpy as np
```

Dataframes can be built in several ways. For instance, using a dictionary:

```
[2]: data = {'Some integers': (1, 2, 3), 'Some booleans': (True, False, True), 'Some strings': ('a', 'b', 'c')}
pd.DataFrame(data=data)
```

```
[2]:      Some integers  Some booleans  Some strings
0              1           True           a
1              2          False           b
2              3           True           c
```

Or an iterable:

```
[3]: data = ((1, True, 'a'), (2, False, 'c'), (3, True, 'c'))
columns = ('Some integers', 'Some booleans', 'Some strings')
pd.DataFrame(data=data, columns=columns)
```

```
[3]:      Some integers  Some booleans  Some strings
0              1           True           a
1              2          False           c
2              3           True           c
```

One can notice an additional columns on the left side: this is **the index along axis 0**, or more simply “index”. Index along axis 1 is also called “columns”.

One can specify the index values:

```
[4]: data = ((1, True, 'a'), (2, False, 'b'), (3, True, 'c'))
columns = ('Some integers', 'Some booleans', 'Some strings')
index = ('first row', 'second row', 'third row')
df = pd.DataFrame(data=data, columns=columns, index=index)
df
```

```
[4]:      Some integers  Some booleans  Some strings
first row              1           True           a
second row             2          False           b
third row              3           True           c
```

11.1.3 Series

A **Series** object is similar to a **DataFrame** with one column. Instead of having ‘columns’, a **Series** has a **name** attribute.

```
[5]: data = (True, False, True)
pd.Series(data=data, name='Some booleans', index=index)
```

```
[5]: first row      True
second row    False
third row      True
Name: Some booleans, dtype: bool
```


11.1.4 Access data

note: explanations below are for DataFrame, but similar behaviour is observed for Series.

One can access data in a `DataFrame` in 2 ways:

- indexing: the same way one would do with a numpy array
- using labels

Using indexing

The important method is `iloc`, which is used using brackets `[]`:

- first value selects along axis 0
- second value selects along axis 1

```
[6]: df
```

```
[6]:          Some integers  Some booleans  Some strings
first row             1             True             a
second row            2             False            b
third row             3             True             c
```

```
[7]: df.iloc[1, 2]
```

```
[7]: 'b'
```

slicing is also possible. Let's extract:

- One row out of two from 0 to 3
- The last two columns

```
[8]: df.iloc[0:3:2, -2:]
```

```
[8]:          Some booleans  Some strings
first row             True             a
third row             True             c
```

Another way is to specify directly a **list** of indexes:

```
[9]: df.iloc[[0, 2], [-2, -1]]
```

```
[9]:          Some booleans  Some strings
first row             True             a
third row             True             c
```

Or a boolean indexer:

```
[10]: df.iloc[[True, False, True], [False, True, True]]
```

```
[10]:          Some booleans  Some strings
first row             True             a
```

```
third row      True      c
```

Beware! The type of returned object depend on the way indexing is done:

```
[11]: print(type(df.iloc[0:3:2, -1:]))    # every column from -1 to the end -->
      ↪ DataFrame
```

```
<class 'pandas.core.frame.DataFrame'>
```

```
[12]: print(type(df.iloc[0:3:2, -1]))    # specifically the last column --> Series
```

```
<class 'pandas.core.series.Series'>
```

```
[13]: print(type(df.iloc[0:3:2, [-1]]))    # the columns specified by one-element list
      ↪ --> DataFrame
```

```
<class 'pandas.core.frame.DataFrame'>
```

As with numpy, `:` is used to get all the data along a specific axis:

```
[14]: df.iloc[:, [-2, -1]]
```

```
[14]:      Some booleans Some strings
first row      True      a
second row    False      b
third row      True      c
```

For columns (axis 1), one can also undefine the index in order to get all data.

```
[15]: df.iloc[[0, 2]]
```

```
[15]:      Some integers  Some booleans  Some strings
first row              1             True           a
third row              3             True           c
```

Using labels

Similarly to `iloc`, `loc` allows to access elements using their labels:

```
[16]: df
```

```
[16]:      Some integers  Some booleans  Some strings
first row              1             True           a
second row              2            False           b
third row              3             True           c
```

```
[17]: df.loc['first row', 'Some strings']
```

```
[17]: 'a'
```

```
[18]: df.loc[['first row', 'third row'], 'Some strings']
```

```
[18]: first row    a
      third row   c
      Name: Some strings, dtype: object
```

If axis=0 does not matter, simple brackets [] can be used to access columns.

Hereafter, the two solutions are equivalent:

```
[19]: df.loc[:, ['Some booleans', 'Some strings']]
      df[['Some booleans', 'Some strings']]
```

```
[19]:          Some booleans Some strings
first row                True          a
second row              False          b
third row                True          c
```

Note: to modify a value, one must **always** :

- use loc or iloc
- specify the 2 coordinates in a single call.

Else, a *warning* is raised.

```
[20]: df.loc['first row', 'Some integers'] = 42
      df
```

```
[20]:          Some integers Some booleans Some strings
first row                42                True          a
second row                2                False          b
third row                3                True          c
```

```
[21]: df.loc['third row'].iloc[2] = 'new_string'  # warning is raised
      df
```

```
/tmp/ipykernel_73600/3522855576.py:1: SettingWithCopyWarning:
A value is trying to be set on a copy of a slice from a DataFrame
```

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy

```
df.loc['third row'].iloc[2] = 'new_string'  # warning is raised
```

```
[21]:          Some integers Some booleans Some strings
first row                42                True          a
second row                2                False          b
third row                3                True          c
```

11.1.5 Modify index

From existing data

`set_index` method replaces the current index with a columns of the DataFrame and then:

- deletes the column if `drop = True` (default)
- keeps the column if `drop = False`

```
[22]: df
```

```
[22]:
```

	Some integers	Some booleans	Some strings
first row	42	True	a
second row	2	False	b
third row	3	True	c

```
[23]: df.set_index('Some booleans', drop=False)
```

```
[23]:
```

	Some integers	Some booleans	Some strings
Some booleans			
True	42	True	a
False	2	False	b
True	3	True	c

```
[24]: df.set_index('Some booleans')
```

```
[24]:
```

	Some integers	Some strings
Some booleans		
True	42	a
False	2	b
True	3	c

Using integers

`reset_index` method replaces the current index by integers. It:

- deletes the current index if `drop = True` (default)
- keeps the current index as a column if `drop = False`

```
[25]: df.reset_index(drop=False)
```

```
[25]:
```

	index	Some integers	Some booleans	Some strings
0	first row	42	True	a
1	second row	2	False	b
2	third row	3	True	c

Si l'index avait un nom, la colonne résultante porte son nom.

```
[26]: df.index.name = 'my_index'
df.reset_index(drop=False)
```

```
[26]:      my_index  Some integers  Some booleans  Some strings
0   first row             42             True           a
1  second row             2             False          b
2   third row             3             True           c
```

11.1.6 Iteration

Iteration over a dataframe is pretty slow but still made possible using dedicated methods:

Over rows

The `iterrows` method is used to iterate over rows, including index.

```
[27]: for index_value, (integer, string) in df[['Some integers', 'Some strings']].
      ↪iterrows():
      print(index_value, integer, string)
```

```
first row 42 a
second row 2 b
third row 3 c
```

Over columns

Let's use `itertuples`. At each iteration, this method returns:

- the column name
- the column data as a `Series` instance

```
[28]: for column_name, column in df[['Some integers', 'Some strings']].items():
      print(column_name, '\n\n', column)
```

Some integers

```
my_index
first row    42
second row    2
third row     3
Name: Some integers, dtype: int64
Some strings
```

```
my_index
first row    a
second row    b
third row     c
Name: Some strings, dtype: object
```

11.1.7 Basic operations

Similar to numpy

Many numpy operations are similar with pandas.

```
[29]: data = np.arange(16).reshape((4, 4))
      df = pd.DataFrame(data=data, columns=['A', 'B', 'C', 'D'])
      df
```

```
[29]:
```

	A	B	C	D
0	0	1	2	3
1	4	5	6	7
2	8	9	10	11
3	12	13	14	15

```
[30]: df.sum(axis=1)  # sum of the first 4 columns
```

```
[30]:
```

0	6
1	22
2	38
3	54

dtype: int64

The `agg` method perform element-wise operations:

```
[31]: df['E'] = df['B'].agg(lambda x: x if x%5==0 else 42)
      df
```

```
[31]:
```

	A	B	C	D	E
0	0	1	2	3	42
1	4	5	6	7	5
2	8	9	10	11	42
3	12	13	14	15	42

Yet, the same result could be achieved using `where`.

```
[32]: cond = df['B']%5==0
      df['E'] = df['B']          # values of B if cond is True
      df['E'] = df['E'].where(cond, 42)  # 42 if cond is False
                                          # (opposite to numpy where
                                          # first arg corresponds to positive cond)
      df
```

```
[32]:
```

	A	B	C	D	E
0	0	1	2	3	42
1	4	5	6	7	5
2	8	9	10	11	42
3	12	13	14	15	42

Sorting data

One can use the `sort_values` and `sort_index` methods:

```
[33]: data = np.random.randint(0, 10, (5, 5))
df = pd.DataFrame(data=data, columns=('c1', 'c2', 'c3', 'c4', 'c5'), index=('e', 'b', 'c', 'a', 'd'))
df
```

```
[33]:
```

	c1	c2	c3	c4	c5
e	6	5	4	3	8
b	6	1	8	8	9
c	3	2	4	0	9
a	9	7	2	4	4
d	9	9	8	0	5

```
[34]: df.sort_index()
```

```
[34]:
```

	c1	c2	c3	c4	c5
a	9	7	2	4	4
b	6	1	8	8	9
c	3	2	4	0	9
d	9	9	8	0	5
e	6	5	4	3	8

Let's sort `df` according to:

- column `c2`
- descending order

```
[35]: df.sort_values(by='c2', ascending=False)
```

```
[35]:
```

	c1	c2	c3	c4	c5
d	9	9	8	0	5
a	9	7	2	4	4
e	6	5	4	3	8
c	3	2	4	0	9
b	6	1	8	8	9

Let's sort following axis 1!

- row `b`
- custom key

```
[36]: # using `key`, the closest the values are to 5 the sooner
# they come in the DataFrame
df.sort_values(by='b', axis=1, key=lambda x: abs(x-5))
```

```
[36]:
```

	c1	c3	c4	c2	c5
e	6	4	3	5	8

b	6	8	8	1	9
c	3	4	0	2	9
a	9	2	4	7	4
d	9	8	0	9	5

11.1.8 Manage *dtype*

You must **always** check that the data type is the expected one, because it defines the possible operations. The `astype` method makes it possible to change the data type of a column:

```
[37]: data = (('01', True, 'a'), ('02', False, 'c'), ('03', True, 'c'))
      columns = ('Some integers', 'Some booleans', 'Some strings')
      df = pd.DataFrame(data=data, columns=columns, index=('first row', 'second row',
      ↪ 'third row'))
      print(df.dtypes)
      df
```

```
Some integers    object
Some booleans    bool
Some strings     object
dtype: object
```

```
[37]:      Some integers  Some booleans  Some strings
first row           01           True           a
second row          02          False           c
third row           03           True           c
```

```
[38]: df['Some integers'] = df['Some integers'].astype(int)
      print(df.dtypes)
      df
```

```
Some integers    int64
Some booleans    bool
Some strings     object
dtype: object
```

```
[38]:      Some integers  Some booleans  Some strings
first row           1           True           a
second row          2          False           c
third row           3           True           c
```


11.2 IO

11.2.1 Introduction

`pandas` can write and read data files from the disk.

A very common file format is CSV. A CSV file is a text file whose columns are separated by `,`. Sometimes, this is not a comma but another character: `;`, `/`, etc...

When reading a file, `pandas` try to guess the data types.

11.2.2 Read a CSV file

Let's define a CSV file `data.csv` and use the `read_csv` function:

```
Integer;Some value;Another column;Date
1;3.45;True;21/02/2026 12:56:54
5;2.75;False;21/02/2026 14:25:08
2;4.15;False;21/02/2026 16:56:41
```

```
[7]: import pandas as pd
df = pd.read_csv('data.csv', index_col=0, sep=';')
df
```

```
[7]:      Some value  Another column      Date
Integer
1          3.45          True  21/02/2026 12:56:54
5          2.75         False  21/02/2026 14:25:08
2          4.15         False  21/02/2026 16:56:41
```

A quick dtype check:

```
[8]: df.dtypes
```

```
[8]: Some value      float64
Another column      bool
Date                object
dtype: object
```

The dates have not been interpreted as dates but as strings. We need an additional argument in `read_csv` to specify the date format:

```
[17]: df['Date'] = pd.to_datetime(df['Date'], format='%d/%m/%Y %H:%M:%S')
df
```

```
[17]:      Some value  Another column      Date
Integer
1          3.45          True  2026-02-21 12:56:54
5          2.75         False  2026-02-21 14:25:08
2          4.15         False  2026-02-21 16:56:41
```

```
[19]: df.dtypes
```

```
[19]: Some value          float64
      Another column      bool
      Date                datetime64[ns]
      dtype: object
```

Many other arguments exist for `read_csv`:

- `names`: define new names for the columns, instead of those of the file
- `index_col`: select the column to use as index (axis 0)
- `comment`: tell pandas no to care about rows starting with a specific character: these are not data
- `skiprows`, `skipfooter`, `nrows`: read only specific rows

11.2.3 Write a CSV file

The `to_csv` method of `DataFrame` and `Series` is used hereafter.

```
[24]: df['Last column'] = df['Some value'] / 8
      df.to_csv('data_write.csv', sep=',',
               index=False) # do not write index
```

Result:

```
Some value,Another column,Date,Last column
3.45,True,2026-02-21 12:56:54,0.43125
2.75,False,2026-02-21 14:25:08,0.34375
4.15,False,2026-02-21 16:56:41,0.51875
```

11.2.4 Other file formats

pandas handle a lot of IO file formats: Excel, json, html, hdf, etc...

The dedicated methods are called `read_...` (data import) and `to_...` (data export).

11.3 Dates

11.3.1 Introduction

`pandas` can handle dates in several ways:

- comparison
- extraction of day, hour, etc...
- addition of delays
- etc...

Date objects in `pandas` are the one of `numpy`, which differ a bit from those of native Python but are nonetheless compatible with them.

11.3.2 Useful functions

Create a dates series

`pd.date_range` expects 3 out of 4 of the following parameters to be specified:

- **start**: (date) first date
- **end**: (date) last date
- **periods** (integer): number of values
- **freq**: elapsed time between 2 consecutive dates. Accepted values [are given here](#).

With `pandas`, one can specify dates in 3 different ways:

- A string

Very handy but beware of bad interpretation done by `pandas`. In particular, the English way of processing date is to write the month before the day (ex: 21th june → 06/21).

- Python date-like objects: `datetime.datetime`, `datetime.timedelta`
- `numpy` date-like objects
- `pandas` date-like objects: `pd.Timestamp`, `pd.TimeDelta`

```
[1]: import pandas as pd
      # 7 values, once every 2 hours, from 21st of January 2023 at 30s past midnight
      pd.date_range(start='21/01/2023 00:00:30', freq='2h', periods=7)
```

```
[1]: DatetimeIndex(['2023-01-21 00:00:30', '2023-01-21 02:00:30',
                    '2023-01-21 04:00:30', '2023-01-21 06:00:30',
                    '2023-01-21 08:00:30', '2023-01-21 10:00:30',
                    '2023-01-21 12:00:30'],
                    dtype='datetime64[ns]', freq='2H')
```

```
[2]: # a value every 3 days, from 21st of January 2023 to 4 of February
      pd.date_range(start='21/01/2023 00:00:00', end='04/02/2023 00:00:00', freq='3D')
```

```
[2]: DatetimeIndex(['2023-01-21', '2023-01-24', '2023-01-27', '2023-01-30',
                    '2023-02-02', '2023-02-05', '2023-02-08', '2023-02-11',
```

```
'2023-02-14', '2023-02-17', '2023-02-20', '2023-02-23',
'2023-02-26', '2023-03-01', '2023-03-04', '2023-03-07',
'2023-03-10', '2023-03-13', '2023-03-16', '2023-03-19',
'2023-03-22', '2023-03-25', '2023-03-28', '2023-03-31'],
dtype='datetime64[ns]', freq='3D')
```

```
[3]: # 3 values from 21st of January 2023 to 4 of February
from datetime import datetime, timedelta
start = datetime(day=21, month=1, year=2023)
end = datetime(day=4, month=2, year=2023)
pd.date_range(start=start, end=end, periods=3)
```

```
[3]: DatetimeIndex(['2023-01-21', '2023-01-28', '2023-02-04'],
dtype='datetime64[ns]', freq=None)
```

Resample temporal data

Whenever temporal data comes with a too high or too low frequency, the `pd.resample` functions can modify this frequency to ease processing. There exists two cases:

- *upsampling*: additional values are added between current values, hence frequency is increased
- *downsampling*: existing values are aggregated following a specific rule, hence frequency is decreased

Upsampling Here after, a DataFrame that has a datetime index: six values, one every 2 hours, from 15th of August.

```
[4]: df = pd.DataFrame({'A': range(6), 'B': range(6, 12)},
                        index=pd.date_range(start='15/08/2024 00:00:00', freq='2h',
                        ↳periods=6))
df
```

```
[4]:
```

	A	B
2024-08-15 00:00:00	0	6
2024-08-15 02:00:00	1	7
2024-08-15 04:00:00	2	8
2024-08-15 06:00:00	3	9
2024-08-15 08:00:00	4	10
2024-08-15 10:00:00	5	11

Let's resample the DataFrame with one value every 50 min:

```
[5]: rs = df.resample('50min')
```

`rs` is an instance of type `Resampler`. It must be used with a rule qui doit être appelé avec une règle that defines what to do with unexistent data. For instance `ffill`, for *'forward fill'*, fill missing values with the previous existing value.

```
[6]: rs.ffmpeg()
```

```
[6]:
```

	A	B
2024-08-15 00:00:00	0	6
2024-08-15 00:50:00	0	6
2024-08-15 01:40:00	0	6
2024-08-15 02:30:00	1	7
2024-08-15 03:20:00	1	7
2024-08-15 04:10:00	2	8
2024-08-15 05:00:00	2	8
2024-08-15 05:50:00	2	8
2024-08-15 06:40:00	3	9
2024-08-15 07:30:00	3	9
2024-08-15 08:20:00	4	10
2024-08-15 09:10:00	4	10
2024-08-15 10:00:00	5	11

Downsampling Let's reduce the frequency from 2h to 4h. Values are averaged.

```
[8]: rs = df.resample('4h')
      rs.mean()
```

```
[8]:
```

	A	B
2024-08-15 00:00:00	0.5	6.5
2024-08-15 04:00:00	2.5	8.5
2024-08-15 08:00:00	4.5	10.5

11.3.3 Indexing

With a temporal index, one can use slicing methods but with date-like instances:

```
[7]: start = datetime(day=15, month=8, year=2024, hour=3)
      end = start + timedelta(hours=5)
      print(start, end, sep='\n')
```

```
2024-08-15 03:00:00
2024-08-15 08:00:00
```

```
[10]: df.loc[start:end]  # everything from start to end
                        # both are included since `loc` is label-based
```

```
[10]:
```

	A	B
2024-08-15 04:00:00	2	8
2024-08-15 06:00:00	3	9
2024-08-15 08:00:00	4	10

11.3.4 dt accessor

When temporal data is stored in a column, the **dt accessor** provides date-specific methods:

```
[8]: df.index.name = 'date'
      df = df.reset_index()
      df
```

```
[8]:
```

	date	A	B
0	2024-08-15 00:00:00	0	6
1	2024-08-15 02:00:00	1	7
2	2024-08-15 04:00:00	2	8
3	2024-08-15 06:00:00	3	9
4	2024-08-15 08:00:00	4	10
5	2024-08-15 10:00:00	5	11

Let's have a look to all the methods and attributes of the **dt** object:

```
[12]: # listing of attributes and methods of object dt
      for attr in dir(df['date'].dt):
          if not attr.startswith('_'):
              print(attr, end=' / ')
```

```
ceil / date / day / day_name / day_of_week / day_of_year / dayofweek / dayofyear
/ days_in_month / daysinmonth / floor / freq / hour / is_leap_year /
is_month_end / is_month_start / is_quarter_end / is_quarter_start / is_year_end
/ is_year_start / isocalendar / microsecond / minute / month / month_name /
nanosecond / normalize / quarter / round / second / strftime / time / timetz /
to_period / to_pydatetime / tz / tz_convert / tz_localize / week / weekday /
weekofyear / year /
```

For instance, one can get the hour of the day of a date-like column:

```
[13]: df['Hour'] = df['date'].dt.hour
      df
```

```
[13]:
```

	date	A	B	Hour
0	2024-08-15 00:00:00	0	6	0
1	2024-08-15 02:00:00	1	7	2
2	2024-08-15 04:00:00	2	8	4
3	2024-08-15 06:00:00	3	9	6
4	2024-08-15 08:00:00	4	10	8
5	2024-08-15 10:00:00	5	11	10

11.3.5 TimeDelta

pandas can also handle date differences.

Hereafter, the first date is subtracted from the other. This operation returns the durations from this initial date, for all elements of `df['date']` (because `df['date']` is chronologically sorted).

```
[9]: df['date'] - df.loc[0, 'date']
```

```
[9]: 0    0 days 00:00:00
      1    0 days 02:00:00
      2    0 days 04:00:00
      3    0 days 06:00:00
      4    0 days 08:00:00
      5    0 days 10:00:00
      Name: date, dtype: timedelta64[ns]
```

11.4 Strings

11.4.1 Introduction

Similarly to the `dt` accessor that can handle dates, a `Series` containing strings can be managed using the `str` accessor.

```
[1]: import pandas as pd
df = pd.DataFrame({'text': ['aCag', '53Bc^', 'cc', '/c_8cd45', 'F98', '__m'],
                  ↪ 'other column': range(6)})
df
```

```
[1]:
```

	text	other column
0	aCag	0
1	53Bc^	1
2	cc	2
3	/c_8cd45	3
4	F98	4
5	__m	5

11.4.2 Existing methods

Below are presented methods and attributes of the `str` accessor

```
[2]: # listing of attributes and methods of object dt
for attr in dir(df['text'].str):
    if not attr.startswith('_'):
        print(attr, end=' / ')
```

```
capitalize / casefold / cat / center / contains / count / decode / encode /
endswith / extract / extractall / find / findall / fullmatch / get / get_dummies
/ index / isalnum / isalpha / isdecimal / isdigit / islower / isnumeric /
isspace / istitle / isupper / join / len / ljust / lower / lstrip / match /
normalize / pad / partition / removeprefix / removesuffix / repeat / replace /
rfind / rindex / rjust / rpartition / rsplit / rstrip / slice / slice_replace /
split / startswith / strip / swapcase / title / translate / upper / wrap / zfill
/
```

Many of them also exist with the native Python `str` type. In other words, what you can do with a Python string can be done at large scale on a `pandas Series` containing strings:

```
[3]: print(*[attr for attr in dir(str) if not attr.startswith('_')], sep=' / ')
```

```
capitalize / casefold / center / count / encode / endswith / expandtabs / find /
format / format_map / index / isalnum / isalpha / isascii / isdecimal / isdigit
/ identifier / islower / isnumeric / isprintable / isspace / istitle / isupper
/ join / ljust / lower / lstrip / maketrans / partition / removeprefix /
removesuffix / replace / rfind / rindex / rjust / rpartition / rsplit / rstrip /
split / splitlines / startswith / strip / swapcase / title / translate / upper /
```


zfill

11.4.3 Simple examples

```
[4]: df['text'].str.lower()    # lower case
```

```
[4]: 0      acag
      1      53bc^
      2      cc
      3  /c_8cd45
      4      f98
      5      _m
      Name: text, dtype: object
```

```
[5]: df['text'].str.len()    # length
```

```
[5]: 0      4
      1      5
      2      2
      3      8
      4      3
      5      3
      Name: text, dtype: int64
```

Indexing

```
[6]: df['text'].str[2:4]
```

```
[6]: 0      ag
      1      Bc
      2
      3      _8
      4      8
      5      m
      Name: text, dtype: object
```

Splitting

Splitting means building different strings by cutting the original one at the location of a special character. Below, the splitting operation results in the substrings being stored in a list, for each row of the Series.

```
[7]: df['text'].str.split('c')
```

```
[7]: 0      [aCag]
      1      [53B, ^]
      2      [, , ]
```

```
3    [/, _8, d45]
4          [F98]
5          [__m]
Name: text, dtype: object
```

The `expand` argument makes it possible to get distinct columns.

```
[8]: df['text'].str.split('c', expand=True)
```

```
[8]:      0      1      2
0  aCag  None  None
1   53B    ^  None
2
3      /    _8  d45
4   F98  None  None
5   __m  None  None
```

Suffixes and prefixes

```
[9]: df['text'].str.startswith('53')
```

```
[9]: 0    False
1     True
2    False
3    False
4    False
5    False
Name: text, dtype: bool
```

```
[10]: df['text'].str.endswith('m')
```

```
[10]: 0    False
1    False
2    False
3    False
4    False
5     True
Name: text, dtype: bool
```

11.4.4 Advanced: *regex*

Introduction

The *regex* word means *regular expression*. A regex is a group of characters built in a very specific order in order to describe a generic type of strings.

Regex can be used on very large amount of data to detect some strings with a particular meaning.

Documentation of the [Python version of regex](#) is accessible [here](#).

Regex is a difficult notion of computer engineering. A very simple case is presented here after.

Case study definition

Let's suppose one has some experimental values coming from different sensors.

```
[11]: import numpy as np
npr = np.random.default_rng(42)
# `npr.choice` randomly takes 10 values from a certain iterable
sensors = npr.choice(['AB-45-PL', 'AB-46-KL', 'AB-47-KL', 'AB-48-KL', 'ZB-76-PM', '87-PA-98'], 10)
values = range(len(sensors))
df = pd.DataFrame({'sensors': sensors, 'values': values})
df
```

```
[11]:
```

	sensors	values
0	AB-45-PL	0
1	ZB-76-PM	1
2	AB-48-KL	2
3	AB-47-KL	3
4	AB-47-KL	4
5	87-PA-98	5
6	AB-45-PL	6
7	ZB-76-PM	7
8	AB-46-KL	8
9	AB-45-PL	9

Question 1 How to access all sensors whose name contains both an 'A' and a '7'?

Solution 1 Let's use the `str.contains` method, 2 times. We use the `&` (and) operator to assemble the two conditions.

```
[12]: cond1 = df['sensors'].str.contains('A', regex=False)
cond2 = df['sensors'].str.contains('7', regex=False)
df[cond1 & cond2]
```

```
[12]:
```

	sensors	values
3	AB-47-KL	3
4	AB-47-KL	4
5	87-PA-98	5

Question 2 How to get all sensors whose name contains:

- either 'A' or 'Z'
- then '7'

Solution 2 It would be pretty difficult with `str.contains` without regex. Thus, let's build a regex pattern:

```
[13]: pattern = '.*(A|Z).*7.*'
      df[df['sensors'].str.contains(pattern, regex=True)]
```

```
/tmp/ipykernel_116620/2985439971.py:2: UserWarning: This pattern is interpreted
as a regular expression, and has match groups. To actually get the groups, use
str.extract.
```

```
df[df['sensors'].str.contains(pattern, regex=True)]
```

```
[13]:
```

	sensors	values
1	ZB-76-PM	1
3	AB-47-KL	3
4	AB-47-KL	4
7	ZB-76-PM	7

Some explanations about the pattern:

- `.*` means: look for every possible characters
- `(A|Z)` means: look for either an 'A' or a 'Z'
- `7` means: look for a '7'

Note that order matters: the '7' must come after the 'A' or 'Z'

11.5 Basic operations

11.5.1 Long and wide data format

There are several ways to store the same data.

Long format

```
[42]: import pandas as pd
df_long = pd.DataFrame({'Animal': ('cat', 'cat', 'dog', 'dog', 'cow', 'cow'),
                        'Feature': ('Age', 'Mass', 'Age', 'Mass', 'Age', 'Mass'),
                        'Value': (11, 5, 8, 17, 4, 650)})
df_long
```

```
[42]:   Animal Feature  Value
0    cat      Age     11
1    cat     Mass      5
2    dog     Age      8
3    dog     Mass     17
4    cow     Age      4
5    cow     Mass    650
```

Above, some data is stored using the **long format** relatively to column **Animal**. This means several rows have the same ‘Animal’ value.

The **long format** :

- makes DataFrame having few columns but many rows
- makes it difficult to work on specific values. For instance, how to perform calculation on the mass of all animals?

From long to wide format

Thus, let’s transform the data to have it in **large format**. This is done using `pivot_table`.

```
[43]: df_wide = df_long.pivot_table(index='Animal', columns='Feature', values='Value')
df_wide
```

```
[43]: Feature  Age  Mass
Animal
cat         11     5
cow          4    650
dog          8    17
```

Above, `df_wide` has as many columns as there are different elements in the **Feature** column of `df_long`. The name ‘Feature’ is given to the index along axis 1, i.e. the columns.

```
[44]: df_wide.columns.name
```

```
[44]: 'Feature'
```

From wide to long format

Conversely, the `melt` function makes it possible to transform data from a wide to a long format:

```
[45]: df_wide = df_wide.reset_index()
df_wide.melt(id_vars='Animal', value_vars=['Age', 'Mass'], var_name='Feature',
           ↪value_name='Value')
```

```
[45]:
```

	Animal	Feature	Value
0	cat	Age	11
1	cow	Age	4
2	dog	Age	8
3	cat	Mass	5
4	cow	Mass	650
5	dog	Mass	17

Advanced

In the previous example `df_long` has only one value `Value` for each `(Animal, Feature)` pair. Whenever it's not the case, a `aggfunc` must be specified when going from long to wide format.

Another DataFrame definition:

```
[46]: df_long = pd.DataFrame({'Animal': ('cat', 'cat', 'cat', 'dog', 'dog', 'dog',
           ↪'cow', 'cow'),
                             'Feature': ('Age', 'Mass', 'Mass', 'Age', 'Mass', 'Mass',
           ↪'Age', 'Mass'),
                             'Value': (11, 5, 9, 8, 17, 11, 4, 650)})
df_long
```

```
[46]:
```

	Animal	Feature	Value
0	cat	Age	11
1	cat	Mass	5
2	cat	Mass	9
3	dog	Age	8
4	dog	Mass	17
5	dog	Mass	11
6	cow	Age	4
7	cow	Mass	650

`df_long` has now 2 masses for the cat and the dog. Let's define `aggfunc`:

```
[47]: df_long.pivot_table(index='Animal', columns='Feature', values='Value',
           ↪aggfunc='mean') # mean
```

```
[47]:
```

	Feature	Age	Mass
Animal			
cat		11	7
cow		4	650

```
dog      8    14
```

```
[48]: df_long.pivot_table(index='Animal', columns='Feature', values='Value',
    ↪aggfunc=list) # keep all values
```

```
[48]: Feature  Age      Mass
Animal
cat      [11]    [5, 9]
cow      [4]     [650]
dog      [8]    [17, 11]
```

11.5.2 Index swapping

A DataFrame has two indexes:

- along rows (axis 0): can be accessed using `.index`
- along columns (axis 1): can be accessed using `.columns`

The `stack` method can append the column index to rows. `unstack` do the opposite.

```
stack
```

```
[49]: df_wide
```

```
[49]: Feature Animal  Age  Mass
0      cat      11    5
1      cow       4  650
2      dog       8   17
```

```
[50]: df_wide_stacked = df_wide.stack()
df_wide_stacked
```

```
[50]: Feature
0  Animal    cat
   Age       11
   Mass       5
1  Animal    cow
   Age        4
   Mass      650
2  Animal    dog
   Age        8
   Mass      17
dtype: object
```

Since there was only one level of columns, the call to `stack` returns a `Series`.

```
[51]: type(df_wide_stacked)
```

```
[51]: pandas.core.series.Series
```

And since there already was an index, there are now 2 of them (multi index):

```
[52]: df_wide_stacked.index
```

```
[52]: MultiIndex([(0, 'Animal'),
                  (0, 'Age'),
                  (0, 'Mass'),
                  (1, 'Animal'),
                  (1, 'Age'),
                  (1, 'Mass'),
                  (2, 'Animal'),
                  (2, 'Age'),
                  (2, 'Mass')],
                 names=[None, 'Feature'])
```

Multi index can be accessed this way:

```
[53]: df_wide_stacked.loc[(1, 'Age')]
```

```
[53]: 4
```

`unstack`

Using `unstack`, the row index becomes a columns index. Thus, the multi index is now at the column level and there is no more index at the row level:

```
[54]: df_wide
```

```
[54]: Feature Animal  Age  Mass
0         cat    11    5
1         cow     4   650
2         dog     8    17
```

```
[55]: df_wide_unstacked = df_wide.unstack()
df_wide_unstacked
```

```
[55]: Feature
Animal  0    cat
        1    cow
        2    dog
Age      0    11
        1     4
        2     8
Mass     0     5
        1   650
        2   17
dtype: object
```


Use case

`stack` and `unstack` are very powerful whenever the DataFrame has an index (rows or columns) with more than one level.

DataFrame definition

```
[56]: import numpy as np
index_data_rows = [[1, 1, 2, 2, 3], ['x', 'y', 'x', 'y', 'z']]
index_rows = pd.MultiIndex.from_arrays(index_data_rows, names=('level_0_rows',
↳ 'level_1_rows'))

index_data_cols = [['a', 'a', 'b'], ['A', 'B', 'B']]
index_cols = pd.MultiIndex.from_arrays(index_data_cols, names=('level_0_cols',
↳ 'level_1_cols'))
df = pd.DataFrame(data=np.arange(15).reshape((5, 3)),
                  columns=index_cols,
                  index=index_rows)
```

```
[57]: df
```

```
[57]: level_0_cols      a      b
level_1_cols      A  B  B
level_0_rows level_1_rows
1           x         0   1   2
           y         3   4   5
2           x         6   7   8
           y         9  10  11
3           z        12  13  14
```

```
[58]: df.index
```

```
[58]: MultiIndex([(1, 'x'),
                  (1, 'y'),
                  (2, 'x'),
                  (2, 'y'),
                  (3, 'z')],
                 names=['level_0_rows', 'level_1_rows'])
```

```
[59]: df.columns
```

```
[59]: MultiIndex([('a', 'A'),
                  ('a', 'B'),
                  ('b', 'B')],
                 names=['level_0_cols', 'level_1_cols'])
```

unstack

```
[60]: unstacked = df.unstack()
```

```
[61]: unstacked
```

```
[61]: level_0_cols    a                                b
      level_1_cols    A                                B
      level_1_rows    x      y      z      x      y      z      x      y      z
      level_0_rows
      1              0.0  3.0   NaN  1.0   4.0   NaN  2.0   5.0   NaN
      2              6.0  9.0   NaN  7.0  10.0   NaN  8.0  11.0   NaN
      3              NaN  NaN  12.0  NaN   NaN  13.0  NaN   NaN  14.0
```

```
[62]: unstacked.index
```

```
[62]: Int64Index([1, 2, 3], dtype='int64', name='level_0_rows')
```

```
[63]: unstacked.columns
```

```
[63]: MultiIndex([('a', 'A', 'x'),
                  ('a', 'A', 'y'),
                  ('a', 'A', 'z'),
                  ('a', 'B', 'x'),
                  ('a', 'B', 'y'),
                  ('a', 'B', 'z'),
                  ('b', 'B', 'x'),
                  ('b', 'B', 'y'),
                  ('b', 'B', 'z')],
                  names=['level_0_cols', 'level_1_cols', 'level_1_rows'])
```

```
stack
```

```
[64]: stacked = df.stack()
```

```
[65]: stacked
```

```
[65]: level_0_cols    a      b
      level_0_rows level_1_rows level_1_cols
      1          x          A          0    NaN
                        B          1    2.0
                        y          A          3    NaN
                        B          4    5.0
      2          x          A          6    NaN
                        B          7    8.0
                        y          A          9    NaN
                        B         10   11.0
      3          z          A         12    NaN
                        B         13   14.0
```

```
[66]: stacked.index
```

```
[66]: MultiIndex([(1, 'x', 'A'),
                  (1, 'x', 'B'),
                  (1, 'y', 'A'),
                  (1, 'y', 'B'),
                  (2, 'x', 'A'),
                  (2, 'x', 'B'),
                  (2, 'y', 'A'),
                  (2, 'y', 'B'),
                  (3, 'z', 'A'),
                  (3, 'z', 'B')],
              names=['level_0_rows', 'level_1_rows', 'level_1_cols'])
```

```
[67]: stacked.columns
```

```
[67]: Index(['a', 'b'], dtype='object', name='level_0_cols')
```

11.5.3 Grouping data

When dealing with multi dimensional data, you may need to extract global trendlines regarding some specific attributes. This can be done using `groupby`.

```
[68]: df_long
```

```
[68]:   Animal Feature  Value
0    cat      Age      11
1    cat      Mass       5
2    cat      Mass       9
3    dog      Age       8
4    dog      Mass      17
5    dog      Mass      11
6    cow      Age       4
7    cow      Mass     650
```

Unique function

Below, let's compute the average of values 'Value' for every pair (Animal, Feature).

```
[69]: df_long.groupby(by=['Animal', 'Feature'])['Value'].mean()
```

```
[69]: Animal  Feature
cat      Age      11.0
         Mass       7.0
cow      Age       4.0
         Mass     650.0
dog      Age       8.0
         Mass      14.0
Name: Value, dtype: float64
```

note: in this particular case, the result is very similar to what would be returned by `melt`.

If several columns exist, the aggregate is done everywhere:

```
[70]: df_long['Other value'] = range(10, 18)
df_long
```

```
[70]:
```

	Animal	Feature	Value	Other value
0	cat	Age	11	10
1	cat	Mass	5	11
2	cat	Mass	9	12
3	dog	Age	8	13
4	dog	Mass	17	14
5	dog	Mass	11	15
6	cow	Age	4	16
7	cow	Mass	650	17

```
[71]: df_long.groupby(by=['Animal', 'Feature']).mean()
```

```
[71]:
```

	Animal	Feature	Value	Other value
cat	cat	Age	11.0	10.0
	cat	Mass	7.0	11.5
cow	cow	Age	4.0	16.0
	cow	Mass	650.0	17.0
dog	dog	Age	8.0	13.0
	dog	Mass	14.0	14.5

Multiple functions

But one can specify a different aggregate function depending on the column. This is done passing a dictionary to `agg`:

```
[164]: df_long.groupby(by=['Animal', 'Feature']).agg({'Value': 'mean', 'Other value':
↳list})
```

```
[164]:
```

	Animal	Feature	Value	Other value
cat	cat	Age	11.0	[10]
	cat	Mass	7.0	[11, 12]
cow	cow	Age	4.0	[16]
	cow	Mass	650.0	[17]
dog	dog	Age	8.0	[13]
	dog	Mass	14.0	[14, 15]

Iterating over groups

Without aggregating, one can **iterate over groups**.

```
[73]: groupby_object = df_long.groupby(by=['Animal', 'Feature'])
```

```
[74]: for tuple_, dataframe in groupby_object:
        print(tuple_)
        print(dataframe, end='\n\n')
```

```
('cat', 'Age')
  Animal Feature  Value  Other value
0    cat     Age     11             10
```

```
('cat', 'Mass')
  Animal Feature  Value  Other value
1    cat    Mass      5             11
2    cat    Mass      9             12
```

```
('cow', 'Age')
  Animal Feature  Value  Other value
6    cow     Age      4             16
```

```
('cow', 'Mass')
  Animal Feature  Value  Other value
7    cow    Mass   650             17
```

```
('dog', 'Age')
  Animal Feature  Value  Other value
3    dog     Age      8             13
```

```
('dog', 'Mass')
  Animal Feature  Value  Other value
4    dog    Mass     17             14
5    dog    Mass     11             15
```

Merging data

Case study Merging data is needed to work on a unified instance that contains all the relevant information. For instance, here are some datasets having similar features:

```
[78]: df1 = pd.DataFrame({'Name': ('Laura', 'Bob', 'Sarah', 'Li'),
                          'Age': (45, 15, 41, 23),
                          'Address': ('Annecy', 'Turin', 'Annecy', 'Chambéry')})
df2 = pd.DataFrame({'Name': ('Sarah', 'Li', 'Pierre'),
                     'Age': (41, 23, 26),
                     'Address': ('Annecy', 'Paris', 'Geneva')})
df1
```

```
[78]:   Name  Age  Address
0  Laura   45   Annecy
```

1	Bob	15	Turin
2	Sarah	41	Annecy
3	Li	23	Chambéry

```
[79]: df2
```

```
[79]:
```

	Name	Age	Address
0	Sarah	41	Annecy
1	Li	23	Paris
2	Pierre	26	Geneva

Note that:

- A row is common to `df1` and `df2`: the one with name **Sarah**
- A row is common to `df1` and `df2` yet has a different value for column **Address**: the one with name **Li**
- Some rows exist only in `df1`, or only in `df2`.

Outer merge Let's use `merge` to gather these datasets in one instance:

```
[127]: pd.merge(df1, df2, how='outer', on=['Name', 'Age'], suffixes=('_df1', '_df2'))
```

```
[127]:
```

	Name	Age	Address_df1	Address_df2
0	Laura	45	Annecy	NaN
1	Bob	15	Turin	NaN
2	Sarah	41	Annecy	Annecy
3	Li	23	Chambéry	Paris
4	Pierre	26	NaN	Geneva

Some explanations:

- `on` tells `pandas` where to look for different tuples of values. These columns must exist in both dataframes.
- `suffixes` makes it possible to assign different names to columns that have the same name in both dataframes.
- `how='outer'` creates one row for every ('Name', 'Age') pair in `df1` or in `df2`.
 - Specifying `how='inner'` would create a row for every pair that exists in `df1` and in `df2`
 - `how='left'` only takes pairs of `df1`.
 - `how='right'` only takes pairs of `df2`.

Inner merge Here after, using `how='inner'`.

```
[128]: pd.merge(df1, df2, how='inner', on=['Name', 'Age'], suffixes=('_df1', '_df2'))
```

```
[128]:
```

	Name	Age	Address_df1	Address_df2
0	Sarah	41	Annecy	Annecy
1	Li	23	Chambéry	Paris

If `on` is set to 'Address' `how='inner'` only 'Annecy' which is in both `df1` and `df2` is kept:

```
[132]: pd.merge(df1, df2, how='inner', on=['Address'], suffixes=('_df1', '_df2'))
```

```
[132]:   Name_df1  Age_df1 Address Name_df2  Age_df2
0    Laura     45  Annecy    Sarah     41
1    Sarah     41  Annecy    Sarah     41
```

Left/Right merge Here after, using `how='left'`.

```
[138]: pd.merge(df1, df2, how='left', on=['Name', 'Age'], suffixes=('_df1', '_df2'))
```

```
[138]:   Name  Age Address_df1 Address_df2
0  Laura  45     Annecy         NaN
1   Bob  15      Turin         NaN
2  Sarah  41     Annecy     Annecy
3    Li  23  Chambéry     Paris
```

11.5.4 Applying a rolling function

Suppose we have some experimental data. How can we compute a rolling mean?

```
[83]: sr = pd.Series(range(6, 0, -1), index=list('abcdef'))
sr
```

```
[83]: a    6
     b    5
     c    4
     d    3
     e    2
     f    1
     dtype: int64
```

Let's use the `rolling` method:

```
[84]: sr.rolling(window=3).mean()
```

```
[84]: a    NaN
     b    NaN
     c    5.0
     d    4.0
     e    3.0
     f    2.0
     dtype: float64
```

The **default behaviour makes the window flushed to the right**: the output value at index k is computed using the input values from $k - \text{windows} + 1$ to k . This behaviour can be changed using `center=True`:

```
[85]: sr.rolling(window=3, center=True).mean()
```

```
[85]: a    NaN  
      b    5.0  
      c    4.0  
      d    3.0  
      e    2.0  
      f    NaN  
      dtype: float64
```

Similarly to `groupby` and `resample` objects, one can iterate over what is returned by the `rolling` method:

```
[89]: rolling_object = sr.rolling(window=3)  
      for k in rolling_object:  
          print(k)
```

```
a    6  
dtype: int64  
a    6  
b    5  
dtype: int64  
a    6  
b    5  
c    4  
dtype: int64  
b    5  
c    4  
d    3  
dtype: int64  
c    4  
d    3  
e    2  
dtype: int64  
d    3  
e    2  
f    1  
dtype: int64
```


Chapter 12

Matplotlib

12.1 Simle plot

12.1.1 Introduction

matplotlib is a Python library that creates charts.

Pros

- Adapted to scientific publications: straight-forward charts
- Unlimited customization of charts
- Large online community

Cons


- No interactive plotting

12.1.2 Simple plot

```
[14]: import matplotlib.pyplot as plt
```

```
[15]: x = range(1, 10)
      y = [3, 5, 2, 3, 4, -1, -2, 0, 7]
      fig, ax = plt.subplots(figsize=(6, 3))    # figsize is given in inches: 1 inch = 2.54 cm
      ax.plot(x, y, label="my_data")
      ax.legend()
```

```
[15]: <matplotlib.legend.Legend at 0x7fca2c4bf910>
```

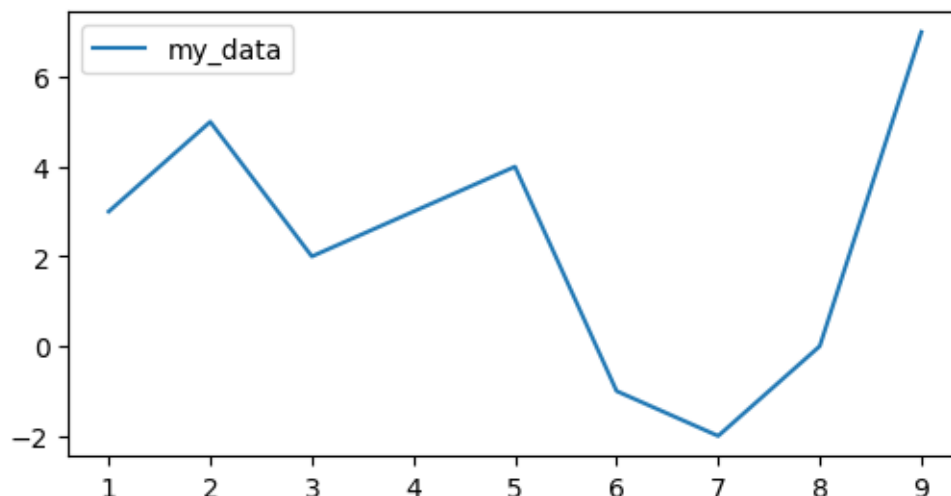

Above, a simple full blue line is used. Yet, plotting style can be [fully configured when calling plot](#).

here after, 3 lines are plotted on the same chart. The first two plots set the line style in a short format, whereas the third one use named keyword argument (`marker`, `linestyle`, `color`). Note that:

- 'x-r' tells that:
 - marker is an 'x'
 - line must be full
 - color is red
- In the '<- .b' string, -. stands for a 'dash-dot line style'


```
[16]: x1 = range(5)
      x2 = range(1, 4)

      y1 = range(10, 5, -1)
      y2 = [1, 2, 8]

      x3 = range(5)
      y3 = [3, 3, 10, -2, 4]

      fig, ax = plt.subplots(figsize=(6, 3))
      ax.plot(x1, y1, 'x-r')
      ax.plot(x2, y2, '<- .b')
      ax.plot(x3, y3, linewidth=2, marker='o', linestyle=':', color="green",
              ↪label="mes_donnees")
      ax.legend()
```


```
[16]: <matplotlib.legend.Legend at 0x7fca2c274ac0>
```

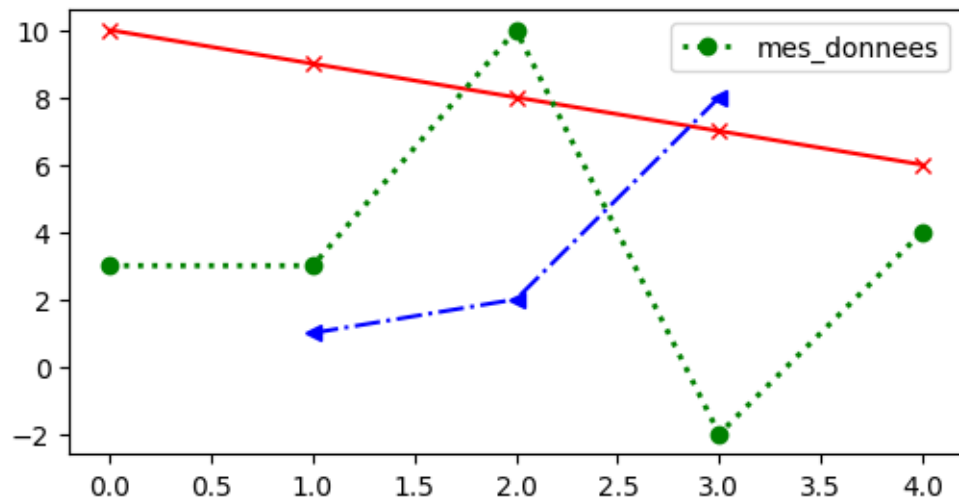

Thus it is possible to plot only the markers, without any line:

```
[17]: fig, ax = plt.subplots(figsize=(6, 3))
      ax.plot(x1, y1, 'xr')
```

```
[17]: [<matplotlib.lines.Line2D at 0x7fca2c1216f0>]
```

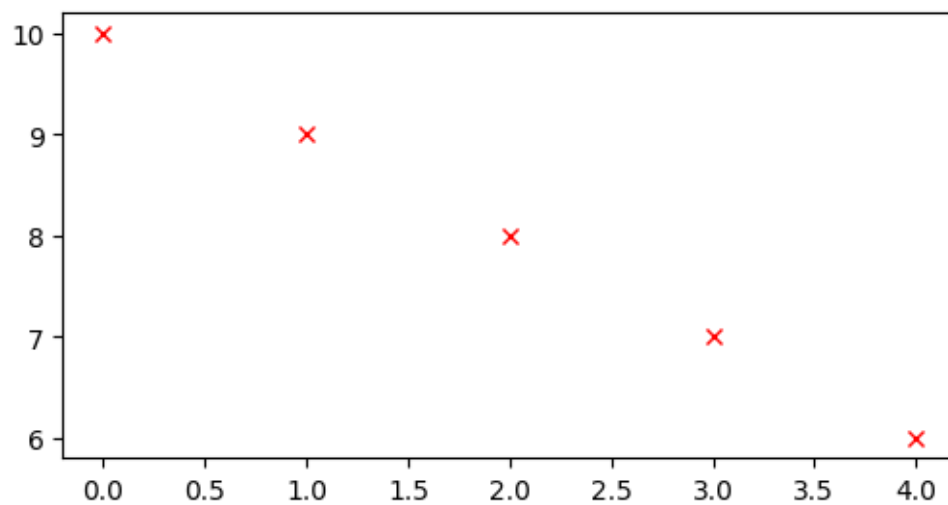

12.1.3 3D plots

Case study definition

Let's define values of a 2-variables function:


```
[18]: import numpy as np
x = np.linspace(0, 10, 100)
y = 10 * np.sin(np.linspace(5, 15, 100))
z = (x-y)**2 + x*y
```

Points

The `scatter` function with a 3d projection can plot the data with only markers:

```
[19]: fig, ax = plt.subplots(figsize=(6, 3), subplot_kw={'projection': '3d'})
ax.scatter(x, y, z, marker='+', color='orange')
```

```
[19]: <mpl_toolkits.mplot3d.art3d.Path3DCollection at 0x7fca2c21ef20>
```

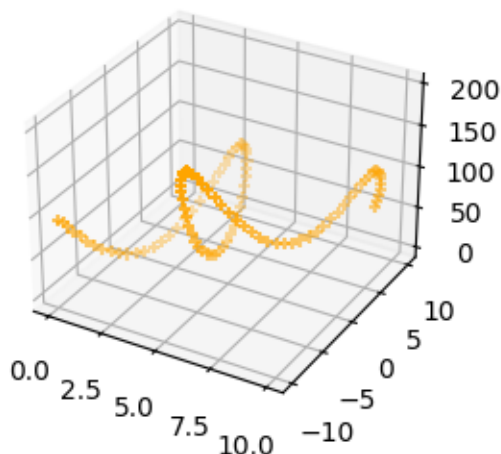

Surface


The previous example used specific values for `x` and `y` data. But if a 2-variable function must be completely described, a grid evaluation (`np.meshgrid`) and a surface plot (`ax.plot_surface`) are needed.

$$f: (x, y) \rightarrow (x - 5)^2 + y^2$$

```
[20]: xx, yy = np.meshgrid(x, y)
zz = (xx - 5)**2 + yy**2

fig, ax = plt.subplots(subplot_kw={"projection": "3d"})
ax.plot_surface(xx, yy, zz)
```


```
[20]: <mpl_toolkits.mplot3d.art3d.Poly3DCollection at 0x7fca2c014e20>
```

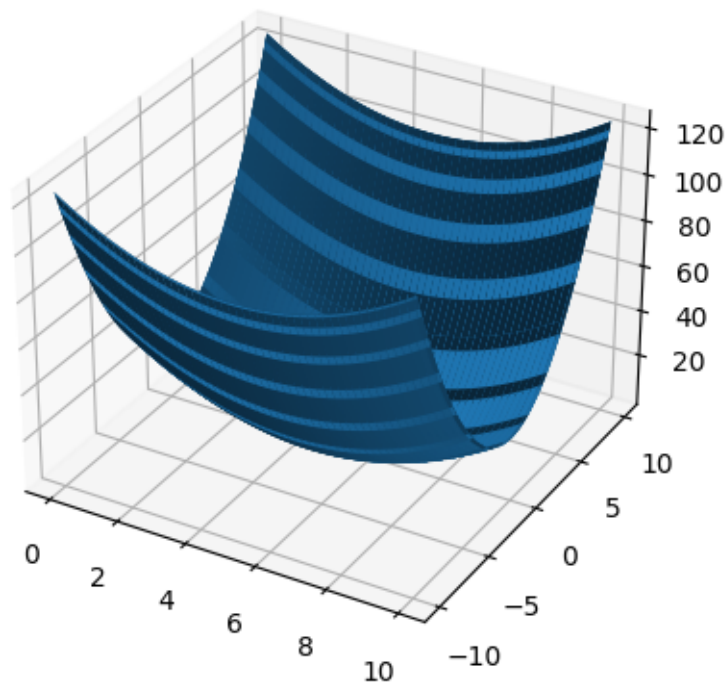

12.1.4 Saving a figure

When using `matplotlib`, figures are shown in an interactive way. Whenever saving to the disk is required, one must use the `savefig` method of the figure:

```
[21]: fig, ax = plt.subplots(figsize=(6, 3))
      ax.plot(range(5), range(5, 0, -1), 'o:g')
      fig.savefig('figures/super_figure.png', dpi=200, bbox_inches='tight')
```

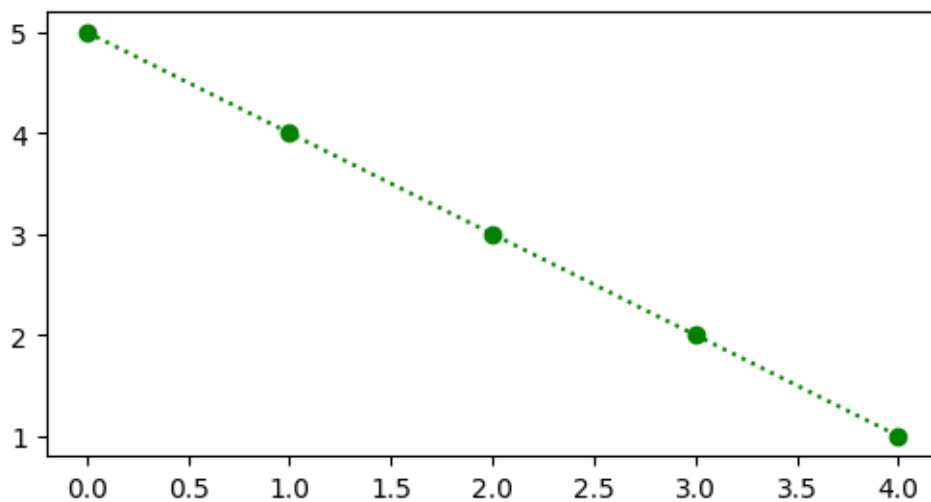

Note the arguments:

- `bbox_inches='tight'`: use all available space in the window
- `dpi`: set the quality of the figure in **pixels per inch**.

Most scientific journals require a dpi higher than 200. Yet, a larger dpi comes with:

- a larger disk space
- a longer writing time

Hence, prefer a not to high dpi in your every-day life.

12.2 Complex figures

12.2.1 Introduction

A figure is made of several `matplotlib.axes` objects, also called ‘ax’. These can be placed in the figure in a special order. In this part, two approaches of axes layout are presented:

1. Simple approach: create a grid of `axes` objects, where all have the same dimensions
2. Advanced approach: define custom dimensions for each `axe`

12.2.2 Simple approach


Using an iterable

Using `plt.subplots`, axes are available in a 2D `numpy` array.

Let’s create 3 axes along columns and 2 along rows, i.e. an array of shape (2, 3). Then one of the axes is used to plot something.

```
[17]: import matplotlib.pyplot as plt
fig, axes = plt.subplots(nrows=2, ncols=3, figsize=(8, 4))
ax = axes[0, 2]           # access the first row and third column
ax.plot([1,2,3], [3,2,9])
```

```
[17]: [<matplotlib.lines.Line2D at 0x7f0cd30c2080>]
```

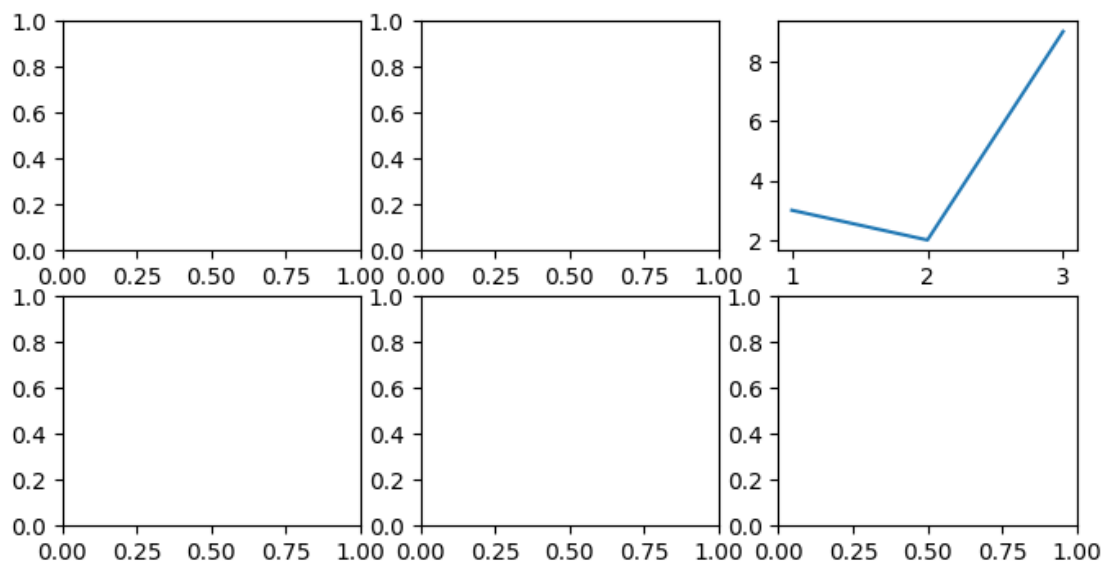


Using a dictionary

`plt.subplot_mosaic` is similar to `plt.subplots` yet it returns a dictionary whose keys are the names used in the passed iterable.

```
[18]: wanted_layout = [['ax1', 'ax2', 'ax3'],
                        ['ax4', 'ax5', 'ax6']]
fig, axes = plt.subplot_mosaic(wanted_layout,
                              figsize=(8,4))

ax = axes['ax3']
ax.plot([1,2,3], [3,2,9])
```

```
[18]: [<matplotlib.lines.Line2D at 0x7f0cd2f9f400>]
```

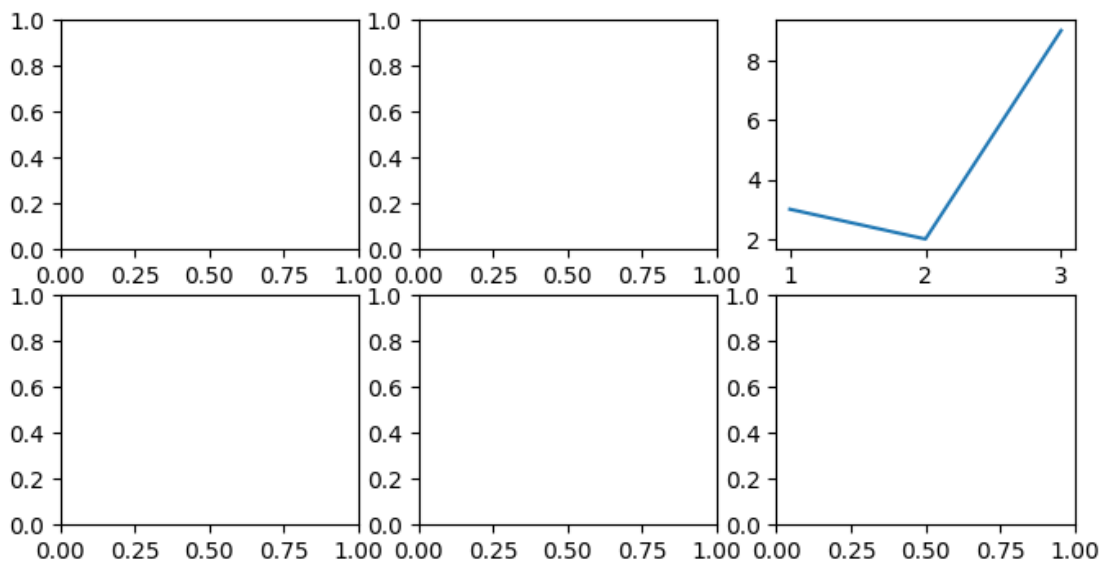

12.2.3 Advanced approach

In the previous example, all axes had equal sizes. Let's create some axes with different sizes.

Using an iterable

There are 3 steps:

1. create the figure
2. add to the figure a `GridSpec` instance using `add_gridspec`
3. add axes one after another, specifying the rows and columns of the grid that axes must occupy. This is done using the `add_subplot` function, which returns an `axe` object.

```
[19]: fig = plt.figure(figsize=(8, 4))
spec = fig.add_gridspec(2, 3)           # 2 rows, 3 columns:
                                         # no more than 6 axes can be defined
                                         # but possibly less if some spans several
                                         # rows/columns

ax1 = fig.add_subplot(spec[0, 0])
```





```

_ = ax1.plot([1,2,3], [3,2,9])

ax2 = fig.add_subplot(spec[1, 1:3]) # 2nd row, from 2nd to 3rd column
ax2.plot([1,2,3], [1,-2,4], label='test_label', color='red')
_ = ax2.legend()

```

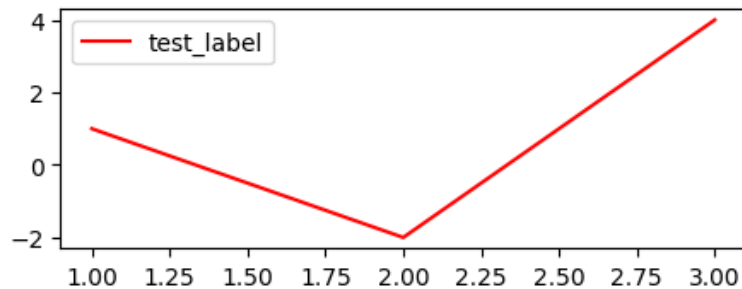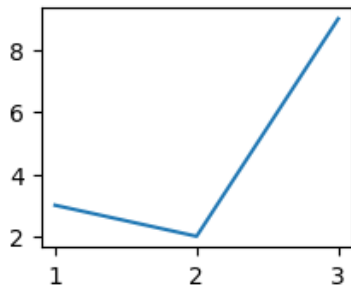

Using a dictionary

In a dictionary approach (`subplot_mosaic`), one must set the same name in different places to have an axis span several rows/columns.


```

[20]: wanted_layout = [['ax1', '.', '.'], # the dot '.' tells matplotlib
→
                        ['.', 'ax6', 'ax6']] # not to define axes at these locations
fig, axes = plt.subplot_mosaic(wanted_layout,
                               figsize=(8,4))

ax1 = axes['ax1']
_ = ax1.plot([1,2,3], [3,2,9])

ax2 = axes['ax6']
ax2.plot([1,2,3], [1,-2,4], label='test_label', color='red')
_ = ax2.legend()

```

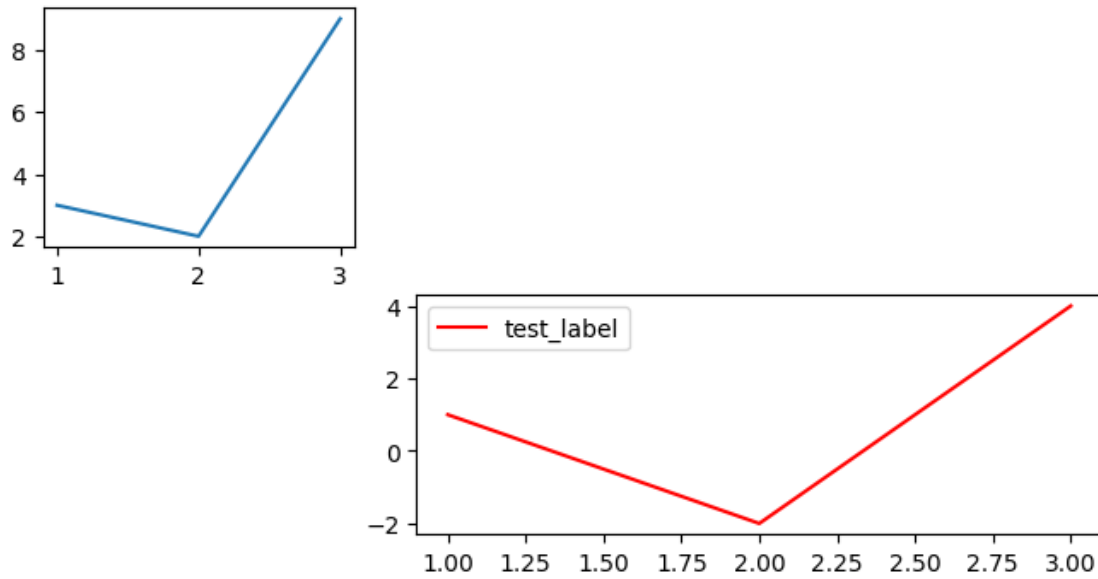


12.2.4 Notes

The figure have some similar properties to those of the axes. For instance, let's define a title at the figure level using `suptitle`:

```
[21]: fig.suptitle('Important title')
      ax = axes['ax6']
      ax.set_title("Title for 'ax6'")
      fig
```

```
[21]:
```

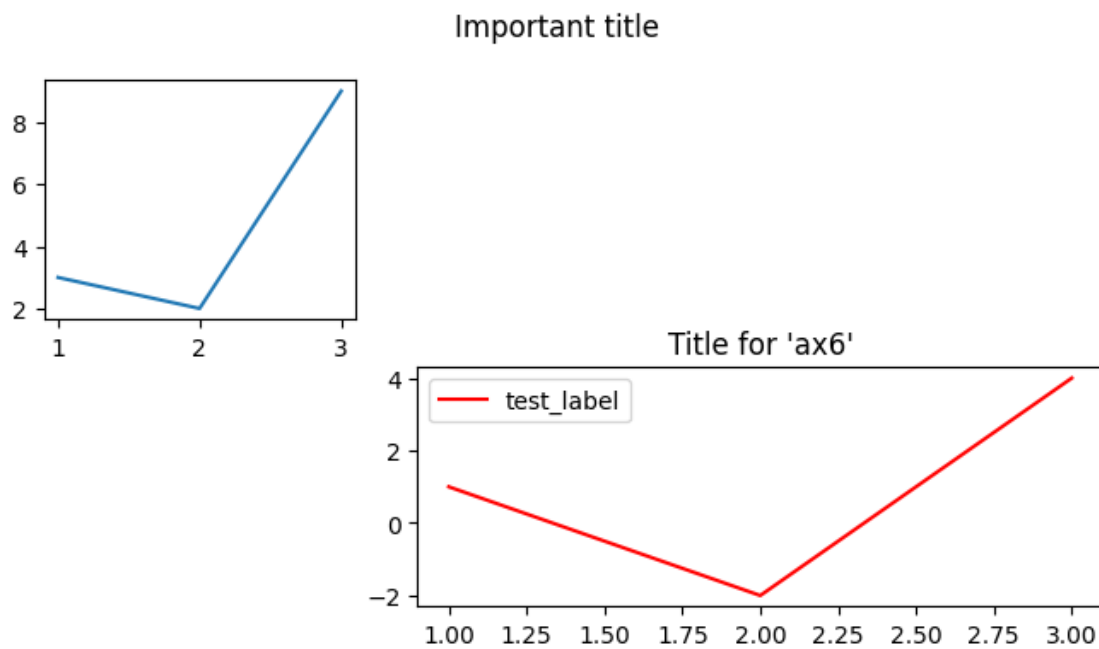


12.3 Customization

12.3.1 Introduction

A figure is made of one or several `axes` objects. In practice, an `ax` is the zone where the chart is drawn.

The properties of an `ax` can be modified before after the data is plotted.

Here is a description of the different customizable features of an `ax`:

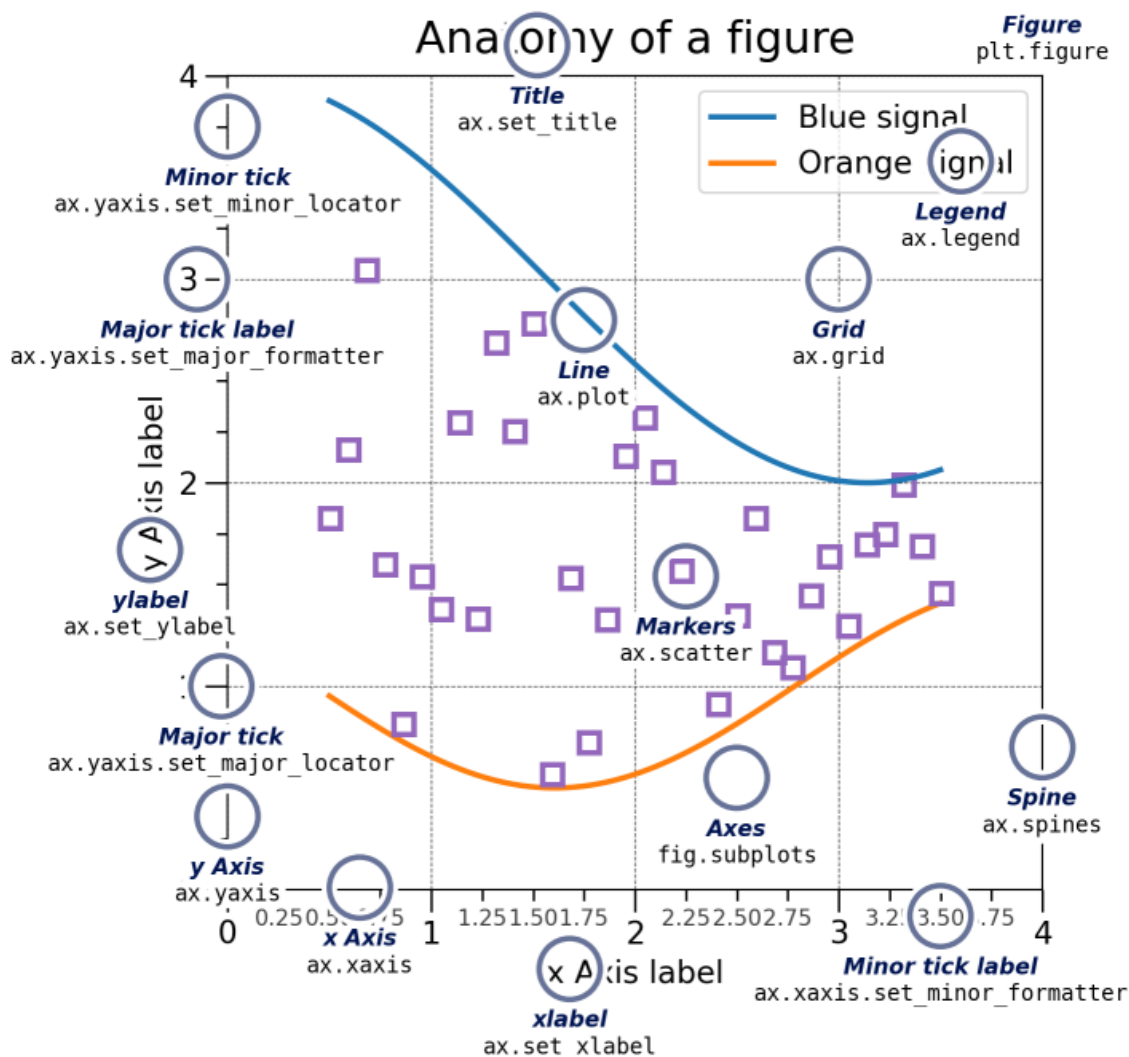

12.3.2 Adding titles, labels, annotations, ...


Basics

A couple of `set_...` methods can be used. Note that `ax` and `axis` are different things.

```
[21]: import matplotlib.pyplot as plt
fig, ax = plt.subplots(figsize=(6, 3))
ax.plot([1,2,3], [1, 4, 5])
```

```
ax.set_xlabel('x axis')    # a label to the x axis
ax.set_ylabel('y axis')    # a label to the y axis
ax.set_title('my_title')   # a title to the ax
```


[21]: `Text(0.5, 1.0, 'my_title')`

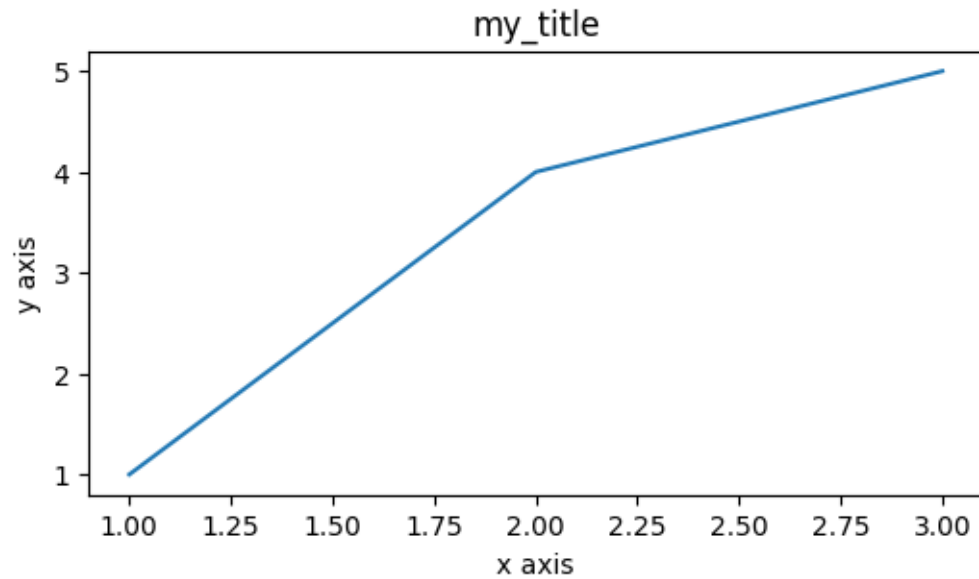

A grid is set using `ax.grid()`:

[22]: `ax.grid()`
`fig`

[22]:

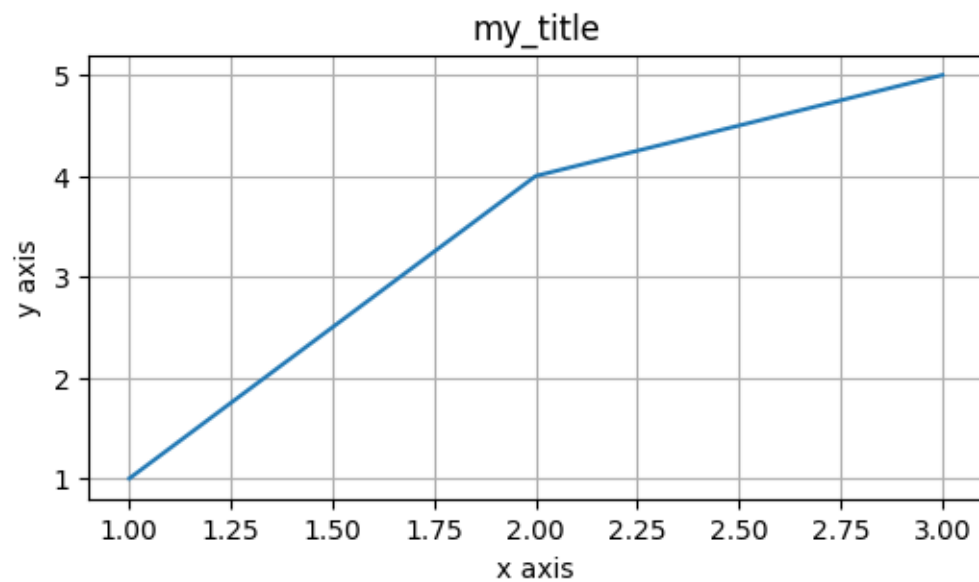


Note: in a Jupyter notebook, figures are automatically displayed after some content is plotted. Yet, one can display them again (in another cell) using the `fig.show()` method.

Annotations

Let's add a small text near the plotted area, using `annotate`.

```
[23]: ax.annotate('Here is a \n small text', xy=(2.5, 2), xytext=(2.5, 2),  
                va="center", # vertical alignment of the text  
                ha="center"  # horizontal alignment  
                )  
fig
```


[23]:

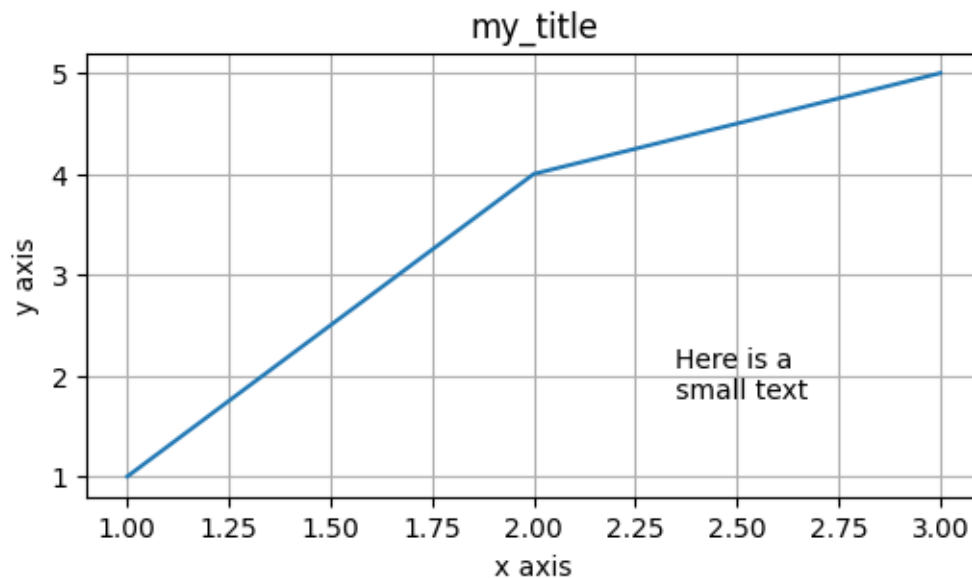

An arrow is needed to describe some specific features of the plot!

```
[24]: ax.annotate('Angle!', xy=(2, 4), xytext=(1.25, 4),  
                arrowprops={"facecolor": 'black'},  
                va="center", ha="center")  
fig
```


[24]:

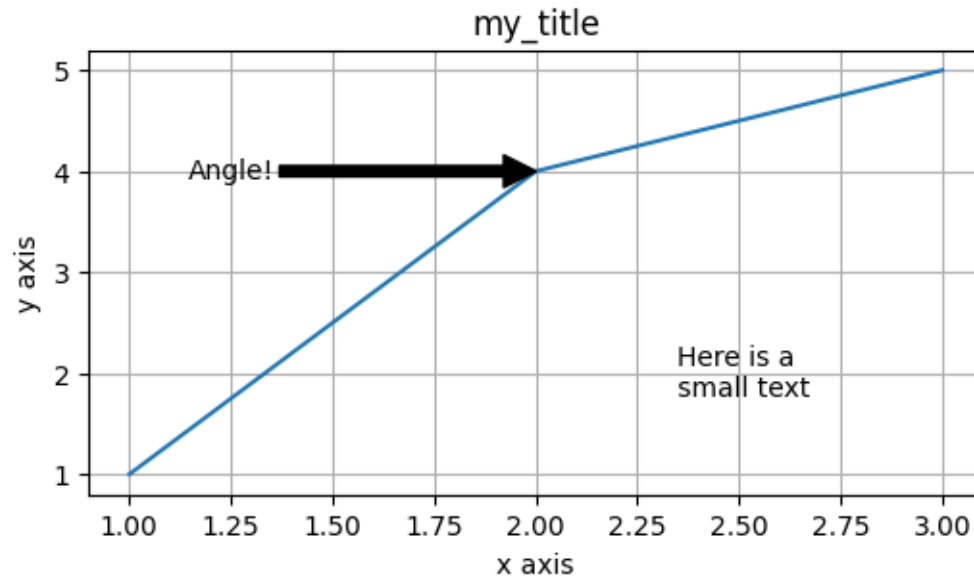

Mathematical content

Mathematical formulas can be displayed too: a **Latex-style mathematical content** must be inserted between $\begin{array}{l}
\text{\$}
\end{array}$ signs, with a **r** in front of the strings:

```
[25]: fig, ax = plt.subplots(figsize=(8, 4))
ax.plot([1,2,-1, 4], 'o-.b')      # no x values specified:
                                   # matplotlib assumes they are `range(len(y))`
formula = r'\theta_{34}(p)=\sum_{k=1}^{2p}{H_k}\$'
_ = ax.annotate(formula,
                 xy=(0.5, 2.5), xytext=(0.5, 2.5),
                 va="center", ha="center")
```

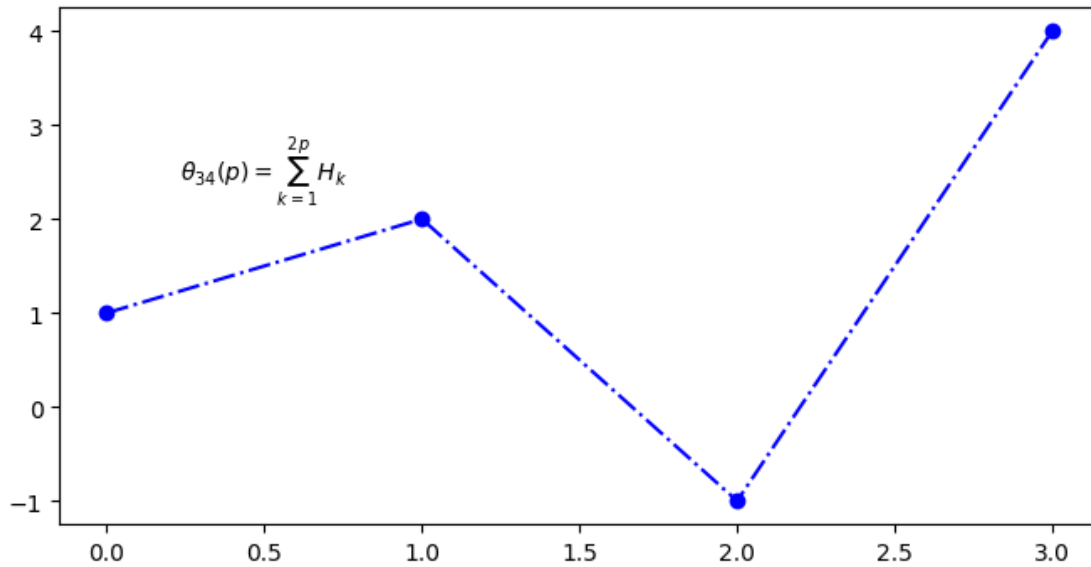

12.3.3 Other customizations

Many other tuning options exist. For instance:


- axis scale: linear, logarithmic, etc. . .
- ticks positions and labels

Below is a more advanced example:

```
[26]: from matplotlib.ticker import FormatStrFormatter

fig, ax = plt.subplots(figsize=(6, 3))
ax.plot([1,2,3], [0, 5, 3], label="my_data")
ax.set_xscale("log")           # set log scale for x axis
ax.set_yticks([1/3, 2.5, 4])  # set custom position for y ticks
ax.yaxis.set_minor_formatter(FormatStrFormatter("%.5f")) # show labels with
↪more precision for y axis
ax.legend(loc='lower left')    # choose the location of legend
```

```
[26]: <matplotlib.legend.Legend at 0x7f25436ec760>
```

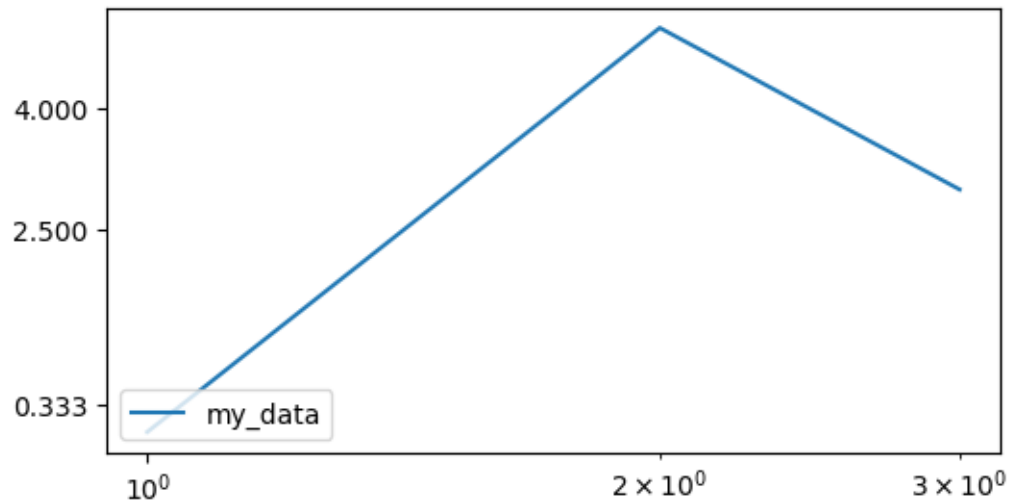12.3.4 Default parameters

Other appearance settings of `matplotlib` are numerous:

- font size and family
- colors
- ...

These parameters can be modified:

- at the script level only
- at system-wide level: will be applied for all future figures

Local modification

One need to modify the `rcParams` attribute **before** importing `matplotlib.pyplot`.

Below is an example of modification:


- a dash grid is forced
- font size is set to 20

All plots in **this script** of will use these parameters.

```
[27]: import matplotlib as mpl
      mpl.rcParams["font.size"] = 20
      mpl.rcParams["axes.grid"] = True
      mpl.rcParams["grid.linestyle"] = "-."

      fig, ax = plt.subplots(figsize=(6, 3))
      ax.plot([1,2,3])
```

[27]: [`<matplotlib.lines.Line2D at 0x7f25435e80d0>`]

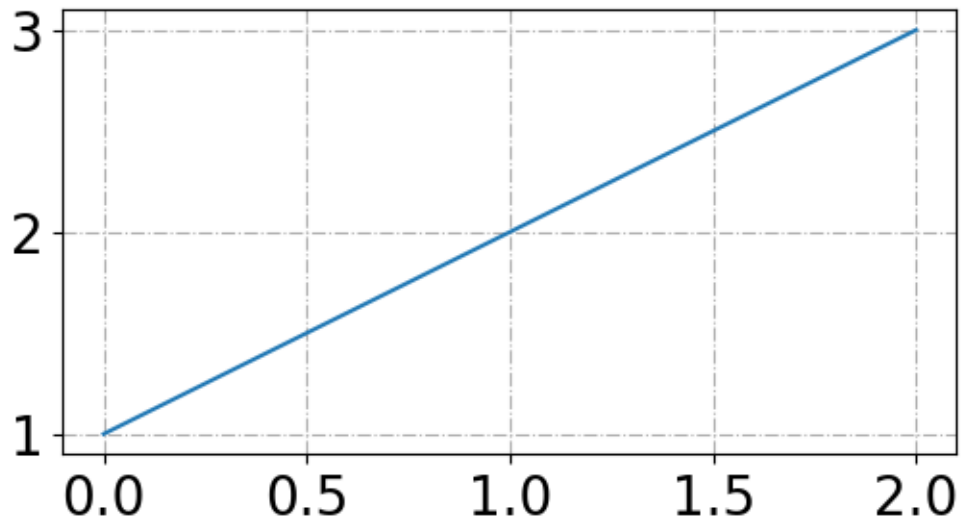

If you mess up with `mpl.rcParams`, original settings can be reloaded using :

```
[28]: mpl.rcParams.update(mpl.rcParamsDefault)
```

System level modification

One can modify the file where `matplotlib` store the default parameters. This is the simplest solution to set parameters once for all.

1. Find where is the parameters file using `mpl.matplotlib_fname()`
2. Save it elsewhere so that you can revert your changes if needed
3. Edit this file

```
[29]: print('On my computer, the file lies in: \n.../', mpl.matplotlib_fname()[44:],  
        ↪sep='')
```

On my computer, the file lies in:

```
.../Python/310_base/lib/python3.10/site-packages/matplotlib/mpl-  
data/matplotlibrc
```

12.3.5 Advice

Customizing a plot can be very time-consuming. You must do it **at the last time**, for instance when the figure is shared with other people (article , poster, presentation, ...).

12.4 Matplotlib backend

12.4.1 Introduction

Many chart types can be built with `matplotlib`: histograms, bars, polar, ... One can look at the **examples presented in the [documentation and gallery](#)**..

Yet, complex charts needs a lot of code lines to be built. For these charts, the preferred way is this one:

1. Use higher-level packages **built on top of matplotlib**
2. Use `matplotlib` to customize the plot if needed

12.4.2 Case study definition

A dataset about a penguins population is downloaded on [seaborn_data](#) and stored on disk as 'data.csv'.

```
[1]: import matplotlib.pyplot as plt
import pandas as pd

df = pd.read_csv('data.csv')
df
```

```
[1]:   species   island  bill_length_mm  bill_depth_mm  flipper_length_mm  \
0   Adelie  Torgersen         39.1           18.7           181.0
1   Adelie  Torgersen         39.5           17.4           186.0
2   Adelie  Torgersen         40.3           18.0           195.0
3   Adelie  Torgersen          NaN           NaN           NaN
4   Adelie  Torgersen         36.7           19.3           193.0
..    ...      ...
339  Gentoo   Biscoe          NaN           NaN           NaN
340  Gentoo   Biscoe         46.8           14.3           215.0
341  Gentoo   Biscoe         50.4           15.7           222.0
342  Gentoo   Biscoe         45.2           14.8           212.0
343  Gentoo   Biscoe         49.9           16.1           213.0

      body_mass_g   sex
0         3750.0  Male
1         3800.0 Female
2         3250.0 Female
3           NaN   NaN
4         3450.0 Female
..          ...   ...
339         NaN   NaN
340         4850.0 Female
341         5750.0  Male
342         5200.0 Female
343         5400.0  Male
```

```
[344 rows x 7 columns]
```


12.4.3 pandas

pandas can perform quick plot of data stored in either a `DataFrame` or a `Series`.

Example 1: *line plot*

Let's plot the length of the bill of penguins from Torgersen island, as a function of their mass:


```
[2]: df1 = df[df['island']=='Torgersen']
      df1 = df1.sort_values('body_mass_g')
      ax = df1.plot(x='body_mass_g', y='bill_length_mm', kind='line')
```

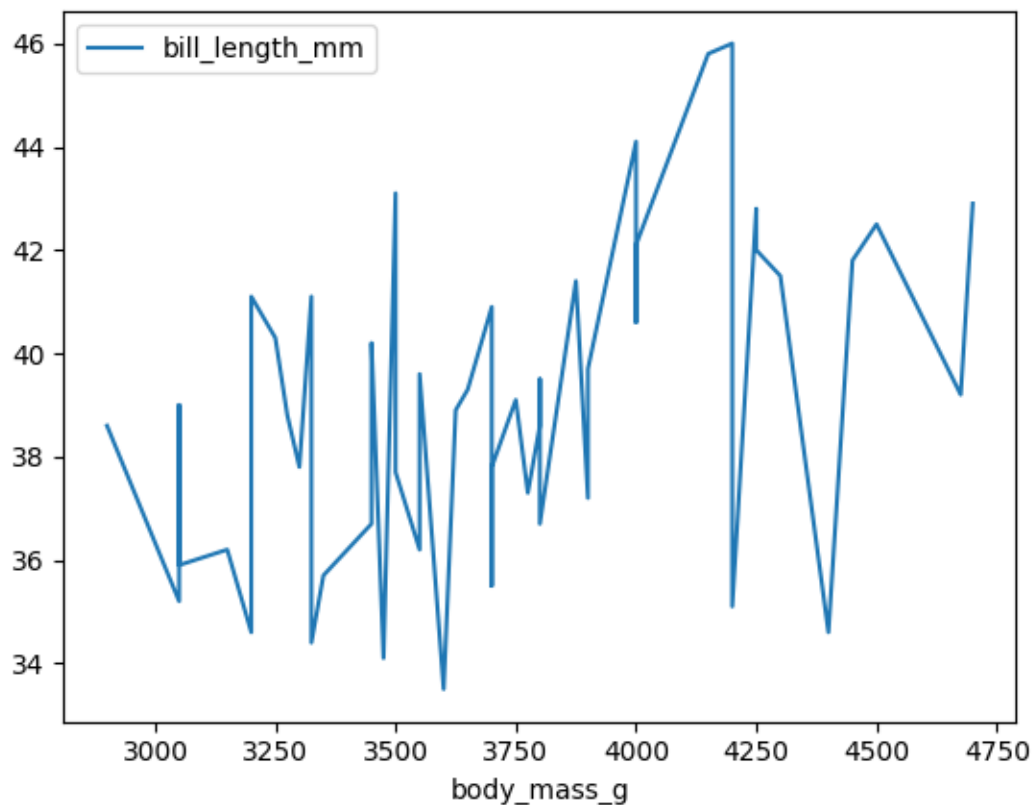

The call to the `plot` method of `pandas` returned a `matplotlib` axes object: **let's modify it.**

```
[3]: ax.grid()
      ax.get_figure()    # needed to display once again
                        # the figure in Jupyter Notebook.
```


```
[3]:
```

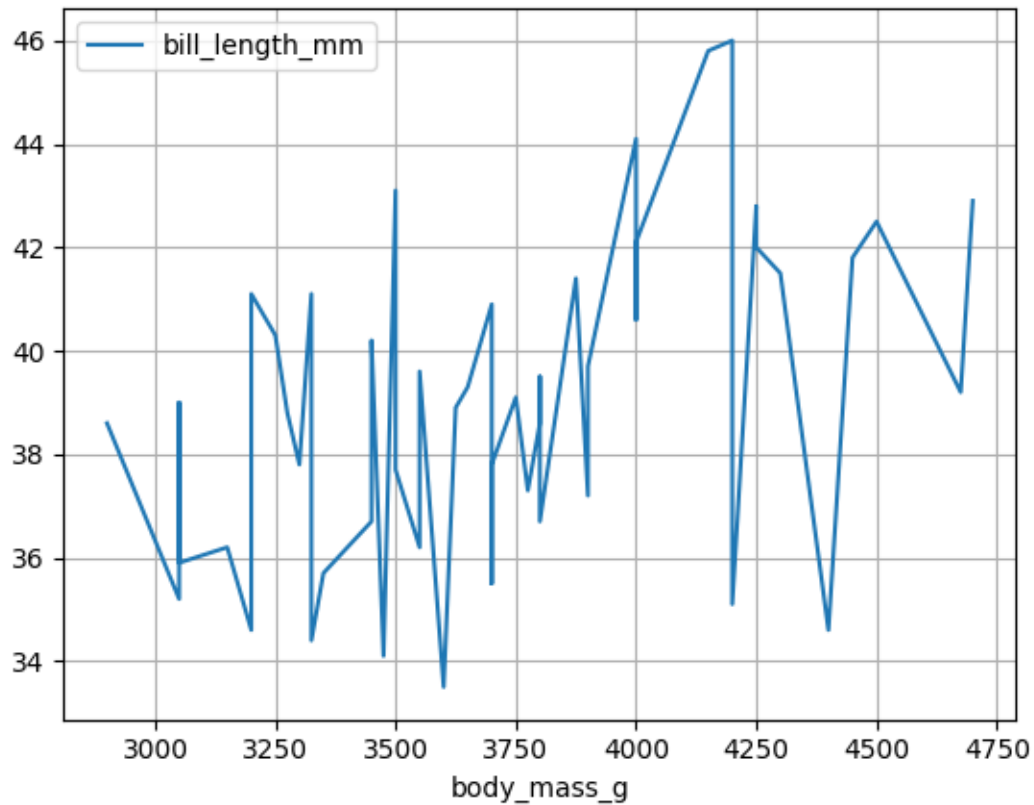

Another way is to modify the plot when created. For this purpose, some *keywords arguments* can be passed to the `plot` method of the dataframe. These are the same than the `plot` function of `matplotlib`.

```
[4]: df1.plot(x='body_mass_g', y='bill_length_mm', kind='line',  
            color='red', linewidth=5)      # these arguments are passed to matplotlib
```

```
[4]: <AxesSubplot:xlabel='body_mass_g'>
```

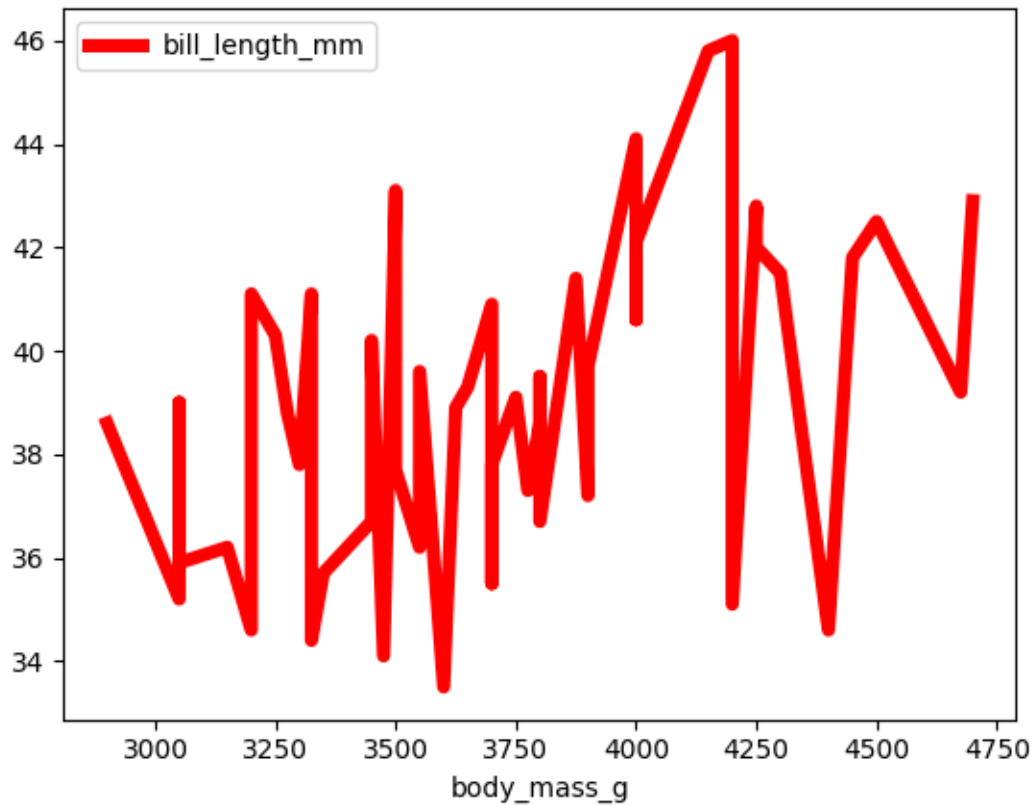

Example 2: *barplot*


Let's plot the numbers of females and males on Torgersen island:

```
[5]: df2 = df.groupby('sex')['bill_length_mm'].count() # a random column is needed
                                             # for rows to be counted
df2
```

```
[5]: sex
     Female      165
     Male       168
     Name: bill_length_mm, dtype: int64
```

```
[6]: df2.plot(kind='bar')
```

```
[6]: <AxesSubplot:xlabel='sex'>
```

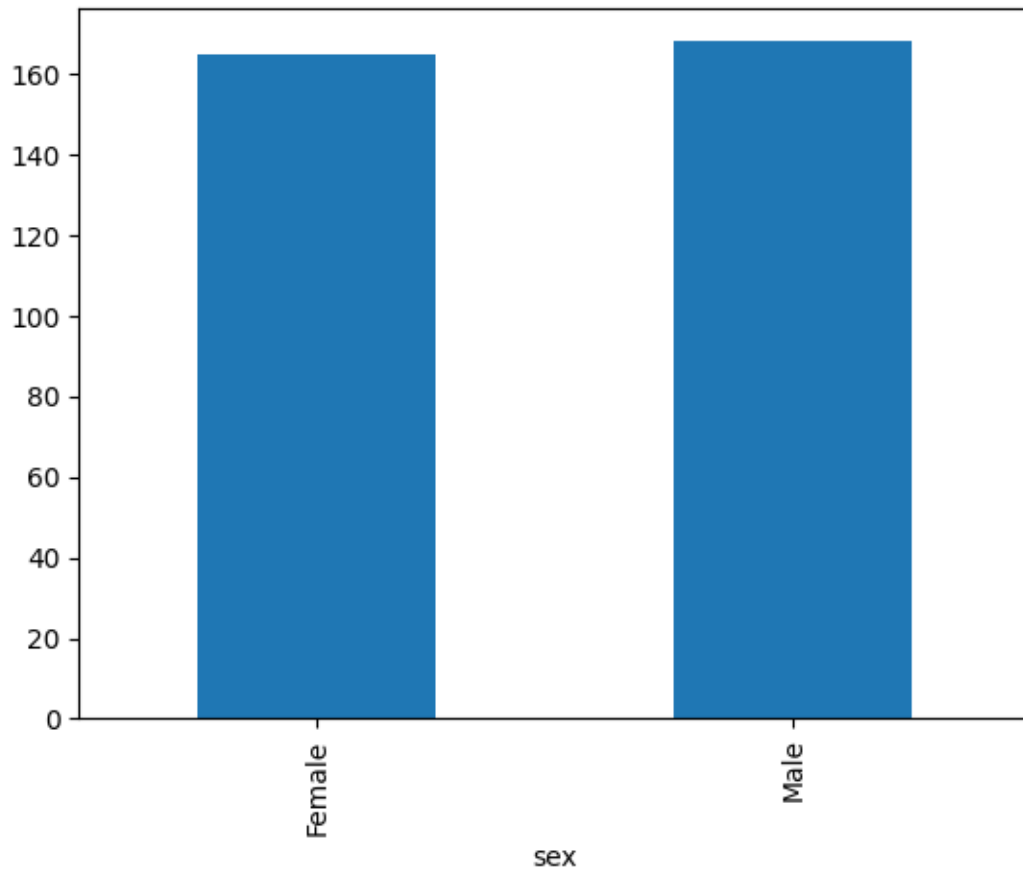

Conclusion

The `plot` method is an easy way to quickly inspect the content of a `DataFrame`. Yet, it is unadapted to advanced statistical plots

In that case, the preferred tool is `seaborn`, which produces clear and pretty charts.

12.4.4 seaborn

`seaborn` is a plotting library that is built on top of `matplotlib`. Learning `seaborn` mainly consists in understanding the arguments it takes:

- **x**: abscissa data
- **y**: ordinate data
- **hue**: data differentiated according to a **color** code
- **style**: data differentiated according to the line/marker **style**
- **size**: data differentiated according to the line/marker **size**

`seaborn` comes with 2 kinds of functions:

1. Functions that create only one `ax` to plot the data

2. Functions that create several axes using arguments `row` and `col` (related to a `FacetGrid` objects):

- `row`: data differentiated according to the **row** of the ax object in the figure
- `col`: data differentiated according to the **col** of the ax object in the figure


The strength of `seaborn` is that it can directly be used with `pandas DataFrames` and `Series`.

One axes

Let's go back to our penguins. The bill length is plotted as a function of body mass, with a color code and style differentiation for species.

```
[7]: import seaborn as sns
sns.scatterplot(df, x='body_mass_g', y='bill_length_mm', hue='species',
               style='species')
```

```
[7]: <AxesSubplot:xlabel='body_mass_g', ylabel='bill_length_mm'>
```

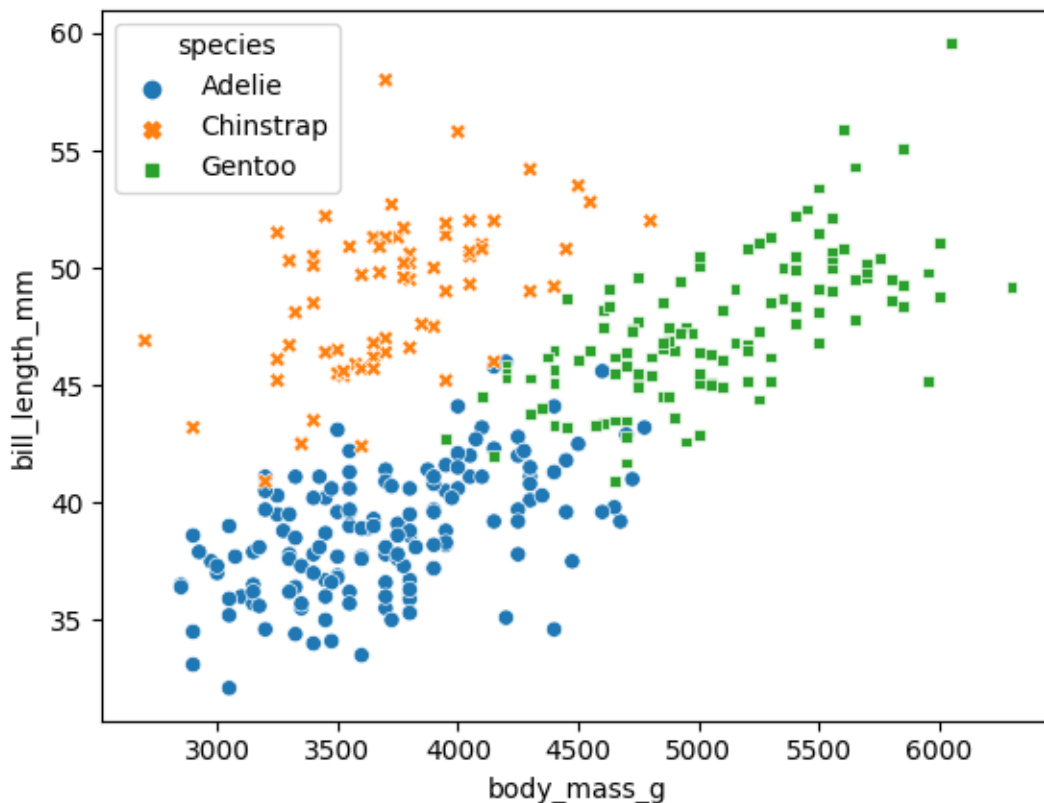


The returned object is an ax object: it can be customized if needed.

Several axes

Complete example Here after, the bill length is plotted:

- as a function of body mass
- with a color code for species
- with sex differentiation along rows
- with island differentiation along columns

```
[8]: import seaborn as sns
import matplotlib
fg = sns.relplot(df, kind='line', x='body_mass_g', y='bill_length_mm',
                hue='species', row='sex', col='island',
                height=3, aspect=1)
```

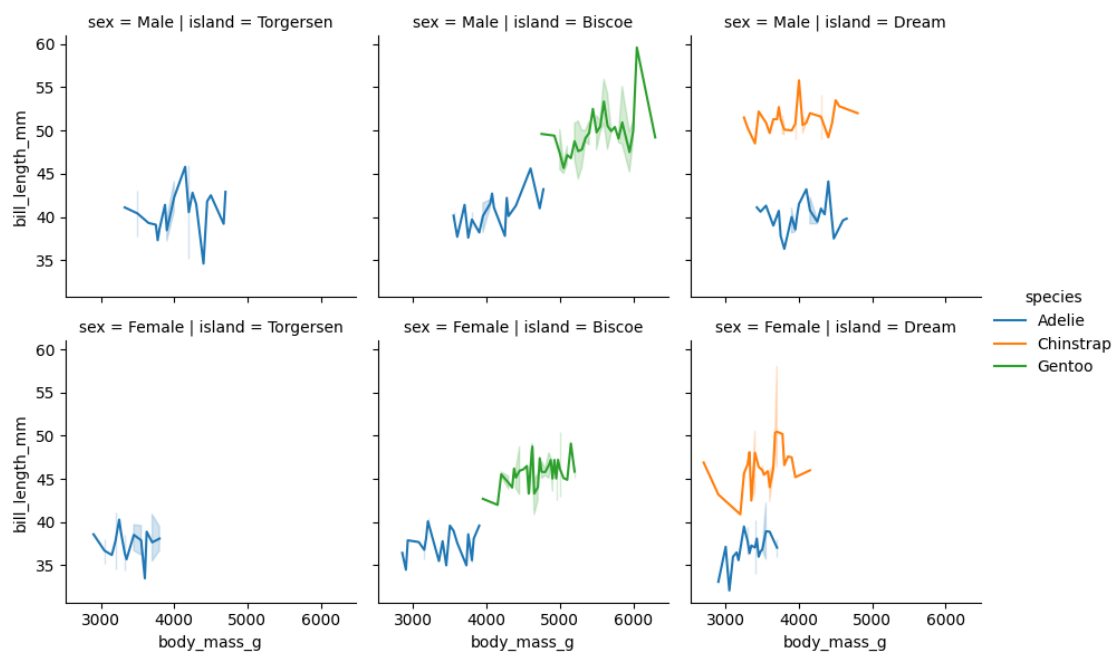

Notes:

- `relplot` needs `kind='line'` to behave as `lineplot`
- `height` is the height of each *subplot*, i.e. each ax.
- `aspect` is the width/height ratio.
- Light color zones represent uncertainties. Indeed, given a tuple of (species, sex, island, mass), there are several individuals.

This can be seen for instance using:


```
[9]: df_ = df.groupby(['body_mass_g', 'species', 'sex', 'island']).count()
df_[(df_['bill_depth_mm']!=1)|(df_['flipper_length_mm']!=1)].head(3)
```

```
[9]:
body_mass_g species sex island bill_length_mm bill_depth_mm \
2850.0 Adelie Female Biscoe 2 2
3000.0 Adelie Female Dream 2 2
3050.0 Adelie Female Torgersen 3 3

flipper_length_mm
body_mass_g species sex island
2850.0 Adelie Female Biscoe 2
3000.0 Adelie Female Dream 2
3050.0 Adelie Female Torgersen 3
```

Finally, note that `relplot` returned a `FacetGrid` instance. It has an `axes` attribute (numpy array) that can be used to customize plots.


```
[10]: axes = fg.axes
axes[1, 2].grid()
axes[1, 2].get_figure() # needed for Jupyter
```

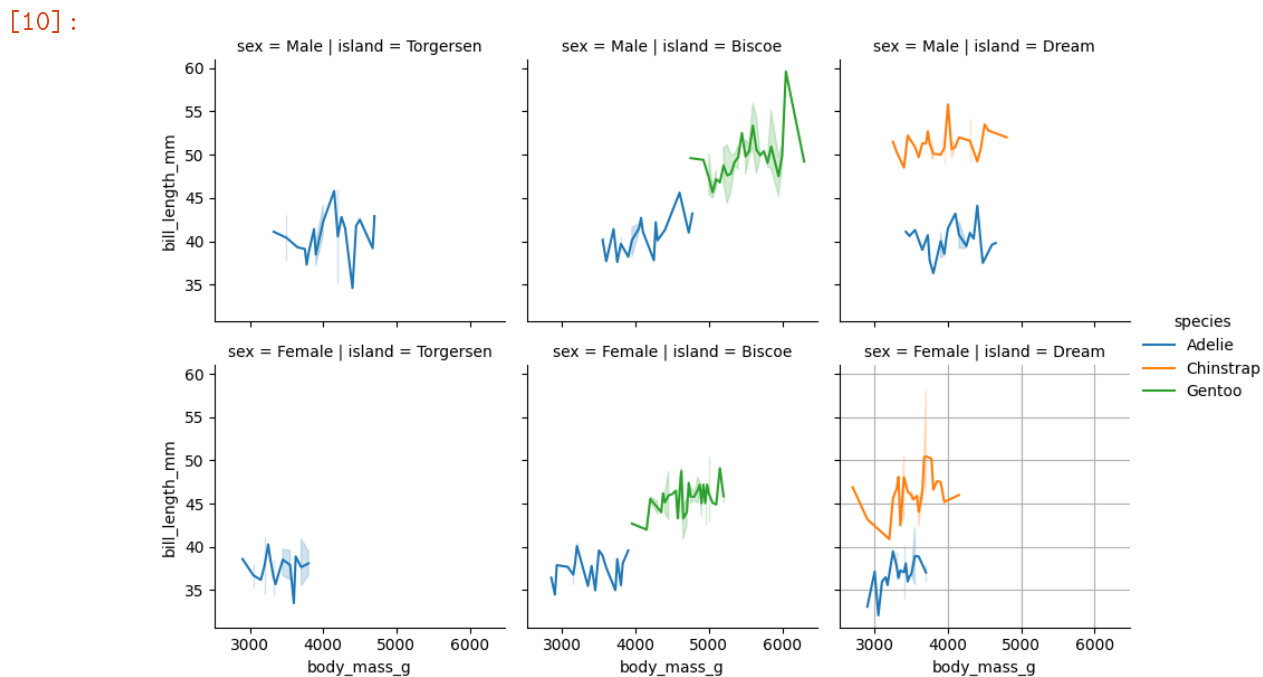

Other chart types Many charts types can be created using `seaborn` (see the [gallery](#)).

For instance, let's create a `violinplot` to get a statistical approach of data:

```
[11]: fg = sns.catplot(df, kind='violin', y='bill_length_mm', row='sex', col='island')
```

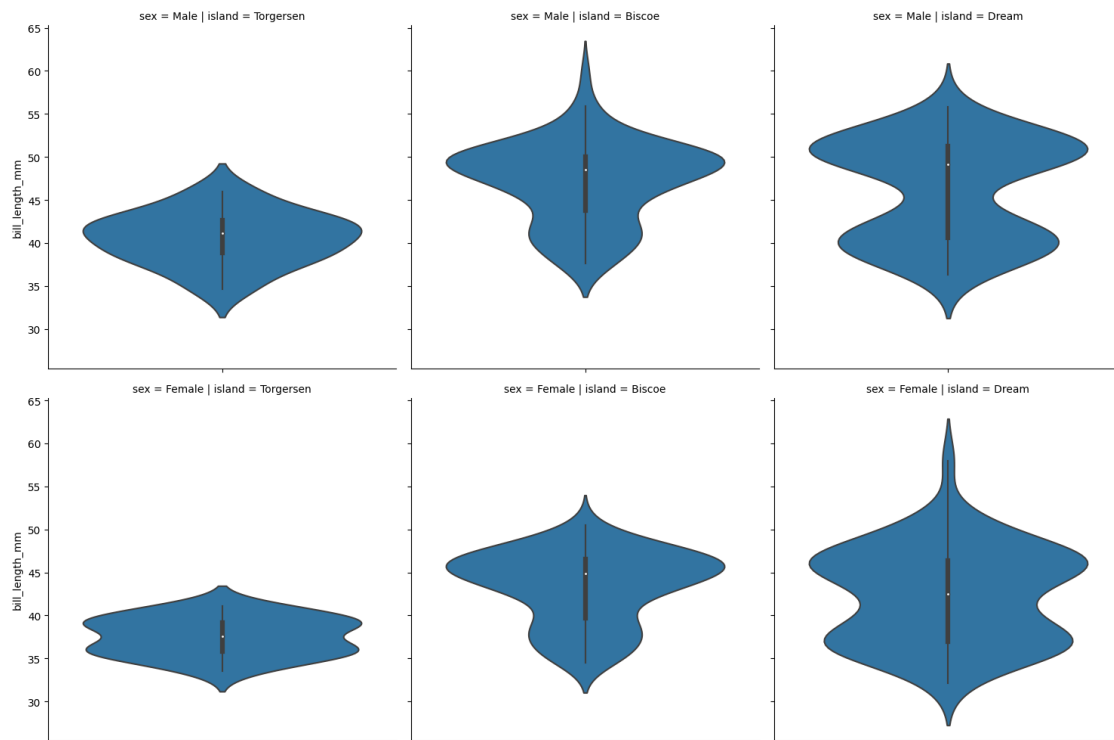

Chapter 13

Typical problems

13.1 Introduction

13.1.1 Many kinds of scientific problems

The scientific questions that arise in biology, mechanics, etc... are all different from each other. Moreover, some work are more experimental-based and others have a strong numerical dimension:

- equations solving
- search for functions optimum
- statistical analysis
- real time data acquisition
- etc...

13.1.2 Some dedicated libraries

Python is suitable for scientific computing:

1. Everything you interact with in Python an object with methods and attributes
2. To solve a problem:
 1. one define some objects that represent some mathematical or physical properties.
 2. these objects interacts with each other using a well documented API

The definition of suitable objects can be difficult (step 2.A). Thus, hundreds of open source dedicated packages did it for you. **numpy**, **pandas** and **matplotlib** are particular examples of these since many libraries are built on top of them.

For instance, a **numpy** array is of type **np.ndarray**: it can store some temperature values which average can be calculated using **.mean()**.

13.1.3 Some very common problems

Some packages are very famous in scientific computing. Let's focus on:

- **scipy**: typically used in optimization problems
- **scikit-learn**: typically used in machine learning problems

- `sympy`: designed for natural mathematical processing

13.2 Function minimization

13.2.1 Case study definition

Here is a 2-variable function:

$$f : (x, y) \rightarrow xy + (x - 4)^2 + (y + 3)^2$$

Let's determine the minimum of this function.

13.2.2 Code

Simple example

The relevant function is `minimize` from package `scipy.optimize`.

```
[1]: from scipy.optimize import minimize
import numpy as np
```

It takes 2 mandatory arguments:

- function to minimize
- initial values for the minimisation

Here after, function `f` takes as input a `numpy` array of size 2.

```
[2]: def f(X):
    x, y = X
    return x*y + (x-4)**2 + (y+3)**2

initial = np.array([4, -3])
```

Then `minimize` is called:

```
[3]: result = minimize(f, initial)
```

It returns a `OptimizeResult` object:

```
[4]: print(type(result))
result
```

```
<class 'scipy.optimize._optimize.OptimizeResult'>
```

```
[4]: message: Optimization terminated successfully.
      success: True
      status: 0
      fun: -24.333333333333265
      x: [ 7.333e+00 -6.667e+00]
      nit: 5
      jac: [ 0.000e+00 -4.768e-07]
      hess_inv: [[ 6.667e-01 -3.333e-01]
```

```

        [-3.333e-01  6.667e-01]]
nfev: 21
njev: 7

```

Let's extract the *argmin* values:

```
[5]: x_min, y_min = result.x
      x_min, y_min
```

```
[5]: (7.333333584713669, -6.666666929228556)
```

Additional arguments

It may happen that function **f** has more arguments than the one we want to minimize along, i.e. that some arguments are fixed. For instance, let's add the *m* variable:

$$f : (x, y, m) \rightarrow (xy + (x - 4)^2)^m + (y + 3)^2$$

When defining **f**, *m* must not be given in **X** (that holds *x* and *y*) but in a separate variable:

```
[6]: def f(X, m):
      x, y = X
      return (x*y + (x-4)**2)**m + (y+3)**2
```

Then an argument **args** is used in **minimize** to set *m* value. Note that a **tuple** is required even if there is only one fixed variable:

```
[7]: minimize(f, initial, args=(1, )).x
```

```
[7]: array([ 7.33333358, -6.66666693])
```

```
[8]: minimize(f, initial, args=(2, )).x
```

```
[8]: array([ 1.72508278, -3.00000009])
```

Specify the jacobian

Specifying the jacobian is a way to fasten/improve minimization. This is done by modifying **f**. **f** now returns:

- the function value itself (same than previously)
- the partial derivatives that define the jacobian

Let's compute these derivatives (without the *m* case).

With respect to *x*:

$$\frac{\partial f}{\partial x} : (x, y) \rightarrow y + 2(x - 4)$$

With respect to y :

$$\frac{\partial f}{\partial y} : (x, y) \rightarrow x + 2(y + 3)$$

```
[9]: def f(X):
      x, y = X
      value = x*y + (x-4)**2 + (y+3)**2
      jac = np.array([y + 2*(x-4), x + 2*(y+3)])
      return value, jac

      x_min, y_min = minimize(f, initial, jac=True).x
      x_min, y_min
```

```
[9]: (7.333333333333333, -6.666666666666667)
```

Note that the order in `jac` is the same as in `X` (x first, then y).

13.2.3 Plot the result

```
[10]: import matplotlib.pyplot as plt
```

Data definition

```
[11]: x = np.linspace(-10, 10, 100)
      y = np.linspace(-10, 10, 100)
      xx, yy = np.meshgrid(x, y)
      zz, _ = f([xx, yy]) # gradient is not needed here
```

Plotting

```
[12]: # surface only
fig, ax = plt.subplots(subplot_kw={'projection': '3d'})
ax.plot_surface(xx, yy, zz)

# red tick label for x_min and y_min
x_ticks = [-10, 0, 10] + [x_min]
ax.set_xticks(x_ticks)
x_ticklabels = ax.get_xticklabels()
for tick, label in zip(x_ticks, x_ticklabels):
    if tick == x_min:
        label.set_color('red')


y_ticks = [-10, 0, 10] + [y_min]
ax.set_yticks(y_ticks)
y_ticklabels = ax.get_yticklabels()
```

```

for tick, label in zip(y_ticks, y_ticklabels):
    if tick == y_min:
        label.set_color('red')

# vertical line at solution point
z, _ = f([x_min, y_min])
marker, line, _ = ax.stem([x_min], [y_min], [z], bottom=300)
line.set_color('red')

```

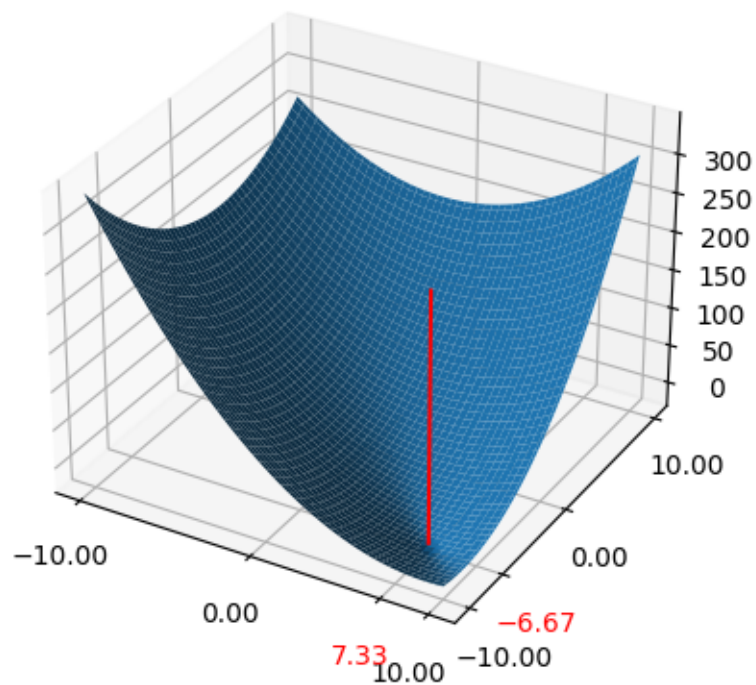

13.3 Function differentiation

13.3.1 Case study definition

Let's define a function with a complicated expression:

$$f: (x, y) \rightarrow \cos \left[(xy + (x - 4)^2 + \arctan((y + 3)^2))x \right]$$

With $x > 0$ and $y > 0$.

`sympy` will be used to compute partial derivatives of this function.

13.3.2 Key idea of `sympy`

`sympy` can handle mathematical objects in a formal way, i.e. **without using numerical discretization but relying on the properties of the defined objects**.

With `sympy`, objects are defined with a mathematical meaning that goes beyond the software meaning of traditional Python code. Then some operations are performed on these objects:

- differentiation
- integration
- limits
- etc...

13.3.3 Code

Mathematical objects declaration

Let's define two mathematical variables `x` and `y`. `sympy` is told these variables must take positive real values, using `positive=True`.

```
[2]: import sympy as sym

x = sym.Symbol('x', positive=True)
y = sym.Symbol('y', positive=True)
```

Then the function is defined:

```
[3]: f = sym.Lambda((x, y),
                    sym.cos((x*y + (x-4)**2 + sym.atan((y+3)**2))*x))
f
```

```
[3]: ((x, y) ↦ cos(x(xy + (x - 4)2 + atan((y + 3)2))))
```

Be careful! Functions `cos`, `atan` and `log` are the one of `sympy`!

Then the function can be evaluated at a specific point:

```
[4]: f(2, 4)
```

```
[4]: cos(2 atan(49) + 24)
```

Yet, `evalf` must be used to get a numerical approximation. `evalf` returns a `sympy`-related type, it can be converted using `float`:

```
[5]: print(type(f(2, 4).evalf()))
      float(f(2, 4).evalf())
```

```
<class 'sympy.core.numbers.Float'>
```

```
[5]: -0.3868788252007259
```

Operations on defined objects

Let's compute the partial derivative of `f` with respect to `x`, using `diff`:

```
[6]: f(x, y).diff(x)
```

```
[6]: -(xy + x(2x + y - 8) + (x - 4)^2 + atan((y + 3)^2)) sin(x(xy + (x - 4)^2 + atan((y + 3)^2)))
```

Or compute the second derivative with respect to `x` and then the first derivative with respect to `y`:

```
[7]: der = f(x, y).diff(x, 2, y)
      der
```

```
[7]: -2x(x + 2(y + 3)/(y + 3)^4 + 1)(3x + y - 8) cos(x(xy + (x - 4)^2 + atan((y + 3)^2))) +
      x(x + 2(y + 3)/(y + 3)^4 + 1)(xy + x(2x + y - 8) + (x - 4)^2 + atan((y + 3)^2))^2 sin(x(xy + (x - 4)^2 + atan((y + 3)^2)))
      4(x + (y + 3)/(y + 3)^4 + 1)(xy + x(2x + y - 8) + (x - 4)^2 + atan((y + 3)^2)) cos(x(xy + (x - 4)^2 + atan((y + 3)^2)))
      2 sin(x(xy + (x - 4)^2 + atan((y + 3)^2)))
```

In this expression, `x` and `y` are still unknown. Let's replace `x` using `subs`:

```
[8]: der = der.subs({x: 5})
      der
```

```
[8]: -10(y + 7)(2(y + 3)/(y + 3)^4 + 1) cos(25y + 5 atan((y + 3)^2) + 5) -
      4((y + 3)/(y + 3)^4 + 1)(10y + atan((y + 3)^2) + 11) cos(25y + 5 atan((y + 3)^2) + 5) +
      5((2(y + 3)/(y + 3)^4 + 1)(10y + atan((y + 3)^2) + 11)^2 sin(25y + 5 atan((y + 3)^2) + 5) -
      2 sin(25y + 5 atan((y + 3)^2) + 5)
```

numpy conversion

The evaluation of `der` is not fast. Thus it can be converted to a `numpy` function using `lambdify`. Then evaluation on arrays is possible:

```
[9]: import numpy as np
      numpy_func = sym.lambdify(y, der)
      Y = np.linspace(0, 10, 5)
      numpy_func(Y)
```

```
[9]: array([ -1618.36732557,  -8543.34409677, -44619.86174987,
            -132966.53918376, -279318.28704865])
```

13.3.4 When to use sympy

sympy can provide exact mathematical solutions **for simple problems only**. Thus, it can be used to check the results of some very specific calculation steps performed in a more numerical way.

13.4 Linear regression

13.4.1 Case study definition

Here is our penguins database:

```
[8]: import pandas as pd
df = pd.read_csv(r'../3__matplotlib/data.csv')
df.head(5)                                # show only the first five rows
```

	species	island	bill_length_mm	bill_depth_mm	flipper_length_mm	\
0	Adelie	Torgersen	39.1	18.7	181.0	
1	Adelie	Torgersen	39.5	17.4	186.0	
2	Adelie	Torgersen	40.3	18.0	195.0	
3	Adelie	Torgersen	NaN	NaN	NaN	
4	Adelie	Torgersen	36.7	19.3	193.0	

	body_mass_g	sex
0	3750.0	Male
1	3800.0	Female
2	3250.0	Female
3	NaN	NaN
4	3450.0	Female

Let's search for a linear dependance of the penguin mass ('body_mass_g', M) in the following variables:

- 'bill_length_mm', L
- 'bill_depth_mm', D
- 'flipper_length_mm', F

The linear expression is the following:

$$M = \alpha_1 L + \alpha_2 D + \alpha_3 F + \beta$$

```
[9]: M = 'body_mass_g'
L = 'bill_length_mm'
D = 'bill_depth_mm'
F = 'flipper_length_mm'
```

13.4.2 Code

The linear expression is the following:

$$M = \alpha_1 L + \alpha_2 D + \alpha_3 F + \beta$$

The `scikit-learn` package includes a `LinearRegression` class to solve this problem;

Removing nan values

```
[10]: cond = df[[M, L, D, F]].isna().any(axis=1)  # every row where at least one
        ↳value is nan
df = df[~cond]  # keep the other rows, '~' does the
        ↳negation of `cond`
```

Performing the regression

A `LinearRegression` instance is first created. Then its `fit` method is called directly using the columns of the 'DataFrame':

```
[11]: from sklearn.linear_model import LinearRegression

model = LinearRegression()
_ = model.fit(df[[L, D, F]], df[M])
```

Results are stored in the model instance. Let's read the coefficients:

```
[12]: alpha_1, alpha_2, alpha_3 = model.coef_.round(1)
beta = model.intercept_.round(1)
print(alpha_1, alpha_2, alpha_3, beta)
```

```
4.2 20.0 50.3 -6424.8
```

The regression quality (determination coefficient) is given by `score`:

```
[13]: model.score(df[[L, D, F]], df[M])
```

```
[13]: 0.7614704841272493
```

Using as a predictor Using the fit coefficient, one can now go the reverse way: define the mass M from the 3 other variables (L, D, F). This is done using `predict`:

```
[14]: import numpy as np
L_predict = [40, 45]
D_predict = [15, 20]
F_predict = [200, 275]
to_predict = np.array([L_predict, D_predict, F_predict]).T  # `T` takes the
        ↳transpose of the array,
        # because data must
        ↳be column-wise
model.predict(to_predict)
```

```
/home/nerotb/Documents/5-Donnees_techniques/Python/310_base/lib/python3.10/site-
packages/sklearn/base.py:465: UserWarning: X does not have valid feature names,
but LinearRegression was fitted with feature names
warnings.warn(
```

```
[14]: array([4096.29544534, 7987.54383621])
```