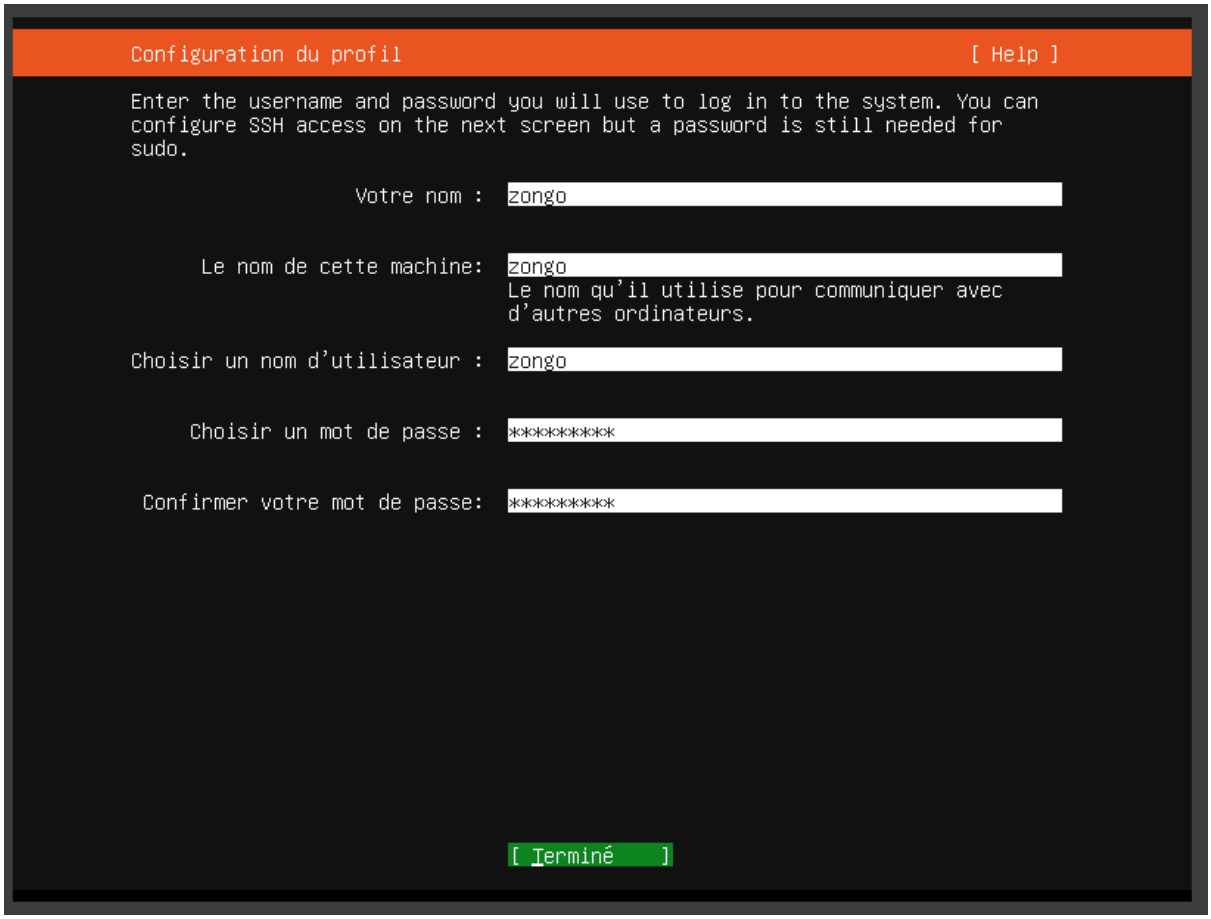
Devoir de linux

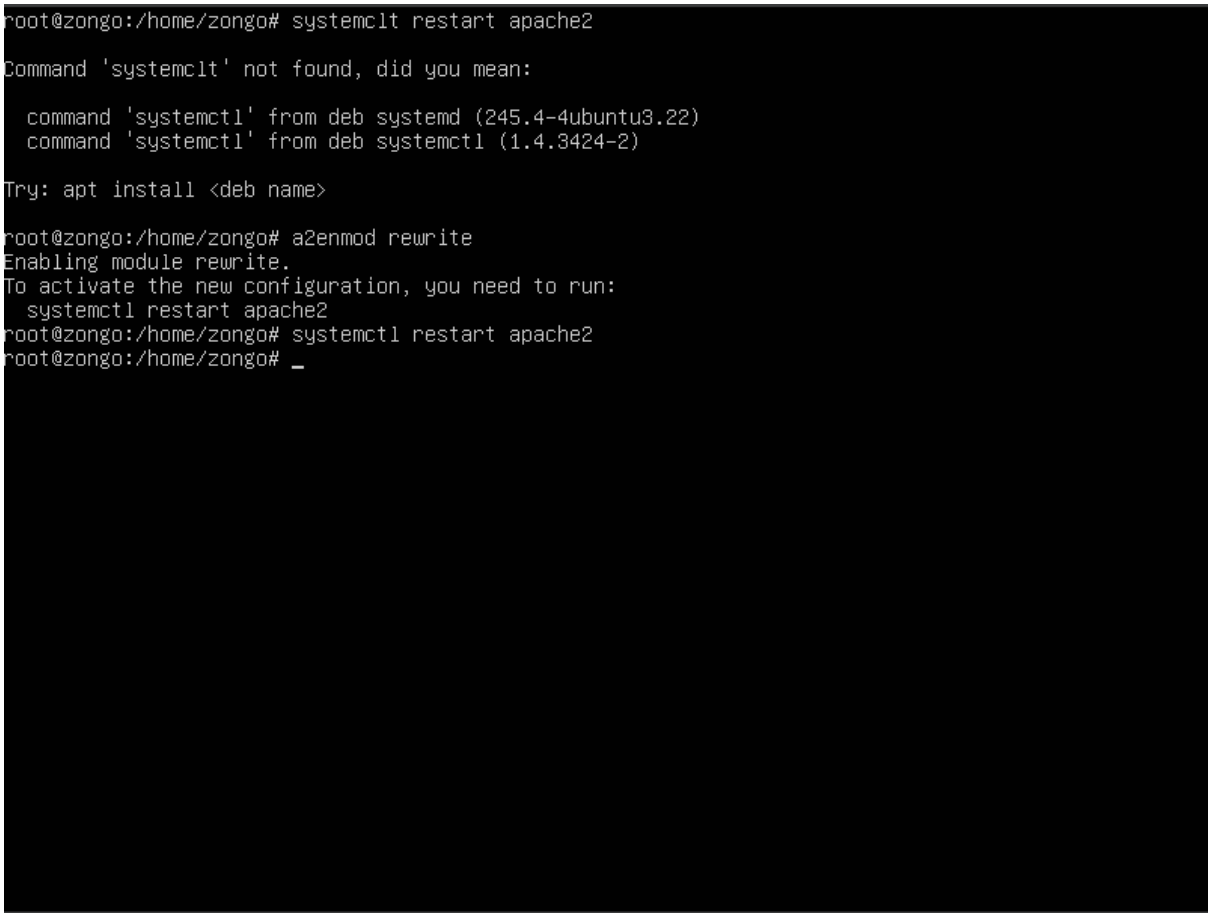
Ecole :Bem tech

Prénom :Jonathan kenny

Nom :zongo

Installation ubuntu server


Configuration du profil
[Help]
Enter the username and password you will use to log in to the system. You can configure SSH access on the next screen but a password is still needed for sudo.
Votre nom : zongo
Le nom de cette machine: zongo
Le nom qu'il utilise pour communiquer avec d'autres ordinateurs.
Choisir un nom d'utilisateur : zongo
Choisir un mot de passe : **********
Confirmer votre mot de passe: **********
[Terminé]

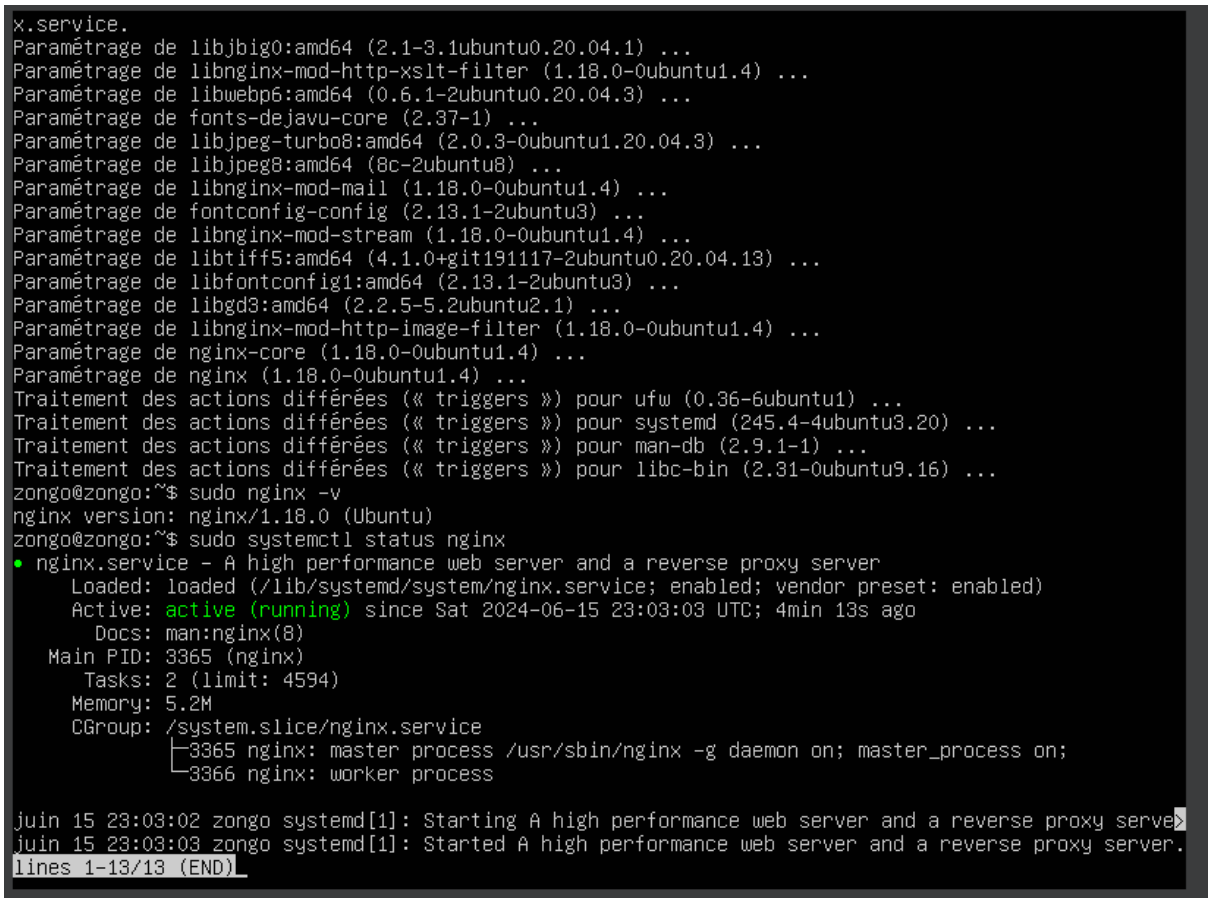


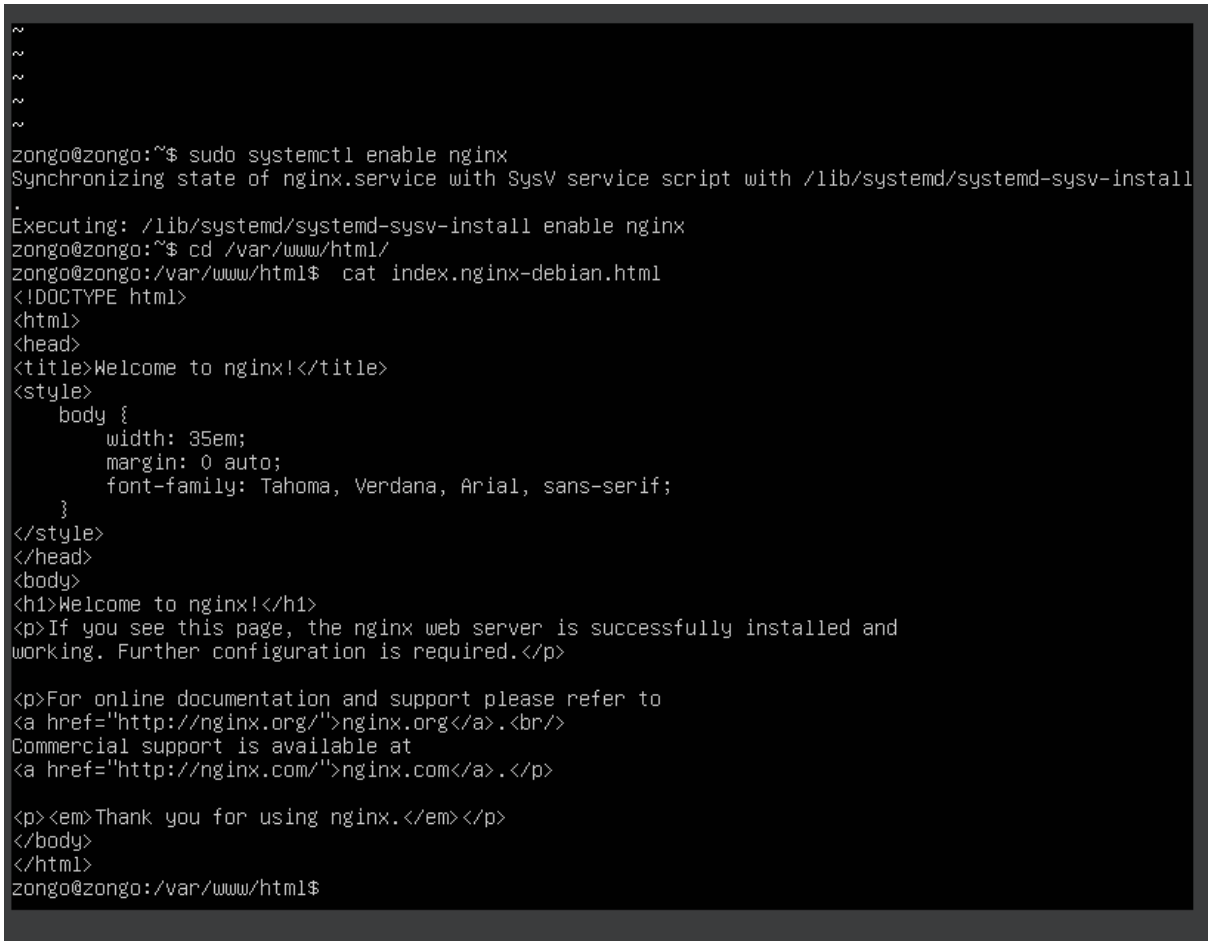
Installation et configuration de Nginx sur Ubuntu server

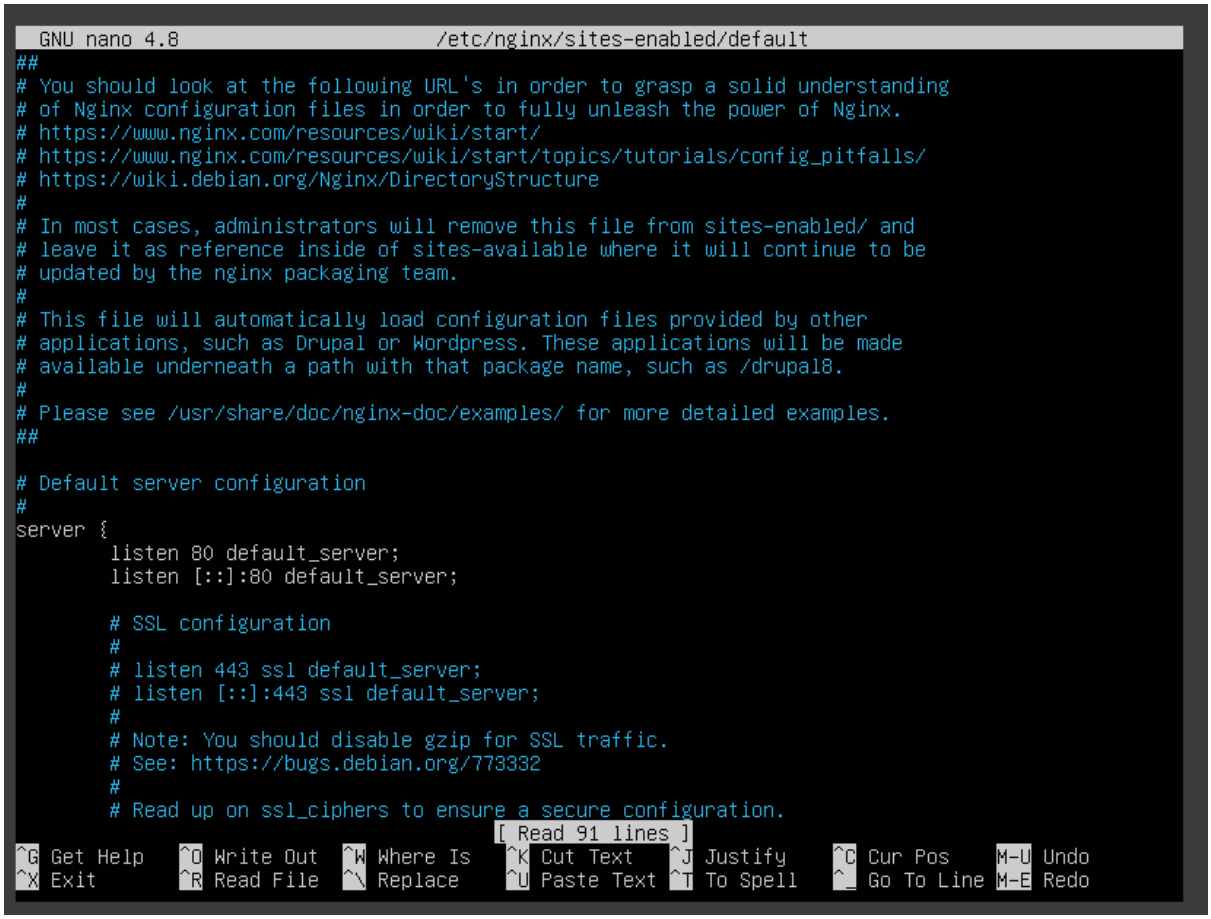
1 Ere année LICC

```
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$
zongo@zongo:~$ sudo apt-get update -y
Atteint :1 http://sn.archive.ubuntu.com/ubuntu focal InRelease
Atteint :2 http://sn.archive.ubuntu.com/ubuntu focal-updates InRelease
Atteint :3 http://sn.archive.ubuntu.com/ubuntu focal-backports InRelease
Atteint :4 http://sn.archive.ubuntu.com/ubuntu focal-security InRelease
Lecture des listes de paquets... Fait
zongo@zongo:~$ sudo apt-get install nginx -y
```

```
Dépaquetage de libnginx-mod-http-xslt-filter (1.18.0-0ubuntu1.4) ...
Sélection du paquet libnginx-mod-mail précédemment désélectionné.
Préparation du dépaquetage de .../13-libnginx-mod-mail_1.18.0-0ubuntu1.4_amd64.deb ...
Dépaquetage de libnginx-mod-mail (1.18.0-0ubuntu1.4) ...
Sélection du paquet libnginx-mod-stream précédemment désélectionné.
Préparation du dépaquetage de .../14-libnginx-mod-stream_1.18.0-0ubuntu1.4_amd64.deb ...
Dépaquetage de libnginx-mod-stream (1.18.0-0ubuntu1.4) ...
Sélection du paquet nginx-core précédemment désélectionné.
Préparation du dépaquetage de .../15-nginx-core_1.18.0-0ubuntu1.4_amd64.deb ...
Dépaquetage de nginx-core (1.18.0-0ubuntu1.4) ...
Sélection du paquet nginx précédemment désélectionné.
Préparation du dépaquetage de .../16-nginx_1.18.0-0ubuntu1.4_all.deb ...
Dépaquetage de nginx (1.18.0-0ubuntu1.4) ...
Paramétrage de libxpm4:amd64 (1:3.5.12-1ubuntu0.20.04.2) ...
Paramétrage de nginx-common (1.18.0-0ubuntu1.4) ...
Created symlink /etc/systemd/system/multi-user.target.wants/nginx.service → /lib/systemd/system/ngin
x.service.
Paramétrage de libjbig0:amd64 (2.1-3.1ubuntu0.20.04.1) ...
Paramétrage de libnginx-mod-http-xslt-filter (1.18.0-0ubuntu1.4) ...
Paramétrage de libwebp6:amd64 (0.6.1-2ubuntu0.20.04.3) ...
Paramétrage de fonts-dejavu-core (2.37-1) ...
Paramétrage de libjpeg-turbo8:amd64 (2.0.3-0ubuntu1.20.04.3) ...
Paramétrage de libjpeg8:amd64 (8c-2ubuntu8) ...
Paramétrage de libnginx-mod-mail (1.18.0-0ubuntu1.4) ...
Paramétrage de fontconfig-config (2.13.1-2ubuntu3) ...
Paramétrage de libnginx-mod-stream (1.18.0-0ubuntu1.4) ...
Paramétrage de libtiff5:amd64 (4.1.0+git191117-2ubuntu0.20.04.13) ...
Paramétrage de libfontconfig1:amd64 (2.13.1-2ubuntu3) ...
Paramétrage de libgd3:amd64 (2.2.5-5.2ubuntu2.1) ...
Paramétrage de libnginx-mod-http-image-filter (1.18.0-0ubuntu1.4) ...
Paramétrage de nginx-core (1.18.0-0ubuntu1.4) ...
Paramétrage de nginx (1.18.0-0ubuntu1.4) ...
Traitement des actions différées (« triggers ») pour ufw (0.36-6ubuntu1) ...
Traitement des actions différées (« triggers ») pour systemd (245.4-4ubuntu3.20) ...
Traitement des actions différées (« triggers ») pour man-db (2.9.1-1) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.31-0ubuntu9.16) ...
zongo@zongo:~$ _
```


x.service.
Paramétrage de libjbig0:amd64 (2.1-3.1ubuntu0.20.04.1) ...
Paramétrage de libnginx-mod-http-xslt-filter (1.18.0-0ubuntu1.4) ...
Paramétrage de libwebp6:amd64 (0.6.1-2ubuntu0.20.04.3) ...
Paramétrage de fonts-dejavu-core (2.37-1) ...
Paramétrage de libjpeg-turbo8:amd64 (2.0.3-0ubuntu1.20.04.3) ...
Paramétrage de libjpeg8:amd64 (8c-2ubuntu8) ...
Paramétrage de libnginx-mod-mail (1.18.0-0ubuntu1.4) ...
Paramétrage de fontconfig-config (2.13.1-2ubuntu3) ...
Paramétrage de libnginx-mod-stream (1.18.0-0ubuntu1.4) ...
Paramétrage de libtiff5:amd64 (4.1.0+git191117-2ubuntu0.20.04.13) ...
Paramétrage de libfontconfig1:amd64 (2.13.1-2ubuntu3) ...
Paramétrage de libgd3:amd64 (2.2.5-5.2ubuntu2.1) ...
Paramétrage de libnginx-mod-http-image-filter (1.18.0-0ubuntu1.4) ...
Paramétrage de nginx-core (1.18.0-0ubuntu1.4) ...
Paramétrage de nginx (1.18.0-0ubuntu1.4) ...
Traitement des actions différées (« triggers ») pour ufw (0.36-6ubuntu1) ...
Traitement des actions différées (« triggers ») pour systemd (245.4-4ubuntu3.20) ...
Traitement des actions différées (« triggers ») pour man-db (2.9.1-1) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.31-0ubuntu9.16) ...
zongo@zongo:~$ sudo nginx -v
nginx version: nginx/1.18.0 (Ubuntu)
zongo@zongo:~$ sudo systemctl status nginx
● nginx.service - A high performance web server and a reverse proxy server
Loaded: loaded (/lib/systemd/system/nginx.service; enabled; vendor preset: enabled)
Active: active (running) since Sat 2024-06-15 23:03:03 UTC; 4min 13s ago
Docs: man:nginx(8)
Main PID: 3365 (nginx)
Tasks: 2 (limit: 4594)
Memory: 5.2M
CGroup: /system.slice/nginx.service
├─3365 nginx: master process /usr/sbin/nginx -g daemon on; master_process on;
└─3366 nginx: worker process
juin 15 23:03:02 zongo systemd[1]: Starting A high performance web server and a reverse proxy serve>
juin 15 23:03:03 zongo systemd[1]: Started A high performance web server and a reverse proxy server.
lines 1-13/13 (END)


~
~
~
~
~
zongo@zongo:~$ sudo systemctl enable nginx
Synchronizing state of nginx.service with SysV service script with /lib/systemd/systemd-sysv-install
.
Executing: /lib/systemd/systemd-sysv-install enable nginx
zongo@zongo:~$ cd /var/www/html/
zongo@zongo:/var/www/html$ cat index.nginx-debian.html
<!DOCTYPE html>
<html>
<head>
<title>Welcome to nginx!</title>
<style>
body {
width: 35em;
margin: 0 auto;
font-family: Tahoma, Verdana, Arial, sans-serif;
}
</style>
</head>
<body>
<h1>Welcome to nginx!</h1>
If you see this page, the nginx web server is successfully installed and
working. Further configuration is required.
For online documentation and support please refer to
nginx.org.
Commercial support is available at
nginx.com.
Thank you for using nginx.
</body>
</html>
zongo@zongo:/var/www/html$


GNU nano 4.8 /etc/nginx/sites-enabled/default
##
You should look at the following URL's in order to grasp a solid understanding
of Nginx configuration files in order to fully unleash the power of Nginx.
https://www.nginx.com/resources/wiki/start/
https://www.nginx.com/resources/wiki/start/topics/tutorials/config_pitfalls/
https://wiki.debian.org/Nginx/DirectoryStructure
#
In most cases, administrators will remove this file from sites-enabled/ and
leave it as reference inside of sites-available where it will continue to be
updated by the nginx packaging team.
#
This file will automatically load configuration files provided by other
applications, such as Drupal or Wordpress. These applications will be made
available underneath a path with that package name, such as /drupal8.
#
Please see /usr/share/doc/nginx-doc/examples/ for more detailed examples.
##
Default server configuration
#
server {
listen 80 default_server;
listen [::]:80 default_server;
SSL configuration
#
listen 443 ssl default_server;
listen [::]:443 ssl default_server;
#
Note: You should disable gzip for SSL traffic.
See: https://bugs.debian.org/773332
#
Read up on ssl_ciphers to ensure a secure configuration.
[Read 91 lines]
^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos M-U Undo
^X Exit ^R Read File ^\ Replace ^U Paste Text ^T To Spell ^_ Go To Line M-E Redo

```
 GNU nano 4.8                        /etc/nginx/sites-enabled/default
        server_name _;

        location / {
                # First attempt to serve request as file, then
                # as directory, then fall back to displaying a 404.
                try_files $uri $uri/ =404;
        }

        # pass PHP scripts to FastCGI server
        #
        #location ~ \.php$ {
        #       include snippets/fastcgi-php.conf;
        #
        #       # With php-fpm (or other unix sockets):
        #       fastcgi_pass unix:/var/run/php/php7.4-fpm.sock;
        #       # With php-cgi (or other tcp sockets):
        #       fastcgi_pass 127.0.0.1:9000;
        #}

        # deny access to .htaccess files, if Apache's document root
        # concurs with nginx's one
        #
        #location ~ /\.ht {
        #       deny all;
        #}
}


# Virtual Host configuration for example.com
#
# You can move that to a different file under sites-available/ and symlink that
# to sites-enabled/ to enable it.
#_

^G Get Help  ^O Write Out  ^W Where Is  ^K Cut Text  ^J Justify  ^C Cur Pos  M-U Undo
^X Exit      ^R Read File  ^\ Replace   ^U Paste Text ^T To Spell ^_ Go To Line M-E Redo
```

```
#       server_name example.com;
#
#       root /var/www/example.com;



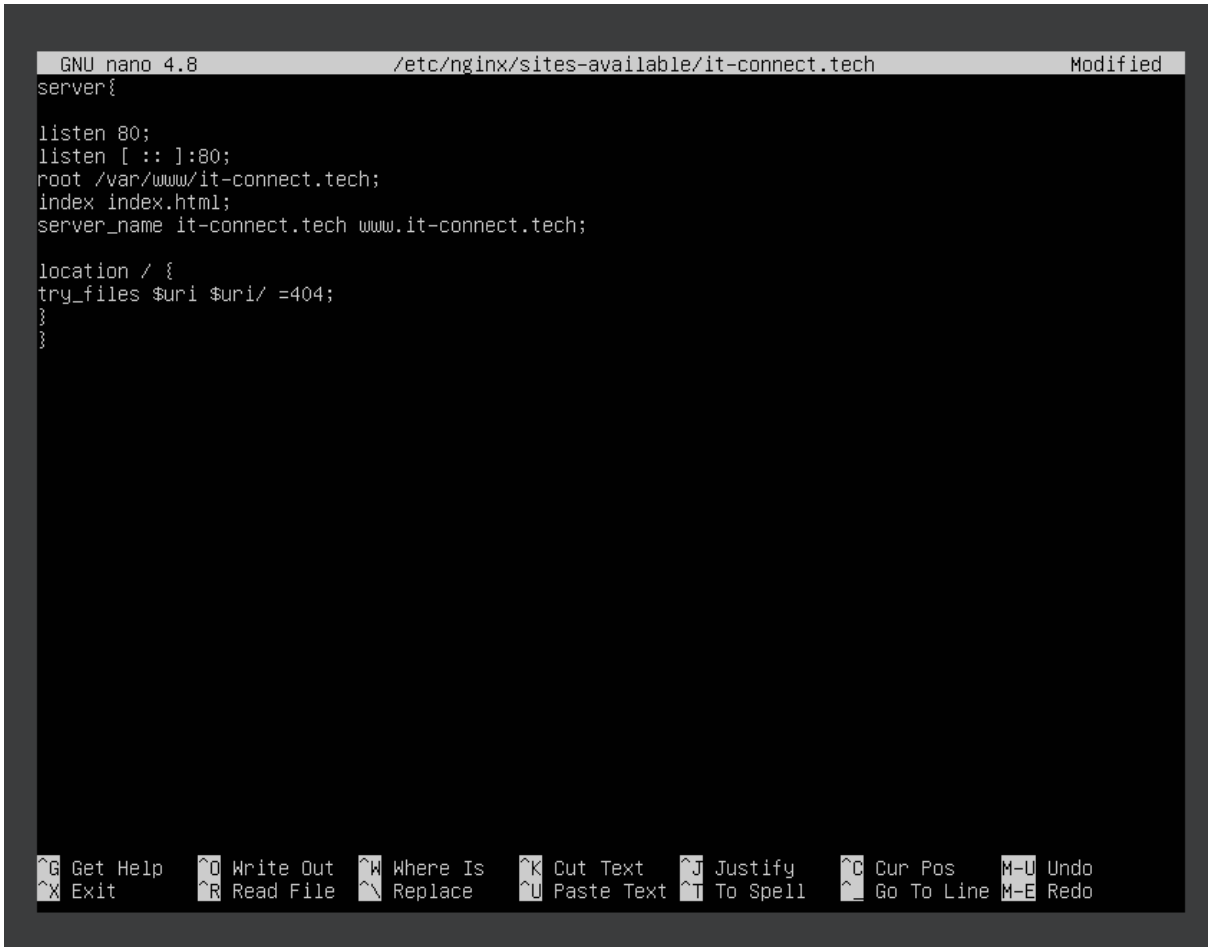


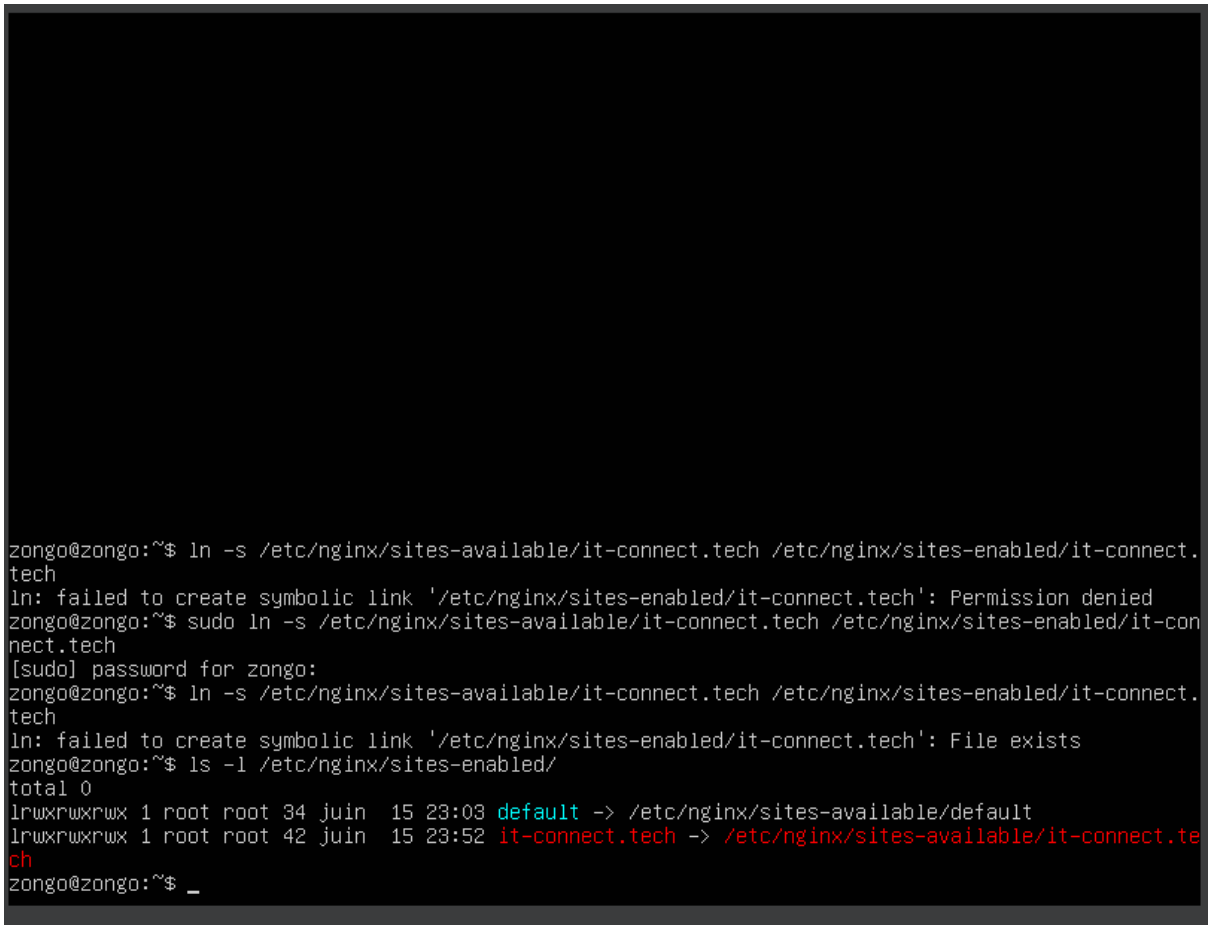




Use "fg" to return to nano.

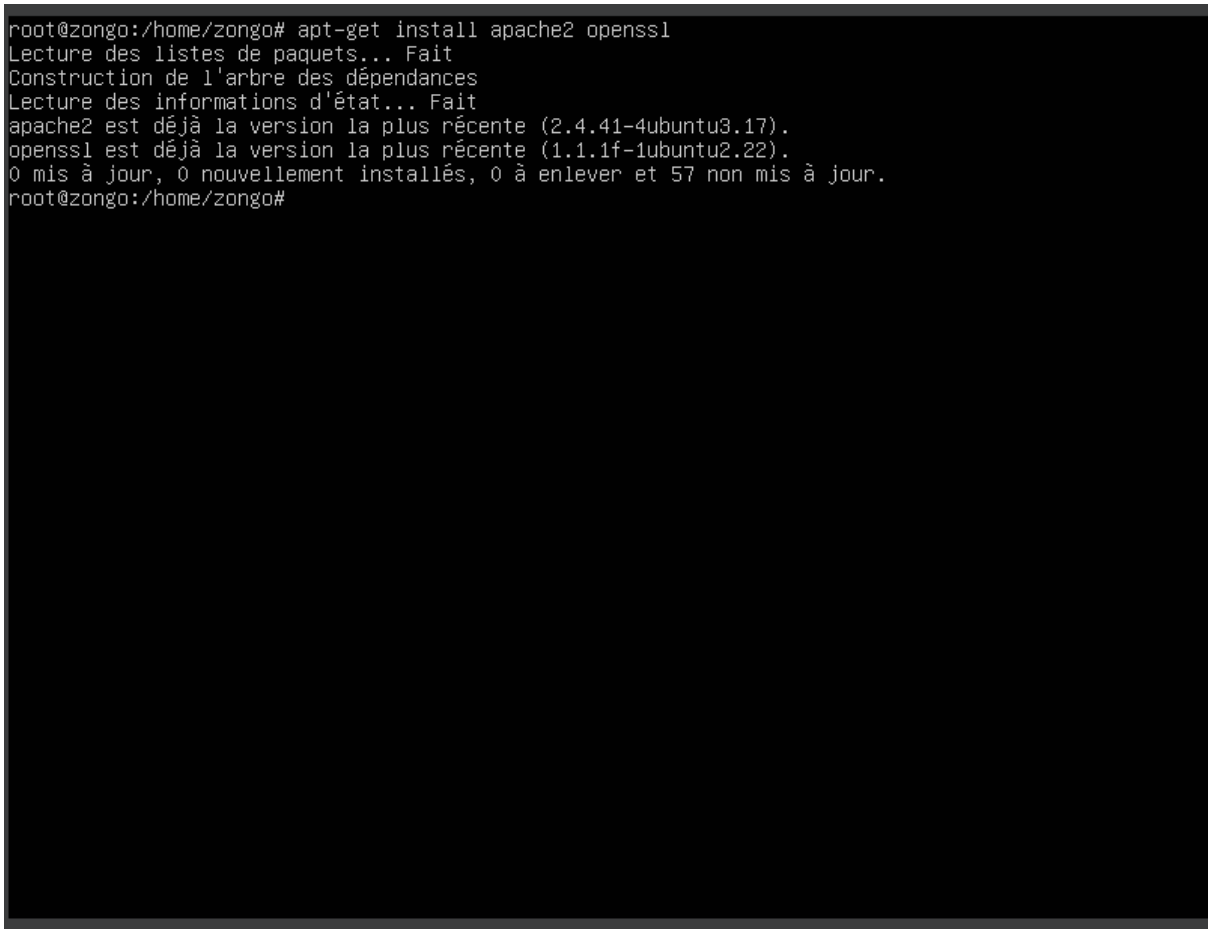
[1]+  Stopped                 sudo nano /etc/nginx/sites-enabled/default
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$ ls /etc/nginx/
conf.d          koi-utf     modules-available  proxy_params     sites-enabled  win-utf
fastcgi.conf    koi-win     modules-enabled    scgi_params      snippets
fastcgi_params  mime.types  nginx.conf         sites-available  uwsgi_params
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$
zongo@zongo:/var/www/html$ cd
zongo@zongo:~$
zongo@zongo:~$ sudo mkdir /var/www/it-connect.tech
zongo@zongo:~$ sudo chown -R www-data:www-data /var/www/it-connect.tech/
zongo@zongo:~$ sudo chmod 755 /var/www/it-connect.tech/
zongo@zongo:~$ sudo nano /var/www/it-connect.tech/index.html_
```

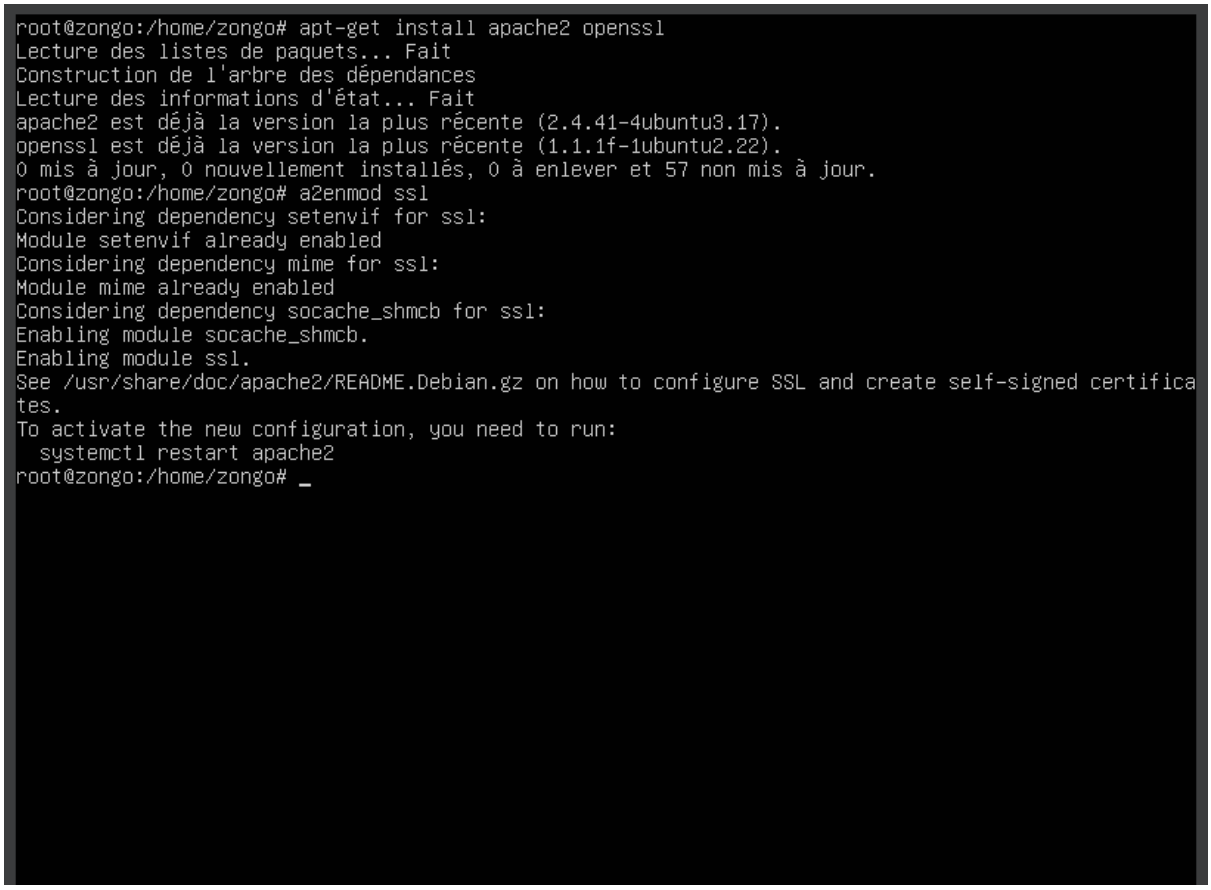

GNU nano 4.8 /etc/nginx/sites-available/it-connect.tech Modified
server{
listen 80;
listen [::]:80;
root /var/www/it-connect.tech;
index index.html;
server_name it-connect.tech www.it-connect.tech;
location / {
try_files $uri $uri/ =404;
}
}
^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos M-U Undo
^X Exit ^R Read File ^\ Replace ^U Paste Text ^T To Spell ^_ Go To Line M-E Redo

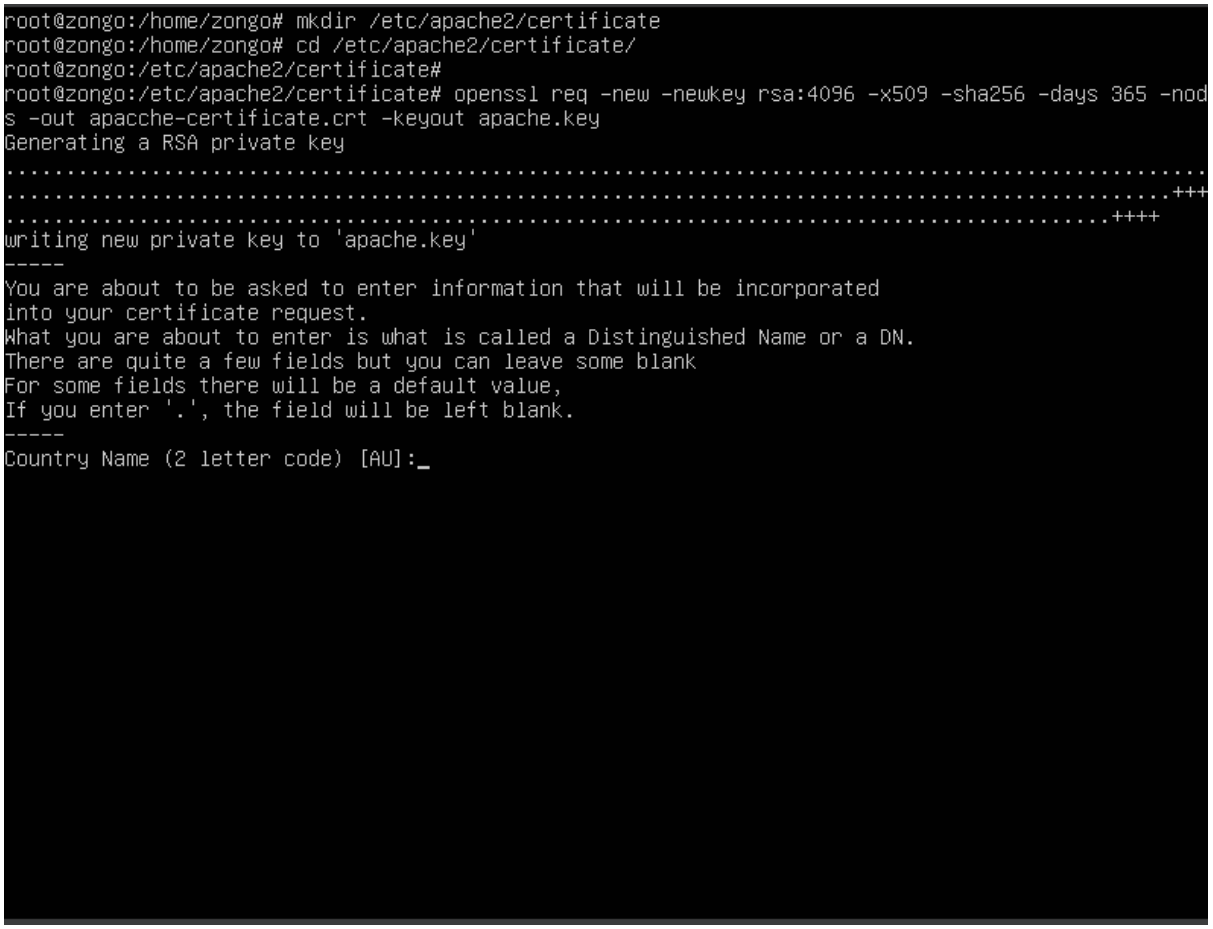


Installation de OpenSSl sur Ubuntu server

1 Ere année LICC

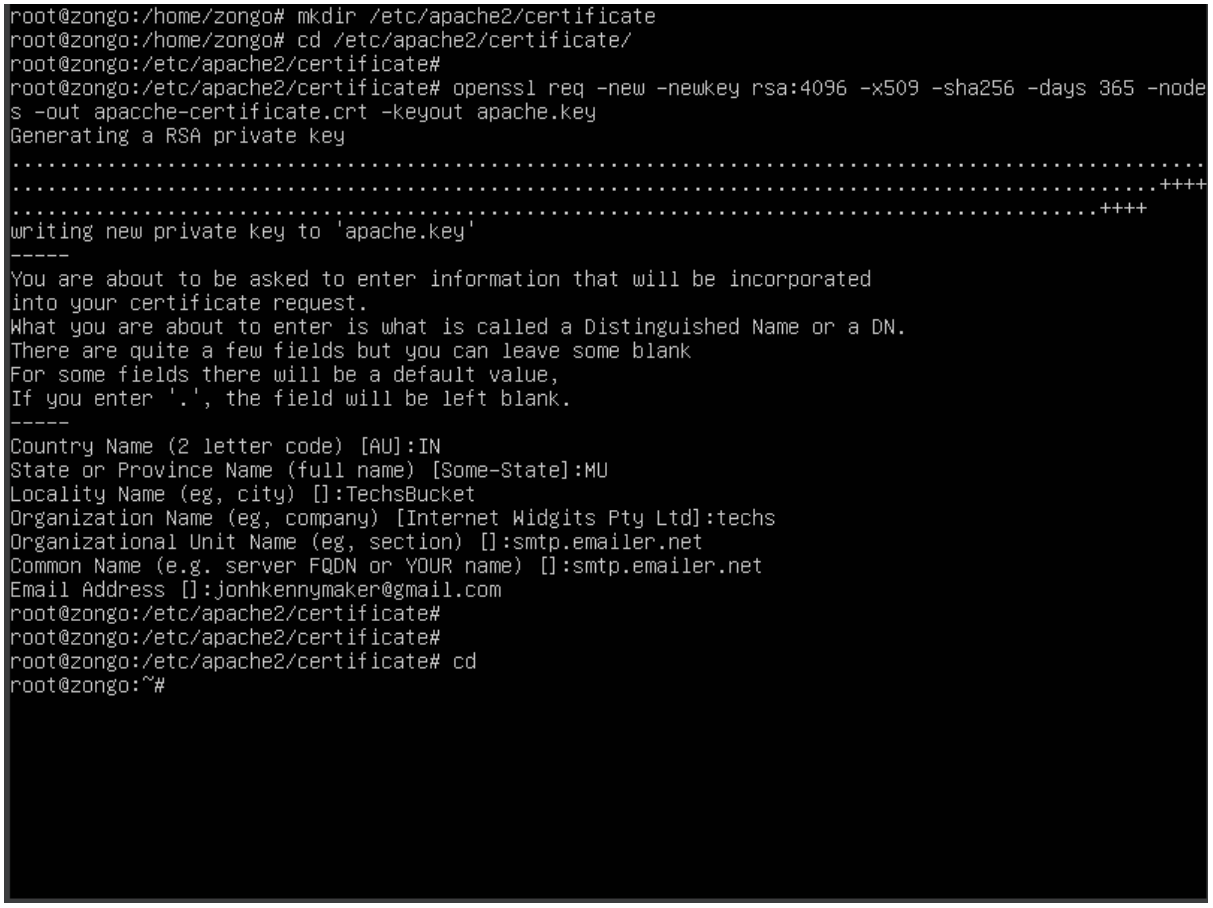

root@zongo:/home/zongo# apt-get install apache2 openssl
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances
Lecture des informations d'état... Fait
apache2 est déjà la version la plus récente (2.4.41-4ubuntu3.17).
openssl est déjà la version la plus récente (1.1.1f-1ubuntu2.22).
0 mis à jour, 0 nouvellement installés, 0 à enlever et 57 non mis à jour.
root@zongo:/home/zongo#


root@zongo:/home/zongo# apt-get install apache2 openssl
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances
Lecture des informations d'état... Fait
apache2 est déjà la version la plus récente (2.4.41-4ubuntu3.17).
openssl est déjà la version la plus récente (1.1.1f-1ubuntu2.22).
0 mis à jour, 0 nouvellement installés, 0 à enlever et 57 non mis à jour.
root@zongo:/home/zongo# a2enmod ssl
Considering dependency setenvif for ssl:
Module setenvif already enabled
Considering dependency mime for ssl:
Module mime already enabled
Considering dependency socache_shmcb for ssl:
Enabling module socache_shmcb.
Enabling module ssl.
See /usr/share/doc/apache2/README.Debian.gz on how to configure SSL and create self-signed certifica
tes.
To activate the new configuration, you need to run:
systemctl restart apache2
root@zongo:/home/zongo# _


root@zongo:/home/zongo# mkdir /etc/apache2/certificate
root@zongo:/home/zongo# cd /etc/apache2/certificate/
root@zongo:/etc/apache2/certificate#
root@zongo:/etc/apache2/certificate# openssl req -new -newkey rsa:4096 -x509 -sha256 -days 365 -nod
s -out apacche-certificate.crt -keyout apache.key
Generating a RSA private key
.....
.....+++
.....++++
writing new private key to 'apache.key'

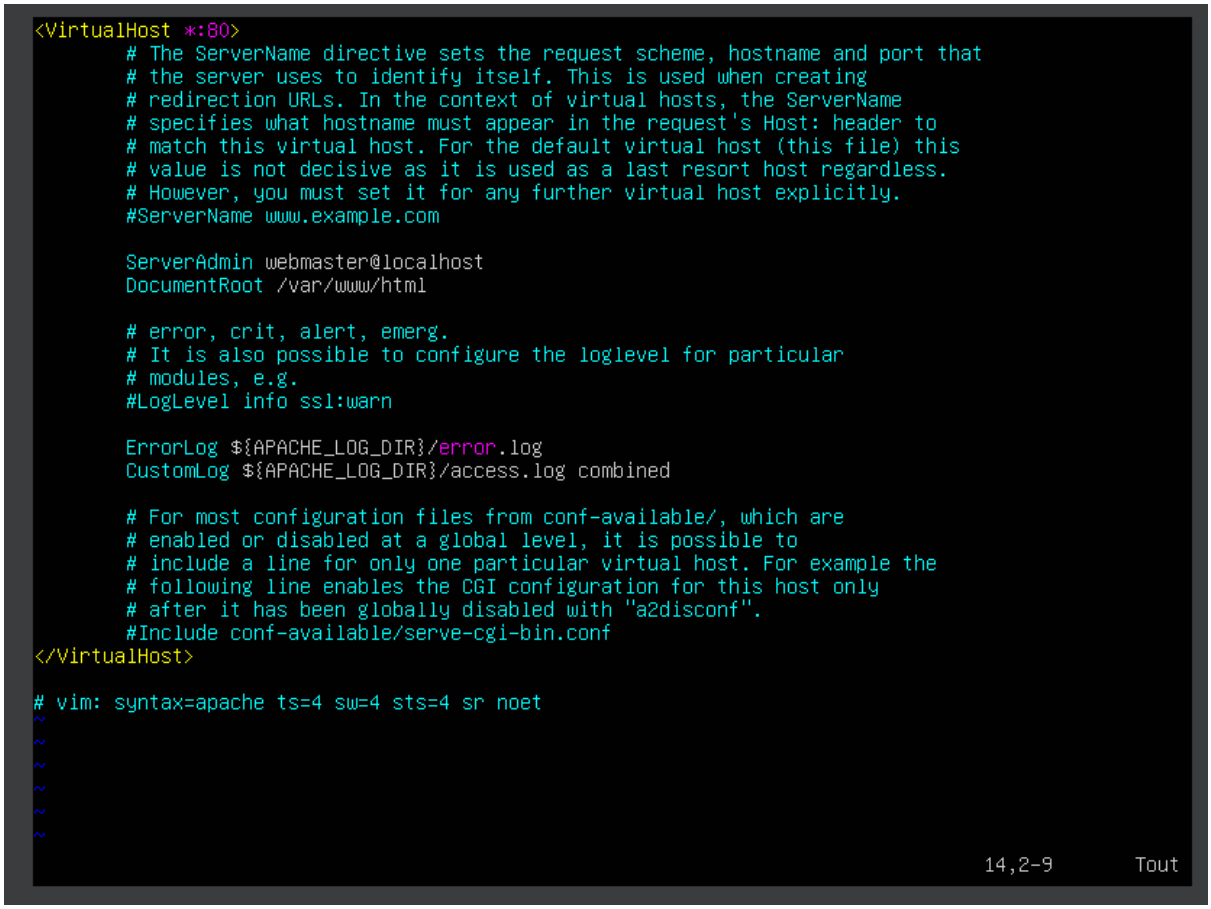
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.

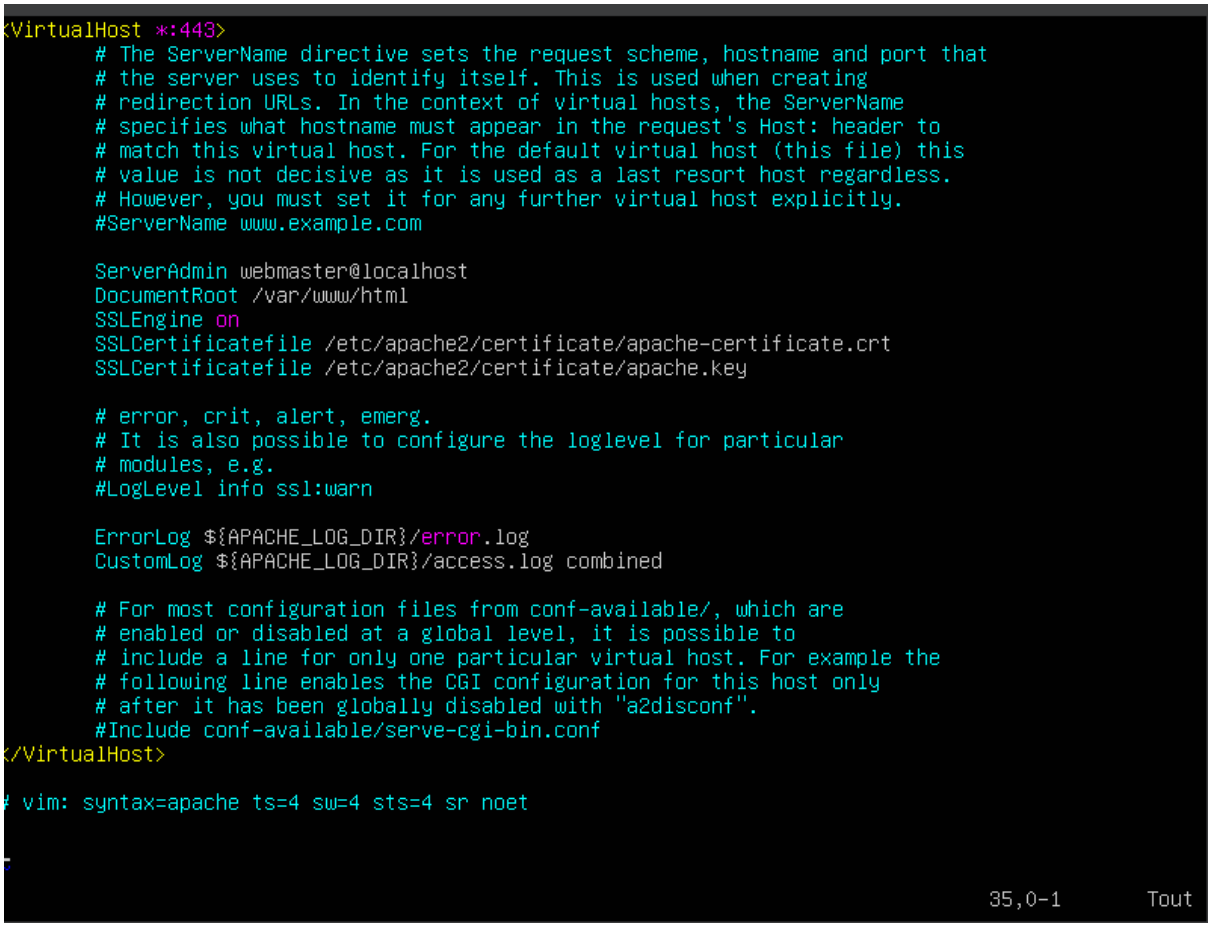
Country Name (2 letter code) [AU]:


root@zongo:/home/zongo# mkdir /etc/apache2/certificate
root@zongo:/home/zongo# cd /etc/apache2/certificate/
root@zongo:/etc/apache2/certificate#
root@zongo:/etc/apache2/certificate# openssl req -new -newkey rsa:4096 -x509 -sha256 -days 365 -node
s -out apacche-certificate.crt -keyout apache.key
Generating a RSA private key
.....
.....+++
.....+++
writing new private key to 'apache.key'

You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.

Country Name (2 letter code) [AU]:IN
State or Province Name (full name) [Some-State]:MU
Locality Name (eg, city) []:TechsBucket
Organization Name (eg, company) [Internet Widgits Pty Ltd]:techs
Organizational Unit Name (eg, section) []:smtp.emailer.net
Common Name (e.g. server FQDN or YOUR name) []:smtp.emailer.net
Email Address []:jonhkennymaker@gmail.com
root@zongo:/etc/apache2/certificate#
root@zongo:/etc/apache2/certificate#
root@zongo:/etc/apache2/certificate# cd
root@zongo:~#


<VirtualHost *:80>
The ServerName directive sets the request scheme, hostname and port that
the server uses to identify itself. This is used when creating
redirection URLs. In the context of virtual hosts, the ServerName
specifies what hostname must appear in the request's Host: header to
match this virtual host. For the default virtual host (this file) this
value is not decisive as it is used as a last resort host regardless.
However, you must set it for any further virtual host explicitly.
#ServerName www.example.com
ServerAdmin webmaster@localhost
DocumentRoot /var/www/html
error, crit, alert, emerg.
It is also possible to configure the loglevel for particular
modules, e.g.
#LogLevel info ssl:warn
ErrorLog ${APACHE_LOG_DIR}/error.log
CustomLog ${APACHE_LOG_DIR}/access.log combined
For most configuration files from conf-available/, which are
enabled or disabled at a global level, it is possible to
include a line for only one particular virtual host. For example the
following line enables the CGI configuration for this host only
after it has been globally disabled with "a2disconf".
#Include conf-available/serve-cgi-bin.conf
</VirtualHost>
vim: syntax=apache ts=4 sw=4 sts=4 sr noet
14,2-9 Tout


<VirtualHost *:443>
The ServerName directive sets the request scheme, hostname and port that
the server uses to identify itself. This is used when creating
redirection URLs. In the context of virtual hosts, the ServerName
specifies what hostname must appear in the request's Host: header to
match this virtual host. For the default virtual host (this file) this
value is not decisive as it is used as a last resort host regardless.
However, you must set it for any further virtual host explicitly.
#ServerName www.example.com
ServerAdmin webmaster@localhost
DocumentRoot /var/www/html
SSLEngine on
SSLCertificatefile /etc/apache2/certificate/apache-certificate.crt
SSLCertificatefile /etc/apache2/certificate/apache.key
error, crit, alert, emerg.
It is also possible to configure the loglevel for particular
modules, e.g.
#LogLevel info ssl:warn
ErrorLog ${APACHE_LOG_DIR}/error.log
CustomLog ${APACHE_LOG_DIR}/access.log combined
For most configuration files from conf-available/, which are
enabled or disabled at a global level, it is possible to
include a line for only one particular virtual host. For example the
following line enables the CGI configuration for this host only
after it has been globally disabled with "a2disconf".
#Include conf-available/serve-cgi-bin.conf
</VirtualHost>
vim: syntax=apache ts=4 sw=4 sts=4 sr noet
35,0-1 Tout