


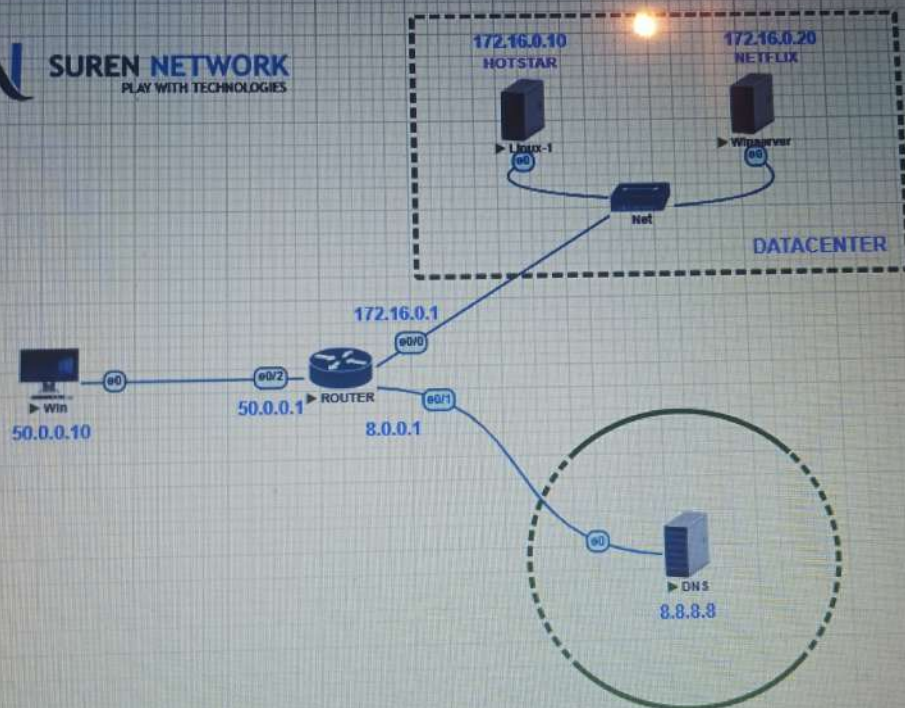

```
Server: Enter IP address of the router. (0-255) 192.168.1.1
Server: ROUTER(config)#ip add 192.168.1.1 255.255.255.0
Feature: ROUTER(config-if)#no sh
Web: ROUTER(config-if)#^Z
ROUTER#
*Sep 1 15:48:24.339: %SYS-5-CONFIG_I: Configured from console by console
Config: ROUTER#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Result: ROUTER(config)#int e 0/1
ROUTER(config-if)#ip add 8.0.0.1
% Incomplete command.

ROUTER(config-if)#
*Sep 1 15:49:01.402: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
ROUTER(config-if)#ip add 8.0.0.1 255.0.0.0
ROUTER(config-if)#no sh
ROUTER(config-if)#^Z
ROUTER#
*Sep 1 15:49:23.849: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#conf t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#int e 0/2
ROUTER(config-if)#ip add 50.0.0.1 255.0.0.0
ROUTER(config-if)#no sh
ROUTER(config-if)#^Z
ROUTER#
*Sep 1 15:49:56.759: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#
```

DFA results

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ncpa.cpl

C:\Documents and Settings\user>route print

=====

Interface List

0x1 MS TCP Loopback interface
0x2 ...50 0a 6c 01 ac 00 Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

=====

Active Routes:

Network Destination	Netmask	Gateway	Interface	Metric
0.0.0.0	0.0.0.0	50.0.0.1	50.0.0.10	10
50.0.0.0	255.0.0.0	50.0.0.10	50.0.0.10	10
50.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
50.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	10
127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
224.0.0.0	240.0.0.0	50.0.0.10	50.0.0.10	10
255.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	1

Default Gateway: 50.0.0.1

=====

Persistent Routes:

