

Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY

Audit

Security Assessment 07. December, 2021

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Scope of Work	12
Inheritance Graph	12
Verify Claims	13
Modifiers	19
CallGraph	20
Source Units in Scope	21
Critical issues	22
High issues	22
Medium issues	22
Low issues	22
Informational issues	22
Audit Comments	23
SWC Attacks	24

Disclaimer

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	07. December 2021	Layout projectAutomated- /Manual-Security TestingSummary

Network

Binance Smart Chain (BEP20)

Website

https://www.binahero.com/#/

Telegram

https://t.me/BinaHero

Twitter

https://twitter.com/binahero

Medium

https://medium.com/@binahero

Description

BinaHero is a decentralized NFT game that integrates collection, mining, market trading, and PVE. Players can play to earn in the game. You can continuously collect and upgrade BinaHero, and get rewards through mining or trading. You can also let hero go through levels to win rewards.

BinaHero has a strong community where players can participate in the collaborative creation of the BinaHero world. And get rewards for community contributions.

Project Engagement

During the 30th of November 2021, **BinaHero Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.

Logo



Contract Link v1.0

https://bscscan.com/address/
 0x78C3AdE403438B37638304F9FbbFB1b76608c1BD#code

Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.


Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
 - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
 - ii) Manual review of code, which is the process of reading source code line-byline in an attempt to identify potential vulnerabilities.
 - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
- 2. Testing and automated analysis that includes the following:
 - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
 - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

Used Code from other Frameworks/Smart Contracts (direct imports)

Imported packages:



Tested Contract Files

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

v1.0

File Name	SHA-1 Hash
contracts/binahero.sol	b2fd3ddf66671bbe49e53b68de472ac40b9ce221

Metrics

Source Lines v1.0

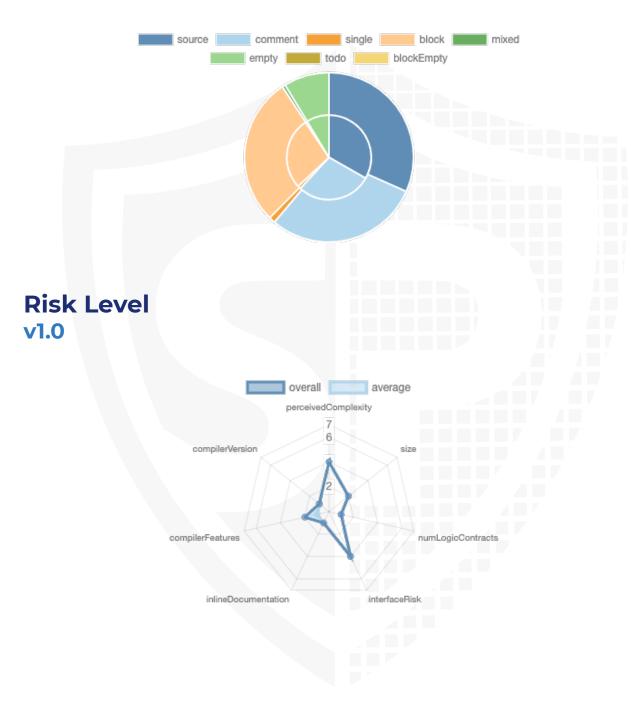

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	1	1	6	2

Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Version		Public	Payable	
1.0		46	0	

Version	External	Internal	Private	Pure	View
1.0	43	54	1	14	21

State Variables

Version	Total	Public
1.0	20	12

Capabilities

Version	Solidity Versions observed	Experim ental Features	Can Receive Funds	Uses Assembl Y	Has Destroya ble Contract s
1.0	0.8.7				

Version	Transf ers ETH	Low- Level Calls	Delega teCall	Uses Hash Functi ons	ECRec over	New/ Create/ Create 2
1.0	yes					


Scope of Work

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

- 1. Correct implementation of Token standard
- 2. Deployer cannot mint any new tokens
- 3. Deployer cannot burn or lock user funds
- 4. Deployer cannot pause the contract
- 5. Overall checkup (Smart Contract Security)

Inheritance Graph v1.0

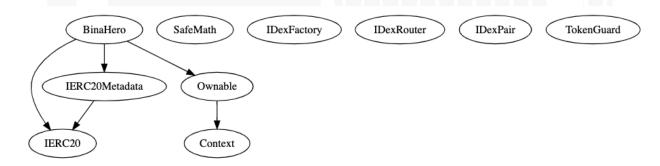

Verify Claims

Correct implementation of Token standard

Tested	Verified
\checkmark	√

Function	Description	Exist	Tested	Verified
TotalSupply	provides information about the total token supply	\checkmark	√	\checkmark
BalanceOf	provides account balance of the owner's account	\checkmark	\checkmark	✓
Transfer	executes transfers of a specified number of tokens to a specified address	√	√	√
TransferFrom	executes transfers of a specified number of tokens from a specified address	√	√	√
Approve	allow a spender to withdraw a set number of tokens from a specified account	√	√	√
Allowance	returns a set number of tokens from a spender to the owner	√	1	√

1. approve
2. changeWithdrawAddress
3. decreaseAllowance
4. excludeFromFee
5. includeInFee
6. increaseAllowance
7. removeSupportedDex
8. renounceOwnership
9. setDefaultSwapRouter
10. setSupportedDex
11. setTGAddress
12. setTax
13. setTaxAddress
14. setTaxFeeVaultLimit
15. setTaxFeeVaultSellMax
16. transfer
17. transferFrom
18. transferOwnership
19. withdrawEth
20. withdrawExternalToken

Deployer cannot mint any new tokens

Name	Exist	Tested	Verified	
Deployer cannot mint	\checkmark	✓	\checkmark	

Max / Total Supply: 100.000.000



Deployer cannot burn or lock user funds

Name	Exist	Tested	Verified
Deployer cannot lock	\checkmark	√	X
Deployer cannot burn	_	-	-

Comments:

v1.0

 It is possible that TokenGuard in line 807 lock user funds. TokenGuard address was not provided to solidproof

Deployer cannot pause the contract

Name	Exist	Tested	Verified
Deployer cannot pause	-	_	-



Overall checkup (Smart Contract Security)

Tested	Verified		
\checkmark	✓		

Legend

Attribute	Symbol
Verfified / Checked	\checkmark
Partly Verified	
Unverified / Not checked	X
Not available	-


Modifiers

changeWithdrawAddress
setSupportedDex
setTaxFeeVaultLimit
setTaxFeeVaultSellMax
setDefaultSwapRouter
removeSupportedDex
setTGAddress
excludeFromFee
includeInFee
setTaxAddress
setTax
withdrawExternalToken
withdrawEth

Comments

- · Following state variables can be set without any limitations
 - taxFeeVaultLimit
 - taxFeeVaultSellMax
- buyTaxFee and sellTaxFee can be set less than 10.000 ■

CallGraph

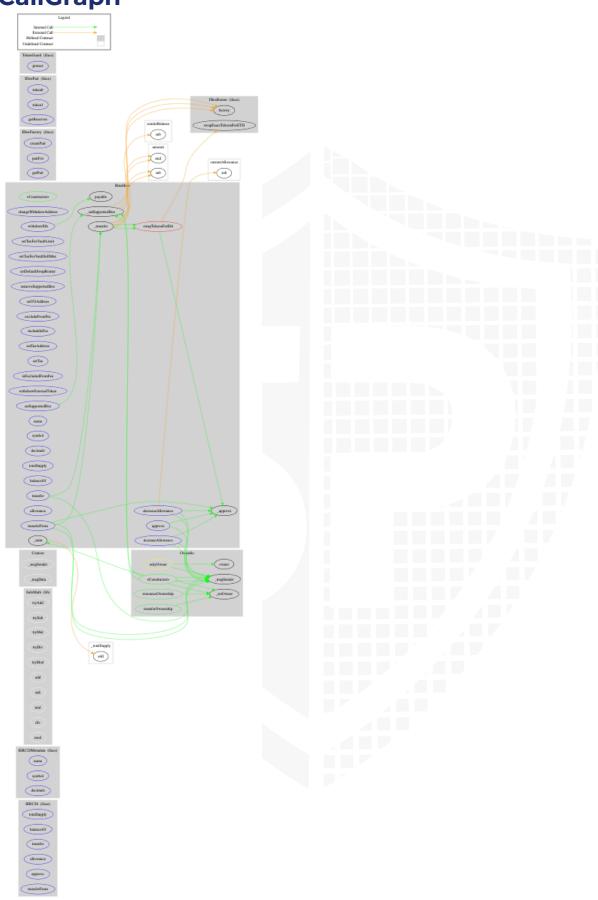

Source Units in Scope v1.0

Туре	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
≥ €Q	contracts/binahero.sol	4	6	909	787	374	388	300	<u>♣</u> ;‡Σ
≥ ≥♦	Totals	4	6	909	787	374	388	300	<u>♣</u>

Legend

2090110				
Attribute	Description			
Lines	total lines of the source unit			
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)			
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)			
Comment Lines	lines containing single or block comments			
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces,)			

Audit Results

AUDIT PASSED

Critical issues

- no critical issues found -

High issues

- no high issues found -

Medium issues

Issue	File	Type	Line	Description
#1	Main	Unchecked tokens transfer	605	Use `SafeERC20`, or ensure that the transfer/ transferFrom return value is checked

Low issues

Issue	File	Туре	Line	Description
#1	Main	Contract doesn't import npm packages from source (like OpenZeppelin etc.)		We recommend to import all packages from npm directly without flatten the contract. Functions could be modified or can be susceptible to vulnerabilities
#2	Main	Missing Zero Address Validation (missing- zero-check)	526, 542, 576, 588	Check that the address is not zero

Informational issues

Issue	File	Type	Line	Description
#1	Main	Unused return values	773	Ensure that all the return values of the function calls are used and handle both success and failure cases if needed by the business logic

#2	Main	Functions that are not	351, 298,	Remove unused functions
		used	258, 324,	
			275, 129, 171,	
			183, 154, 142	

Audit Comments

07. December 2021:

- Include owner in fees when ownership is renounced
- TokenGuard was not provided to Solidproof
 - It is possible that tokenGuard protect function can lock user funds
- · Following state variables can be set without any limitations
 - taxFeeVaultLimit
 - taxFeeVaultSellMax
- buyTaxFee and sellTaxFee can be set less than 10.000

SWC Attacks

ID	Title	Relationships	Status
<u>SW</u> <u>C-13</u> <u>6</u>	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
<u>SW</u> <u>C-13</u> <u>5</u>	Code With No Effects	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-13</u> <u>4</u>	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
<u>SW</u> <u>C-13</u> <u>3</u>	Hash Collisions With Multiple Variable Length Arguments	CWE-294: Authentication Bypass by Capture-replay	PASSED
<u>SW</u> <u>C-13</u> <u>2</u>	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
<u>SW</u> <u>C-13</u> <u>1</u>	Presence of unused variables	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-13</u> <u>0</u>	Right-To-Left- Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
<u>SW</u> <u>C-12</u> <u>9</u>	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
<u>SW</u> <u>C-12</u> <u>8</u>	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

<u>SW</u> <u>C-12</u> <u>7</u>	Arbitrary Jump with Function Type Variable	CWE-695: Use of Low-Level Functionality	PASSED
<u>SW</u> <u>C-12</u> <u>5</u>	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
<u>SW</u> <u>C-12</u> <u>4</u>	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
<u>SW</u> <u>C-12</u> <u>3</u>	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
<u>SW</u> <u>C-12</u> <u>2</u>	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
<u>SW</u> <u>C-12</u> <u>1</u>	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
<u>SW</u> <u>C-12</u> <u>0</u>	Weak Sources of Randomness from Chain Attributes	CWE-330: Use of Insufficiently Random Values	PASSED
<u>SW</u> <u>C-11</u> <u>9</u>	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-11</u> <u>8</u>	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
<u>SW</u> <u>C-11</u> <u>7</u>	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

<u>SW</u> <u>C-11</u> <u>6</u>	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>5</u>	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>4</u>	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
<u>SW</u> <u>C-11</u> <u>3</u>	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
<u>SW</u> <u>C-11</u> <u>2</u>	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-111</u>	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>O</u>	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
<u>SW</u> <u>C-10</u> <u>9</u>	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
<u>SW</u> <u>C-10</u> <u>8</u>	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-10</u> <u>7</u>	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	PASSED
<u>SW</u> <u>C-10</u> <u>6</u>	Unprotected SELFDESTRUC T Instruction	CWE-284: Improper Access Control	PASSED

<u>SW</u> <u>C-10</u> <u>5</u>	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
<u>SW</u> <u>C-10</u> <u>4</u>	Unchecked Call Return Value	CWE-252: Unchecked Return Value	NOT PASSED
<u>SW</u> <u>C-10</u> <u>3</u>	Floating Pragma	CWE-664: Improper Control of a Resource Through its Lifetime	PASSED
<u>SW</u> <u>C-10</u> <u>2</u>	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
<u>SW</u> <u>C-10</u> <u>1</u>	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
<u>SW</u> <u>C-10</u> <u>0</u>	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED



Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY