

**Blockchain Security | Smart Contract Audits | KYC** 

MADE IN GERMANY

# Audit

Security Assessment 17. December, 2021

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Scope of Work	13
Inheritance Graph	13
Verify Claims	14
Modifiers	20
CallGraph	21
Source Units in Scope	22
Critical issues	23
High issues	23
Medium issues	23
Low issues	23
Informational issues	23
Audit Comments	23
SWC Attacks	24

## **Disclaimer**

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	17. December 2021	<ul><li>Layout project</li><li>Automated- /Manual-Security Testing</li><li>Summary</li></ul>

#### Network

Binance Smart Chain (BEP20)

#### Website

https://www.kawaiiswap.finance/

#### **Docs**

https://kawaiiswap.gitbook.io/kawaiiswap-finance/

#### **Twitter**

https://twitter.com/kawaiiswap

## **Telegram announcements**

https://t.me/KawaiiSwapAnn

## **Telegram chat**

https://t.me/kawaiiswap

#### **Discord**

https://discord.gg/rhkHuSMzTR

## **Description**

KawaiiSwap project enriches traditional yield farming experience with gamification features. We prove exciting user interaction with our platform and bringing constant utility to our native token therefore ensuring continuous growth of the project.

KawaiiSwap users are able to win tokens and NFTs in games run on the platform or complete quests to gain APR boosts. NFTs can be traded on the marketplace or used for game activities. KAWAII token holders are able to become shareholders and receive dividends just by holding tokens in the wallet as well as to participate in decision-making process.

KawaiiSwap project is backed by the team of professional developers and belongs to "Brainstorm Digital" Ltd company. Our vision is to extend gamification aspects of the platform way beyond yield farming app by creating fictional world with play to earn model that combines traditional RPG experience with NFT ownership.

## **Project Engagement**

During the 7th of December 2021, **Kawaii swap Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.

## Logo



## **Contract Link**

#### v1.0

https://bscscan.com/address/
 0xa8047c2cadc9f4560376cfd1b54ec6c7e4068235#code

## **Vulnerability & Risk Level**

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

# Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.

## Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
  - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
  - ii) Manual review of code, which is the process of reading source code line-byline in an attempt to identify potential vulnerabilities.
  - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
- 2. Testing and automated analysis that includes the following:
  - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
  - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

# Used Code from other Frameworks/Smart Contracts (direct imports)

#### Imported packages:

- ./SafeBEP20.sol
- ./IBEP20.sol
- ./SafeMath.sol
- ./Ownable.sol
- ./ReentrancyGuard.sol
- ./ICalcifireVault.sol
- ./IPancakeswapFarm.sol
- ./IPancakeRouter01.sol

## **Tested Contract Files**

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

#### **v1.0**

File Name	SHA-1 Hash
contracts/SafeMath.sol	16904ca20d27ddfca0969cc322c39d159d33aa57
contracts/IPancakeRouter01.sol	9b34082de47367fc5731612f87e949fe6b550e56
contracts/Address.sol	66db1de364ee244b292cf4cc5e63385e8f6b9420
contracts/Ownable.sol	276129ff22713a5e32a785d4b72eea81e72912b2
contracts/ReentrancyGuard.sol	4ac50679fc09a3ea3d6dd545e187063e9a05be2c
contracts/IBEP20.sol	8e83c72a70de313ccbb600d3d9c1297df8d6fef0
contracts/ICalcifireVault.sol	7cf85d64c7fcfe784bde1a6c2ddbd7864446ab4e
contracts/Context.sol	02ebe0e93c5d1da25b91ba7f4cfb990a949263f8
contracts/SafeBEP20.sol	96bc8a79b9bd44b8d86c0a7dc9d5560929463755
contracts/IPancakeswapFarm.sol	c6cf1c71751aeb4bf501f4613d1940c25583a738
contracts/kawaiivault.sol	c81157ed61ee1d5e7bf056606331a112db7359a4

## **Metrics**

# Source Lines v1.0

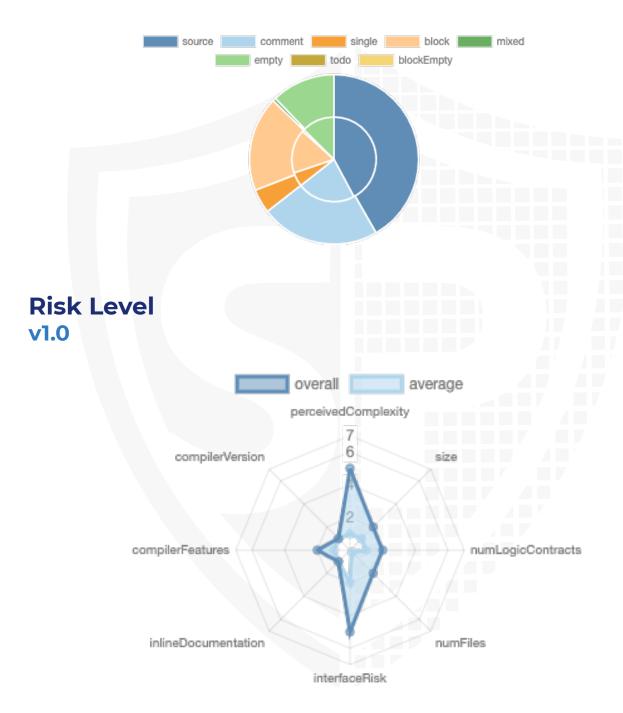

## **Capabilities**

## **Components**

Version	Contracts	Libraries	Interfaces	Abstract
1.0	2	3	4	2

## **Exposed Functions**

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Version	Public	Payable
1.0	68	3

Version	External Internal		Private Pure		View	
1.0	58	84	9	14	30	

## **State Variables**

Version	Total	Public
1.0	33	27

## Capabilities

Version	Solidity Versions observed	Experim ental Features	Can Receive Funds	Uses Assembl Y	Has Destroya ble Contract s
1.0	>=0.6. 0 <0.8.0 >=0.6. 2 <0.8.0 >=0.6. 4 0.6.12		yes	yes (2 asm blocks)	

Version	Transf ers ETH	Low- Level Calls	Delega teCall	Uses Hash Functi ons	ECRec over	New/ Create/ Create 2
1.0	yes		yes			


## **Scope of Work**

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

- 1. Correct implementation of Token standard
- 2. Deployer cannot mint any new tokens
- 3. Deployer cannot burn or lock user funds
- 4. Deployer cannot pause the contract
- 5. Overall checkup (Smart Contract Security)

## Inheritance Graph v1.0

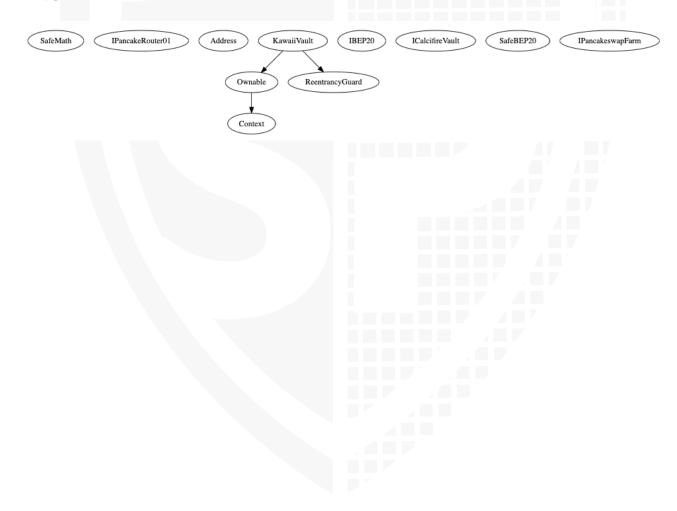

## **Verify Claims**

## **Correct implementation of Token standard**

Tested	Verified
<b>√</b>	<b>√</b>

Function	Description	Exist	Tested	Verified
TotalSupply	provides information about the total token supply	$\checkmark$	<b>√</b>	✓
BalanceOf	provides account balance of the owner's account	$\checkmark$	<b>√</b>	$\checkmark$
Transfer	executes transfers of a specified number of tokens to a specified address	<b>√</b>	<b>√</b>	<b>√</b>
TransferFrom	executes transfers of a specified number of tokens from a specified address	<b>√</b>	<b>√</b>	<b>√</b>
Approve	allow a spender to withdraw a set number of tokens from a specified account	<b>√</b>	<b>√</b>	<b>√</b>
Allowance	returns a set number of tokens from a spender to the owner	<b>√</b>	1	✓

## Write functions of contract

1. claimRewards
2. deposit
3. earn
4. lock
5. renounceOwnership
6. setBurnRate
7. setEarlyWithdrawFee
8. setEarlyWithdrawFeePeriod
9. setFeeAddress
10. setKeeper
11. setKeeperFee
12. setPathToCalcifire
13. setPathToWbnb
14. setPlatform
15. setPlatformFee
16. transferOwnership
17. unlock
18. withdraw

## **Deployer cannot mint any new tokens**

Name	Exist	Tested	Verified
Deployer cannot mint	-	-	-



## Deployer cannot burn or lock user funds

Name	Exist	Tested	Verified
Deployer cannot lock	$\checkmark$	<b>√</b>	✓
Deployer cannot burn	<b>√</b>	<b>√</b>	✓

#### Comments:

#### **v1.0**

- · Burn is used in following function
  - getExpectedOutputs
  - earn

## **Deployer cannot pause the contract**

Name	Exist	Tested	Verified
Deployer cannot pause	_	_	-



## **Overall checkup (Smart Contract Security)**

Tested	Verified
$\checkmark$	$\checkmark$


#### Legend

Attribute	Symbol
Verfified / Checked	$\checkmark$
Partly Verified	
Unverified / Not checked	X
Not available	-

## **Modifiers**

- earn
- ⊗ onlyKeeper
- deposit
- withdraw
- claimRewards
- setPathToCalcifire
- ⊗ onlyOwner
- setPathToWbnb
- setFeeAddress
- ❷ onlyOwner
- setKeeper
- ⊗ onlyOwner
- setKeeperFee
- ⊗ onlyOwner
- setPlatform
- ⊗ onlyOwner
- setPlatformFee
- ⊗ onlyOwner
- setBurnRate
- ⊗ onlyOwner
- setEarlyWithdrawFee
- ❷ onlyOwner
- setEarlyWithdrawFeePeriod
- ⊗ onlyOwner

## **CallGraph**

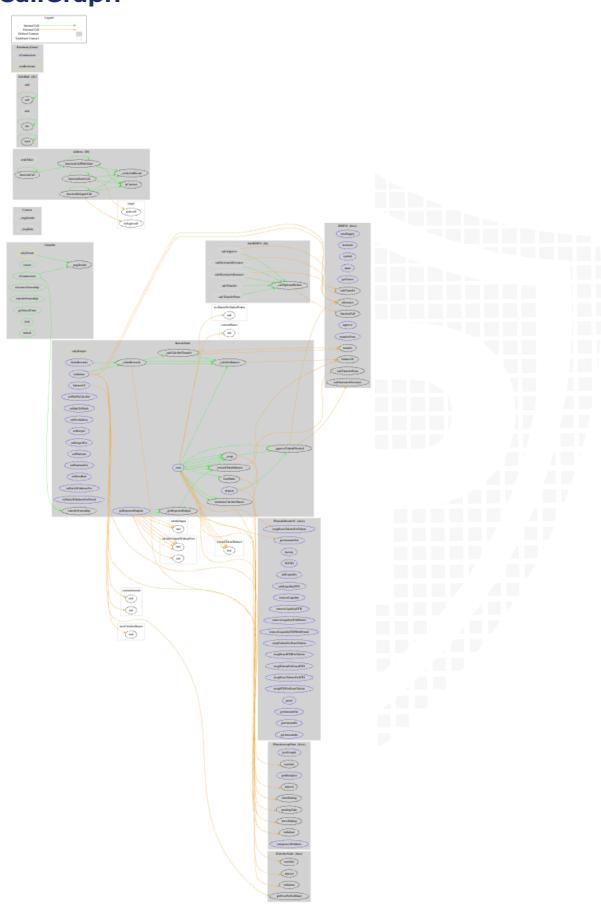

## **Source Units in Scope**

## v1.0

Туре	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
<b>\end{array}</b>	contracts/SafeMath.sol	1		159	159	39	106	10	*
Q	contracts/IPancakeRouter01.sol		1	162	6	3	1	48	. <u>Š</u> .
<b>\equiv </b>	contracts/Address.sol	1		189	169	78	113	47	<b></b>
10	contracts/Ownable.sol	1		90	90	44	35	38	
<b>%</b>	contracts/ReentrancyGuard.sol	1		62	62	15	38	5	
Q	contracts/IBEP20.sol		1	93	22	17	66	21	
Q	contracts/ICalcifireVault.sol		1	21	9	5	1	9	
<b>%</b>	contracts/Context.sol	1		24	24	10	12	1	*
<b>\equiv </b>	contracts/SafeBEP20.sol	1		75	74	33	32	25	
Q	contracts/IPancakeswapFarm.sol		1	36	6	3	8	19	
9	contracts/kawaiivault.sol	1		586	559	406	36	285	
<b>∌</b> ≨ <b>Q%</b>	Totals	7	4	1497	1180	653	448	508	<b>■</b> § <b>Ω</b> *

## Legend

Attribute	Description
Lines	total lines of the source unit
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)
Comment Lines	lines containing single or block comments
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces,)

## **Audit Results**

## **AUDIT PASSED**

#### **Critical issues**

- no critical issues found -

## **High issues**

- no high issues found -

#### **Medium issues**

- no medium issues found -

#### Low issues

Issue	File	Туре	Line	Description
#1	Main	Contract doesn't import npm packages from source (like OpenZeppelin etc.)		We recommend to import all packages from npm directly without flatten the contract. Functions could be modified or can be susceptible to vulnerabilities

## Informational issues

- no informational issues found -

#### **Audit Comments**

#### 14. December 2021:

 If deployer use lock function address of owner will be set as \_previousOwner, after renouncing or transferring ownership to another address previous owner can get back the ownership by using unlock function because only \_previousOwner can use unlock function

## **SWC Attacks**

ID	Title	Relationships	Status
<u>SW</u> <u>C-1</u> <u>36</u>	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
<u>SW</u> <u>C-1</u> <u>35</u>	Code With No Effects	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-1</u> <u>34</u>	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
<u>SW</u> <u>C-1</u> <u>33</u>	Hash Collisions With Multiple Variable Length	CWE-294: Authentication Bypass by Capture-replay	PASSED
<u>SW</u> <u>C-1</u> <u>32</u>	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
<u>SW</u> <u>C-1</u> <u>31</u>	Presence of unused variables	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-1</u> <u>30</u>	Right-To-Left- Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
<u>SW</u> <u>C-1</u> <u>29</u>	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
<u>SW</u> <u>C-1</u> <u>28</u>	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

<u>SW</u> <u>C-1</u> <u>27</u>	Arbitrary Jump with Function Type	CWE-695: Use of Low-Level Functionality	PASSED
<u>SW</u> <u>C-1</u> <u>25</u>	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
<u>SW</u> <u>C-1</u> <u>24</u>	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
<u>SW</u> <u>C-1</u> <u>23</u>	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
<u>SW</u> <u>C-1</u> <u>22</u>	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
<u>SW</u> <u>C-1</u> <u>21</u>	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
<u>SW</u> <u>C-1</u> <u>20</u>	Weak Sources of Randomness from Chain	CWE-330: Use of Insufficiently Random Values	PASSED
<u>SW</u> <u>C-11</u> <u>9</u>	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-11</u> <u>8</u>	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
<u>SW</u> <u>C-11</u> <u>7</u>	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

<u>SW</u> <u>C-11</u> <u>6</u>	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>5</u>	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>4</u>	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
<u>SW</u> <u>C-11</u> <u>3</u>	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
<u>SW</u> <u>C-11</u> <u>2</u>	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>1</u>	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>O</u>	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
<u>SW</u> <u>C-1</u> <u>09</u>	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
<u>SW</u> <u>C-1</u> <u>08</u>	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-1</u> <u>07</u>	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	PASSED
SW C-1 06	Unprotected SELFDESTRUC T Instruction	CWE-284: Improper Access Control	PASSED

<u>SW</u> <u>C-1</u> <u>05</u>	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
<u>SW</u> <u>C-1</u> <u>04</u>	Unchecked Call Return Value	CWE-252: Unchecked Return Value	PASSED
<u>SW</u> <u>C-1</u> <u>03</u>	Floating Pragma	CWE-664: Improper Control of a Resource Through its Lifetime	PASSED
<u>SW</u> <u>C-1</u> <u>02</u>	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
<u>SW</u> <u>C-1</u> <u>01</u>	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
<u>SW</u> <u>C-1</u> <u>00</u>	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED



**Blockchain Security | Smart Contract Audits | KYC** 

MADE IN GERMANY