

Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY

Audit

Security Assessment 20. December, 2021

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Scope of Work	12
Inheritance Graph	12
Verify Claims	13
Modifiers	19
CallGraph	20
Source Units in Scope	21
Critical issues	22
High issues	22
Medium issues	22
Low issues	22
Informational issues	22
Audit Comments	23
SWC Attacks	24

Disclaimer

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	20. December 2021	Layout projectAutomated- /Manual-Security TestingSummary

Network

Binance Smart Chain (BEP20)

Website

https://nowmeta.io/

Telegram

https://t.me/NOWMETA

Twitter

https://twitter.com/NowMetaCoin

Discord

https://discord.gg/pP8XMKfTaT

Description

Nowmeta is the evolution of social connection & financial stability, our company's vision is to help bridge the wealth gap in not only the physical but the Digital world. We are committed to the future and we are committed to you

Project Engagement

During the 15th of December 2021, **NOW META Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.





Contract Link v1.0

https://bscscan.com/address/
 0xfac45d4b406D94cddFC48b198839673351CB2Bf9#code

Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.


Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
 - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
 - ii) Manual review of code, which is the process of reading source code line-byline in an attempt to identify potential vulnerabilities.
 - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
- 2. Testing and automated analysis that includes the following:
 - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
 - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

Used Code from other Frameworks/Smart Contracts (direct imports)

Imported packages:



Tested Contract Files

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

v1.0

File Name	SHA-1 Hash
contracts/nowmeta.sol	da124ffec25f90a27e8fc98dd40930eadde71423

Metrics

Source Lines v1.0

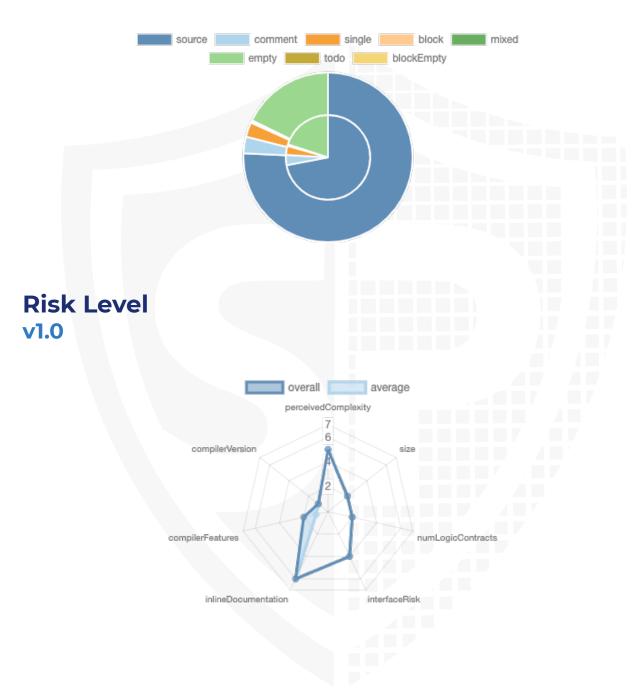

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	2	2	5	1

Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Ve	rsion	Public	Payable
1.0		50	3

Version	External	Internal	Private	Pure	View
1.0	32	62	8	10	17

State Variables

Version	Total	Public
1.0	33	19

Capabilities

Version	Solidity Versions observed	Experim ental Features	Can Receive Funds	Uses Assembl Y	Has Destroya ble Contract s
1.0	^0.6.2		yes	yes (2 asm blocks)	

Scope of Work

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

- 1. Correct implementation of Token standard
- 2. Deployer cannot mint any new tokens
- 3. Deployer cannot burn or lock user funds
- 4. Deployer cannot pause the contract
- 5. Overall checkup (Smart Contract Security)

Inheritance Graph v1.0



Verify Claims

Correct implementation of Token standard

Tested	Verified
\checkmark	√

Function	Description	Exist	Tested	Verified
TotalSupply	provides information about the total token supply	\checkmark	√	\checkmark
BalanceOf	provides account balance of the owner's account	\checkmark	\checkmark	\checkmark
Transfer	executes transfers of a specified number of tokens to a specified address	√	√	√
TransferFrom	executes transfers of a specified number of tokens from a specified address	√	√	√
Approve	allow a spender to withdraw a set number of tokens from a specified account	√	√	√
Allowance	returns a set number of tokens from a spender to the owner	√	1	√

eAllowance ceOwnership aFee rityFee rityWallet uidityFee rketingFee rketingWallet xTxAmount aTokensBeforeSwap r apAndLiquifyEnabled cActive dFee dess er	Ð
t dee dee dee dee dee dee dee dee dee de	nce
Allowance BOWnership Fee ByFee ByWallet BidityFee RetingFee RetingWallet TxAmount FokensBeforeSwap pAndLiquifyEnabled Bective From	Account
stBurnFee stCharityFee stCharityWallet setLiquidityFee setMarketingFee setMarketingWallet setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFee setTaxless stransfer stransferFrom	cludeAccount
setCharityWallet setLiquidityFee setMarketingFee setMarketingWallet setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFee transfer transferFrom	increaseAllowance
etCharityFee etCharityWallet setLiquidityFee setMarketingFee setMarketingWallet setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFee setTaxfer transferFrom	enounceOwnership
setLiquidityFee setMarketingFee setMarketingWallet setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFee transfer transferFrom	etBurnFee
setLiquidityFee setMarketingFee setMarketingWallet setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFee setTaxfer transferFrom	etCharityFee
setMarketingWallet setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFer setTaxFer	etCharityWallet
setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFee setTaxFer transfer	setLiquidityFee
setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFer transferFrom	setMarketingFee
setMaxTxAmount setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxFer transferFrom	. setMarketingWallet
setMinTokensBeforeSwap setPair setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxless transfer transferFrom	. setMaxTxAmount
setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxless transfer transferFrom	setMinTokensBeforeSwap
setSwapAndLiquifyEnabled setTaxActive setTaxFee setTaxless transfer transferFrom	setPair
setTaxActive setTaxFee setTaxless transfer transferFrom	setSwapAndLiquifyEnabled
setTaxFee setTaxless transfer transferFrom	
setTaxless transfer transferFrom	
transfer transferFrom	
transferFrom	
	21. transferFrom 22. transferOwnership

Deployer cannot mint any new tokens

Name	Exist	Tested	Verified
Deployer cannot mint	-	-	-



Deployer cannot burn or lock user funds

Name	Exist	Tested	Verified
Deployer cannot lock	√	√	X
Deployer cannot burn	√	√	✓

Comments:

v1.0

- · Tokens will burned while using _transfer
- Deployer can lock user funds by setting maxTxAmount to 0

Deployer cannot pause the contract

Name	Exist	Tested	Verified
Deployer cannot pause	-	_	-



Overall checkup (Smart Contract Security)

Tested	Verified
\checkmark	\checkmark

Legend

Attribute	Symbol
Verfified / Checked	\checkmark
Partly Verified	
Unverified / Not checked	X
Not available	-

Modifiers

onlyOwner

excludeAccount

includeAccount

setPair

setMarketingWallet

setCharityWallet

setTaxless

setSwapAndLiquifyEnabled

setTaxActive

setTaxFee

setBurnFee

setLiquidityFee

setMarketingFee

setCharityFee


setMaxTxAmount

setMinTokensBeforeSwap

Comments

- · Deployer can set following state variables without any limitations
 - _taxFee
 - _burnFee
 - _liquidityFee
 - _marketingFee
 - _charityFee
 - maxTxAmount
- · Deployer can enable/disable following state variables
 - swapAndLiquifyEnabled
 - isTaxActive
 - minTokensBeforeSwap

CallGraph

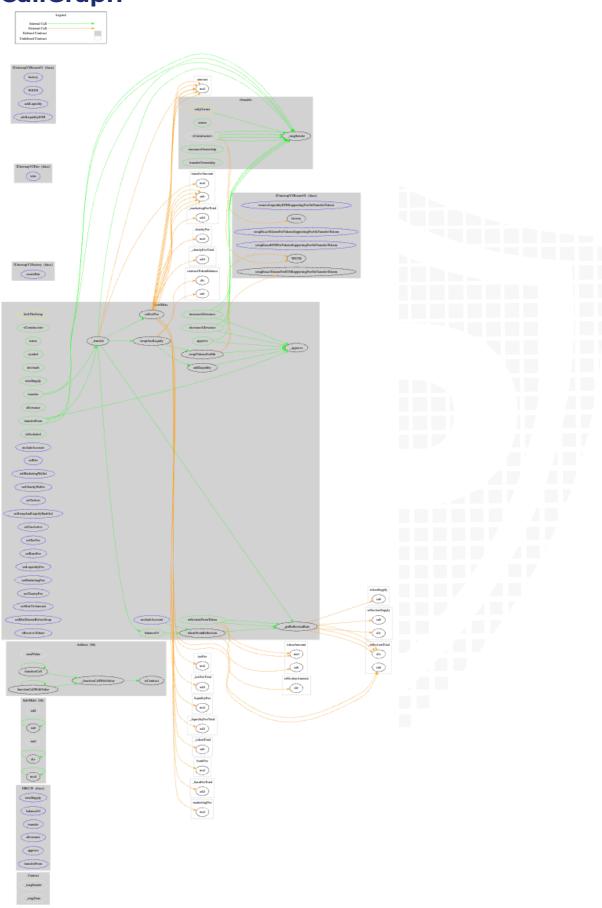

Source Units in Scope v1.0

Туре	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
∌ ≧Q %	contracts/nowmeta.sol	5	5	793	609	458	26	423	■Š ☆
∌≧Q	Totals	5	5	793	609	458	26	423	■Š ⊹

Legend

Attribute	Description
Lines	total lines of the source unit
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)
Comment Lines	lines containing single or block comments
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces,)

Audit Results

AUDIT PASSED

Critical issues

- no critical issues found -

High issues

- no high issues found -

Medium issues

- no medium issues found -

Low issues

Issue	File	Type	Line	Description
#1	Main	Contract doesn't import npm packages from source (like OpenZeppelin etc.)		We recommend to import all packages from npm directly without flatten the contract. Functions could be modified or can be susceptible to vulnerabilities
#2	Main	A floating pragma is set	8	The current pragma Solidity directive is ""^0.6.2"".
#3	Main	Missing Zero Address Validation (missing- zero-check)	747, 743, 739	Check that the address is not zero
#4	Main	State variable visibility is not set	347	It is best practice to set the visibility of state variables explicitly

Informational issues

Issue	File	Туре	Line	Description
#1	Main	State variables that could be declared constant (constablestates)	334, 351, 331, 332	Add the `constant` attributes to state variables that never change

#2	Main	Unused return values	729	Ensure that all the return values of the function calls are used and handle both success and failure cases if needed by the business logic
#3	Main	Functions that are not used	191, 147, 154, 163, 178, 121, 133, 14,103, 108	Remove unused functions
#4	Main	Local variables shadowing	567	Change owner to owner_ Rename the local variables that shadow another component

Audit Comments 20. December 2021:

- · Deployer can lock user funds
- · Read whole report for more information

SWC Attacks

ID	Title	Relationships	Status
<u>SW</u> <u>C-1</u> <u>36</u>	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
<u>SW</u> <u>C-1</u> <u>35</u>	Code With No Effects	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-1</u> <u>34</u>	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
<u>SW</u> <u>C-1</u> <u>33</u>	Hash Collisions With Multiple Variable Length Arguments	CWE-294: Authentication Bypass by Capture-replay	PASSED
<u>SW</u> <u>C-1</u> <u>32</u>	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
<u>SW</u> <u>C-1</u> <u>31</u>	Presence of unused variables	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-1</u> <u>30</u>	Right-To-Left- Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
<u>SW</u> <u>C-1</u> <u>29</u>	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
<u>SW</u> <u>C-1</u> <u>28</u>	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

<u>SW</u> <u>C-1</u> <u>27</u>	Arbitrary Jump with Function Type Variable	CWE-695: Use of Low-Level Functionality	PASSED
<u>SW</u> <u>C-1</u> <u>25</u>	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
<u>SW</u> <u>C-1</u> <u>24</u>	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
SW C-1 23	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
<u>SW</u> <u>C-1</u> <u>22</u>	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
<u>SW</u> <u>C-1</u> <u>21</u>	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
<u>SW</u> <u>C-1</u> <u>20</u>	Weak Sources of Randomness from Chain Attributes	CWE-330: Use of Insufficiently Random Values	PASSED
<u>SW</u> <u>C-11</u> <u>9</u>	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	NOT PASSED
<u>SW</u> <u>C-11</u> <u>8</u>	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
<u>SW</u> <u>C-11</u> <u>7</u>	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

<u>SW</u> <u>C-11</u> <u>6</u>	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>5</u>	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>4</u>	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
<u>SW</u> <u>C-11</u> <u>3</u>	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
<u>SW</u> <u>C-11</u> <u>2</u>	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>1</u>	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>O</u>	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
<u>SW</u> <u>C-1</u> <u>09</u>	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
<u>SW</u> <u>C-1</u> <u>08</u>	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	NOT PASSED
<u>SW</u> <u>C-1</u> <u>07</u>	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	PASSED
<u>SW</u> <u>C-1</u> <u>06</u>	Unprotected SELFDESTRUC T Instruction	CWE-284: Improper Access Control	PASSED

<u>SW</u> <u>C-1</u> <u>05</u>	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
<u>SW</u> <u>C-1</u> <u>04</u>	Unchecked Call Return Value	CWE-252: Unchecked Return Value	NOT PASSED
<u>SW</u> <u>C-1</u> <u>03</u>	Floating Pragma	CWE-664: Improper Control of a Resource Through its <u>Lifetime</u>	NOT PASSED
<u>SW</u> <u>C-1</u> <u>02</u>	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
<u>SW</u> <u>C-1</u> <u>01</u>	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
<u>SW</u> <u>C-1</u> <u>00</u>	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED



Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY