

Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY

Audit

Security Assessment 20. December, 2021

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Scope of Work	13
Inheritance Graph	13
Verify Claims	14
Modifiers	20
CallGraph	21
Source Units in Scope	22
Critical issues	23
High issues	23
Medium issues	23
Low issues	23
Informational issues	24
Audit Comments	24
SWC Attacks	25

Disclaimer

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	20. December 2021	Layout projectAutomated- /Manual-Security TestingSummary

Network

Binance Smart Chain (BEP20)

Website

https://solidray.finance/

Telegram

https://t.me/solidrayofficial

Twitter

https://twitter.com/SolidRayFinance

Discord

https://discord.gg/3VY8N2xn5y

Github

https://github.com/SolidRayFinance

Description

Solidray is a utility token that is built on the Binance Smart Chain (BSC) and the governance token for the solid ecosystem. Solidray is a collaboration of DEFI, NFT Arts, NFT Gaming Collectables and a payment system.

Project Engagement

During the 30th of November 2021, **Solidray Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.



Contract Link v1.0

https://bscscan.com/address/
 0x5b6c496cc837CCf003fEAcC4835E39D5976105A8#code

Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.


Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
 - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
 - ii) Manual review of code, which is the process of reading source code line-byline in an attempt to identify potential vulnerabilities.
 - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
- 2. Testing and automated analysis that includes the following:
 - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
 - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

Used Code from other Frameworks/Smart Contracts (direct imports)

Imported packages:



Tested Contract Files

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

v1.0

File Name	SHA-1 Hash
contracts/solidray.sol	593a7d2fc63cc19ca2d1ed54518efa60a9b895f8

Metrics

Source Lines v1.0

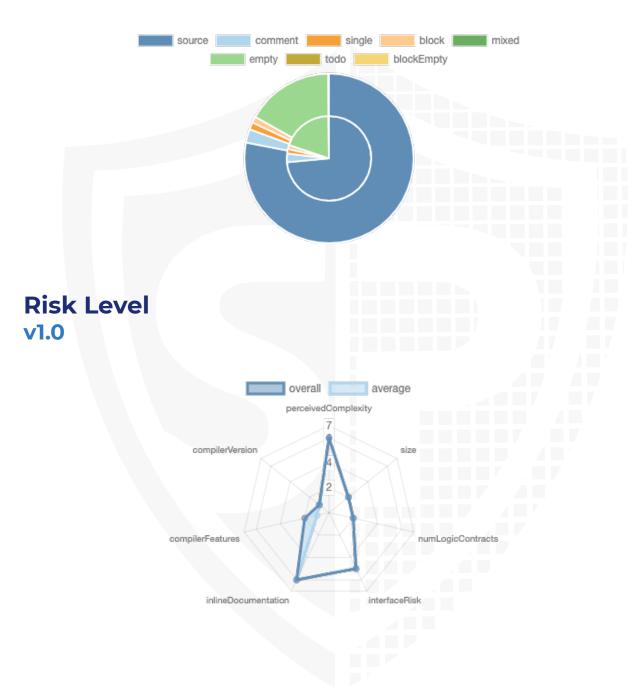

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	1	2	5	2

Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Ve	rsion	Public	Payable
1.0		105	5

Version	External	Internal	Private	Pure	View
1.0	78	98	25	18	47

State Variables

Version	Total	Public
1.0	39	15

Capabilities

Version	Solidity Versions observed	Experim ental Features	Can Receive Funds	Uses Assembl Y	Has Destroya ble Contract s
1.0	^0.8.4		yes	yes (2 asm blocks)	

Version	Transf ers ETH	Low- Level Calls	Delega teCall	Uses Hash Functi ons	ECRec over	New/ Create/ Create 2
---------	----------------------	------------------------	------------------	-------------------------------	---------------	--------------------------------

	1.0	yes		ves			
--	-----	-----	--	-----	--	--	--



Scope of Work

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

- 1. Correct implementation of Token standard
- 2. Deployer cannot mint any new tokens
- 3. Deployer cannot burn or lock user funds
- 4. Deployer cannot pause the contract
- 5. Overall checkup (Smart Contract Security)

Inheritance Graph v1.0



Verify Claims

Correct implementation of Token standard

Tested	Verified
√	√

Function	Description	Exist	Tested	Verified
TotalSupply	provides information about the total token supply	\checkmark	√	\checkmark
BalanceOf	provides account balance of the owner's account	\checkmark	√	\checkmark
Transfer	executes transfers of a specified number of tokens to a specified address	√	√	√
TransferFrom	executes transfers of a specified number of tokens from a specified address	√	√	√
Approve	allow a spender to withdraw a set number of tokens from a specified account	√	√	√
Allowance	returns a set number of tokens from a spender to the owner	√	1	✓

Write functions of contract

27. transferOwnership



Deployer cannot mint any new tokens

Name	Exist	Tested	Verified
Deployer cannot mint	-	-	-

Max / Total Supply: 10.000.000.000



Deployer cannot burn or lock user funds

Name	Exist	Tested	Verified
Deployer cannot lock	√	√	X
Deployer cannot burn	-	-	-

Comments:

v1.0

- Deployer locks user funds by setting _maxWalletToken to 0
- Deployer locks user funds by setting _maxTxAmount to 0
- Deployer locks user funds by setting _walletMax to 0
- Deployer can lock user funds by blacklisting
- Deployer can lock user funds with cooldown enabled + interval because there is not limitations
- Deployer can lock user funds by tradingOpen state variable

Deployer cannot pause the contract

Name	Exist	Tested	Verified
Deployer cannot pause	_	_	-



Overall checkup (Smart Contract Security)

Tested	Verified
\checkmark	\checkmark

Legend

Attribute	Symbol
Verfified / Checked	\checkmark
Partly Verified	
Unverified / Not checked	X
Not available	-

Modifiers

manageBlacklist

cooldownEnabled

tradingStatus

convertLiquidityBalance

excludeFromReward

includeInReward

excludeFromFee

includeInFee

setNumTokensToLiquidity

feeSetReflect

feeSetLiquidity

feeSetMarketing

feeSetUtilityDevelopment

feeSetDev

setMaxTxPercent

setMaxHoldPercent

setSwapAndLiquifyEnabled

process_TokensFromContract

process_BNBFromContract

Comments

- changeIsAuthorized
 - Add/remove authorized status for address. Addresses which are authorized can transfer before tradingOpen is true
- setEnableAntiBot
 - Deployer can active antibot onPreTransferCheck function
- setTaxes
 - · Fees can be set without any limitation
- setMaxTxAmount
 - _maxTxAmount can be set without any limitation
- setWalletLimit
 - _walletMax can be set without any limitation
- setNumTokensBeforeSwap
 - · minimumTokensBeforeSwap can be set without any limitation

CallGraph



Source Units in Scope v1.0

Туре	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
≥ €Q	contracts/solidray.sol	5	6	830	608	445	29	547	S
≥ ≥ \	Totals	5	6	830	608	445	29	547	■ Š ♣

Legend

Attribute	Description			
Lines	total lines of the source unit			
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)			
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)			
Comment Lines	lines containing single or block comments			
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces,)			

Audit Results

AUDIT PASSED

Critical issues

- no critical issues found -

High issues

- no high issues found -

Medium issues

Issue	File	Type	Line	Description
#1	Main	Reentrancy vulnerabilities	779	Apply the [`check-effects-interactions pattern`](http://solidity.readthedocs.io/en/v0.4.21/security-considerations.html#re-entrancy).or nonReentrant modifier from OpenZeppelin

Low issues

Issue	File	Type	Line	Description
#1	Main	Contract doesn't import npm packages from source (like OpenZeppelin etc.)		We recommend to import all packages from npm directly without flatten the contract. Functions could be modified or can be susceptible to vulnerabilities
#2	Main	A floating pragma is set	17	The current pragma Solidity directive is ""^0.8.4"".
#3	Main	State variable visibility is not set	416	It is best practice to set the visibility of state variables explicitly

#4	Main	Local variables shadowing	771, 492	We recommend to change owner to owner_
				Rename the local variables that shadow another component

Informational issues

Issue	File	Туре	Line	Description
#1	Main	State variables that could be declared constant (constable-states)	388, 385, 383, 392, 393, 384	Add the `constant` attributes to state variables that never change
#2	Main	Unused return values	896	Ensure that all the return values of the function calls are used and handle both success and failure cases if needed by the business logic
#3	Main	Unused state variable	385, 406, 384	Remove unused state variables
#4	Main	Unnecessary condition	547-551	Write instead tokensToConvert = contractTokenBalance In a single line because there is not difference in the if condition
#5	Main	Functions that are not used	739, 733	Remove unused functions

Audit Comments 20. December 2021:

- Developer can
 - set maxTxAmount to zero to lock transfer function
 - Enable/disable swap and liquify
- Deployer locks user funds
 - by setting _maxWalletToken to 0
 - by setting _maxTxAmount to 0
 - by setting _walletMax to 0
 - by blacklisting addresses
 - · with cooldown enabled + interval because there is not limitations
 - by disable tradingOpen state variable
- · Read whole report for more information

SWC Attacks

ID	Title	Relationships	Status
<u>SW</u> <u>C-1</u> <u>36</u>	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
<u>SW</u> <u>C-1</u> <u>35</u>	Code With No Effects	CWE-1164: Irrelevant Code	NOT PASSED
<u>SW</u> <u>C-1</u> <u>34</u>	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
<u>SW</u> <u>C-1</u> <u>33</u>	Hash Collisions With Multiple Variable Length	CWE-294: Authentication Bypass by Capture-replay	PASSED
<u>SW</u> <u>C-1</u> <u>32</u>	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
<u>SW</u> <u>C-1</u> <u>31</u>	Presence of unused variables	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-1</u> <u>30</u>	Right-To-Left- Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
<u>SW</u> <u>C-1</u> <u>29</u>	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
<u>SW</u> <u>C-1</u> <u>28</u>	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

SW C-1 27	Arbitrary Jump with Function Type	CWE-695: Use of Low-Level Functionality	PASSED
<u>SW</u> <u>C-1</u> <u>25</u>	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
<u>SW</u> <u>C-1</u> <u>24</u>	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
<u>SW</u> <u>C-1</u> <u>23</u>	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
<u>SW</u> <u>C-1</u> <u>22</u>	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
<u>SW</u> <u>C-1</u> <u>21</u>	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
<u>SW</u> <u>C-1</u> <u>20</u>	Weak Sources of Randomness from Chain	CWE-330: Use of Insufficiently Random Values	PASSED
<u>SW</u> <u>C-11</u> <u>9</u>	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-11</u> <u>8</u>	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
<u>SW</u> <u>C-11</u> <u>7</u>	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

<u>SW</u> <u>C-11</u> <u>6</u>	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>5</u>	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>4</u>	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
<u>SW</u> <u>C-11</u> <u>3</u>	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
<u>SW</u> <u>C-11</u> <u>2</u>	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>1</u>	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>O</u>	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
<u>SW</u> <u>C-1</u> <u>09</u>	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
<u>SW</u> <u>C-1</u> <u>08</u>	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	NOT PASSED
<u>SW</u> <u>C-1</u> <u>07</u>	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	NOT PASSED
<u>SW</u> <u>C-1</u> <u>06</u>	Unprotected SELFDESTRUC T Instruction	CWE-284: Improper Access Control	PASSED

<u>SW</u> <u>C-1</u> <u>05</u>	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
<u>SW</u> <u>C-1</u> <u>04</u>	Unchecked Call Return Value	CWE-252: Unchecked Return Value	NOT PASSED
<u>SW</u> <u>C-1</u> <u>03</u>	Floating Pragma	CWE-664: Improper Control of a Resource Through its Lifetime	NOT PASSED
<u>SW</u> <u>C-1</u> <u>02</u>	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
<u>SW</u> <u>C-1</u> <u>01</u>	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
<u>SW</u> <u>C-1</u> <u>00</u>	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED



Blockchain Security | Smart Contract Audits | KYC

