

Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY

Audit

Security Assessment 04. December, 2021

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Scope of Work	12
Inheritance Graph	12
Verify Claims	13
Modifiers	19
CallGraph	20
Source Units in Scope	21
Critical issues	22
High issues	22
Medium issues	22
Low issues	22
Informational issues	22
Commented Code exist	23
Audit Comments	23
SWC Attacks	24

Disclaimer

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	04. December 2021	Layout projectAutomated- /Manual-Security TestingSummary

Network

Binance Smart Chain (BEP20)

Website

https://flokipad.io/

Telegram

https://t.me/FlokiPadEcosystem

Twitter

https://twitter.com/flokipad

Description

Since its inception FlokiPad has been on a mission to make Defi more secure, accessible and rewarding. We've accomplished this by applying the concept of a circular ecosystem that aligns incentives for holders, novice investors, experienced traders, and developers.

Backed by years of blockchain experience and data driven research, our team is committed to bringing innovation to the forefront of our cutting edge technologies.

At FlokiPad we're creating a unique and collaborative dynamic launchpad dApp and utility package, available on Android and iOS. This was ultimately designed to facilitate ease, security and success for both ICO launches as well as for investors who will also benefit from optimal flexibility with our instant cross chain transactions and liquidity pools. Users will enjoy a streamlined user interface where they can convert their tokens in one simple click.

Project Engagement

During the 25th of November 2021, **FlokiPad Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.

Logo



Contract Link

v1.0

https://bscscan.com/address/ 0x367F881e42B83030dD73F0e2e8D951013cA97D16#code

Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.


Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
 - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
 - ii) Manual review of code, which is the process of reading source code line-byline in an attempt to identify potential vulnerabilities.
 - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
- 2. Testing and automated analysis that includes the following:
 - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
 - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

Used Code from other Frameworks/Smart Contracts (direct imports)

Imported packages:



Tested Contract Files

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

v1.0

File Name	SHA-1 Hash
contracts/flokipad.sol	11d0b1cc189313104101c3c6ce388c5ba3673027

Metrics

Source Lines v1.0

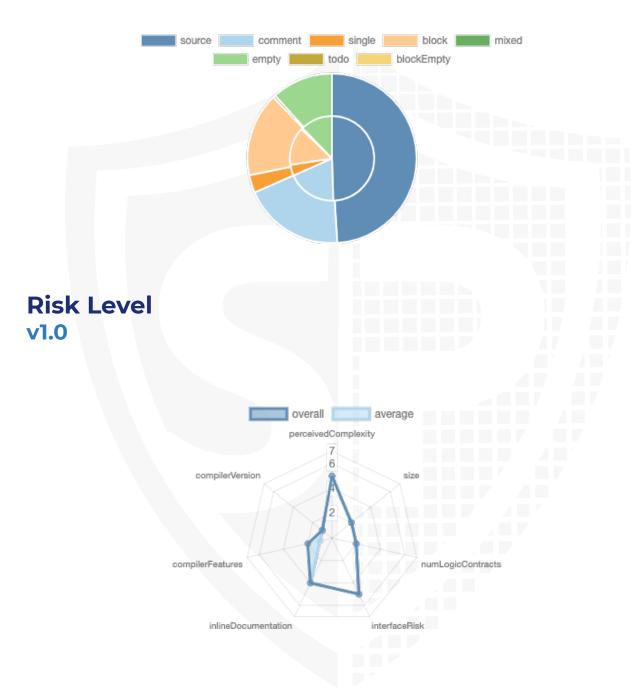

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	2	2	5	1

Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Version	Public	Payable
1.0	105	5

Version	External	Internal	Private	Pure	View
1.0	75	92	22	19	45

State Variables

Version	Total	Public
1.0	42	25

Capabilities

Version	Solidity Versions observed	Experim ental Features	Can Receive Funds	Uses Assembl Y	Has Destroya ble Contract s
1.0	^0.8.10		yes	yes (2 asm blocks)	


Scope of Work

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

- 1. Correct implementation of Token standard
- 2. Deployer cannot mint any new tokens
- 3. Deployer cannot burn or lock user funds
- 4. Deployer cannot pause the contract
- 5. Overall checkup (Smart Contract Security)

Inheritance Graph v1.0

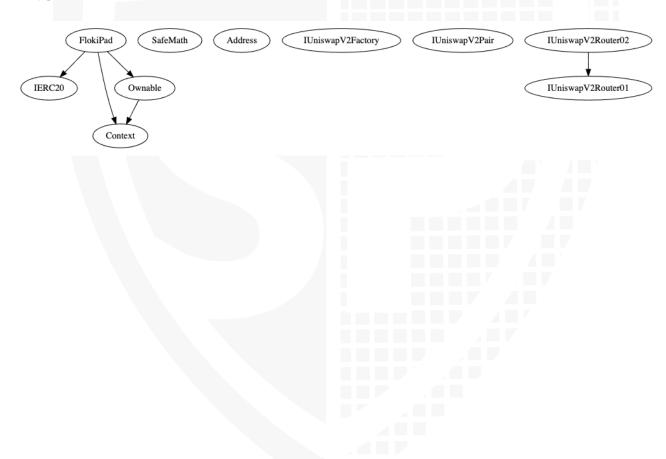

Verify Claims

Correct implementation of Token standard

Tested	Verified
\checkmark	√

Function	Description	Exist	Tested	Verified
TotalSupply	provides information about the total token supply	\checkmark	√	\checkmark
BalanceOf	provides account balance of the owner's account	\checkmark	\checkmark	\checkmark
Transfer	executes transfers of a specified number of tokens to a specified address	√	√	√
TransferFrom	executes transfers of a specified number of tokens from a specified address	√	√	√
Approve	allow a spender to withdraw a set number of tokens from a specified account	√	√	√
Allowance	returns a set number of tokens from a spender to the owner	√	1	√

approve clearStuckBalance decreaseAllowance deliver excludeFromFee excludeFromReward includeInFee includeInReward inc	/rite functions o	f contract	
ecreaseAllowance eliver xcludeFromFee xcludeFromReward xcludeInFee xcludeInReward increaseAllowance lock renounceOwnership rescueToken setBuyTaxes setBuyTaxes setBuyTaxes setMarketingWallet setMaxTxAmount setNumTokensSelToAddToLiquidity setNumTokensSelToAddToLiquidity setSelTaxes setSelTaxes			
selliver sciludeFromFee sciludeInFee cliudeInFee cliudeInReward noreaseAllowance oock renounceOwnership rescueToken setAirdropWallet setBuyTaxes setBuyTaxes setMarketingWallet setMarkTxAmount setNumTokensSeliToAddToLiquidIty setRouterAddress setSelTaxes setSelTaxes setSelTaxes setSelTaxes	earStuckBalance		
excludeFromReward increaseAllowance lock renounceOwnership rescueToken setAirdropWallet setBuyTaxes setLiquidityAddress setMarketingWallet setMaxTxAmount setNumTokensSellToAddToLiquidity setRouterAddress setSellTaxes setSellTaxes setSellTaxes setSwapAndLiquifyEnabled transfer transferFrom	decreaseAllowance		
excludeFromReward includeInReward . IncreaseAllowance . lock . renounceOwnership . rescueToken . setAirdropWallet . setBuyTaxes . setLiquidityAddress . setLiquidityAddress . setMarketingWallet . setRouterAddress . setRouterAddress . setSellTaxes . setSellTaxes . setSellTaxes . setSellTaxes . setSwapAndLiquifyEnabled . transfer . transferFrom	deliver		
excludeFromReward includeInFee includeInReward . IncreaseAllowance . look . renounceOwnership . rescueToken . setAirdropWallet 5. setBuyTaxes 5. setLiquidityAddress . setMarketingWallet 9. setMarXxAmount 9. setNumTokensSellToAddToLiquidity 9. setRouterAddress . setSellTaxes 2. setSwapAndLiquifyEnabled 9. transferFrom	excludeFromFee		
IncludeInFee IncludeInReward IncreaseAllowance Iock IncreaseAllowance IncreaseAllowance Iock Iock IncreaseAllowance Iock Iock IncreaseAllowance Iock Iock Iock Iock Iock Iock Iock Iock			
increaseAllowance lock renounceOwnership rescueToken setAirdropWallet setBuyTaxes setLiquidityAddress setMarketingWallet setMaxTxAmount setNumTokensSellToAddToLiquidity setRouterAddress setSellTaxes setSellTaxes setSwapAndLiquifyEnabled transfer transferFrom			
. IncreaseAllowance . lock . renounceOwnership . rescueToken . setAirdropWallet . setBuyTaxes . setLiquidityAddress . setMarketingWallet . setMaxTxAmount . setNumTokensSellToAddToLiquidity . setRouterAddress . setSellTaxes . setSellTaxes . setSwapAndLiquifyEnabled . transferFrom			
1. lock 2. renounceOwnership 3. rescueToken 3. setAirdropWallet 5. setBuyTaxes 5. setLiquidityAddress 7. setMarketingWallet 8. setMaxTxAmount 9. setMumTokensSellToAddToLiquidity 9. setRouterAddress 9. setSwapAndLiquifyEnabled 9. transfer 1. transferFrom			
. renounceOwnership d. rescueToken setAirdropWallet d. setBuyTaxes d. setLiquidityAddress d. setMarxtxAmount d. setNumTokensSellToAddToLiquidity d. setRouterAddress d. setSellTaxes d. setSwapAndLiquifyEnabled d. transfer d. transferFrom). increaseAllowance		
2. renounceOwnership 3. rescueToken 3. setAirdropWallet 5. setBuyTaxes 5. setLiquidityAddress 7. setMarketingWallet 8. setMaxTxAmount 9. setNumTokensSellToAddToLiquidity 9. setRouterAddress 1. setSellTaxes 2. setSwapAndLiquifyEnabled 8. transfer 8. transferFrom	I. lock		
setAirdropWallet setBuyTaxes setLiquidityAddress setMarketingWallet setMaxTxAmount setNumTokensSellToAddToLiquidity setRouterAddress setSellTaxes setSwapAndLiquifyEnabled transfer transferFrom	renounceOwnership		
setBuyTaxes setMarketingWallet setMaxTxAmount setNumTokensSellToAddToLiquidity setRouterAddress setSellTaxes setSwapAndLiquifyEnabled transfer transferFrom	. rescueToken		
is. setLiquidityAddress if. setMaxTxAmount is. setMaxTxAmount is. setNumTokensSellToAddToLiquidity is. setRouterAddress is. setSellTaxes is. setSwapAndLiquifyEnabled is. transfer is. transferFrom	. setAirdropWallet		
. setMarketingWallet . setMaxTxAmount . setNumTokensSellToAddToLiquidity . setRouterAddress . setSellTaxes . setSwapAndLiquifyEnabled . transfer . transferFrom	. setBuyTaxes		
setMaxTxAmount setNumTokensSellToAddToLiquidity setRouterAddress setSellTaxes setSwapAndLiquifyEnabled transfer transferFrom	setLiquidityAddress		
setNumTokensSellToAddToLiquidity setRouterAddress setSellTaxes setSwapAndLiquifyEnabled transfer transferFrom	. setMarketingWallet		
D. setNumTokensSellToAddToLiquidity D. setRouterAddress D. setSellTaxes D. setSwapAndLiquifyEnabled D. setSwapAndLiquifyEnabled D. transfer D. transferFrom	3. setMaxTxAmount		
2. setSellTaxes 2. setSwapAndLiquifyEnabled 3. transfer 4. transferFrom	setNumTokensSellToAddToLiquidity		
2. setSwapAndLiquifyEnabled 3. transfer 4. transferFrom	D. setRouterAddress		
2. setSwapAndLiquifyEnabled 3. transfer 4. transferFrom	1. setSellTaxes		
3. transfer 4. transferFrom	2. setSwapAndLiquifyEnabled		
	i. transfer		
. transferOwnership	I. transferFrom		
	5. transferOwnership		

26. unlock

Deployer cannot mint any new tokens

Name	Exist	Tested	Verified	File
Deployer cannot mint	-	-	-	Main
Comment	Line: -			

Max / Total Supply: 10.000.000.000

Deployer cannot burn or lock user funds

Name	Exist	Tested	Verified
Deployer cannot lock	√	√	X
Deployer cannot burn	✓	✓	✓

Comments:

v1.0

- In each transfer a part of the amount is burned if the burnTax is above
 0
- Deployer can lock user funds if maxTxAmount is set to 0 with setMaxTxAmount function
- Deployer can set all taxes without any limitations which can lock user funds

Deployer cannot pause the contract

Name	Exist	Tested	Verified
Deployer cannot pause	-	_	-



Overall checkup (Smart Contract Security)

Tested	Verified
\checkmark	✓

Legend

Attribute	Symbol
Verfified / Checked	\checkmark
Partly Verified	
Unverified / Not checked	X
Not available	-

Modifiers

excludeFromReward

includeInReward

addLiquidity

excludeFromFee

includeInFee

setAirdropWallet

setMarketingWallet

setRouterAddress

setSwapAndLiquifyEnabled

setBuyTaxes

setSellTaxes

setLiquidityAddress

setNumTokensSellToAddToLiquidity

clearStuckBalance

setMaxTxAmount

rescueToken

CallGraph



Source Units in Scope v1.0

Туре	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
≥ €Q	contracts/flokipad.sol	5	5	1218	940	582	297	588	
≥ €Q	Totals	5	5	1218	940	582	297	588	■ Š ♣ ∴

Legend

Attribute	Description
Lines	total lines of the source unit
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)
Comment Lines	lines containing single or block comments
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces,)

Audit Results

AUDIT PASSED

Critical issues

- no critical issues found -

High issues

- no high issues found -

Medium issues

- no medium issues found -

Low issues

Issue	File	Type	Line	Description
#1	Main	Contract doesn't import npm packages from source (like OpenZeppelin etc.)	-	We recommend to import all packages from npm directly without flatten the contract. Functions could be modified or can be susceptible to vulnerabilities
#2	Main	A floating pragma is set	7	The current pragma Solidity directive is ""^0.8.10"".
#3	Main	Missing Zero Address Validation (missing- zero-check)	740, 1164, 1198, 1168, 1172	Check that the address is not zero
#4	Main	State variable visibility is not set	722	It is best practice to set the visibility of state variables explicitly

Informational issues

Issue	File	Type	Line	Description
#1	Main	State variables that could be declared constant (constable-states)	687, 685, 686, 681, 689	Add the `constant` attributes to state variables that never change

#2	Main	uniswapV2Pair is commented out	749	uniswapV2Pair is commented out in constructor but it can be set with setRouterAddress function
#3	Main	uniswapV2Pair is set with setLiquidityAddress	1198	Change the function and parameters name, when you want to change uniswapV2Pair

Commented Code exist

There are some instances of code being commented out in the following files that should be removed:

Line	Comment
750	/*uniswapV2Pair = IUniswapV2Factory(_uniswapV2Router.factory()) .createPair(address(this), _uniswapV2Router.WETH());*/

Recommendation

Remove the commented code, or address them properly.

Audit Comments

04. December 2021:

- · Taxes can be set without any limitations
- uniswapV2Pair can be set with setLiquidityAddress, this can be confusing for anyone reading the contract, make sure to change the name of the function or parameter

SWC Attacks

ID	Title	Relationships	Status
<u>SW</u> <u>C-13</u> <u>6</u>	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
<u>SW</u> <u>C-13</u> <u>5</u>	Code With No Effects	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-13</u> <u>4</u>	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
<u>SW</u> <u>C-13</u> <u>3</u>	Hash Collisions With Multiple Variable Length Arguments	CWE-294: Authentication Bypass by Capture-replay	PASSED
<u>SW</u> <u>C-13</u> <u>2</u>	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
<u>SW</u> <u>C-13</u> <u>1</u>	Presence of unused variables	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-13</u> <u>0</u>	Right-To-Left- Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
<u>SW</u> <u>C-12</u> <u>9</u>	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
<u>SW</u> <u>C-12</u> <u>8</u>	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

<u>SW</u> <u>C-12</u> <u>7</u>	Arbitrary Jump with Function Type Variable	CWE-695: Use of Low-Level Functionality	PASSED
<u>SW</u> <u>C-12</u> <u>5</u>	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
<u>SW</u> <u>C-12</u> <u>4</u>	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
<u>SW</u> <u>C-12</u> <u>3</u>	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
<u>SW</u> <u>C-12</u> <u>2</u>	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
<u>SW</u> <u>C-12</u> <u>1</u>	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
<u>SW</u> <u>C-12</u> <u>0</u>	Weak Sources of Randomness from Chain Attributes	CWE-330: Use of Insufficiently Random Values	PASSED
<u>SW</u> <u>C-11</u> <u>9</u>	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-11</u> <u>8</u>	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
<u>SW</u> <u>C-11</u> <u>7</u>	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

<u>SW</u> <u>C-11</u> <u>6</u>	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>5</u>	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>4</u>	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
<u>SW</u> <u>C-11</u> <u>3</u>	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
<u>SW</u> <u>C-11</u> <u>2</u>	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-111</u>	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>O</u>	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
<u>SW</u> <u>C-10</u> <u>9</u>	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
<u>SW</u> <u>C-10</u> <u>8</u>	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	NOT PASSED
<u>SW</u> <u>C-10</u> <u>7</u>	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	PASSED
<u>SW</u> <u>C-10</u> <u>6</u>	Unprotected SELFDESTRUC T Instruction	CWE-284: Improper Access Control	PASSED

<u>SW</u> <u>C-10</u> <u>5</u>	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
<u>SW</u> <u>C-10</u> <u>4</u>	Unchecked Call Return Value	CWE-252: Unchecked Return Value	PASSED
<u>SW</u> <u>C-10</u> <u>3</u>	Floating Pragma	CWE-664: Improper Control of a Resource Through its Lifetime	NOT PASSED
<u>SW</u> <u>C-10</u> <u>2</u>	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
<u>SW</u> <u>C-10</u> <u>1</u>	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
<u>SW</u> <u>C-10</u> <u>0</u>	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED



Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY