

Afillar Standard API Specification

Insurance Integration

A Standard Orchestration Layer for Channel Partners

Version 1.1

02-Oct-2026

Prepared for the Afillar Channel Integration Program

Table of Contents

Table of Contents	2
1. Introduction	3
1.1 Purpose of the Document	3
1.2 Target Audience	3
1.3 Supported Use Cases	3
1.4 Contact Information	3
1.5 Versioning & Release Log	3
2. Workflow Overview	4
2.1 High-Level Integration Flow	4
2.2 Two Journeys: Sales and Servicing	4
2.3 Step-by-Step Dependencies	4
2.4 Data Flow Diagrams	5
2.4.1 Sales Journey — Sequence	5
2.4.2 Orchestration Flows — Sales and Cancellation	5
3. API Specifications	7
3.0 API Use Case	7
3.1 Get Token	8
3.2 Get Plans	9
3.3 Create Proposal	13
3.4 Update Proposal	18
3.5 Issue Policy	23
3.6 Load Proposal / Policy	26
3.7 Reject Proposal	30
3.8 Policy Documents (PDF)	31
3.9 Application Form (PDF)	32
3.10 Cancel Check (Checker)	33
3.11 Cancel Approve (Approver)	36
3.12 Master Data	38
3.13 Commission Query	39
3.14 Policy Feed File	42
4. Standard Data Model — Product, Plan & Cover Reference	43
4.1 Products and Variants	43
4.2 Cover Catalogue	43
4.3 Plans, Premiums and Sums Insured	44
5. Data Tables	46
5.1 Code Table Values	46
6. Business Rules	48
6.1 Eligibility, Premium Mode and Term	48
6.2 Cancellation and Refund	48
7. Error Handling and Security	49
7.1 Error Response	49
7.2 Field Error Codes	49
7.3 Request Conventions and Security	49
8. Testing and Go-Live	51

1. Introduction

1.1 Purpose of the Document

This document defines the Standard API Specification for selling and servicing Afillar Insurance Company retail insurance products through the InsureMO platform. It establishes a single orchestration layer — one request and response structure, one field-level data model and one workflow — that a channel, bank or broker integrates against once, while the platform absorbs the underlying rating, policy administration, endorsement and document services. It is designed to guide channel partners and integration teams through the technical and functional aspects of quoting, proposing, issuing, printing, cancelling and reporting policies.

This specification is a standard contract: every API, field and workflow described here applies uniformly to all products listed in section 4. Product specific values (plans, premiums, covers, age and term limits) are reference data and are listed in sections 4 and 5; they are returned by the APIs and are not hard-coded in the integration.

1.2 Target Audience

- Digital Banking and Insurance Product Teams
- Integration Engineers and Solution Architects
- Insurance Product and Operations SMEs
- QA Automation Engineers
- InsureMO System Integrators

1.3 Supported Use Cases

- Plan, premium and cover lookup for an insured person (Get Plans), for single, annual and monthly premium modes
- Application (proposal) creation and update, with insured, beneficiary and payment details
- Policy issuance and retrieval of the proposal or policy record (Load Proposal / Policy)
- Policy documents — application form and policy certificate as PDF
- Policy cancellation with a maker-checker approval: the Checker calculates the refund (free look or pro-rata) and creates the request, the Approver approves or rejects it
- Proposal rejection for applications that are not taken forward
- Master data (code tables), commission query and policy feed file for reporting and reconciliation

1.4 Contact Information

Contact Person	Role	Email

1.5 Versioning & Release Log

Version	Date	Status	Description
v1.1	02-Oct-2026	Released	CarrierCode and CarrierName (insurer code and name, from the insurer table) returned by every API and accepted as an optional, validated request field on Get Plans, Create Proposal and Update Proposal; insurer table added to the data tables; insurer master data available from Master Data.
v1.0	02-Oct-2026	Released	Standard API Kit — Afillar Insurance Company: Get Plans, Create Proposal, Update Proposal, Issue Policy, Load Proposal / Policy, Reject Proposal, Policy Documents, Cancellation (Checker and Approver), Master Data, Commission Query and Policy Feed File for seven products, with ChannelCode on every request.

2. Workflow Overview

2.1 High-Level Integration Flow

Generate Access Token

Get Plans — plans, premiums, commission and covers for the insured and the chosen product variant; plan eligibility, age and term rules are checked in the same call

Create Proposal — captures the insured, beneficiary and payment detail for the chosen plan; the premium is calculated by the platform and returned in the same call

Update Proposal — optional, while the proposal is open (enrolment, corrections)

Issue Policy — issues the policy and returns the policy number

Policy Documents — application form and policy certificate (PDF)

Load Proposal / Policy — full record of a proposal or an issued policy

Cancel Check (Checker) and Cancel Approve (Approver) — refund calculation, request and approval

Reject Proposal — closes an open proposal that is not taken forward

Master Data, Commission Query and Policy Feed File — reference data and reporting

2.2 Two Journeys: Sales and Servicing

Journey A — Sales

The channel shows the plans, creates the proposal for the chosen plan, optionally updates it with beneficiary and payment details, issues the policy and prints the documents. A proposal that is not wanted is rejected. An issued proposal cannot be updated, issued again or rejected.

- Get Plans
- Create Proposal
- Update Proposal (optional)
- Issue Policy
- Policy Documents
- Load Proposal / Policy

Journey B — Cancellation (maker-checker)

Cancellation needs two steps by two roles. The Checker calls Cancel Check with the cancellation date; the platform calculates the refund and creates a pending request. The Approver calls Cancel Approve with the request number: APPROVE cancels the policy and returns the refund, REJECT closes the request and keeps the policy in force.

- Cancel Check (Checker) — premium details, refund details, request number
- Cancel Approve (Approver) — APPROVE or REJECT
- Load Policy — status Cancelled and the endorsement

2.3 Step-by-Step Dependencies

Step	Depends On	Produces
Get Token	Credentials	Bearer Token
Get Plans	Token, ChannelCode, Product, Premium Mode, Insured date of birth	Plans with DuePremium, Commission and covers
Create Proposal	Get Plans response (PlanId), insured detail	ProposalNo, premium
Update Proposal (Optional)	ProposalNo	Updated proposal
Issue Policy	ProposalNo (open proposal)	PolicyNo
Policy Documents	PolicyNo or ProposalNo	PDF
Load Proposal / Policy	ProposalNo or PolicyNo	Full record

Step	Depends On	Produces
Cancel Check (Checker)	PolicyNo (in force), cancellation date, reason	RequestNo, premium and refund details
Cancel Approve (Approver)	RequestNo, Decision	Policy status, RefundPremium, EndorsementNo
Reject Proposal	ProposalNo (open)	Confirmation
Commission Query / Feed File	PolicyNo, product, or a period	Commission records / policy file

2.4 Data Flow Diagrams

2.4.1 Sales Journey — Sequence

The diagram shows the touch points of the sales journey between the channel, the APIs and the platform services. Every call carries the bearer token and the ChannelCode.

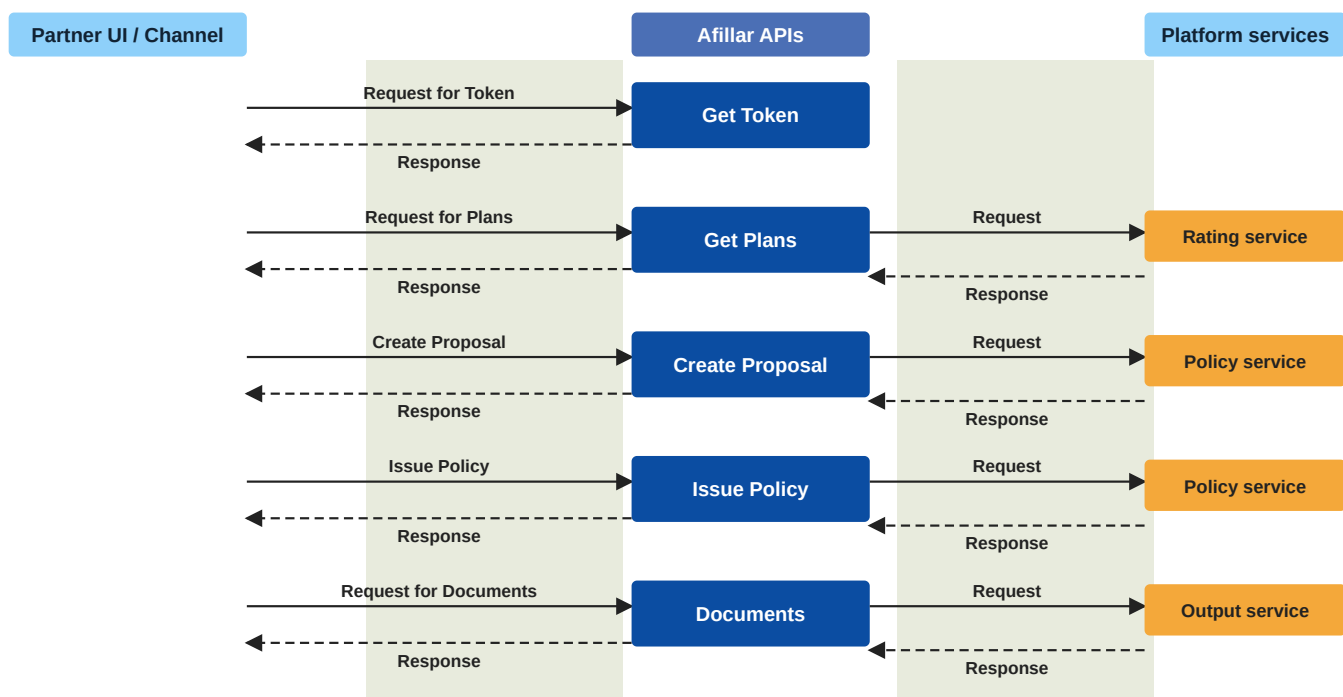


Figure 1: Sales journey — sequence across the channel, the APIs and the platform

2.4.2 Orchestration Flows — Sales and Cancellation

The diagram lays out both journeys side by side. Every step is an atomic API; the cancellation journey is a maker-checker pair that works on the pending request created by the Checker.

INSURANCE — API ORCHESTRATION FLOWS

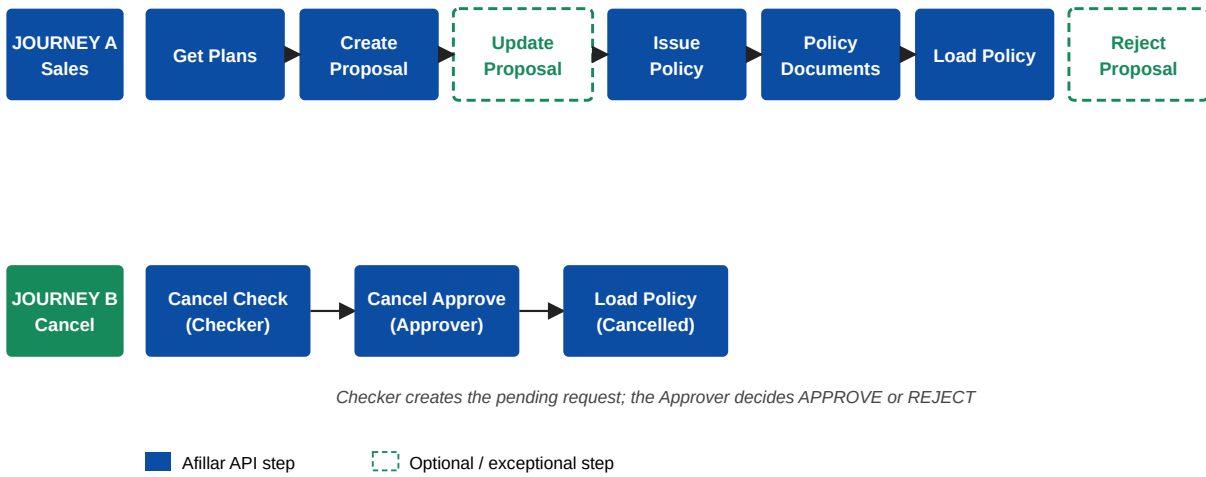


Figure 2: Insurance API orchestration flows — Sales (Journey A) and Cancellation (Journey B)

3. API Specifications

3.0 API Use Case

Get Token:

- To get secure access to the APIs.

Get Plans:

- Returns every plan of the product variant with the annual (or single) premium, the commission and the cover list for the insured details sent.
- Checks the insured age and the term against the product rules when the date of birth and term are supplied.
- Supports single, annual and monthly premium modes where the product offers them.

Create Proposal:

- Takes the insured, beneficiary and payment detail and the chosen PlanId, and creates the proposal; the premium is calculated by the platform from the plan and is never taken from the request.
- Returns the ProposalNo used by every following call.

Update Proposal:

- Updates an open proposal before issue; the whole proposal is sent again.

Issue Policy:

- Issues an open proposal and returns the policy number and the policy data.

Load Proposal / Policy:

- Atomic query API: returns the stored proposal (proposalNo) or the issued policy (policyNo) of the calling channel.

Reject Proposal:

- Closes an open proposal with a reason.

Policy Documents / Application Form:

- Returns the policy certificate or the application form as PDF; the print data can be returned as JSON.

Cancel Check (Checker):

- Calculates the refund for the cancellation date (free look or pro-rata), returns premium details, refund details and the current policy status, and creates the pending cancellation request.

Cancel Approve (Approver):

- Approves the request (the policy is cancelled through a platform endorsement and the refund is returned) or rejects it (the policy stays in force).

Master Data:

- Lists the values of a code table for drop-downs and validation.

Commission Query:

- Commission by policy, by plan configuration or for a period.

Policy Feed File:

- Generates the policy feed file for a period as Excel or JSON for reporting and reconciliation.

3.1 Get Token

This API is used to obtain an authentication token using the user name and password issued to your channel during onboarding. The token received from this endpoint is passed in the “Authorization” header as a Bearer token when invoking the subsequent APIs. When a call returns HTTP 401 the token has expired: call this API again.

Request URL: {casUrl}/cas/ebao/v2/json/tickets

Request Method: POST

Request Header: Content-Type: application/json | x-mo-user-source-id: platform | x-mo-tenant-id: {tenant} (tenant code provided at onboarding)

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
	username	String	M	API user name issued to the channel
	password	String	M	Password of the API user (never logged or echoed back)

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
	access_token	String	Bearer access token (the Postman collection stores it in the variable token)

3.2 Get Plans

Returns the plans of a product variant with premium, commission and covers for the insured details supplied. Plan eligibility, the insured age and the policy term are checked against the product rules; the premium of every plan is calculated by the platform. The same policy body structure is used by Create Proposal, so the response can be reused as the base of the proposal.

Request URL: /up/get-plans

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
Policy	ProductCode	String	M	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001); 3-10 characters
Policy	ProductSubcode	String	M	Product variant (see section 4); 1-5 characters
Policy	PremiumModeCode	String	C	Premium mode, from PremiumMode - mandatory where the plans of the variant differ by premium mode (UPPA001, TL001, CI001, LP001); see the Product sheet (1 = Single Premium; 2 = Annual Premium; 3 = Monthly Premium)
Policy	PolicyTerm	Integer	C	Policy term in years - single premium: between the minimum and maximum term of the product; annual and monthly premium: 1 year; 1 to 99
Policy	EffectiveDate	Date	O	Policy start date (YYYY-MM-DD)
Policy	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters
Policy	CarrierCode	String	O	Carrier code (AFIC = Afillar Insurance Company); 2-10 characters
Policy	ApplicationNo	String	O	Partner's own unique application reference
Policy	ExpiryDate	Date	O	Policy end date (YYYY-MM-DDT23:59:59)
Policy	UserName	String	O	User who captures the application
Policy	ApplyDate	Date	O	Application date (YYYY-MM-DD)
Policy	BranchCode	String	O	Branch, from BranchCode
Policy	DiscountAmount	Integer	O	Discount amount requested
Policy	StaffId	String	O	Staff id of the user
PolicyCustomer	CIFNumber	String	O	Customer CIF number
PolicyCustomer	CustomerType	String	O	Customer type, from CustomerType
PolicyLob	ProductCode	String	O	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyRisk	DateOfBirth	Date	O	Insured date of birth (YYYY-MM-DD)
PolicyRisk	Gender	String	O	Gender, from GenderCode
PolicyRisk	IdNo	String	O	ID or passport number
PolicyRisk	IdType	String	O	ID type, from IdType
PolicyRisk	Salutation	String	O	Salutation, from Salutation
PolicyRisk	InsuredName	String	O	Insured full name
PolicyRisk	ResidentStatus	String	O	Resident status, from ResidentStatus
PolicyRisk	Email	String	O	E-mail address
PolicyRisk	MaritalStatus	String	O	Marital status, from InsMaritalStatus

Parent Object	Field Name	Data Type	Required	Description
PolicyRisk	PostCode	String	O	PO box / post code
PolicyRisk	Mobile	String	O	Mobile number (returned masked)
PolicyRisk	Address	String	O	Communication address
PolicyRisk	MonthSalaryIncome	String	O	Monthly salary income
PolicyRisk	ProductElementCode	String	O	Risk element code

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent. The optional insured and policy fields are used for the age and premium check when they are supplied.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Policy	ApplicationNo	String	Partner's own unique application reference
Policy	ApplyDate	Date	Application date (YYYY-MM-DD)
Policy	BranchCode	String	Branch, from BranchCode
Policy	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
Policy	DiscountAmount	Integer	Discount amount requested
Policy	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
Policy	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
Policy	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
Policy	PolicyStatus	Integer	Policy status
Policy	PremiumModeCode	String	Premium mode, from PremiumMode
Policy	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
Policy	ProductSubcode	String	Product variant (see section 4)
Policy	StaffId	String	Staff id of the user
Policy	UserName	String	User who captures the application
Policy	CarrierCode	String	Carrier code
Policy	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyCustomer	CIFNumber	String	Customer CIF number
PolicyCustomer	CustomerType	String	Customer type, from CustomerType
PolicyLob	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyLob	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyRisk	Address	String	Communication address
PolicyRisk	DateOfBirth	Date	Insured date of birth (YYYY-MM-DD)
PolicyRisk	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyRisk	Email	String	E-mail address
PolicyRisk	Gender	String	Gender, from GenderCode
PolicyRisk	IdNo	String	ID or passport number
PolicyRisk	IdType	String	ID type, from IdType

Parent Object	Field Name	Data Type	Description
PolicyRisk	InsuredName	String	Insured full name
PolicyRisk	MaritalStatus	String	Marital status, from InsMaritalStatus
PolicyRisk	Mobile	String	Mobile number (returned masked)
PolicyRisk	MonthSalaryIncome	String	Monthly salary income
PolicyRisk	PostCode	String	PO box / post code
PolicyRisk	ProductElementCode	String	Risk element code
PolicyRisk	ResidentStatus	String	Resident status, from ResidentStatus
PolicyRisk	Salutation	String	Salutation, from Salutation
PlanList	Commission	Integer	Commission for the plan
PlanList	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PlanList	PlanId	String	Plan id of the product variant
PlanList	PlanName	String	Plan name
PolicyCoverage	CoverageCode	String	Cover code
PolicyCoverage	CoverageDescription	String	Cover description
PolicyCoverage	ProductElementCode	String	Risk element code

Sample Request

```

POST {baseUrl}/up/get-plans
{
  "ApplicationNo": "1790935382104",
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "UserName": "Salman",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "DiscountAmount": 10,
  "StaffId": "76",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1"
    }
  ],
  "PolicyLobList": [
    {
      "PolicyRiskList": [
        {
          "Gender": "1",
          "IdNo": "123456789",
          "IdType": "1",
          "Salutation": "1",
          "InsuredName": "Mohamed",
          "DateOfBirth": "1988-10-01",
          "ResidentStatus": "1",
          "Email": "Mohamed@gmail.com",
          "MaritalStatus": "1",
          "PostCode": "100345",
          "Mobile": "9989374444",
          "Address": "Oman",
          "MonthSalaryIncome": "10000",
          "ProductElementCode": "R00001"
        }
      ],
      "ProductCode": "UPPA001"
    }
  ],
  "ProductCode": "UPPA001",
  "ProductSubcode": "1",
  "ChannelCode": "SOHAR",
  "PremiumModeCode": "2"
}

```

Sample Response

```
{
  "ApplicationNo": "1790935382104",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "ChannelCode": "SOHAR",
  "DiscountAmount": 10,
  "DuePremium": 0,
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1",
      "PolicyStatus": 2
    }
  ],
  "PolicyLobList": [
    {
      "DuePremium": 0,
      "PolicyRiskList": [
        {
          "Address": "Oman",
          "DateOfBirth": "1988-10-01",
          "DuePremium": 0,
          "Email": "Mohamed@gmail.com",
          "Gender": "1",
          "IdNo": "123456789",
          "IdType": "1",
          "InsuredName": "Mohamed",
          "MaritalStatus": "1",
          "Mobile": "998***4444",
          "MonthSalaryIncome": "10000",
          "PlanList": [
            {
              "Commission": 44.1,
              "DuePremium": 68,
              "PlanId": "1",
              "PlanName": "Plan 1",
            }
          ]
        }
      ]
    }
  ],
  ...
}
```

Errors

- 400 OUT_OF_RANGE — insured age or term outside the product limits
- 400 NOT_ALLOWED — premium mode not allowed for the product
- 400 REQUIRED — PremiumModeCode where plans differ by mode
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.3 Create Proposal

Creates a proposal (application) for the chosen plan. The request carries the insured, beneficiary and payment detail together with the PlanId selected from Get Plans. The premium and commission are calculated by the platform from the plan; premium, commission, status and policy number values sent by the caller are ignored. Send OrgCode 1 (the service adds it when it is missing).

Request URL: /up/proposal

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
Policy	ProductCode	String	M	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001); 3-10 characters
Policy	ProductSubcode	String	M	Product variant (see section 4); 1-5 characters
Policy	PremiumModeCode	String	C	Premium mode, from PremiumMode - mandatory where the plans of the variant differ by premium mode; must be a mode allowed for the product (1 = Single Premium; 2 = Annual Premium; 3 = Monthly Premium)
Policy	PolicyTerm	Integer	M	Policy term in years; 1 to 99
Policy	EffectiveDate	Date	M	Policy start date (YYYY-MM-DD)
Policy	ApplicationNo	String	M	Partner's own unique application reference; 1-30 characters
Policy	ExpiryDate	Date	M	Policy end date (YYYY-MM-DDT23:59:59)
Policy	ApplyDate	Date	M	Application date (YYYY-MM-DD)
Policy	UserName	String	M	User who captures the application; 1-50 characters
Policy	BranchCode	String	M	Branch, from BranchCode (001 = CBD Branch)
Policy	StaffId	String	O	Staff id of the user; 1-20 characters
Policy	DiscountAmount	Double	O	Discount amount requested; 0 to 1000000
Policy	PlanId	String	M	Plan id of the product variant (1 = Plan 1; 2 = Plan 2; 3 = Plan 3; 4 = Plan 4; 5 = Plan 5)
Policy	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters
Policy	CarrierCode	String	O	Carrier code (AFIC = Afillar Insurance Company); 2-10 characters
Policy	OrgCode	String	O	Issuing branch code; the service sends 1 when it is omitted - the service sends 1 when it is omitted (1); 1-10 characters
Policy	ProposalNo	String	X	Proposal number - Must not be sent when creating a proposal (use Update Proposal)
PolicyCustomer	CIFNumber	String	M	Customer CIF number; 1-20 characters
PolicyCustomer	CustomerType	String	M	Customer type, from CustomerType (1 = Normal; 2 = Staff; 3 = Special)
PolicyRisk	DateOfBirth	Date	M	Insured date of birth (YYYY-MM-DD)
PolicyRisk	InsuredName	String	M	Insured full name; 2-100 characters
PolicyRisk	Gender	String	M	Gender, from GenderCode (1 = Male; 2 = Female)
PolicyRisk	Salutation	String	M	Salutation, from Salutation (1 = Mr.; 2 = Mrs; 3 = Miss)

Parent Object	Field Name	Data Type	Required	Description
PolicyRisk	IdType	String	M	ID type, from IdType (1 = National ID / Resident Card; 2 = Passport Copy with Visa Page)
PolicyRisk	IdNo	String	M	ID or passport number; 3-30 characters
PolicyRisk	ResidentStatus	String	M	Resident status, from ResidentStatus (1 = Expat; 2 = Omani)
PolicyRisk	MaritalStatus	String	M	Marital status, from InsMaritalStatus (1 = Married; 2 = Single; 3 = Mr.; 4 = Mrs.; 5 = Ms.)
PolicyRisk	Mobile	String	M	Mobile number (returned masked)
PolicyRisk	Email	String	O	E-mail address; 5-100 characters
PolicyRisk	PostCode	String	O	PO box / post code; 1-10 characters
PolicyRisk	Address	String	M	Communication address; 2-200 characters
PolicyRisk	MonthSalaryIncome	Double	O	Monthly salary income; 0 to 100000000
BeneficiaryList	BeneficiaryName	String	M	Beneficiary name; 2-100 characters
BeneficiaryList	RelationshipCode	String	M	Relationship of the beneficiary, from Relationship (1 = Brother; 2 = Daughter; 3 = Son; 4 = Father; 5 = Mother; 6 = Spouse)
BeneficiaryList	Share	Double	C	Beneficiary share in percent - mandatory for every beneficiary that is sent; the shares of one insured must total 100; 1 to 100
BeneficiaryList	BeneficiarySequence	Integer	O	Beneficiary sequence number; 1 to 99
PolicyPaymentInfoList	LGCode	String	O	Payment LG code; 1-10 characters
PolicyPaymentInfoList	LCCode	String	O	Payment LC code; 1-10 characters
PolicyPaymentInfoList	IsInstallment	String	O	Whether the payment is made in instalments (Y / N) (Y, N)
PolicyPaymentInfoList	DebitAccountNo	String	O	Debit account number; 6-20 characters
PolicyPaymentInfoList	DebitRefNo	String	O	Debit transaction reference number; 1-30 characters
PolicyPaymentInfoList	TransactionDate	Date	O	Payment transaction date (YYYY-MM-DD)

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Policy	ApplicationNo	String	Partner's own unique application reference
Policy	ApplyDate	Date	Application date (YYYY-MM-DD)
Policy	BranchCode	String	Branch, from BranchCode
Policy	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
Policy	Commission	Integer	Commission for the plan
Policy	CommissionRate	Double	Commission rate
Policy	DiscountAmount	Integer	Discount amount requested
Policy	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
Policy	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
Policy	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
Policy	OrgCode	String	Issuing branch code; the service sends 1 when it is omitted

Parent Object	Field Name	Data Type	Description
Policy	PlanId	String	Plan id of the product variant
Policy	PolicyStatus	Integer	Policy status
Policy	PolicyTerm	String	Policy term in years
Policy	PremiumModeCode	String	Premium mode, from PremiumMode
Policy	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
Policy	ProductSubcode	String	Product variant (see section 4)
Policy	ProposalNo	String	Proposal number
Policy	ProposalStatus	String	Proposal status
Policy	StaffId	String	Staff id of the user
Policy	UserName	String	User who captures the application
Policy	CarrierCode	String	Carrier code
Policy	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyCustomer	CIFNumber	String	Customer CIF number
PolicyCustomer	CustomerType	String	Customer type, from CustomerType
PolicyLob	Commission	Double	Commission for the plan
PolicyLob	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyLob	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyLob	ProductElementCode	String	Risk element code
PolicyRisk	Address	String	Communication address
PolicyRisk	Commission	Double	Commission for the plan
PolicyRisk	DateOfBirth	Date	Insured date of birth (YYYY-MM-DD)
PolicyRisk	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyRisk	Email	String	E-mail address
PolicyRisk	Gender	String	Gender, from GenderCode
PolicyRisk	IdNo	String	ID or passport number
PolicyRisk	IdType	String	ID type, from IdType
PolicyRisk	InsuredName	String	Insured full name
PolicyRisk	MaritalStatus	String	Marital status, from InsMaritalStatus
PolicyRisk	Mobile	String	Mobile number (returned masked)
PolicyRisk	MonthSalaryIncome	Integer	Monthly salary income
PolicyRisk	PostCode	String	PO box / post code
PolicyRisk	ProductElementCode	String	Risk element code
PolicyRisk	ResidentStatus	String	Resident status, from ResidentStatus
PolicyRisk	Salutation	String	Salutation, from Salutation
BeneficiaryList	BeneficiaryName	String	Beneficiary name
BeneficiaryList	BeneficiarySequence	Integer	Beneficiary sequence number
BeneficiaryList	RelationshipCode	String	Relationship of the beneficiary, from Relationship
BeneficiaryList	Share	String	Beneficiary share in percent
PolicyPaymentInfoList	DebitAccountNo	String	Debit account number

Parent Object	Field Name	Data Type	Description
PolicyPaymentInfoList	DebitRefNo	String	Debit transaction reference number
PolicyPaymentInfoList	IsInstallment	String	Whether the payment is made in instalments (Y / N)
PolicyPaymentInfoList	LCCode	String	Payment LC code
PolicyPaymentInfoList	LGCode	String	Payment LG code
PolicyPaymentInfoList	PayRate	Integer	Pay Rate
PolicyPaymentInfoList	TransactionDate	Date	Payment transaction date (YYYY-MM-DD)
PlanList	Commission	Double	Commission for the plan
PlanList	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PlanList	PlanId	String	Plan id of the product variant
PlanList	PlanName	String	Plan name
PolicyCoverage	CoverageCode	String	Cover code
PolicyCoverage	CoverageDescription	String	Cover description
PolicyCoverage	ProductElementCode	String	Risk element code

Sample Request

```

POST {baseUrl}/up/proposal
{
  "ApplicationNo": "1790935382104",
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "UserName": "Salman",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "DiscountAmount": 10,
  "StaffId": "76",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1"
    }
  ],
  "PolicyLobList": [
    {
      "PolicyRiskList": [
        {
          "Gender": "1",
          "IdNo": "123456789",
          "IdType": "1",
          "Salutation": "1",
          "InsuredName": "Mohamed",
          "DateOfBirth": "1988-10-01",
          "ResidentStatus": "1",
          "Email": "Mohamed@gmail.com",
          "MaritalStatus": "1",
          "PostCode": "100345",
          "Mobile": "9989374444",
          "Address": "Oman",
          "MonthSalaryIncome": "10000",
          "PlanList": [
            {
              "PolicyCoverageList": [
                {
                  "ProductElementCode": "REX",
                  "SumInsured": 1500
                },
                {
                  "ProductElementCode": "ACD",
                  "SumInsured": 12000
                }
              ]
            }
          ]
        }
      ]
    }
  ]
}

```

```

    },
    {
      "ProductElementCode": "PTD",
    }
  ],
  ...

```

Sample Response

```

{
  "ApplicationNo": "1790935382104",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "ChannelCode": "SOHAR",
  "Commission": 0,
  "CommissionRate": 0.1,
  "DiscountAmount": 10,
  "DuePremium": 0,
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "OrgCode": "1",
  "PlanId": "1",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1",
      "PolicyStatus": 2
    }
  ],
  "PolicyLobList": [
    {
      "Commission": 44.1,
      "DuePremium": 68,
      "PolicyRiskList": [
        {
          "Address": "Oman",
          "BeneficiaryList": [
            {
              "BeneficiaryName": "Sayyed",
              "BeneficiarySequence": 1,
              "PolicyStatus": 2,
              "RelationshipCode": "1",
              "Share": "100"
            }
          ]
        }
      ],
      "Commission": 44.1,
      "DateOfBirth": "1988-10-01",
    }
  ],
  ...
}

```

Errors

- 400 UP-VALIDATION — age, term, premium mode, code values, INVALID_TOTAL for beneficiary shares
- A duplicate ApplicationNo is not rejected: use a unique value
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.4 Update Proposal

Updates an open proposal (enrolment: beneficiaries, payment details, corrected insured data). The complete proposal body is sent again together with the ProposalNo; the premium is recalculated. An issued or rejected proposal cannot be updated (HTTP 409).

Request URL: /up/update-proposal

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
Policy	ProductCode	String	M	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001); 3-10 characters
Policy	ProductSubcode	String	M	Product variant (see section 4); 1-5 characters
Policy	PremiumModeCode	String	C	Premium mode, from PremiumMode - mandatory where the plans of the variant differ by premium mode; must be a mode allowed for the product (1 = Single Premium; 2 = Annual Premium; 3 = Monthly Premium)
Policy	PolicyTerm	Integer	M	Policy term in years; 1 to 99
Policy	EffectiveDate	Date	M	Policy start date (YYYY-MM-DD)
Policy	ApplicationNo	String	M	Partner's own unique application reference; 1-30 characters
Policy	ExpiryDate	Date	M	Policy end date (YYYY-MM-DDT23:59:59)
Policy	ApplyDate	Date	M	Application date (YYYY-MM-DD)
Policy	UserName	String	M	User who captures the application; 1-50 characters
Policy	BranchCode	String	M	Branch, from BranchCode (001 = CBD Branch)
Policy	StaffId	String	O	Staff id of the user; 1-20 characters
Policy	DiscountAmount	Double	O	Discount amount requested; 0 to 1000000
Policy	PlanId	String	M	Plan id of the product variant (1 = Plan 1; 2 = Plan 2; 3 = Plan 3; 4 = Plan 4; 5 = Plan 5)
Policy	ProposalNo	String	M	Proposal number; 5-30 characters
Policy	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters
Policy	CarrierCode	String	O	Carrier code (AFIC = Afillar Insurance Company); 2-10 characters
Policy	OrgCode	String	O	Issuing branch code; the service sends 1 when it is omitted - the service sends 1 when it is omitted (1); 1-10 characters
PolicyCustomer	CIFNumber	String	M	Customer CIF number; 1-20 characters
PolicyCustomer	CustomerType	String	M	Customer type, from CustomerType (1 = Normal; 2 = Staff; 3 = Special)
PolicyRisk	DateOfBirth	Date	M	Insured date of birth (YYYY-MM-DD)
PolicyRisk	InsuredName	String	M	Insured full name; 2-100 characters
PolicyRisk	Gender	String	M	Gender, from GenderCode (1 = Male; 2 = Female)
PolicyRisk	Salutation	String	M	Salutation, from Salutation (1 = Mr.; 2 = Mrs; 3 = Miss)
PolicyRisk	IdType	String	M	ID type, from IdType (1 = National ID / Resident Card; 2 = Passport Copy with Visa Page)

Parent Object	Field Name	Data Type	Required	Description
PolicyRisk	IdNo	String	M	ID or passport number; 3-30 characters
PolicyRisk	ResidentStatus	String	M	Resident status, from ResidentStatus (1 = Expat; 2 = Omani)
PolicyRisk	MaritalStatus	String	M	Marital status, from InsMaritalStatus (1 = Married; 2 = Single; 3 = Mr.; 4 = Mrs.; 5 = Ms.)
PolicyRisk	Mobile	String	M	Mobile number (returned masked)
PolicyRisk	Email	String	O	E-mail address; 5-100 characters
PolicyRisk	PostCode	String	O	PO box / post code; 1-10 characters
PolicyRisk	Address	String	M	Communication address; 2-200 characters
PolicyRisk	MonthSalaryIncome	Double	O	Monthly salary income; 0 to 100000000
BeneficiaryList	BeneficiaryName	String	M	Beneficiary name; 2-100 characters
BeneficiaryList	RelationshipCode	String	M	Relationship of the beneficiary, from Relationship (1 = Brother; 2 = Daughter; 3 = Son; 4 = Father; 5 = Mother; 6 = Spouse)
BeneficiaryList	Share	Double	C	Beneficiary share in percent - mandatory for every beneficiary that is sent; the shares of one insured must total 100; 1 to 100
BeneficiaryList	BeneficiarySequence	Integer	O	Beneficiary sequence number; 1 to 99
PolicyPaymentInfoList	LGCode	String	M	Payment LG code; 1-10 characters
PolicyPaymentInfoList	LCCode	String	M	Payment LC code; 1-10 characters
PolicyPaymentInfoList	IsInstallment	String	M	Whether the payment is made in instalments (Y / N) (Y, N)
PolicyPaymentInfoList	DebitAccountNo	String	M	Debit account number; 6-20 characters
PolicyPaymentInfoList	DebitRefNo	String	M	Debit transaction reference number; 1-30 characters
PolicyPaymentInfoList	TransactionDate	Date	M	Payment transaction date (YYYY-MM-DD)

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Policy	ApplicationNo	String	Partner's own unique application reference
Policy	ApplyDate	Date	Application date (YYYY-MM-DD)
Policy	BranchCode	String	Branch, from BranchCode
Policy	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
Policy	Commission	Integer	Commission for the plan
Policy	CommissionRate	Double	Commission rate
Policy	DiscountAmount	Integer	Discount amount requested
Policy	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
Policy	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
Policy	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
Policy	OrgCode	String	Issuing branch code; the service sends 1 when it is omitted
Policy	PlanId	String	Plan id of the product variant

Parent Object	Field Name	Data Type	Description
Policy	PolicyStatus	Integer	Policy status
Policy	PolicyTerm	String	Policy term in years
Policy	PremiumModeCode	String	Premium mode, from PremiumMode
Policy	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
Policy	ProductSubcode	String	Product variant (see section 4)
Policy	ProposalNo	String	Proposal number
Policy	ProposalStatus	String	Proposal status
Policy	StaffId	String	Staff id of the user
Policy	UserName	String	User who captures the application
Policy	CarrierCode	String	Carrier code
Policy	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyCustomer	CIFNumber	String	Customer CIF number
PolicyCustomer	CustomerType	String	Customer type, from CustomerType
PolicyLob	Commission	Double	Commission for the plan
PolicyLob	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyLob	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyLob	ProductElementCode	String	Risk element code
PolicyRisk	Address	String	Communication address
PolicyRisk	Commission	Double	Commission for the plan
PolicyRisk	DateOfBirth	Date	Insured date of birth (YYYY-MM-DD)
PolicyRisk	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyRisk	Email	String	E-mail address
PolicyRisk	Gender	String	Gender, from GenderCode
PolicyRisk	IdNo	String	ID or passport number
PolicyRisk	IdType	String	ID type, from IdType
PolicyRisk	InsuredName	String	Insured full name
PolicyRisk	MaritalStatus	String	Marital status, from InsMaritalStatus
PolicyRisk	Mobile	String	Mobile number (returned masked)
PolicyRisk	MonthSalaryIncome	Integer	Monthly salary income
PolicyRisk	PostCode	String	PO box / post code
PolicyRisk	ProductElementCode	String	Risk element code
PolicyRisk	ResidentStatus	String	Resident status, from ResidentStatus
PolicyRisk	Salutation	String	Salutation, from Salutation
BeneficiaryList	BeneficiaryName	String	Beneficiary name
BeneficiaryList	BeneficiarySequence	Integer	Beneficiary sequence number
BeneficiaryList	RelationshipCode	String	Relationship of the beneficiary, from Relationship
BeneficiaryList	Share	String	Beneficiary share in percent
PolicyPaymentInfoList	DebitAccountNo	String	Debit account number
PolicyPaymentInfoList	DebitRefNo	String	Debit transaction reference number

Parent Object	Field Name	Data Type	Description
PolicyPaymentInfoList	IsInstallment	String	Whether the payment is made in instalments (Y / N)
PolicyPaymentInfoList	LCCode	String	Payment LC code
PolicyPaymentInfoList	LGCode	String	Payment LG code
PolicyPaymentInfoList	PayRate	Integer	Pay Rate
PolicyPaymentInfoList	TransactionDate	Date	Payment transaction date (YYYY-MM-DD)
PlanList	Commission	Double	Commission for the plan
PlanList	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PlanList	PlanId	String	Plan id of the product variant
PlanList	PlanName	String	Plan name
PolicyCoverage	CoverageCode	String	Cover code
PolicyCoverage	CoverageDescription	String	Cover description
PolicyCoverage	ProductElementCode	String	Risk element code

Sample Request

```

POST {baseUrl}/up/update-proposal
{
  "ProposalNo": "PUPPA0010000000225",
  "ApplicationNo": "1790935382104",
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "UserName": "Salman",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "DiscountAmount": 10,
  "StaffId": "76",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1"
    }
  ],
  "PolicyLobList": [
    {
      "PolicyRiskList": [
        {
          "Gender": "1",
          "IdNo": "123456789",
          "IdType": "1",
          "Salutation": "1",
          "InsuredName": "Mohamed",
          "DateOfBirth": "1988-10-01",
          "ResidentStatus": "1",
          "Email": "Mohamed@gmail.com",
          "MaritalStatus": "1",
          "PostCode": "100345",
          "Mobile": "9989374444",
          "Address": "Oman",
          "MonthSalaryIncome": "10000",
          "PlanList": [
            {
              "PolicyCoverageList": [
                {
                  "ProductElementCode": "REX",
                  "SumInsured": 1500
                },
                {
                  "ProductElementCode": "ACD",
                  "SumInsured": 12000
                }
              ]
            }
          ]
        }
      ]
    }
  ]
}

```

```
{
...
}
```

Sample Response

```
{
  "ApplicationNo": "1790935382104",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "ChannelCode": "SOHAR",
  "Commission": 0,
  "CommissionRate": 0.1,
  "DiscountAmount": 10,
  "DuePremium": 0,
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "OrgCode": "1",
  "PlanId": "1",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1",
      "PolicyStatus": 2
    }
  ],
  "PolicyLobList": [
    {
      "Commission": 44.1,
      "DuePremium": 68,
      "PolicyRiskList": [
        {
          "Address": "Oman",
          "BeneficiaryList": [
            {
              "BeneficiaryName": "Sayyed",
              "BeneficiarySequence": 1,
              "PolicyStatus": 2,
              "RelationshipCode": "1",
              "Share": "100"
            }
          ]
        }
      ],
      "Commission": 44.1,
      "DateOfBirth": "1988-10-01",
      ...
    }
  ]
}
```

Errors

- 404 unknown proposal
- 400 MISMATCH — product differs from the stored proposal
- 409 — proposal already issued or rejected
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.5 Issue Policy

Issues the policy for an open proposal and returns the policy data with the PolicyNo. The proposal must belong to the calling channel and to the ProductCode sent. A proposal that is already issued or rejected cannot be issued (HTTP 409).

Request URL: /up/issue

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
Policy	ProposalNo	String	M	Proposal number; 5-30 characters
Policy	ProductCode	String	M	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001); 3-10 characters
Policy	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Policy	ApplicationNo	String	Partner's own unique application reference
Policy	ApplyDate	Date	Application date (YYYY-MM-DD)
Policy	BranchCode	String	Branch, from BranchCode
Policy	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
Policy	Commission	Integer	Commission for the plan
Policy	CommissionRate	Double	Commission rate
Policy	DiscountAmount	Integer	Discount amount requested
Policy	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
Policy	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
Policy	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
Policy	IssueDate	Date	Date and time of issue
Policy	OrgCode	String	Issuing branch code; the service sends 1 when it is omitted
Policy	PlanId	String	Plan id of the product variant
Policy	PolicyNo	String	Policy number
Policy	PolicyStatus	Integer	Policy status
Policy	PolicyTerm	String	Policy term in years
Policy	PremiumModeCode	String	Premium mode, from PremiumMode
Policy	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
Policy	ProductSubcode	String	Product variant (see section 4)
Policy	ProposalNo	String	Proposal number
Policy	ProposalStatus	String	Proposal status

Parent Object	Field Name	Data Type	Description
Policy	StaffId	String	Staff id of the user
Policy	UserName	String	User who captures the application
Policy	CarrierCode	String	Carrier code
Policy	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyCustomer	CIFNumber	String	Customer CIF number
PolicyCustomer	CustomerType	String	Customer type, from CustomerType
PolicyLob	Commission	Double	Commission for the plan
PolicyLob	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyLob	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyLob	ProductElementCode	String	Risk element code
PolicyRisk	Address	String	Communication address
PolicyRisk	Commission	Double	Commission for the plan
PolicyRisk	DateOfBirth	Date	Insured date of birth (YYYY-MM-DD)
PolicyRisk	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyRisk	Email	String	E-mail address
PolicyRisk	Gender	String	Gender, from GenderCode
PolicyRisk	IdNo	String	ID or passport number
PolicyRisk	IdType	String	ID type, from IdType
PolicyRisk	InsuredName	String	Insured full name
PolicyRisk	MaritalStatus	String	Marital status, from InsMaritalStatus
PolicyRisk	Mobile	String	Mobile number (returned masked)
PolicyRisk	MonthSalaryIncome	Integer	Monthly salary income
PolicyRisk	PostCode	String	PO box / post code
PolicyRisk	ProductElementCode	String	Risk element code
PolicyRisk	ResidentStatus	String	Resident status, from ResidentStatus
PolicyRisk	Salutation	String	Salutation, from Salutation
BeneficiaryList	BeneficiaryName	String	Beneficiary name
BeneficiaryList	BeneficiarySequence	Integer	Beneficiary sequence number
BeneficiaryList	RelationshipCode	String	Relationship of the beneficiary, from Relationship
BeneficiaryList	Share	String	Beneficiary share in percent
PolicyPaymentInfoList	DebitAccountNo	String	Debit account number
PolicyPaymentInfoList	DebitRefNo	String	Debit transaction reference number
PolicyPaymentInfoList	IsInstallment	String	Whether the payment is made in instalments (Y / N)
PolicyPaymentInfoList	LCCode	String	Payment LC code
PolicyPaymentInfoList	LGCode	String	Payment LG code
PolicyPaymentInfoList	PayRate	Integer	Pay Rate
PolicyPaymentInfoList	TransactionDate	Date	Payment transaction date (YYYY-MM-DD)

Parent Object	Field Name	Data Type	Description
PlanList	Commission	Double	Commission for the plan
PlanList	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PlanList	PlanId	String	Plan id of the product variant
PlanList	PlanName	String	Plan name
PolicyCoverage	CoverageCode	String	Cover code
PolicyCoverage	CoverageDescription	String	Cover description
PolicyCoverage	ProductElementCode	String	Risk element code

Sample Request

```
POST {baseUrl}/up/issue
{
  "ProposalNo": "PUPPA0010000000225",
  "ProductCode": "UPPA001",
  "ChannelCode": "SOHAR"
}
```

Sample Response

```
{
  "ApplicationNo": "1790935382104",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "ChannelCode": "SOHAR",
  "Commission": 0,
  "CommissionRate": 0.1,
  "DiscountAmount": 10,
  "DuePremium": 0,
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "IssueDate": "2026-10-02T14:03:12",
  "OrgCode": "1",
  "PlanId": "1",
  "PolicyCustomerList": [
    {
      "CIFNumber": "45678",
      "CustomerType": "1",
      "PolicyStatus": 2
    }
  ],
  "PolicyLobList": [
    {
      "Commission": 44.1,
      "DuePremium": 68,
      "PolicyRiskList": [
        {
          "Address": "Oman",
          "BeneficiaryList": [
            {
              "BeneficiaryName": "Sayyed",
              "BeneficiarySequence": 1,
              "PolicyStatus": 2,
              "RelationshipCode": "1",
              "Share": "100"
            }
          ]
        }
      ],
      "Commission": 44.1,
      ...
    }
  ]
}
```

Errors

- 404 unknown proposal
- 400 MISMATCH — ProductCode differs
- 409 — already issued or rejected
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.6 Load Proposal / Policy

Atomic query API that returns the stored proposal (proposalNo) or the issued policy (policyNo) of the calling channel, with code descriptions for the coded fields. PolicyStatus 2 = in force, 3 = cancelled.

Request URL: /up/load-policy

Request Method: GET

Request Header: Authorization: Bearer {access_token}

Query Parameters

Parent Object	Field Name	Data Type	Required	Description
Query	policyNo	String	C	Policy number - send either policyNo or proposalNo, not both; 5-30 characters
Query	proposalNo	String	C	Proposal number - send either policyNo or proposalNo, not both; 5-30 characters
Query	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Policy	ApplicationNo	String	Partner's own unique application reference
Policy	ApplyDate	Date	Application date (YYYY-MM-DD)
Policy	BranchCode	String	Branch, from BranchCode
Policy	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
Policy	Commission	Integer	Commission for the plan
Policy	CommissionRate	Double	Commission rate
Policy	DiscountAmount	Integer	Discount amount requested
Policy	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
Policy	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
Policy	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
Policy	OrgCode	String	Issuing branch code; the service sends 1 when it is omitted
Policy	PlanId	String	Plan id of the product variant
Policy	PolicyStatus	Integer	Policy status
Policy	PolicyTerm	String	Policy term in years
Policy	PremiumModeCode	String	Premium mode, from PremiumMode
Policy	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
Policy	ProductSubcode	String	Product variant (see section 4)
Policy	ProposalNo	String	Proposal number
Policy	ProposalStatus	String	Proposal status
Policy	StaffId	String	Staff id of the user
Policy	UserName	String	User who captures the application
Policy	IssueDate	Date	Date and time of issue (only for an issued policy)

Parent Object	Field Name	Data Type	Description
Policy	PolicyNo	String	Policy number (only for an issued policy)
Policy	StandardGrossPremiumDelta	Integer	Standard Gross Premium Delta (returned when applicable)
Policy	TerminateCode	String	Terminate Code (returned when applicable)
Policy	TerminateDate	Date	Terminate Date (returned when applicable)
Policy	CarrierCode	String	Carrier code
Policy	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyCustomer	CIFNumber	String	Customer CIF number
PolicyCustomer	CustomerType	String	Customer type, from CustomerType
PolicyLob	Commission	Double	Commission for the plan
PolicyLob	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyLob	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyLob	ProductElementCode	String	Risk element code
PolicyLob	AnnualPremiumDelta	Integer	Annual Premium Delta (returned when applicable)
PolicyLob	EffectiveDate	Date	Policy start date (YYYY-MM-DD) (returned when applicable)
PolicyLob	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59) (returned when applicable)
PolicyLob	StandardGrossPremiumDelta	Integer	Standard Gross Premium Delta (returned when applicable)
PolicyLob	TerminateDate	Date	Terminate Date (returned when applicable)
PolicyRisk	Address	String	Communication address
PolicyRisk	Commission	Double	Commission for the plan
PolicyRisk	DateOfBirth	Date	Insured date of birth (YYYY-MM-DD)
PolicyRisk	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PolicyRisk	Email	String	E-mail address
PolicyRisk	Gender	String	Gender, from GenderCode
PolicyRisk	IdNo	String	ID or passport number
PolicyRisk	IdType	String	ID type, from IdType
PolicyRisk	InsuredName	String	Insured full name
PolicyRisk	MaritalStatus	String	Marital status, from InsMaritalStatus
PolicyRisk	Mobile	String	Mobile number (returned masked)
PolicyRisk	MonthSalaryIncome	Integer	Monthly salary income
PolicyRisk	PostCode	String	PO box / post code
PolicyRisk	ProductElementCode	String	Risk element code
PolicyRisk	ResidentStatus	String	Resident status, from ResidentStatus
PolicyRisk	Salutation	String	Salutation, from Salutation
PolicyRisk	AnnualPremiumDelta	Integer	Annual Premium Delta (returned when applicable)
PolicyRisk	EffectiveDate	Date	Policy start date (YYYY-MM-DD) (returned when applicable)
PolicyRisk	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59) (returned when applicable)
PolicyRisk	StandardGrossPremiumDelta	Integer	Standard Gross Premium Delta (returned when applicable)

Parent Object	Field Name	Data Type	Description
PolicyRisk	TerminateDate	Date	Terminate Date (returned when applicable)
BeneficiaryList	BeneficiaryName	String	Beneficiary name
BeneficiaryList	BeneficiarySequence	Integer	Beneficiary sequence number
BeneficiaryList	RelationshipCode	String	Relationship of the beneficiary, from Relationship
BeneficiaryList	Share	String	Beneficiary share in percent
PolicyPaymentInfoList	DebitAccountNo	String	Debit account number
PolicyPaymentInfoList	DebitRefNo	String	Debit transaction reference number
PolicyPaymentInfoList	IsInstallment	String	Whether the payment is made in instalments (Y / N)
PolicyPaymentInfoList	LCCode	String	Payment LC code
PolicyPaymentInfoList	LGCode	String	Payment LG code
PolicyPaymentInfoList	PayRate	Integer	Pay Rate
PolicyPaymentInfoList	TransactionDate	Date	Payment transaction date (YYYY-MM-DD)
PlanList	Commission	Double	Commission for the plan
PlanList	DuePremium	Integer	Premium payable for the plan (annual premium, or single premium for the term)
PlanList	PlanId	String	Plan id of the product variant
PlanList	PlanName	String	Plan name
PolicyCoverage	CoverageCode	String	Cover code
PolicyCoverage	CoverageDescription	String	Cover description
PolicyCoverage	ProductElementCode	String	Risk element code
PolicyCoverage	AnnualPremiumDelta	Integer	Annual Premium Delta (returned when applicable)
PolicyCoverage	EffectiveDate	Date	Policy start date (YYYY-MM-DD) (returned when applicable)
PolicyCoverage	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59) (returned when applicable)
PolicyCoverage	StandardGrossPremiumDelta	Integer	Standard Gross Premium Delta (returned when applicable)
PolicyCoverage	TerminateDate	Date	Terminate Date (returned when applicable)

Sample Request

```
GET {baseUrl}/up/load-policy?policyNo=POUPPA00100000067&ChannelCode=SOHAR
```

Sample Response

```
{
  "ApplicationNo": "1790935382104",
  "ApplyDate": "2026-10-02",
  "BranchCode": "001",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "ChannelCode": "SOHAR",
  "Commission": 0,
  "CommissionRate": 0.1,
  "DiscountAmount": 10,
  "DuePremium": 0,
  "EffectiveDate": "2026-10-03",
  "ExpiryDate": "2027-10-02T23:59:59",
  "IssueDate": "2026-10-02T14:03:12",
}
```

```

"OrgCode": "1",
"PlanId": "1",
"PolicyCustomerList": [
  {
    "CIFNumber": "45678",
    "CustomerType": "1",
    "PolicyStatus": 2
  }
],
"PolicyLobList": [
  {
    "Commission": 44.1,
    "DuePremium": 68,
    "PolicyRiskList": [
      {
        "Address": "Oman",
        "BeneficiaryList": [
          {
            "BeneficiaryName": "Sayyed",
            "BeneficiarySequence": 1,
            "PolicyStatus": 2,
            "RelationshipCode": "1",
            "Share": "100"
          }
        ]
      },
      {
        "Commission": 44.1,
        ...

```

Errors

- 400 — neither or both of policyNo and proposalNo
- 404 — not found for the channel
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.7 Reject Proposal

Rejects an open proposal. An issued or already rejected proposal cannot be rejected (HTTP 409).

Request URL: /up/proposal-reject

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
Policy	ProposalNo	String	M	Proposal number; 5-30 characters
Policy	ProposalRejectDesc	String	M	Reason for rejecting the proposal; 3-200 characters
Policy	ProductCode	String	O	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001); 3-10 characters
Policy	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	message	String	Confirmation message
Response	status	String	SUCCESS

Sample Request

```
POST {baseUrl}/up/proposal-reject
{
  "ProposalNo": "PUPPA0010000000226",
  "ProposalRejectDesc": "checker rejected",
  "ProductCode": "UPPA001",
  "ChannelCode": "SOHAR"
}
```

Sample Response

```
{
  "message": "checker rejected",
  "status": "SUCCESS"
}
```

Errors

- 404 unknown proposal
- 409 — already issued or rejected
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.8 Policy Documents (PDF)

Generates the policy certificate (DocType = Policy, by PolicyNo) or the application form (DocType = Application, by ProposalNo) as a PDF file. With PreviewData = Y the print data is returned as JSON.

Request URL: /up/doc_generation

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
DocumentRequest	ProductSubcode	String	O	Product variant (see section 4); 1-5 characters
DocumentRequest	DocType	String	M	Application (application form) or Policy (certificate) (Application, Policy)
DocumentRequest	ProposalNo	String	C	Proposal number - mandatory when DocType = Application; 5-30 characters
DocumentRequest	PolicyNo	String	C	Policy number - mandatory when DocType = Policy; 5-30 characters
DocumentRequest	PreviewData	String	O	Y returns the print data as JSON instead of a PDF (Y, N)
DocumentRequest	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/pdf

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	(file)	File	The document as a PDF file; with PreviewData = Y the print data as JSON

Sample Request

```
POST {baseUrl}/up/doc_generation
{
  "DocType": "Policy",
  "PolicyNo": "POUPPA00100000067",
  "ProductSubcode": "1",
  "ChannelCode": "SOHAR"
}
```

Errors

- 404 unknown policy or proposal
- 400 REQUIRED — PolicyNo or ProposalNo for the DocType
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.9 Application Form (PDF)

Generates the application form of a proposal as a PDF file.

Request URL: /up/application_doc_generation

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
DocumentRequest	ProductSubcode	String	O	Product variant (see section 4); 1-5 characters
DocumentRequest	proposalNo	String	M	Proposal number; 5-30 characters
DocumentRequest	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/pdf

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	(file)	File	The document as a PDF file; with PreviewData = Y the print data as JSON

Sample Request

```
POST {baseUrl}/up/application_doc_generation
{
  "DocType": "Application",
  "ProposalNo": "PUPPA0010000000225",
  "ProductSubcode": "1",
  "ChannelCode": "SOHAR"
}
```

Errors

- 404 unknown proposal
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.10 Cancel Check (Checker)

Used by the Checker. Calculates the refund for the cancellation date and creates the pending cancellation request. Cancellation up to 15 days after the policy start date is a free look cancellation with a 100% refund; later cancellations refund the pro-rata premium of the unexpired days at 80%. Calling it again for a policy with a pending request returns the same request.

Request URL: /up/cancel-check

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
CancelRequest	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters
CancelRequest	PolicyNo	String	C	Policy number - send either PolicyNo or ProposalNo, not both; 5-30 characters
CancelRequest	ProposalNo	String	C	Proposal number - send either PolicyNo or ProposalNo, not both; 5-30 characters
CancelRequest	CancellationDate	Date	M	Requested cancellation date (YYYY-MM-DD) between policy start and expiry
CancelRequest	CancelReason	String	M	Cancellation reason (3 to 200 characters); 3-200 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	CancelReason	String	Cancellation reason (3 to 200 characters)
Response	CancellationDate	Date	Requested cancellation date (YYYY-MM-DD) between policy start and expiry
Response	RequestExists	String	Y when the request already existed
Response	RequestNo	String	Cancellation request number returned by Cancel Check
Response	RequestStatus	String	PENDING, APPROVED or REJECTED
Response	CarrierCode	String	Carrier code
Response	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyInfo	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
PolicyInfo	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
PolicyInfo	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
PolicyInfo	InsuredName	String	Insured full name
PolicyInfo	PlanId	String	Plan id of the product variant
PolicyInfo	PolicyNo	String	Policy number
PolicyInfo	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyInfo	ProductSubcode	String	Product variant (see section 4)
PolicyInfo	ProposalNo	String	Proposal number
PolicyInfo	CarrierCode	String	Carrier code

Parent Object	Field Name	Data Type	Description
PolicyInfo	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyStatus	Code	String	Status code (2 = in force, 3 = cancelled)
PolicyStatus	Description	String	Status description
PremiumDetails	DaysSinceCommencement	Integer	Days from the start date to the cancellation date
PremiumDetails	FreeLookDays	Integer	Free look days of the product
PremiumDetails	PolicyPeriodDays	Integer	Days of the policy period
PremiumDetails	Premium	Integer	Premium of the policy
PremiumDetails	ProRataPremium	Double	Pro-rata premium of the unexpired days
PremiumDetails	UnexpiredDays	Integer	Days not yet expired at the cancellation date
RefundDetails	CancellationType	String	FREE_LOOK or PRO_RATA
RefundDetails	RefundPercent	Integer	Refund percentage applied
RefundDetails	RefundPremium	Double	Refund premium

Sample Request

```
POST {baseUrl}/up/cancel-check
{
  "PolicyNo": "POUPPA001000000067",
  "CancellationDate": "2026-11-02",
  "CancelReason": "Customer request",
  "ChannelCode": "SOHAR"
}
```

Sample Response

```
{
  "CancelReason": "Customer request",
  "CancellationDate": "2026-11-02",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "PolicyInfo": {
    "CarrierCode": "AFIC",
    "CarrierName": "Afillar Insurance Company",
    "ChannelCode": "SOHAR",
    "EffectiveDate": "2026-10-03",
    "ExpiryDate": "2027-10-02",
    "InsuredName": "Mohamed",
    "PlanId": "1",
    "PolicyNo": "POUPPA001000000067",
    "ProductCode": "UPPA001",
    "ProductSubcode": "1",
    "ProposalNo": "PUPPA0010000000225"
  },
  "PolicyStatus": {
    "Code": "2",
    "Description": "Effective"
  },
  "PremiumDetails": {
    "DaysSinceCommencement": 30,
    "FreeLookDays": 15,
    "PolicyPeriodDays": 365,
    "Premium": 68,
    "ProRataPremium": 62.41,
    "UnexpiredDays": 335
  },
  "RefundDetails": {
    "CancellationType": "PRO_RATA",
    "RefundPercent": 80,
    "RefundPremium": 49.93
  },
  "RequestExists": "N",
  "RequestNo": "POUPPA001000000067-001",
  "RequestStatus": "PENDING"
}
```

Errors

- 404 unknown policy
- 400 — cancellation date before the start or after the expiry date
- 409 — proposal not issued, policy already cancelled, or another endorsement pending
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.11 Cancel Approve (Approver)

Used by the Approver. APPROVE cancels the policy (the policy status becomes 3 – Cancelled) and returns the refund premium and the endorsement number; REJECT closes the request and keeps the policy in force. A request can be decided once; a second call returns HTTP 404.

Request URL: /up/cancel-approve

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
CancelRequest	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters
CancelRequest	PolicyNo	String	C	Policy number - send either PolicyNo or ProposalNo, not both; 5-30 characters
CancelRequest	ProposalNo	String	C	Proposal number - send either PolicyNo or ProposalNo, not both; 5-30 characters
CancelRequest	RequestNo	String	M	Cancellation request number returned by Cancel Check; 5-40 characters
CancelRequest	Decision	String	M	APPROVE cancels the policy; REJECT closes the request and keeps the policy in force (APPROVE, REJECT)

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	EndorsementNo	String	Number of the endorsement that cancelled the policy
Response	RefundPremium	Double	Refund premium
Response	RequestNo	String	Cancellation request number returned by Cancel Check
Response	RequestStatus	String	PENDING, APPROVED or REJECTED
Response	CarrierCode	String	Carrier code
Response	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyInfo	ChannelCode	String	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them
PolicyInfo	EffectiveDate	Date	Policy start date (YYYY-MM-DD)
PolicyInfo	ExpiryDate	Date	Policy end date (YYYY-MM-DDT23:59:59)
PolicyInfo	InsuredName	String	Insured full name
PolicyInfo	PlanId	String	Plan id of the product variant
PolicyInfo	PolicyNo	String	Policy number
PolicyInfo	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001)
PolicyInfo	ProductSubcode	String	Product variant (see section 4)
PolicyInfo	ProposalNo	String	Proposal number
PolicyInfo	CarrierCode	String	Carrier code
PolicyInfo	CarrierName	String	Insurer (carrier) name, from the insurer table
PolicyStatus	Code	String	Status code (2 = in force, 3 = cancelled)

Parent Object	Field Name	Data Type	Description
PolicyStatus	Description	String	Status description

Sample Request

```
POST {baseUrl}/up/cancel-approve
{
  "PolicyNo": "POUPPA001000000067",
  "RequestNo": "POUPPA001000000067-001",
  "Decision": "APPROVE",
  "ChannelCode": "SOHAR"
}
```

Sample Response

```
{
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "EndorsementNo": "POUPPA001000000067-002",
  "PolicyInfo": {
    "CarrierCode": "AFIC",
    "CarrierName": "Afillar Insurance Company",
    "ChannelCode": "SOHAR",
    "EffectiveDate": "2026-10-03",
    "ExpiryDate": "2026-11-02",
    "InsuredName": "Mohamed",
    "PlanId": "1",
    "PolicyNo": "POUPPA001000000067",
    "ProductCode": "UPPA001",
    "ProductSubcode": "1",
    "ProposalNo": "PUPPA0010000000225"
  },
  "PolicyStatus": {
    "Code": "3",
    "Description": "Cancelled"
  },
  "RefundPremium": 49.93,
  "RequestNo": "POUPPA001000000067-001",
  "RequestStatus": "APPROVED"
}
```

Errors

- 404 — request not found or already decided
- 400 NOT_ALLOWED — Decision
- 409 — the platform refused the cancellation; the request stays pending
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.12 Master Data

Lists the records of a master (code) table, or one record when Id is sent.

Request URL: /up/list-master-table

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
MasterTableRequest	DataTableName	String	M	Name of the master table; 2-40 characters
MasterTableRequest	Id	String	O	Record id to read a single record; 1-20 characters
MasterTableRequest	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Response (array)	Id	String	Record id (code)
Response (array)	Description	String	Record description

Sample Request

```
POST {baseUrl}/up/list-master-table
{
  "DataTableName": "UP_Carrier",
  "ChannelCode": "SOHAR"
}
```

Sample Response

```
[
  {
    "@pk": 1188663017,
    "CarrierCode": "AFIC",
    "CarrierName": "Afillar Insurance Company",
    "DataTableId": 1188663015,
    "Id": "1",
    "IsActive": "Y",
    "RecordId": 1188663017,
    "RecordUsage": 5
  }
]
```

Errors

- 400 NOT_ALLOWED — table not available
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.13 Commission Query

Returns commission by policy, by plan configuration (product, sub-product, plan) or for a period (with paging).

Request URL: /up/commission-query

Request Method: POST

Request Header: Authorization: Bearer {access_token} | Content-Type: application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
CommissionQuery	PolicyNo	String	C	Policy number - query by policy: send PolicyNo, or ProductCode (+ ProductSubcode / PlanId), or FromDate and ToDate; 5-30 characters
CommissionQuery	ProductCode	String	C	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001) - query by plan configuration or period: send PolicyNo, or ProductCode (+ ProductSubcode / PlanId), or FromDate and ToDate; 3-10 characters
CommissionQuery	ProductSubcode	String	O	Product variant (see section 4) - used together with ProductCode; 1-5 characters
CommissionQuery	PlanId	String	O	Plan id of the product variant - used together with ProductCode (1 = Plan 1; 2 = Plan 2; 3 = Plan 3; 4 = Plan 4; 5 = Plan 5)
CommissionQuery	FromDate	Date	C	Start of the period (YYYY-MM-DD) - query for a period: FromDate and ToDate must be sent together
CommissionQuery	ToDate	Date	C	End of the period (YYYY-MM-DD) - query for a period: FromDate and ToDate must be sent together; not before FromDate
CommissionQuery	PageNo	Integer	O	Page number, from 1; 1 to 100000
CommissionQuery	PageSize	Integer	O	Rows per page, 1 to 50; 1 to 50
CommissionQuery	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	BranchCode	String	Branch, from BranchCode (returned when querying by policy)
Response	CarrierCode	String	Carrier code (returned when querying by policy)
Response	CarrierName	String	Insurer (carrier) name, from the insurer table (returned when querying by policy)
Response	CommencementDate	String	Policy commencement date (returned when querying by policy)
Response	Commission	String	Commission for the plan (returned when querying by policy)
Response	CommissionRate	String	Commission rate (returned when querying by policy)
Response	CommissionRaw	String	Commission, unrounded (returned when querying by policy)
Response	PlanId	String	Plan id of the product variant (returned when querying by policy)

Parent Object	Field Name	Data Type	Description
Response	PlanName	String	Plan name (returned when querying by policy)
Response	PolicyNo	String	Policy number (returned when querying by policy)
Response	PolicyStatus	String	Policy status (returned when querying by policy)
Response	Premium	String	Premium of the policy (returned when querying by policy)
Response	PremiumRaw	String	Premium, unrounded (returned when querying by policy)
Response	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001) (returned when querying by policy)
Response	ProductSubcode	String	Product variant (see section 4) (returned when querying by policy)
Response	ProposalNo	String	Proposal number (returned when querying by policy)
Response	Source	String	Where the commission was taken from (returned when querying by plan configuration / for a period)
Response	FromDate	Date	Start of the period (YYYY-MM-DD) (returned when querying for a period)
Response	PageNo	Integer	Page number, from 1 (returned when querying for a period)
Response	PageTotalCommission	String	Commission total of the page (returned when querying for a period)
Response	PageTotalPremium	String	Premium total of the page (returned when querying for a period)
Response	ToDate	Date	End of the period (YYYY-MM-DD) (returned when querying for a period)
Response	Total	Integer	Total number of records (returned when querying for a period)
Records	CarrierCode	String	Carrier code (returned when querying by plan configuration / for a period)
Records	CarrierName	String	Insurer (carrier) name, from the insurer table (returned when querying by plan configuration / for a period)
Records	Commission	String	Commission for the plan (returned when querying by plan configuration / for a period)
Records	CommissionRate	String	Commission rate (returned when querying by plan configuration / for a period)
Records	PlanId	String	Plan id of the product variant (returned when querying by plan configuration / for a period)
Records	PlanName	String	Plan name (returned when querying by plan configuration / for a period)
Records	Premium	String	Premium of the policy (returned when querying by plan configuration / for a period)
Records	PremiumModeCode	String	Premium mode, from PremiumMode (returned when querying by plan configuration)
Records	ProductCode	String	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001) (returned when querying by plan configuration / for a period)
Records	ProductSubcode	String	Product variant (see section 4) (returned when querying by plan configuration / for a period)
Records	BranchCode	String	Branch, from BranchCode (returned when querying for a period)
Records	CommencementDate	String	Policy commencement date (returned when querying for a period)
Records	PolicyNo	String	Policy number (returned when querying for a period)
Records	PolicyStatus	String	Policy status (returned when querying for a period)
Records	ProposalNo	String	Proposal number (returned when querying for a period)

Sample Request

```
POST {baseUrl}/up/commission-query
{
  "PolicyNo": "POUPPA00100000067",
  "ChannelCode": "SOHAR"
}
```

Sample Response

```
{
  "BranchCode": "001",
  "CarrierCode": "AFIC",
  "CarrierName": "Afillar Insurance Company",
  "CommencementDate": "03/10/2026",
  "Commission": "49.00",
  "CommissionRate": "70.00%",
  "CommissionRaw": "49",
  "PlanId": "1",
  "PlanName": "Plan 1",
  "PolicyNo": "POHC00100000068",
  "PolicyStatus": "Cancelled",
  "Premium": "70.00",
  "PremiumRaw": "70",
  "ProductCode": "HC001",
  "ProductSubcode": "1",
  "ProposalNo": "PHC001000000229"
}
```

Errors

- 400 REQUIRED — none of PolicyNo, ProductCode or FromDate + ToDate
- 400 OUT_OF_RANGE — PageSize above 50
- 404 unknown policy
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

3.14 Policy Feed File

Generates the policy feed file for the effective-date period as an Excel file (or JSON). The result is limited in size: narrow the period and page through the result.

Request URL: /up/generate-feedfile

Request Method: POST

Request Header: Authorization: Bearer {access_token} | **Content-Type:** application/json

Request Body Parameters

Parent Object	Field Name	Data Type	Required	Description
Conditions	ProductCode	String	O	Product code (UPPA001, TL001, FP001, HC001, CI001, LP001, DH001); 3-10 characters
FromRangeConditions	EffectiveDate	Date	M	Policy start date (YYYY-MM-DD)
ToRangeConditions	EffectiveDate	Date	M	Policy start date (YYYY-MM-DD)
FeedFileRequest	SearchType	String	M	Policy or Proposal (Policy, Proposal)
FeedFileRequest	PageNo	Integer	M	Page number, from 1; 1 to 100000
FeedFileRequest	PageSize	Integer	M	Rows per page, 1 to 50; 1 to 50
FeedFileRequest	OutputFormat	String	O	EXCEL (default) or JSON (JSON, EXCEL)
FeedFileRequest	ChannelCode	String	M	Channel code assigned to the partner (Sohar Bank = SOHAR). Records can only be used by the channel that created them (SOHAR); 2-20 characters

Required: M = Mandatory, O = Optional, C = Conditional mandatory (the condition is stated in the description), X = must not be sent.

Response Content Type: application/vnd.openxmlformats-officedocument.spreadsheetml.sheet (Excel) or application/json

Response Parameters

Parent Object	Field Name	Data Type	Description
Response	(file)	File	Excel file with one row per policy; JSON when OutputFormat = JSON

Sample Request

```
POST {baseUrl}/up/generate-feedfile
{
  "Conditions": {
    "ProductCode": "FP001"
  },
  "FromRangeConditions": {
    "EffectiveDate": "2026-10-01T00:00:00"
  },
  "ToRangeConditions": {
    "EffectiveDate": "2026-10-31T23:59:59"
  },
  "Module": "Policy",
  "PageNo": 1,
  "PageSize": 10,
  "SearchType": "Policy",
  "SortField": "index_time",
  "SortType": "desc",
  "ChannelCode": "SOHAR"
}
```

Errors

- 400 — date range missing or too large
- 400 OUT_OF_RANGE — PageSize above 50
- Common errors (400 validation, 401, 404, 409, 422, 500) are described in section 7.

4. Standard Data Model — Product, Plan & Cover Reference

The tables below define the products, plans and covers available through the APIs. Not every cover is available on every plan; the Get Plans response surfaces only the covers a plan actually includes.

4.1 Products and Variants

Product Code	Product Subcode	Product Name	Insurer	Premium Modes	Term (years)	Insured Age	Free Look / Refund
UPPA001	1	Personal Accident with TTD	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
UPPA001	2	Personal Accident without TTD	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
TL001	1	Term Life with Travel	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
TL001	2	Term Life without Travel	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
FP001	1	Female Protection	AFIC - Afillar Insurance Company	2 = Annual Premium	1-1	18-69	15 days / 80%
HC001	1	Hospital Cash Benefit	AFIC - Afillar Insurance Company	2 = Annual Premium	1-1	18-69	15 days / 80%
CI001	1	Critical Illness - 7 CI	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
CI001	2	Critical Illness - 11 CI	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
CI001	3	Critical Illness - 32 CI	AFIC - Afillar Insurance Company	1 = Single Premium, 2 = Annual Premium	2-10	18-69	15 days / 80%
LP001	1	Life Protect	AFIC - Afillar Insurance Company	2 = Annual Premium, 3 = Monthly Premium	1-1	18-69	15 days / 80%
DH001	1	Domestic Helper Insurance	AFIC - Afillar Insurance Company	2 = Annual Premium	1-1	18-69	15 days / 80%

4.2 Cover Catalogue

IMO Cover Code	Cover Name	Available In (Product - Sub)
REX	Repatriation Expenses	TL001-1, TL001-2, UPPA001-1, UPPA001-2
ACD	Death due to accident	UPPA001-1, UPPA001-2
PTD	PTD due to accident	LP001-1, TL001-1, TL001-2, UPPA001-1, UPPA001-2
PPD	PPD due to accident	LP001-1, TL001-1, TL001-2, UPPA001-1, UPPA001-2
TTD	TTD due to accident	UPPA001-1
HCB	HCB due to accident	HC001-1, UPPA001-1, UPPA001-2
DTH	Death	DH001-1, LP001-1, TL001-1, TL001-2
TRV	Annual Family Travel	TL001-1
FCC	Female Cancer Cover	FP001-1
CIB	Critical Illness Benefit	CI001-1, CI001-2, CI001-3
AME	Accidental Medical Expenses	DH001-1
RHE	Replacement Domestic Helper Expenses	DH001-1
REP	Repatriation due to Death	DH001-1

4.3 Plans, Premiums and Sums Insured

Premium is the annual premium of the plan (single premium products: the premium for the whole term). The amount for a given insured is always returned by Get Plans.

Product - Sub	Plan	Premium	Commission	Covers and limits
UPPA001-1	1 - Plan 1	68	44.1	REX 1500; ACD 12000; PTD 12000; PPD 12000; TTD 3000; HCB 20
UPPA001-1	2 - Plan 2	96	63.7	REX 1500; ACD 22000; PTD 22000; PPD 22000; TTD 3000; HCB 20
UPPA001-1	3 - Plan 3	124	83.3	REX 1500; ACD 32000; PTD 32000; PPD 32000; TTD 3000; HCB 20
UPPA001-1	4 - Plan 4	152	102.9	REX 1500; ACD 42000; PTD 42000; PPD 42000; TTD 3000; HCB 20
UPPA001-1	5 - Plan 5	180	122.5	REX 1500; ACD 52000; PTD 52000; PPD 52000; TTD 3000; HCB 20
UPPA001-2	1 - Plan 1	55	35	ACD 10000; PTD 10000; PPD 10000; HCB 20; REX 1500
UPPA001-2	2 - Plan 2	81	53.2	ACD 20000; PTD 20000; PPD 20000; HCB 20; REX 1500
UPPA001-2	3 - Plan 3	109	72.8	ACD 30000; PTD 30000; PPD 30000; HCB 20; REX 1500
UPPA001-2	4 - Plan 4	137	92.4	ACD 40000; PTD 40000; PPD 40000; HCB 20; REX 1500
UPPA001-2	5 - Plan 5	165	112	ACD 50000; PTD 50000; PPD 50000; HCB 20; REX 1500
TL001-1	1 - Plan 1	216	151.2	DTH 10000; PTD 10000; PPD 10000; TRV 0; REX 1000
TL001-1	2 - Plan 2	328	229.6	DTH 20000; PTD 20000; PPD 20000; TRV 0; REX 1000
TL001-1	3 - Plan 3	440	308	DTH 30000; PTD 30000; PPD 30000; TRV 0; REX 1000
TL001-1	4 - Plan 4	552	386.4	DTH 40000; PTD 40000; PPD 40000; TRV 0; REX 1000
TL001-1	5 - Plan 5	664	464.8	DTH 50000; PTD 50000; PPD 50000; TRV 0; REX 1000
TL001-2	1 - Plan 1	132	92.4	DTH 7500; PTD 7500; PPD 7500; REX 1000
TL001-2	2 - Plan 2	244	170.8	DTH 17500; PTD 17500; PPD 17500; REX 1000
TL001-2	3 - Plan 3	360	252	DTH 27500; PTD 27500; PPD 27500; REX 1000
TL001-2	4 - Plan 4	472	330.4	DTH 37500; PTD 37500; PPD 37500; REX 1000
TL001-2	5 - Plan 5	580	406	DTH 47500; PTD 47500; PPD 47500; REX 1000
FP001-1	1 - Plan 1	11	7.7	FCC 1000
FP001-1	2 - Plan 2	28	19.6	FCC 2000
FP001-1	3 - Plan 3	56	39.2	FCC 3000
FP001-1	4 - Plan 4	84	58.8	FCC 4000
FP001-1	5 - Plan 5	112	78.4	FCC 5000
HC001-1	1 - Plan 1	70	49	HCB 50
HC001-1	2 - Plan 2	140	98	HCB 100
HC001-1	3 - Plan 3	280	196	HCB 200
HC001-1	4 - Plan 4	420	294	HCB 300
HC001-1	5 - Plan 5	560	392	HCB 400
CI001-1	1 - Plan 1	73	51.1	CIB 2500
CI001-1	2 - Plan 2	146	102.2	CIB 5000
CI001-1	3 - Plan 3	292	204.4	CIB 10000
CI001-1	4 - Plan 4	730	511	CIB 25000
CI001-1	5 - Plan 5	1460	1022	CIB 50000
CI001-2	1 - Plan 1	100	70	CIB 2500

Product - Sub	Plan	Premium	Commission	Covers and limits
CI001-2	2 - Plan 2	200	140	CIB 5000
CI001-2	3 - Plan 3	400	280	CIB 10000
CI001-2	4 - Plan 4	1000	700	CIB 25000
CI001-2	5 - Plan 5	2000	1400	CIB 50000
CI001-3	1 - Plan 1	150	105	CIB 2500
CI001-3	2 - Plan 2	300	210	CIB 5000
CI001-3	3 - Plan 3	600	420	CIB 10000
CI001-3	4 - Plan 4	1500	1050	CIB 25000
CI001-3	5 - Plan 5	3000	2100	CIB 50000
LP001-1	1 - Plan 1	60	15	DTH 7500; PTD 7500; PPD 7500
LP001-1	2 - Plan 2	120	30	DTH 10000; PTD 10000; PPD 10000
LP001-1	3 - Plan 3	180	45	DTH 15000; PTD 15000; PPD 15000
LP001-1	4 - Plan 4	300	75	DTH 25000; PTD 25000; PPD 25000
LP001-1	5 - Plan 5	600	150	DTH 50000; PTD 50000; PPD 50000
LP001-1	1 - Plan 1	5	1.25	DTH 7500; PTD 7500; PPD 7500
LP001-1	2 - Plan 2	10	2.5	DTH 10000; PTD 10000; PPD 10000
LP001-1	3 - Plan 3	15	3.75	DTH 15000; PTD 15000; PPD 15000
LP001-1	4 - Plan 4	25	6.25	DTH 25000; PTD 25000; PPD 25000
LP001-1	5 - Plan 5	50	12.5	DTH 50000; PTD 50000; PPD 50000
DH001-1	1 - Plan 1	49	34.3	DTH 3000; AME 1500; RHE 500; REP 500
DH001-1	2 - Plan 2	31	21.7	DTH 1500; AME 1000; RHE 350; REP 500

5. Data Tables

Master reference tables used throughout this specification. The values can be listed with the Master Data API.

S.No.	Table Name	Purpose	Input Column Name
1	UP_Carrier	Insurer (carrier) master: CarrierCode and CarrierName of the insurer of the products	CarrierCode
2	BranchCode	Branch master	BranchCode
3	CustomerType	Customer type master	Id
4	GenderCode	Gender master	Id
5	IdType	ID type master	Id
6	InsMaritalStatus	Marital status master	Id
7	Plan	Plan master (plan id of the product variants)	Id
8	PremiumMode	Premium mode master (single, annual, monthly)	Id
9	Relationship	Beneficiary relationship master	Id
10	ResidentStatus	Resident status master	Id
11	Salutation	Salutation master	Id

5.1 Code Table Values

UP_Carrier

Code	Description
AFIC	Afillar Insurance Company

BranchCode

Code	Description
001	CBD Branch

CustomerType

Code	Description
1	Normal
2	Staff
3	Special

GenderCode

Code	Description
1	Male
2	Female

IdType

Code	Description
1	National ID / Resident Card
2	Passport Copy with Visa Page

InsMaritalStatus

Code	Description
1	Married
2	Single
3	Mr.

Code	Description
4	Mrs.
5	Ms.

Plan

Code	Description
1	Plan 1
2	Plan 2
3	Plan 3
4	Plan 4
5	Plan 5

PremiumMode

Code	Description
1	Single Premium
2	Annual Premium
3	Monthly Premium

Relationship

Code	Description
1	Brother
2	Daughter
3	Son
4	Father
5	Mother
6	Spouse

ResidentStatus

Code	Description
1	Expat
2	Omani

Salutation

Code	Description
1	Mr.
2	Mrs
3	Miss

6. Business Rules

6.1 Eligibility, Premium Mode and Term

The insured age is calculated from the date of birth at the effective date and checked against the minimum age, the maximum entry age and the maximum exit age (age + term) of the product (section 4.1). A single premium covers the whole term and the term must lie within the product limits; for annual and monthly premium the term is one year. The premium is calculated by the platform from the plan: premium, commission and discount values sent by the caller do not change it.

6.2 Cancellation and Refund

Case	Refund
Cancellation date up to 15 days after the policy start date (free look)	100% of the premium
Later	$\text{premium} \times \text{unexpired days} \div \text{policy days} \times 80\%$

Policy days = days from the start date to the expiry date, both included; unexpired days = policy days minus the days since commencement. Amounts are rounded half up to 2 decimals. Example: premium 70.00, policy of 365 days, cancelled 29 days after the start date: $70.00 \times 336 \div 365 = 64.44$; $64.44 \times 80\% = 51.55$. The free look days and the refund percentage are set per product (section 4.1). A proposal must be issued before it can be cancelled; a cancelled policy cannot be cancelled again; the cancellation date must lie between the start and the expiry date.

7. Error Handling and Security

7.1 Error Response

Errors raised by the APIs have one structure:

```
{
  "api": "UPGetPlans",
  "code": "UP-VALIDATION",
  "errors": [
    {
      "code": "REQUIRED",
      "field": "ProductCode",
      "message": "Product code is required"
    }
  ],
  "message": "Validation failed: 1 field error(s)",
  "status": 400,
  "trace_id": "84e0afc1f14301f3e561a9ddc3ac575c"
}
```

HTTP	code	Meaning	Action
400	UP-VALIDATION	One or more fields are wrong; errors[] lists every problem (field, code, message)	Fix the fields and resend
400	UP-400	The request cannot be processed	Correct the request
401	—	Missing, invalid or expired token	Get a new token
404	UP-404	The proposal, policy or request does not exist for the channel	Check the number and the channel
409	UP-409	Not allowed in the current state (issued, rejected, cancelled, pending)	Read the record and follow its state
422	—	Wrong HTTP method for the path	Use the documented method
500	UP-500 / UP-CONFIG	Unexpected error; the message is generic	Retry once, then contact support with the trace_id

7.2 Field Error Codes

Code	Meaning
OUT_OF_RANGE	Outside the allowed range (age, term, amount, page size, date)
NOT_ALLOWED	The value or the combination is not allowed
UNKNOWN_VALUE	The value is not in the list of allowed values
INVALID_TOTAL	Beneficiary shares do not total 100
REQUIRED	A required field is missing or empty
INVALID_TYPE	The value has the wrong type
TOO_LONG	Longer than the maximum length
TOO_SHORT	Shorter than the minimum length
INVALID_FORMAT	The value does not match the required format
MISMATCH	The value does not match the stored proposal / policy
INVALID_CHARACTER	The value contains a character that is not allowed
INVALID_BODY	The body is not a JSON object

7.3 Request Conventions and Security

- JSON, UTF-8, HTTPS only. Dates YYYY-MM-DD; expiry date YYYY-MM-DDT23:59:59.
- ChannelCode is required on every request and a record can only be used by the channel that created it.
- Text fields may contain letters (any script), digits, space and . , ' - / @ + (); the characters < > \$ { } ` \ | ^ ~ ; and control characters are rejected (INVALID_CHARACTER).

- Do not send server-owned fields (policy number, ids, statuses); they are ignored. Responses may contain additional technical fields: ignore what is not documented.
- Create and approve calls are not idempotent: after a lost answer read the record before repeating the call.
- Keep tokens and credentials secret; never log request or response bodies containing personal data in clear text; the mobile number is returned masked.
- Use separate API users for the Checker and the Approver role of the cancellation process.
- Quote the trace_id of the response when contacting support.

8. Testing and Go-Live

1. Import the Sohar Bank Postman collection and environment, set username and password and run Get Token.
2. Run the folder of a product from top to bottom: plans, proposal, update, load, issue, load policy, reject, documents, cancel check, cancel approve, load cancelled policy.
3. Test the error cases of section 7: missing field, unknown number, second issue, second approval.
4. Agree the production base URL, credentials and the Checker / Approver users with the Afillar integration team.
5. Go-live checklist: token renewal on 401, unique ApplicationNo, ChannelCode and OrgCode on every proposal, handling of 400 / 404 / 409, storing ProposalNo, PolicyNo, RequestNo and trace_id.