CSS

Box.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Box </title>
  <!-- <link rel="stylesheet" href="./CSS/box.css"> -->
  <link rel="stylesheet" href="./CSS/box2.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
</head>
<body>

  <h1>HELLO CODER ARMY</h1>

  <h2>Lorem ipsum dolor sit amet consectetur, adipisicing elit. </h2>

  <span>Hello Brother! I am gunman</span> <span>You wanna see my GUN</span>

  <p>Lorem ipsum dolor sit amet consectetur adipisicing elit. Quos quibusdam eius
consequatur ratione corrupti eaque nisi autem expedita cumque iste repellat
recusandae sequi, atque ipsa laborum? Itaque qui, provident nemo esse corrupti
maiores, quasi illo recusandae ipsam rerum in quo incidunt voluptatibus dolor nihil
neque nobis ipsa. Similique ducimus mollitia repellendus ea laboriosam at veritatis
quisquam voluptas et dolore, doloribus excepturi officia. Autem, nisi quos. Aliquam,
enim! Magnam cum libero repudiandae soluta quidem consequatur, numquam error
consectetur obcaecati, sit nostrum facilis voluptate cupiditate blanditiis? Dolorem
nulla sunt totam possimus? Adipisci deserunt atque debitis similique pariatur iure
sint vel eius consectetur?</p>
  <p>Lorem ipsum dolor sit, amet consectetur adipisicing elit. Optio nihil fugiat
voluptatum nobis, cum reprehenderit modi doloremque! Dolores, placeat. Dolore
dolorum quia laudantium dicta ab neque fugiat? Enim inventore a labore doloribus
facere dicta saepe tempora nesciunt esse nam laborum dolor neque sed distinctio,
quis sunt tenetur minima cum asperiores?</p>
</body>
</html>
```

Box.css

```
body {
  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;
}
h1 {
  background-color: rgb(234, 177, 72);
  height: 300px ;
  width: 600px ;
  /*
  display: flex ;
  align-items: center ;
  */
  border: 5px solid green ;
  padding: 20px ;
  margin: 20px ;
  border-radius: 10px ;
}
h2 {
  background-color: pink ;
  border: 2px solid green
}
p {
  background-color: aquamarine ;
  border: 4px solid orange ;
  padding: 20px ;
  margin: 5px ;
  /* margin: 5px ; --> TOP[5px] RIGHT[5px]  BOTTOM[5px]  LEFT[5px]   */
  /* margin: 5px 10px ; --> TOP[5px] RIGHT[10px] BOTTOM[5px]  LEFT[10px]  */
  /* margin: 5px 10px 15px ; --> TOP[5px] RIGHT[10px] BOTTOM[15px] LEFT[10px]  */
  /* margin: 5px 10px 15px 20px ;-->TOP[5px] RIGHT[10px] BOTTOM[15px] LEFT[20px]  */

  /* SAME WITH PADDING  */
}
```

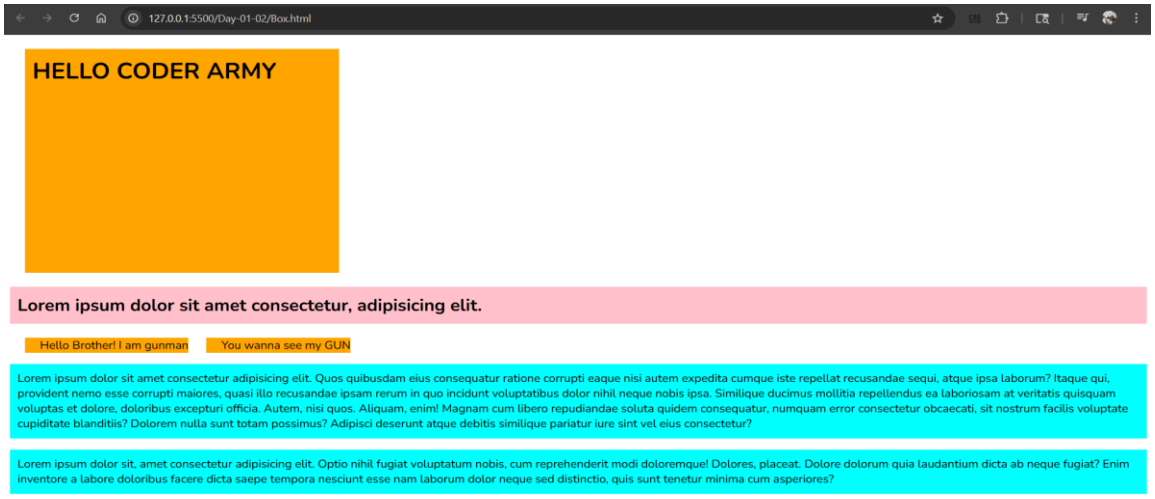

Inline.html

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Inline CSS</title>
</head>
<body>
  <h1 style="background-color: aqua; ">GYM WEBSITE</h1>
  <h2 style="background-color: bisque; ">Exercises ---</h2>
  <ul>
    <li>Biceps</li>
    <li>Legs</li>
    <li>Chest</li>
    <li>Shoulder</li>
    <li>Triceps</li>
    <li>Back</li>
  </ul>
  <h2 style="background-color: bisque; ">Diet ---</h2>
  <ul>
    <li>
      Veg:
        <ol>
          <li>Paneer</li>
          <li>Soya</li>
          <li>Tofu</li>
        </ol>
    </li>
    <li>
      Non Veg :
        <ol>
          <li>Chicken</li>
          <li>Eggs</li>
          <li>Mutton</li>
        </ol>
    </li>
  </ul>
</body>
</html>
```

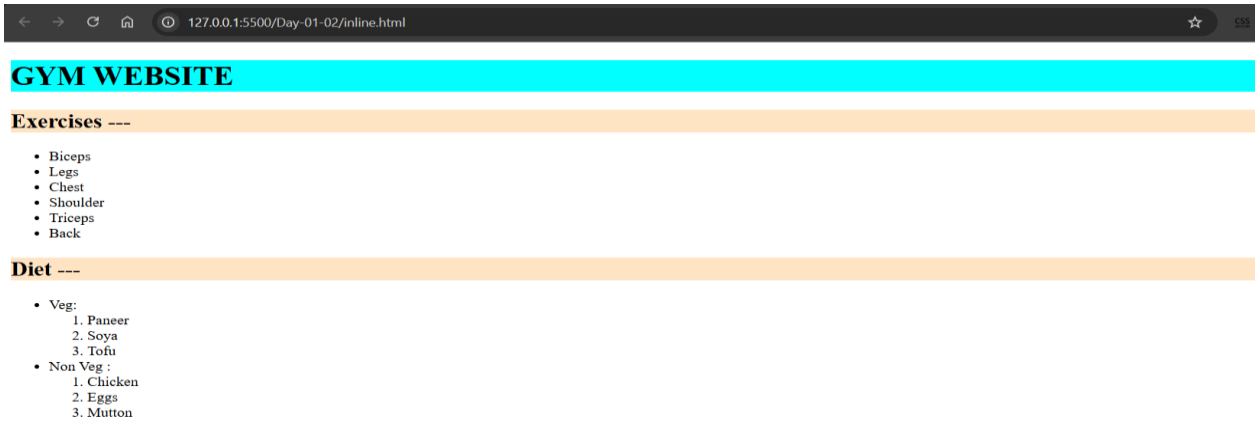

Internal.html

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Internal CSS</title>
  <!--<link rel="stylesheet" href="./CSS/inline.css">
      <link rel="stylesheet" href="./CSS/style.css">  -->
  <style>
    h1{
      background-color: aqua ;
    }
    h2{
      background-color: antiquewhite ;
    }
  </style>
</head>
<body>
  <h1>GYM WEBSITE</h1>
  <h2>Exercises ---</h2>
  <ul>
    <li>Biceps</li>
    <li>Legs</li>
    <li>Chest</li>
    <li>Shoulder</li>
    <li>Triceps</li>
    <li>Back</li>
  </ul>
  <h2>Diet ---</h2>
  <ul>
    <li>
      Veg:
        <ol>
          <li>Paneer</li>
          <li>Soya</li>
          <li>Tofu</li>
        </ol>
    </li>

    <li>
      Non Veg :
        <ol>
          <li>Chicken</li>
          <li>Eggs</li>
          <li>Mutton</li>
        </ol>
    </li>
  </ul>
</body>
</html>
```

External.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>External CSS</title>
  <link rel="stylesheet" href="./CSS/external.css">
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>
  <h1 >GYM WEBSITE</h1>
  <h2>Exercises ---</h2>
  <ul>
    <li>Biceps</li>
    <li>Legs</li>
    <li>Chest</li>
    <li>Shoulder</li>
    <li>Triceps</li>
    <li>Back</li>
  </ul>
  <h2>Diet ---</h2>
  <ul>
    <li>
      Veg:
        <ol>
          <li>Paneer</li>
          <li>Soya</li>
          <li>Tofu</li>
        </ol>
    </li>
    <li>
      Non Veg :
        <ol>
          <li>Chicken</li>
          <li>Eggs</li>
          <li>Mutton</li>
        </ol>
    </li>
  </ul>

  <div class="outer">
    What the fuck is happening .
    <div class="inner">
      I dont know.
    </div>
  </div>
```

```
  <!--
  <div class="rem">
    REM ki baat hi kuchh aur h.
  </div>

  <div class="viewport-width">
    VIEWPORT WIDTH -- percentage of total width
  </div>

  <div class="viewport-height">
    VIEWPORT WIDTH -- percentage of total height
  </div> -->

  <div class="para">
    <p>Blanditiis beatae molestiae enim iure, eos perferendis ducimus, nesciunt
dolores repellat cupiditate ipsum illo omnis laboriosam, sequi nihil alias.
Quibusdam ducimus provident aliquam maxime expedita distinctio, culpa, cum fugit
alias nesciunt tempora eum minima sunt nulla quas laboriosam saepe eligendi, quasi
odit voluptates vitae hic! Nihil perspiciatis voluptatum explicabo sunt porro
consequatur delectus, saepe numquam eveniet, nostrum officiis corporis tempore
ipsam, aliquid quibusdam maiores eum? Nostrum doloribus quam quas impedit, ipsum
soluta nesciunt corrupti! Minima quasi.</p>
  </div>

</body>
</html>
```

External.css

```
body {
  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;
  /* background-color: rgb(142, 192, 235) ; */
  /* font-family: system-ui, -apple-system, BlinkMacSystemFont, 'Segoe UI', Roboto,
Oxygen, Ubuntu, Cantarell, 'Open Sans', 'Helvetica Neue', sans-serif ; */
}
h1 {
  background-color: pink ;
}
h2 {
  background-color: aquamarine ;
}
ul{
  background-color: rgb(234, 234, 165) ;
}
.outer{
  font-size: 20px ;
}
.inner {
  font-size: 2em ;;
}
```

```
/*
html {
  font-size: 40px ;
}
.rem {
  font-size: 3rem ;  3*(40px) = 120px
}
*/
/*
2em --> 2 times of parent element (means 2*20px=40px)
2rem --> 2 times of root element (means 2*20px=40px)
font-size: 2vw --> 2 percent of width size
*/
.viewport-width{
  font-size: 2vw ;
}
.viewport-height{
  font-size: 3vh ;
}
```

BoxFlex.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Box Flex</title>
  <link rel="stylesheet" href="./CSS/boxFlex.css">
</head>
<body>
```

```
  <div class="container">
    <div class="box first">FIRST</div>
    <div class="box second">SECOND</div>
    <div class="box third">THIRD</div>
    <div class="box fourth">FOURTH</div>
  </div>

</body>
</html>
```

boxFlex.css

```
/*
flex-direction: column ;
MAIN AXIS ---> along flex-direction
CROSS AXIS ---> vertical of flex-direction

justify-content center works along MAIN-AXIS
align-items work along CROSS_AXIS
*/
.container {
  background-color: bisque ;
  height: 95vh ;

  display: flex ;
  flex-direction: row ;
  /* row column column-reverse(4 3 2 1) row-reverse(4 3 2 1) */

  justify-content: center ;
  /* start, end, center, space-around([--A----B----C----D--])
      space-evenly([---A---B---C---D---])*/
  /* justify center works along MAIN-AXIS */

  align-items: center ;
  /* start, end, center, space-around([--A----B----C----D--])
      space-evenly([---A---B---C---D---])*/
  /* align-items work along CROSS_AXIS */

  /* flex-wrap: wrap-reverse ; */
  /* wrap elements and push them down when width decreases --> RESPONSIVE */
  /* wrap [(1 2)/(3 4)], no-wrap, wrap-reverse [(3 4)/(1 2)] */
  gap: 30px ;
  /* display:flex; make boxes no space between them(unless flex-direction:space-
around/space-evenly) */
}
.box {
  height: 150px ;
  width: 150px ;
  /* margin: 10px ; */
}
```

```
/*
flex-grow BY DEFAULT 'ZERO'
first - flex-grow: 1
second - flex-grow: 2

empty space in line of boxes(100%) distributed bw first and second with RATIO 1: 2
ie first(33.33%) second(66.66%)
*/

.first {
  background-color: red ;

  /* flex-grow: 1 ; */

  /* flex-shrink: 4 ;  */
  /* by default flex-shrink: 1 and all boxes shrink with equally speed */
  /* flex-shrink: 4 means This(first) boxe shrink with 4 times speed of OTHER
BOXES*/

  /* flex-basis: 500px ; */
  /* WORKS ALONG main axis */
  /* flex-basis: 200px ; WIDTH(since flex-direction: row;) of box is OVERRIDDEN by
200px */
}

.second {
  background-color: yellow ;

  /* flex-grow: 2 ; */
}
.third {
  background-color: green ;

  align-self: flex-end ;
  /* breaks normal flow and special flexing for This(third) box*/
  /* flex-start; flex-end*/
}
.fourth {
  background-color: blue ;
}
```

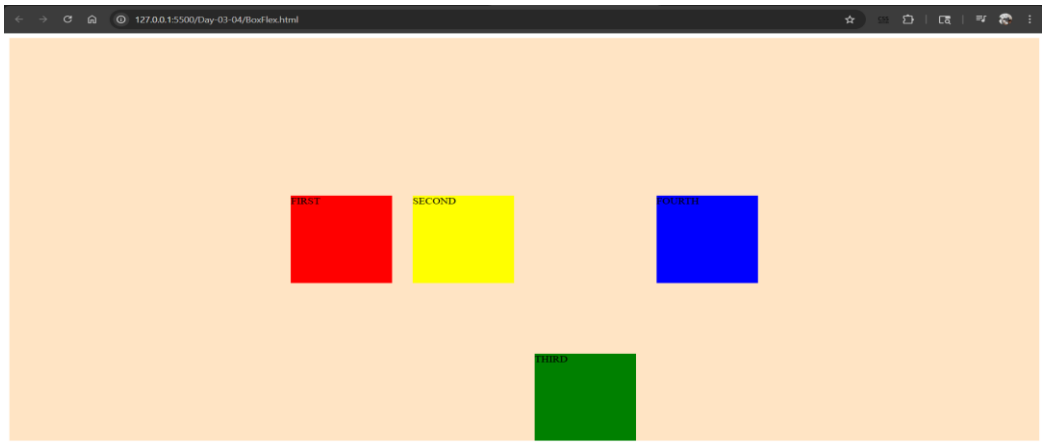

Cascading.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Cascading CSS</title>
  <style>
    h1{
      background-color: red ;
    }
  </style>
  <link rel="stylesheet" href="./CSS/cascading.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>
  <h1 class="classA" id="first">Hello! CODER ARMY</h1>
  <!-- <h2 style="background-color: red; " class="classB" id="second">Strike is
comming soon</h2> -->
  <h2 class="classB" id="second">Strike is comming soon</h2>

</body>
</html>
```

cascading.css

```
/*
PRIORITY --> inline(high) <<---- Internal <<---- External
--------------- WRRRROOOONNNGGGG ------------------------

ORDERING of Internal and External CSS decides
<style>
  h1{
    background-color: red ;
  }
</style>
<link rel="stylesheet" href="../CSS/cascading.css">
FINAL STYLING ---->> External

Reverse ORDER --->> Internal will work
*/

/*
<style>INTERNAL CSS</style>
<link rel="stylesheet" href="../CSS/cascading.css"> EXTERNAL CSS

IS EQUAL TO
```

```
<style>INTERNAL CSS</style>
<style>EXTERNAL CSS</style>
*/
body {
  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;
}
h1 {
  background-color: aqua ;
}

/*
CSS PRIORITY ---> most specific CSS applied
Class(multiple element can have same class) <<< Id(unique for every element)

Hence ID is more SPECIFIC/PRIOR than CLASS
*/

/*
Priority Order --------------
1. inline CSS
2. Id
3. Class
4. Tag(like h1, h2, p)
*/
/*
#first {
  background-color: pink ;
}
.classA {
  background-color: yellowgreen ;
}
*/
h2 {
  background-color: antiquewhite !important ;
}
/* background-color: antiquewhite !important ; ---> OVERRIDES even INLINE CSS */
```

Position.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Cascading CSS</title>
  <style>
    h1{
      background-color: red ;
    }
  </style>
  <link rel="stylesheet" href="./CSS/position.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>
  <div style="height: 1200px; position: relative; top: 100px ; ">
    <h1>Hello! CODER ARMY</h1>
    <h2>Strike is comming soon POSITION: RELATIVE</h2>

    <h3>I am the Navigation BAR POSITION: FIXED</h3>

    <h4>I am best in the WORLD POSITION: STICKY</h4>

    <h5>I AM ABSOLUTE POSITION: ABSOLUTE</h5>

    <p>Lorem ipsum dolor sit, amet consectetur adipisicing elit. Delectus quidem ab
vel assumenda sint architecto
      aliquam! Placeat ipsa rem obcaecati nesciunt, explicabo pariatur iure
necessitatibus iste quia velit id ratione
      asperiores consequatur, numquam inventore eligendi reprehenderit? Et libero
ullam illum qui dolorum fuga dolore
      deserunt ea quis. Quo hic atque similique magni debitis quas facere dolorum
blanditiis neque? Et veniam
      consectetur aliquid modi voluptatem nostrum cumque, error accusamus quae
tenetur dolorum quia explicabo totam
      nam rerum, esse doloribus perferendis. Praesentium, dolores ratione aut
voluptas placeat, ex fugit veniam
      eveniet maxime ad fuga sed sequi quod officiis soluta, vel quibusdam impedit?
Reiciendis, ratione. Alias beatae
      placeat odit mollitia deserunt iste ex accusamus provident obcaecati at
similique ab fugit dolorum, aliquid
      vero ducimus voluptas quaerat ipsam explicabo? Ab soluta dolorem cupiditate,
magnam, facere ipsum esse dolorum
      veritatis pariatur debitis natus reprehenderit explicabo vitae fugiat impedit,
beatae molestiae nihil mollitia
    </p>
```

```
</div>
</body>
</html>
```

Position.css

```
* {
  padding: 0 ;
  margin: 0 ;
}

body {
  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;
  background-color: antiquewhite ;
}

h1 {
  height: 100px ;
}

/*
position: relative ;
------------------------------
1. RELATIVE to it's ORIGINAL POSITION
2. Position is reserved, No other element can take their place
*/

/* z-index: 10 ; --> (by default 1) to overlap */

h2 {
  background-color: orange !important ;
  height: 100px ;

  position: relative ; /* RELATIVE to it's ORIGINAL POSITION */
  /* bottom: 50px ; */ /* TOP BOTTOM LEFT RIGHT */
  left: 50px ;
  bottom: 20px ;

  z-index: 10 ;
}


/*
position: FIXED ;
------------------------------
1. FIXED with respect to WINDOW
2. Position is NOT RESERVED, OTHER element can take their place.
*/
```

```
h3 {
  background-color: yellow ;
  height: 50px ;

  position: fixed ;  /* FIXED with respect to WINDOW */
  top: 0px ;
  left: 50px ;
}

h4 {
  height: 50px ;
  background-color: aquamarine ;

  position: sticky ; /* STICK to window when h4 is 10px from top when you scroll
down */
  top: 50px ;
}

/*
position: absolute ;
1. find their position with respect to closest ancestor with position:
[fixed/sticky/relative]
2. (h5--->div(position: not defined)---->window(position: not defined))
ANCESTOR  Now with respect to WINDOW
3. if div is positioned, ABSOLUTE with respect to div's TOP LEFT RIGHT and BOTTOM
*/

h5 {
  background-color: yellowgreen ;
  height: 40px ;
  padding: 5px ;

  position: absolute ;
  top: 0px ;
  left: 500px ;
}

p {
  background-color: yellowgreen ;
  padding: 20px ;
}
```

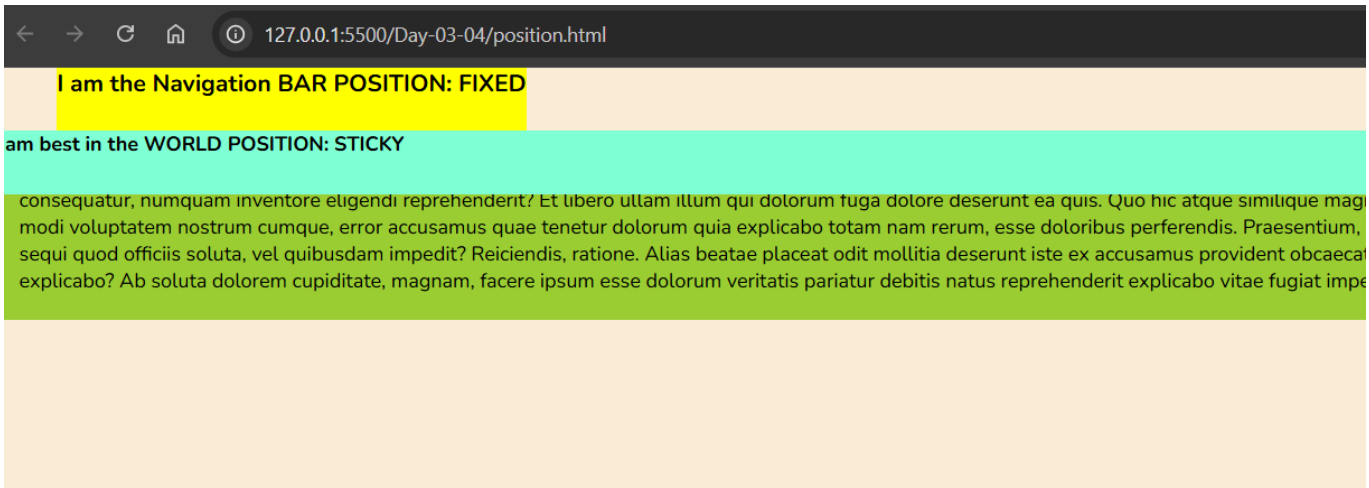

Grid.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Grid</title>

  <link rel="stylesheet" href="./CSS/grid.css">
</head>
<body>

  <div class="container">
    <div class="Box first">FIRST</div>
    <div class="Box second">
      <div class="child A">CHILD A</div>
      <div class="child B">CHILD B</div>
    </div>
  </div>

</body>
</html>
```

Japan-flag.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Japan Flag</title>
  <link rel="stylesheet" href="./CSS/japan-flag.css">
</head>
<body>

  <!-- <div id="container">
    <div id="circle">

    </div>
```

```
  </div> -->

  <div id="denmark-container">
    <div id="top-left"></div>
    <div id="top-right"></div>
    <div id="bottom-left"></div>
    <div id="bottom-right"></div>
  </div>

</body>
</html>
```

Japan-flag.css

```
body {
  background-color: slategrey ;
}

#container {
  height: 300px ;
  width: 500px ;
  background-color: azure ;

  position: relative ;
}

#circle {
  height: 200px ;
  width: 200px ;
  border-radius: 50% ;
  background-color: red ;

  position: absolute ;
  top: 50px ;
  left: 150px ;
}


#denmark-container {
  height: 300px ;
  width: 500px ;
  background-color: yellow ;

  position: relative ;
}

#top-left, #bottom-left {
  background-color: blue ;
  height: 125px ;
  width: 125px ;
}
```

```
#top-right, #bottom-right {
  height: 125px ;
  width: 325px ;
  background-color: blue ;

  position: absolute ;
  top: 0px ;
  right: 0px ;
}

#bottom-left {
  /* background-color: blue ;
  height: 125px ;
  width: 125px ; */

  position: absolute ;
  top: 175px ;
}

#bottom-right {
  /* background-color: blue ;
  height: 125px ;
  width: 325px ; */

  position: absolute ;
  top: 175px ;
  left: 175px ;
}
```

Grid.css

```
* {
  padding: 0px ;
  margin: 0px ;
}

body {
  background-color: aquamarine ;
}

.container {
  display: flex ;
  height: 300px ;
  background-color: burlywood ;

  padding: 10px ;
}

.Box {
  width: 250px ;
}
```

```
.first {
  background-color: red ;
}

.second {
  display: flex ;
  flex-direction: column ;
  gap: 20px ;
}

.child {
  height: 140px ;

  gap: 5px ;

}

.A {
  background-color: rgb(105, 176, 34);
}

.B {
  background-color: yellow ;
}
```

Login.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login</title>

  <link rel="stylesheet" href="./CSS/login.css">
```

```
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
    <h1>LOGIN</h1>
      <div class="user">
        <label for="first">USERNAME</label>
        <input id="first" type="text" placeholder="Input username here!">
      </div>

      <div class="pass">
        <label for="second">PASSWORD</label>
        <input id="second" type="password" placeholder="Input password here!">
      </div>

      <button>LOGIN</button>
  </div>
</body>
</html>
```

Login.css

```
* {
  padding: 0px ;
  margin: 0px ;

}

body {
  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

  background-color: rgb(212, 217, 217) ;
  height: 100vh ;

  display: flex ;
  justify-content: center ;
  align-items: center ;
}

.container {
  height: 350px ;
  width: 350px ;
  background-color: white ;
```

```
  padding: 60px ;
}

h1 {
  /* background-color: aqua ; */
  text-align: center ;
  margin-bottom: 30px ;

  color: blue ;
}

.user, .pass {
  margin-bottom: 40px ;
}

label, input {
  display: block ;

  font-size: 21px ;
  font-weight: 600px ;
  margin-bottom: 5px ;
}

input{
  width: 100% ;

  padding-left: 10px ;
  border-radius: 5px ;
}
button {
  width: 100% ;
  height: 40px ;
  background-color: rgb(99, 99, 239) ;
  color: white ;

  font-size: 20px ;
  padding: 5px ;
  border-radius: 5px ;

  cursor: pointer ;
}
```

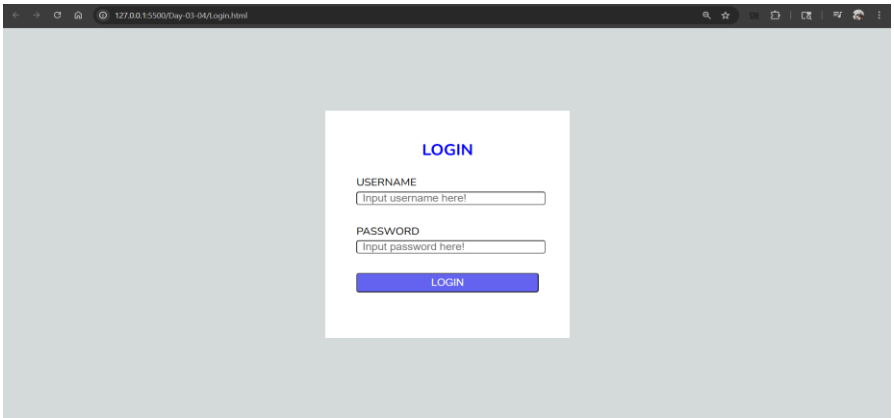

Grid1.html

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>GRID 1</title>

  <link rel="stylesheet" href="./CSS/grid1.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
</head>
<body>

  <div class="container">
    <div class="Box first">FIRST</div>
    <div class="Box second">SECOND</div>
    <div class="Box third">THIRD</div>
    <div class="Box fourth">FOURTH</div>
  </div>
</body>
</html>
```

Grid1.css

```css
* {
  padding: 0px ;
  margin: 0px ;
}

body {
  background-color: rgb(77, 77, 76) ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;
}

.container {
  padding: 10px ;
  background-color: greenyellow ;

  display: grid ;
  /* grid-template-rows: 200px 200px ;
     grid-template-columns: 300px 300px ; */
  grid-template-rows: 1fr 1fr ; /* ration 1:1 equal in rows */
  grid-template-columns: 1fr 1fr ; /* ration 1:1 equal in columns */
```

```
  height: 400px ; /* overflow without fraction method ie. 1fr*/
  width: 400px ;
  gap: 10px ;
}

.first {
  background-color: red ;
}

.second {
  background-color: green ;
}

.third {
  background-color: yellow ;
}

.fourth {
  background-color: blueviolet ;
}
```

Complex-grid.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Complex Grid</title>
  <link rel="stylesheet" href="./CSS/complex-grid.css">
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
```

```html
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>
  <div class="container">
    <div class="Box Header">HEADER</div>
    <div class="Box Sidebar">SIDEBAR</div>
    <div class="Box Content1">CONTENT1</div>
    <div class="Box Content2">CONTENT2</div>

    <div class="Box Content3">CONTENT3</div>
    <div class="Box Footbar">FOOTBAR</div>
  </div>
</body>
</html>
```

Complex-grid.css

```css
*{
  padding: 0px ;
  margin: 0px ;
}

body {
  background-color: rgb(132, 134, 134);
  height: 100vh ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

  display: flex ;
  justify-content: center ;
  align-items: center ;
}

.container {
  height: 600px ;
  width: 600px ;

  display: grid ;
  grid-template-columns: repeat(3, 1fr) ;
  grid-template-rows: 1fr 2fr 2fr 1fr ;
  gap: 5px ;
  background-color: rgb(249, 245, 245) ;
}

.Box {
  background-color: blueviolet ;
  color: white ;
  font-size: 25px ;
```

```
}

.Header {
  /* grid-column-start: 1 ;
  grid-column-end: 4 ; */
  grid-column: 1/4 ; /* SHORTCUT */
}

.Sidebar {
  /* grid-row-start: 2 ;
  grid-row-end: 4 ; */
  grid-row: 2/4 ;
}

.Content1 {
  /* grid-column-start: 2 ;
  grid-column-end: 4 ; */
  grid-column: 2/4 ;
}

.Content2 {
  /* grid-column-start: 2 ;
  grid-column-end: 3 ; */
  grid-column: 2/3 ;
}

.Content3 {
  /* grid-column-start: 3 ;
  grid-column-end: 4 ; */
  grid-column: 3/4 ;
}

.Footbar {
  /* grid-column-start: 1 ;
  grid-column-end: 4 ; */
  grid-column: 1/4 ;
}
```

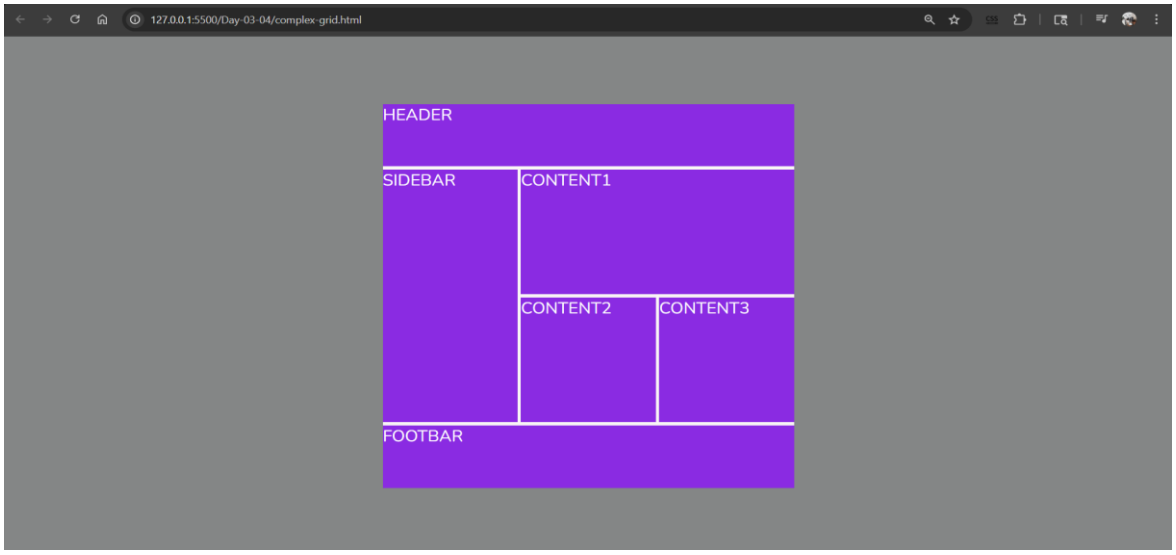

Chess.html

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Chess</title>

  <link rel="stylesheet" href="./CSS/chess.css">
</head>
<body>

  <div class="container">
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>

    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>

    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>

    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>

    <div class="white"></div>
    <div class="black"></div>
```

```
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>

    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>

    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>

    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
    <div class="black"></div>
    <div class="white"></div>
  </div>

</body>
</html>
```

Chess.css

```
* {
  padding: 0px ;
  margin: 0px ;
}

body {
  background-color: rgb(92, 92, 91);
  height: 100vh ;

  display: flex ;
  justify-content: center ;
  align-items: center ;
```

```
}

.container {
  height: 800px ;
  width: 800px ;

  display: grid ;
  grid-template-columns: repeat(8, 1fr) ;
  grid-template-rows: repeat(8, 1fr) ;

  background-color: pink ;
}

.white {
  background-color: white ;
}

.black{
  background-color: black ;
}
```

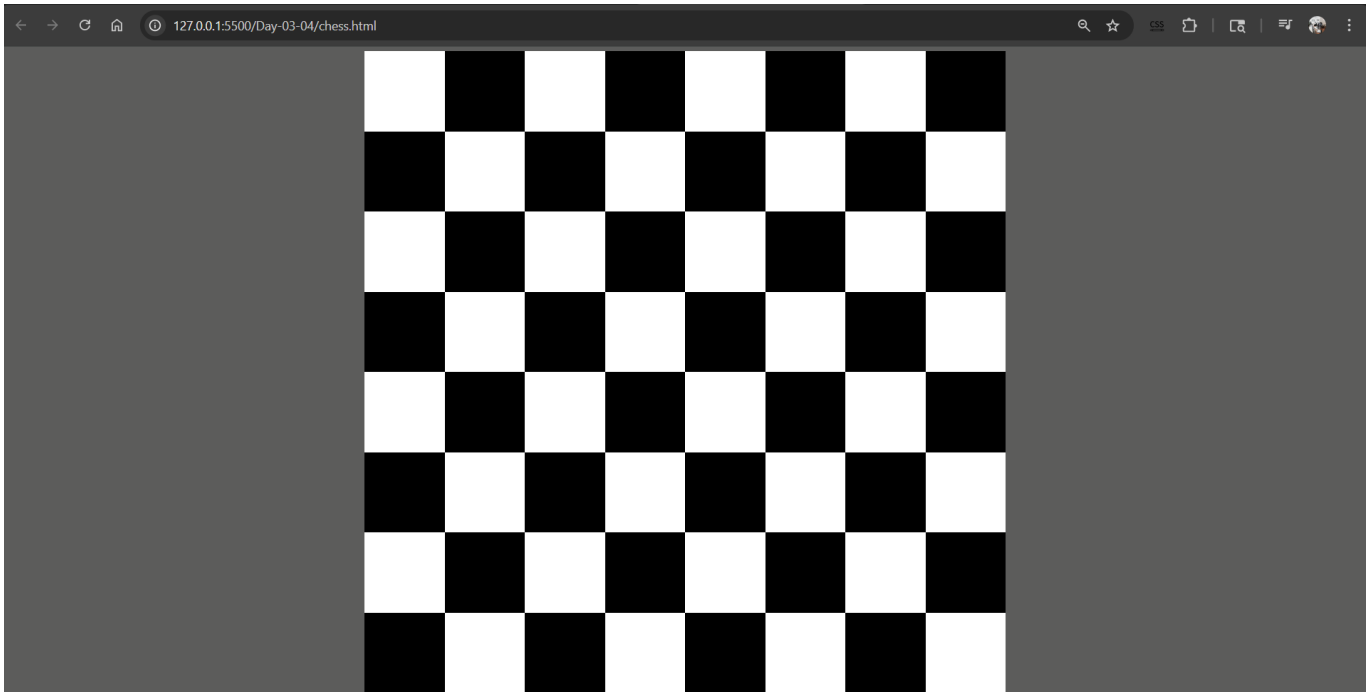

Mobile.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Mobile Responsive</title>

  <link rel="stylesheet" href="./CSS/mobile.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
```

```
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
    <div class="box">
      <img src="https://static-files.cricket-
australia.pulselive.com/headshots/288/10917-camedia.png" alt="virat">
    </div>
    <div class="box">
      <img src="https://static-files.cricket-
australia.pulselive.com/headshots/288/10917-camedia.png" alt="virat">
    </div>
    <div class="box">
      <img src="https://static-files.cricket-
australia.pulselive.com/headshots/288/10917-camedia.png" alt="virat">
    </div>
    <div class="box">
      <img src="https://static-files.cricket-
australia.pulselive.com/headshots/288/10917-camedia.png" alt="virat">
    </div>
  </div>

</body>
</html>
```

Mobile.css

```
* {
  padding: 0px ;
  margin: 0px ;

}

body {
  background-color: rgb(31, 32, 32);
  height: 100vh ;

  display: flex ;
  align-items: center ;
  justify-content: center ;
}

.container {
  height: 300px ;
  width: 1200px ;
  background-color: orange ;
  padding: 20px ;

  display: grid ;
  grid-template-columns: repeat(4, 1fr) ;
```

```
  grid-template-rows: 1fr ;;
  gap: 5px ;
}

img {
  height: 100% ;
  width: 100% ;

}

@media screen and (max-width: 900px) {
  .container {
    height: 400px ;
    width: 400px ;
    grid-template-columns: 1fr 1fr ;
    grid-template-rows: 1fr 1fr ;
  }
}

@media screen and (max-width: 500px) {
  .container {
    height: 800px ;
    width: 200px ;
    grid-template-columns: 1fr ;
    grid-template-rows: repeat(4, 1fr) ;
  }
}
```

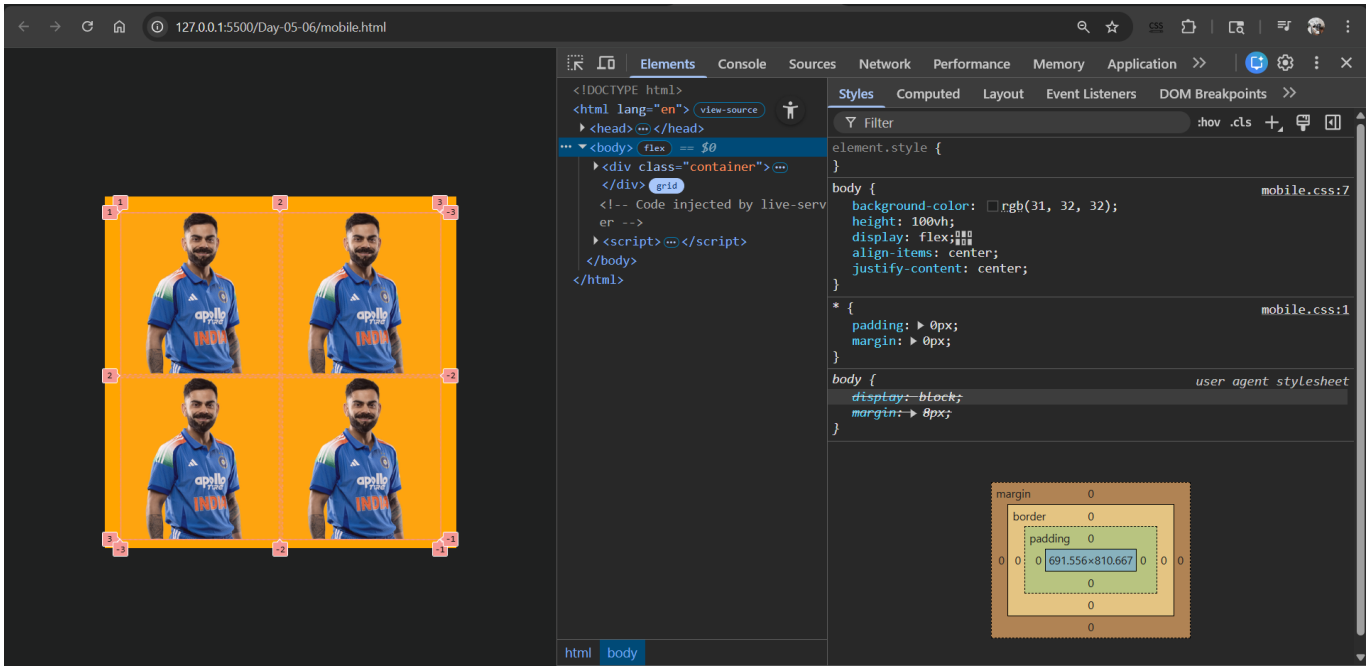

Overflow.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
```

```html
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Overflow</title>

  <link rel="stylesheet" href="./CSS/overflow.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
    <p>Lorem ipsum dolor sit amet consectetur adipisicing elit. Magnam, dignissimos
perspiciatis laborum quasi tempore blanditiis molestias recusandae. Voluptates aut
officia nisi doloremque sint enim, suscipit assumenda iusto sapiente at tempore
incidunt alias quidem beatae provident vero fugiat repellendus? Iure neque porro vel
voluptas fugit, aut exercitationem aliquam odit minima voluptate adipisci accusamus
officia ex commodi quibusdam facilis? Ullam laboriosam culpa sed inventore iusto
provident expedita, explicabo eius quas cum sunt optio dolorum placeat facere
blanditiis reprehenderit numquam ratione incidunt cupiditate porro in vero totam
rem! Maiores, praesentium qui. p>
  </div>

</body>
</html>
```

Overflow.css

```css
*{
  padding: 0px ;
  margin: 0px ;
}

body {
  height: 100vh ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

  display: flex ;
  justify-content: center ;
  align-items: center ;
}

.container {
  width: 400px ;
  height: 400px ;
  background-color: aqua ;
```

```
  /* overflow: hidden ; */ /* hide rest of content(invisible)*/
  overflow: scroll ; /* read hidden content by scrolling */
}
```

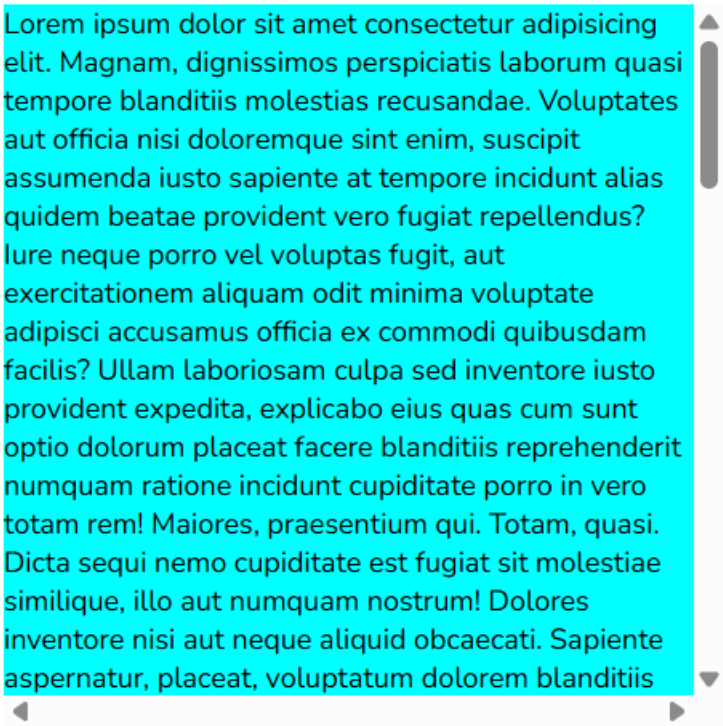

Responsive.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Responsive</title>

  <link rel="stylesheet" href="./CSS/responsive.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
    RESPONSIVE BOX
  </div>
</body>
</html>
```

Responsive.css

```
* {
  padding: 0px ;
  margin: 0px ;

}

body {
  background-color: rgb(115, 116, 116);

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;
}

.container {
  width: 400px ;
  height: 400px ;
  background-color: beige ;

  font-size: 50px ;
}

/*
@media screen and (max-width:600px){
  .container {
    background-color: rgb(223, 223, 83) ;
    font-size: 35px ;
  }
}

@media screen and (min-width:800px){
  .container {
    background-color: green ;
    font-size: 25px ;
  }
}
*/

/*
@media screen and (max-width:600px){
  .container {
    width: 300px ;
    height: 300px ;
    background-color: rgb(223, 223, 83) ;

    font-size: 35px ;
  }
}
*/
```

Animation01.html

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Animation First</title>

  <link rel="stylesheet" href="./CSS/animation01.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
    <div class="box">

    </div>
  </div>

</body>
</html>
```

Animation01.css

```css
*{
  padding: 0px ;
  margin: 0px ;
}

body {
  height: 100vh ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

}

.container {
  padding: 30px ;

  position: relative ;
}

/*
animation-timing-function: ease-in ;
['ease', 'ease-in', 'ease-out', 'ease-in-out', 'step-start', 'step-end', 'linear']
```

```
cubic-bezier(0.075, 0.82, 0.165, 1)
*/

.box {
  height: 100px ;
  width: 200px ;
  background-color: orange ;
  animation-name: moving ;
  animation-iteration-count: infinite ;
  /* animation-timing-function: ease-in-out ; */
  animation-timing-function: linear ;
  /* animation-direction: alternate ; */ /* LEFT->RIGHT then RIGHT->LEFT */
  animation-delay: 1s ;
  /* animation-fill-mode: forwards ;  */
  /*
    farwards(moves and stop at final position)
    backwords(moves and stop at initial position)
    none
    both
  */
  animation-duration: 3s ;

  position: absolute ;
}

/*
@keyframes moving {
  from {
    background-color: orange ;
    top: 10px ;
    left: 10px ;
  }
  to {
    background-color: yellow ;
    top: 10px ;
    left: 1250px ;
  }
}

*/

@keyframes moving {
  0% {
    background-color: orange ;
    top: 30px ;
    left: 30px ;
  }
  25% {
    background-color: red ;
    top: 30px ;
```

```
    left: 1250px ;
  }
  50% {
    background-color: yellow ;
    top: 600px ;
    left: 1250px ;
  }
  75% {
    background-color: greenyellow ;
    top: 600px ;
    left: 30px ;
  }
  100% {
    background-color: orange ;
    top: 30px ;
    left: 30px ;
  }
}
```

Animation-proj01.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Animation First</title>

  <link rel="stylesheet" href="./CSS/animation-proj01.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
```

```
    <p>Strike is comming soon! STAY TUNED</p>
  </div>

</body>
</html>
```

Animation-proj01.css

```
*{
  padding: 0px ;
  margin: 0px ;
}

body {
  background-color: rgb(72, 71, 71) ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

  display: flex ;
  justify-content: center ;

}

.container {
  width: 65% ;
  margin-top: 40px ;
  background-color: rgb(40, 40, 40) ;
  border-radius: 5px ;

  padding: 30px ;
  white-space: nowrap ; /* dont show extra content in multiple lines -- OVERFLOW is
allowed */
  overflow: hidden ;
}

p {
  font-size: 30px ;
  color: white ;

  /* margin-left: 100% ; goes completely out of the box */
  margin-left: 100% ;

  animation-name: moving ;
  animation-duration: 6s ;
  animation-iteration-count: infinite ;
}

@keyframes moving {
  from {
```

```
    margin-left: 100% ;
  }
  to {
    margin-left: -100% ;
  }
}
```

Project-revolve.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Animation First</title>

  <link rel="stylesheet" href="./CSS/project-revolve.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container">
    <div class="box">
      <div class="sun"></div>
    </div>
  </div>


</body>
</html>
```

Project-revolve.css

```
*{
  padding: 0px ;
  margin: 0px ;
}

body {
```

```
  background-color: rgb(72, 71, 71) ;
  height: 100vh ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

}

.container{
  height: 100vh ;
  background-color: rgb(51, 51, 52) ;

  /* position: relative ; */

  display: flex ;
  justify-content: center ;
  align-items: center ;
}

.box{
  height: 500px ;
  width: 500px ;
  background-color: white ;

  border-radius: 50% ;

  /*
  position: absolute ;
  top: 50% ;
  left: 50% ;
  transform: translate(-50%, -50%) ;
  */

  animation-name: moving ;
  animation-duration: 2s ;
  animation-timing-function: linear ;
  animation-iteration-count: infinite ;

  position: relative ;

}

@keyframes moving {
  /*
  from {
    transform: rotate(0deg) translateX(300px) rotate(0deg) ;
  }
  to {
    transform: rotate(360deg) translateX(300px) rotate(-360deg) ;
```

```
  }
  */
  from {
    transform: rotate(0deg) ;
  }
  to {
    transform: rotate(360deg) ;
  }
}

.sun{
  width: 50px ;
  height: 50px ;
  background-color: red ;
  border-radius: 50% ;

  position: absolute ;
  top: 100px ;
  left: 100px ;
}
```

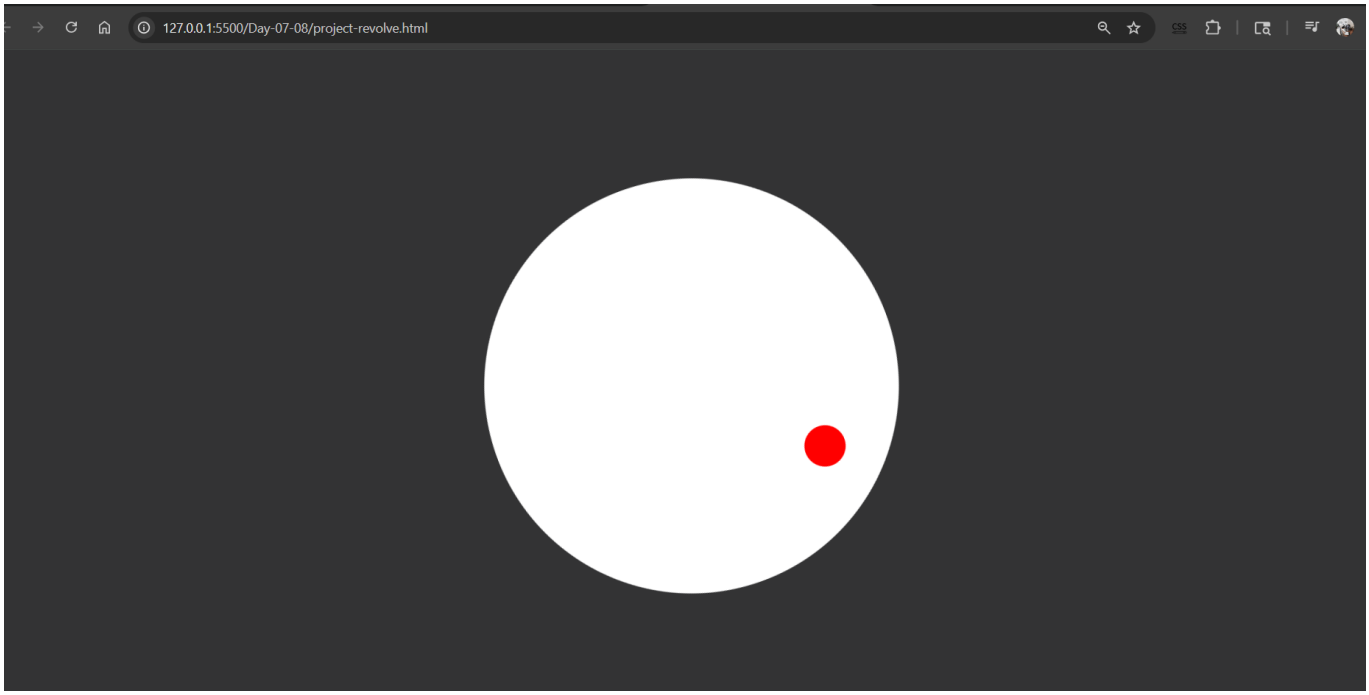

Transition.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Transition</title>

  <link rel="stylesheet" href="./CSS/transition.css">

  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
```

```
  <link
href="https://fonts.googleapis.com/css2?family=Nunito:ital,wght@0,200..1000;1,200..1
000&display=swap" rel="stylesheet">
</head>
<body>

  <div class="container"></div>
  <!-- <div class="container" style="background-color: greenyellow ;"></div> -->

</body>
</html>
```

Transition.css

```
*{
  padding: 0px ;
  margin: 0px ;
}

body {
  background-color: rgb(72, 71, 71) ;
  height: 100vh ;

  font-family: "Nunito", sans-serif;
  font-optical-sizing: auto;
  font-weight: 400 ;
  font-style: normal;

  display: flex ;
  justify-content: center ;
  align-items: center ;
  gap: 20px ;

  perspective: 800px ; /* include 3D animation eg. transform: translateZ(200px) ; */
}

.container {
  width: 250px ;
  height: 250px ;
  background-color: rgb(169, 234, 95) ;
  cursor: pointer ;
  border-radius: 5px ;

  /* transition-property: background-color, width, height ; */
  /*
  transition-property: all ;
  transition-duration: 1s ;
  transition-timing-function: cubic-bezier(0.175, 0.885, 0.32, 1.275) ;
  */
  /*
    transition-timing-function: ['ease', 'ease-in', 'ease-out', 'ease-in-out',
'linear'] ;
    transition-timing-function: cubic-bezier(0.175, 0.885, 0.32, 1.275)
```

```
  */

  /* SHORT HAND TRANSITION PROPERTY */
  transition: all 1s ease-in 0s ;
  /* transition: all(property) 1s(duration) ease-in(name) 1s(delay) ; */

  animation-name: moving ;
  animation-duration: 2s ;
  animation-iteration-count: infinite ;
  animation-timing-function: linear ;
}

.container:hover {
  /*
  width: 400px ;
  height: 400px ;
  background-color: rgb(234, 167, 91) ;
  */

  /* transform: scale(1.4) ; */ /* 1.4 times scaling WITHOUT affecting other
element's CSS*/
  /* transform: scaleX(1.4) ; SCALING in X dimension only */
  /* transform: scaleY(1.4) ; SCALING in Y dimension only */

  /* transform: translateY(200px) ; */
  /* transform: translateZ(200px) ; */ /* doesn't work in 2D screen, 'perspective'
property required */
  /* transform: translate(200px, 400px) ; */ /* 200px(right) 400px(down) */

  /* transform: rotate(90deg); */

  /* transform: skew(30deg) ; */ /* transform: skew(-30deg) ; */

  /* transform: rotateX(90deg) ; */
}

@keyframes moving {
  from {
    transform: rotate(0deg) ;
  }
  to {
    transform: rotate(360deg) ;
  }
}
```

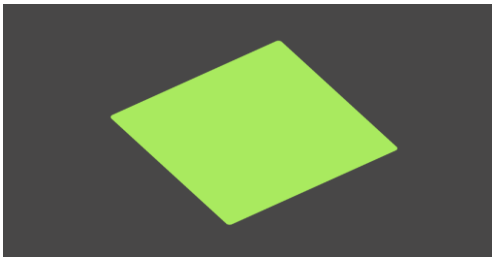

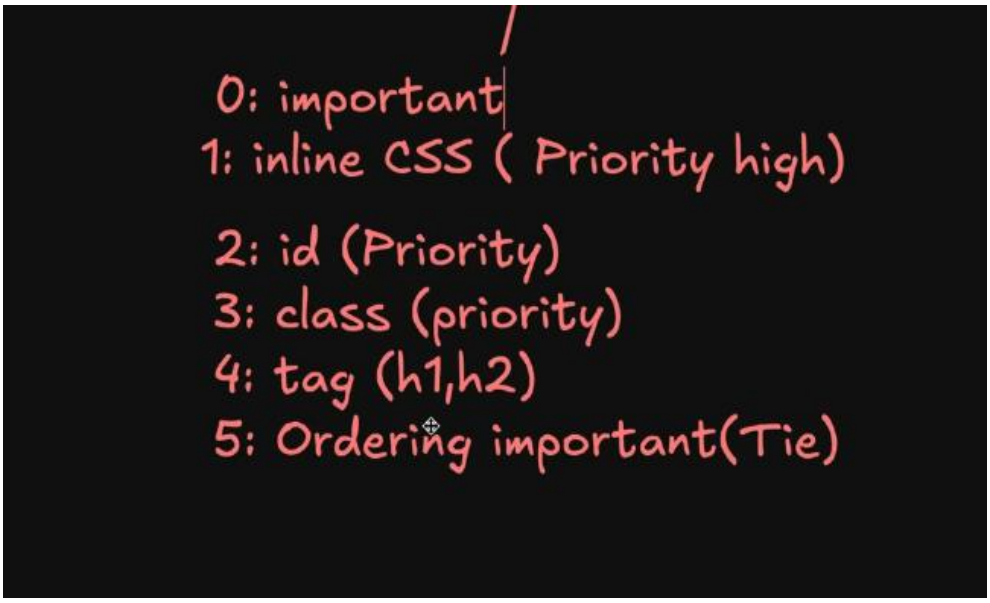
0: important
1: inline CSS (Priority high)
2: id (Priority)
3: class (priority)
4: tag (h1,h2)
5: Ordering important(Tie)

PRIORITY

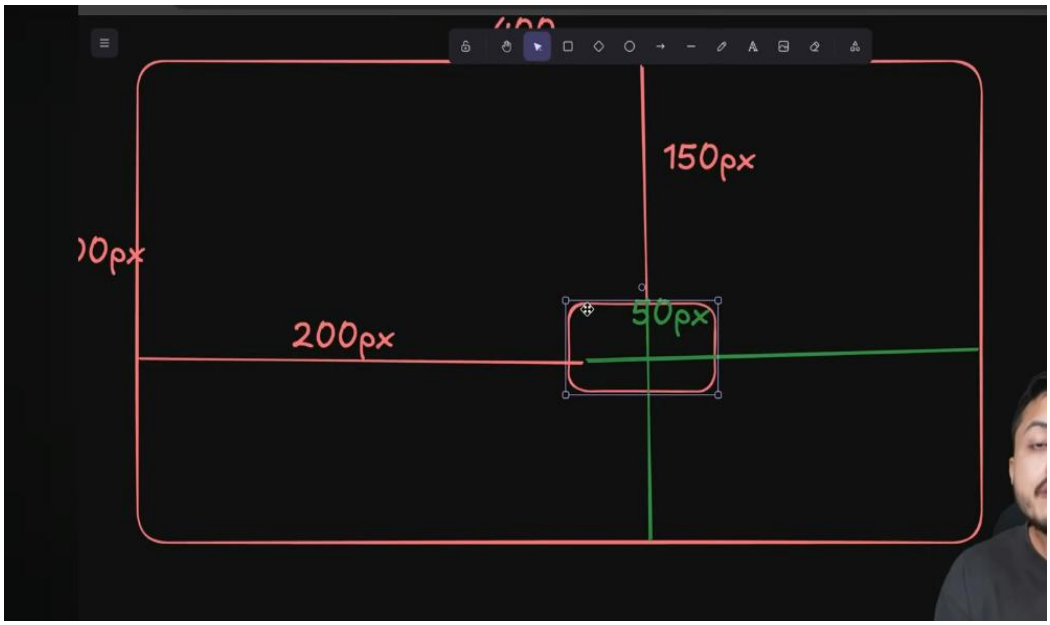
150px
200px
50px

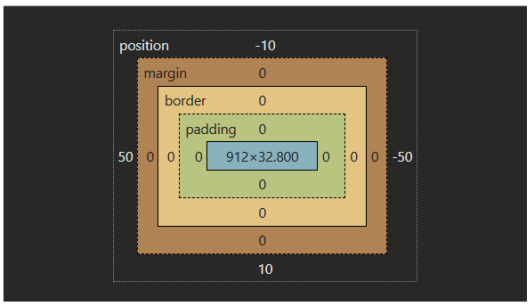
position -10
margin 0
border 0
padding 0
50 0 0 0 912×32.800 0 0 0 -50
0
0
0
10

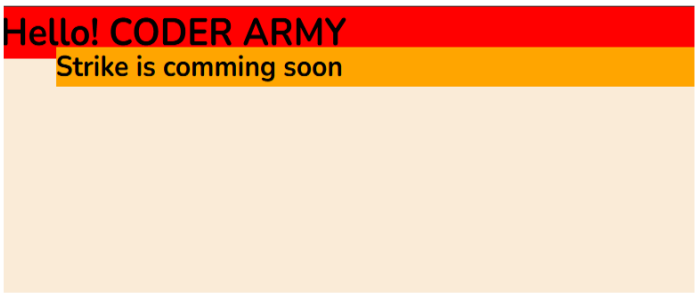
Hello! CODER ARMY
Strike is comming soon

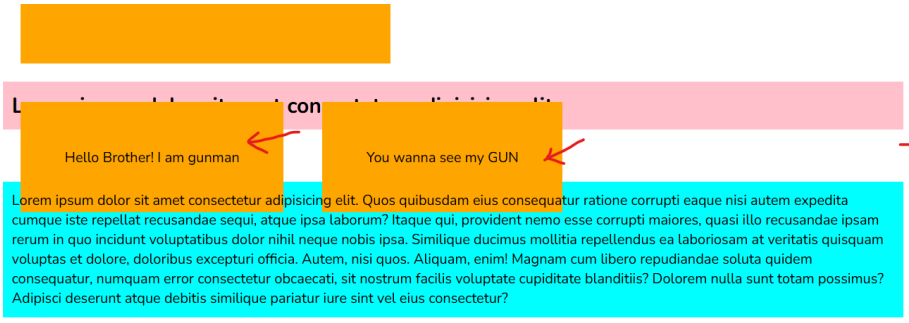
Hello Brother! I am gunman
You wanna see my GUN
Lorem ipsum dolor sit amet consectetur adipisicing elit. Quos quibusdam eius consequatur ratione corrupti eaque nisi autem expedita cumque iste repellat recusandae sequi, atque ipsa laborum? Itaque qui, provident nemo esse corrupti maiores, quasi illo recusandae ipsam rerum in quo incidunt voluptatibus dolor nihil neque nobis ipsa. Similique ducimus mollitia repellendus ea laboriosam at veritatis quisquam voluptas et dolore, doloribus excepturi officia. Autem, nisi quos. Aliquam, enim! Magnam cum libero repudiandae soluta quidem consequatur, numquam error consectetur obcaecati, sit nostrum facilis voluptate cupiditate blanditiis? Dolorem nulla sunt totam possimus? Adipisci deserunt atque debitis similique pariatur iure sint vel eius consectetur?

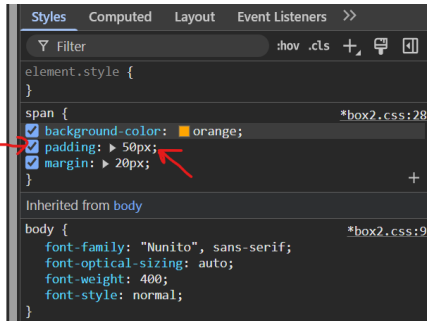
Styles
Computed
Layout
Event Listeners
Filter
:hov .cls
element.style {
}
span {
*box2.css:28
background-color: orange;
padding: 50px;
margin: 20px;
}
Inherited from body
body {
*box2.css:9
font-family: "Nunito", sans-serif;
font-optical-sizing: auto;
font-weight: 400;
font-style: normal;
}

INSET BOX SHADOW

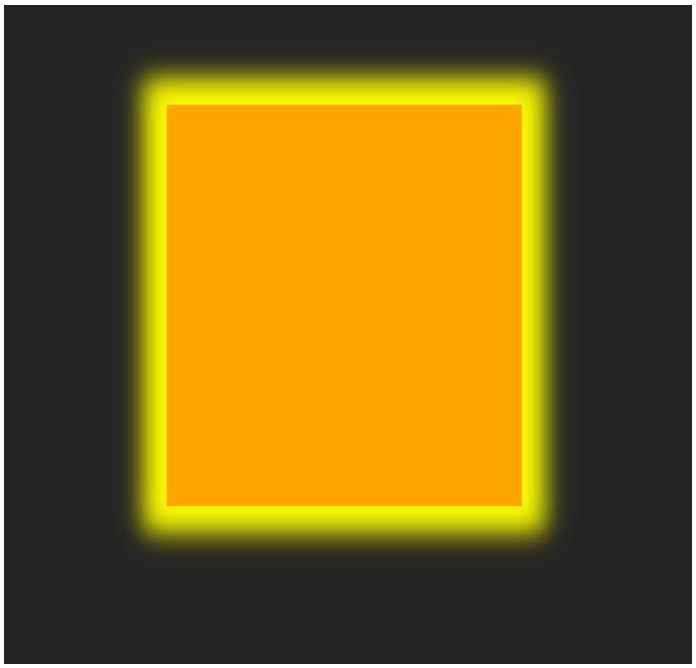

SPREAD BLUR BOX SHADOW

Box Shadow Blur Radius

Responsive Website

HTML: content
CSS: Content arrange karte(media)

if(device width >900px)
CSS apply kar dunga

if(device<900 && 600>