Event model - 4 Identify inputs
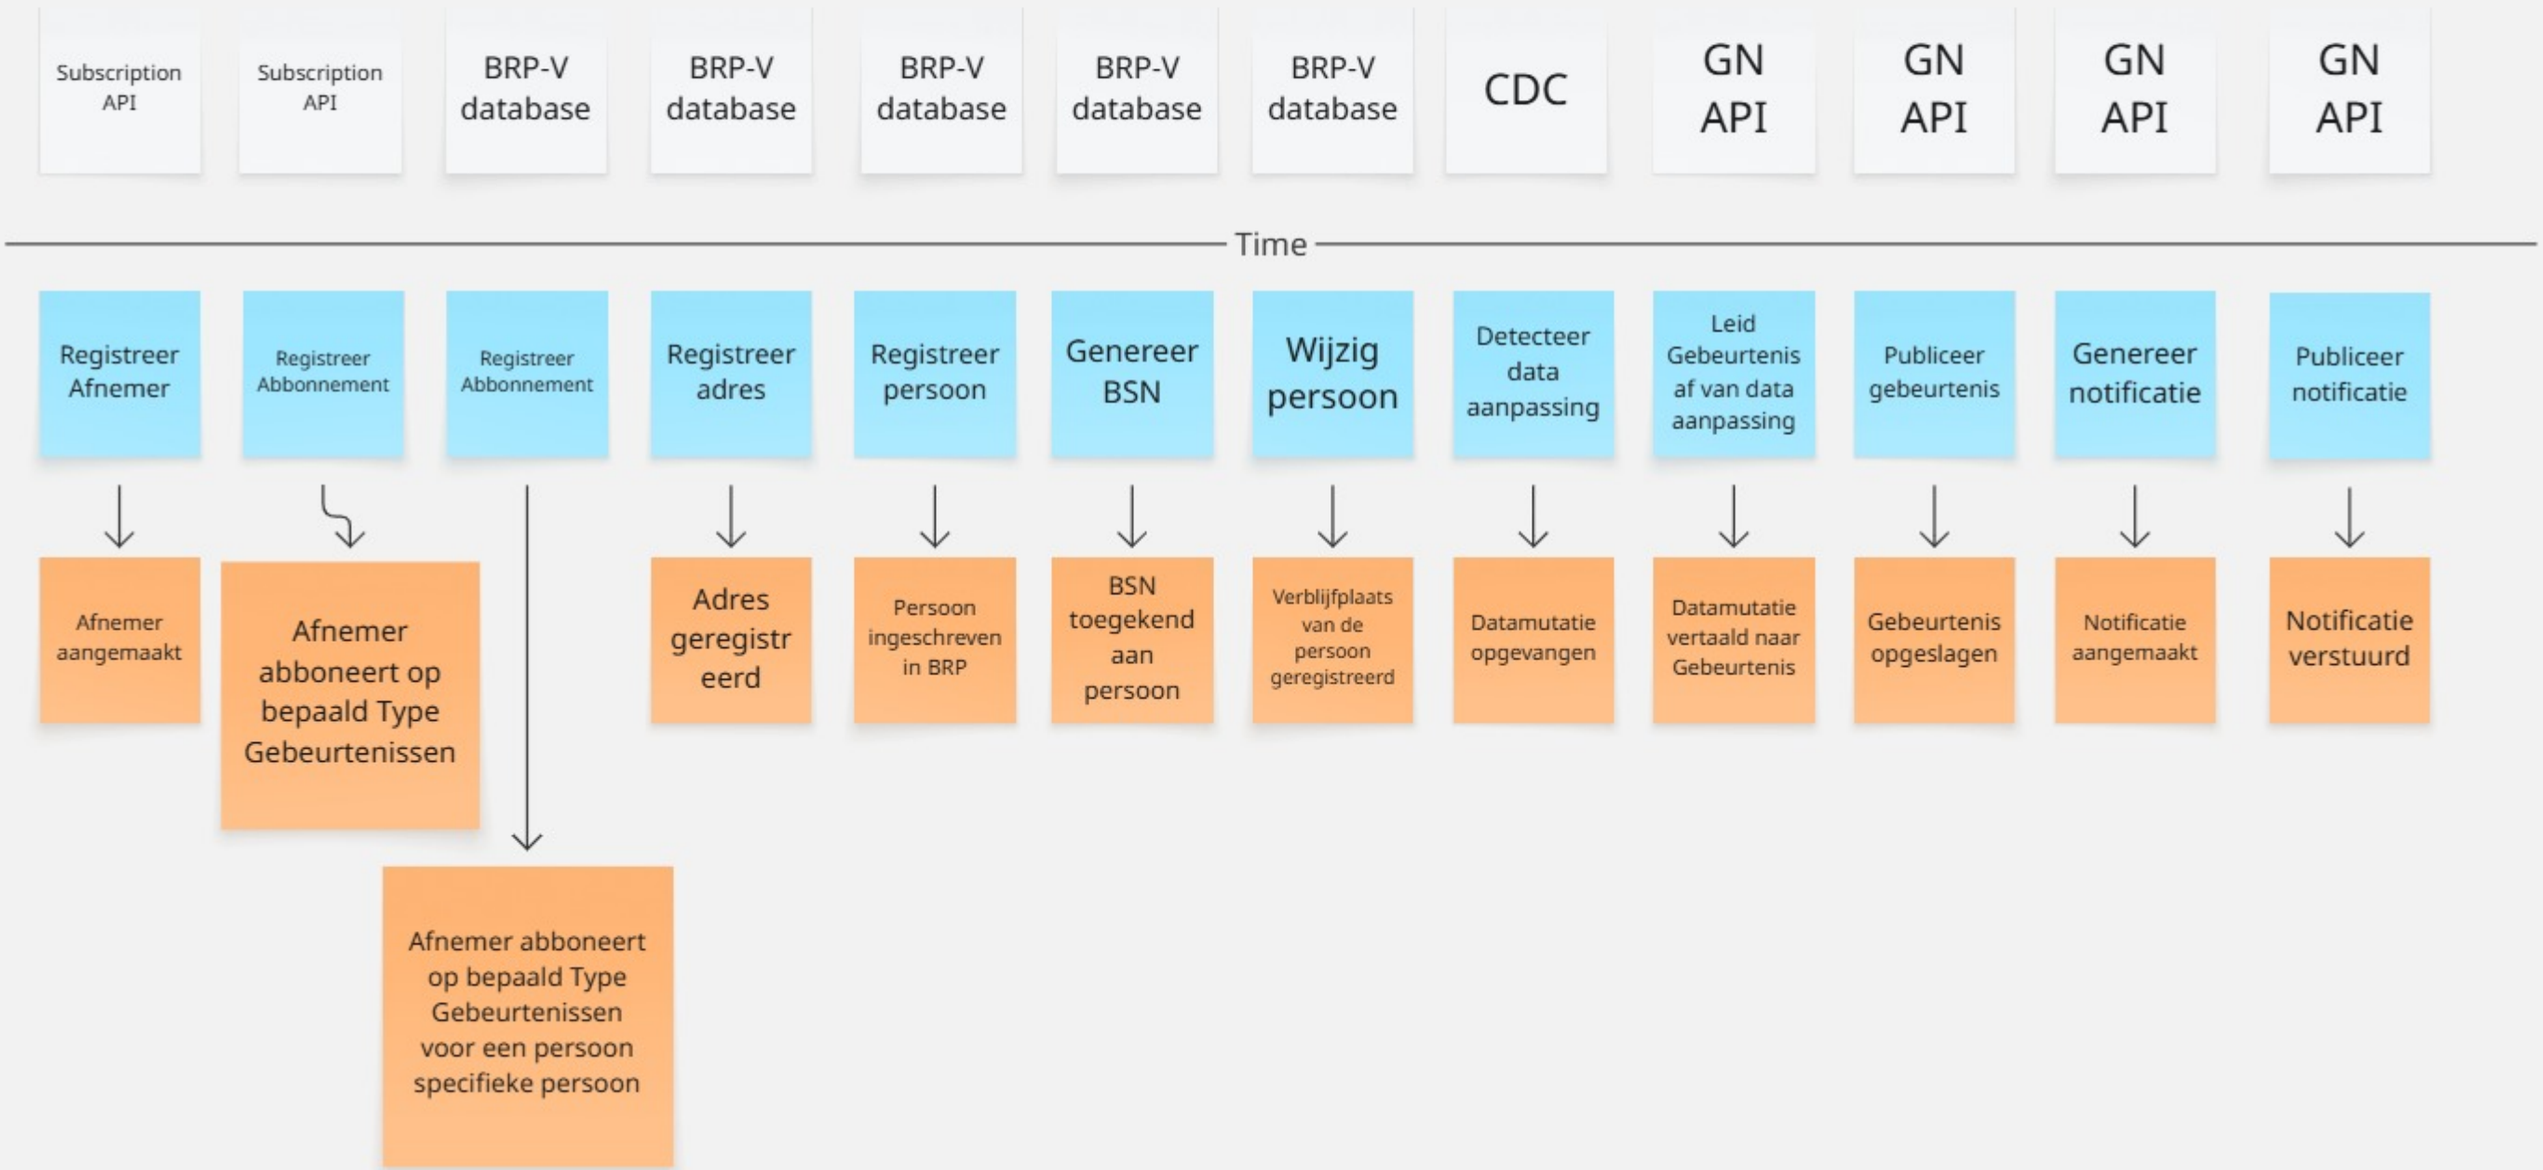
Show how we enable the user to change the state of the system. Each time an event is stored due to a users action, we link that to the UI by a command that shows that we are getting from the screen or implicitly from client state