“Tour and Travel Management System”

A

Project Report

Submitted in partial fulfillment of the requirement for the

award of Degree of

Bachelor of Science in Information Technology

Submitted to

444 - Swatantrata Senani Shankarlal Agarwal Prabandhan Avum Takniki Mahavidyalay, Patna

CIMAGE
Knowledge . Skill . Success

PATLIPUTRA UNIVERSITY

Submitted By
Amit kumar
Registration No.- **202344400151**
B.Sc.IT-3rd Year
Session-2023-2026

Under Joint Guidance of
Prof. Niraj Kumar Singh &
Prof. Anjesh Kumar
[Asst. Professor]
Computer Science &
Applications

Swatantrata Senani Shankarlal Agarwal Prabandhan Avum Takniki Mahavidyalay, Patna

Department of Computer Science & Applications

Session 2023-2026

DATE:……

CERTIFICATE

This is to certify that the work embodies in this project entitled, **Tour and Travel Management System",** being submitted by **Amit kumar**

UNIVERSITY, PATNA during the academic year 2022-25 is a record of bonafide piece of work, carried out by him/her under our/my supervision and guidance in the **"Department of Computer Science & Applications", SSSAPTM, Patna.**

(202344400151)in partial fulfillment of the requirement for the award of "**Bachelor of Science in Information Technology**" to ***PATLIPUTRA***

Dr. Neeraj Agrawal
Director

Dr. Neeraj Kumar
Dean- Academics

Dr. Amit Kumar Shukla
Principal

Swatantrata Senani Shankarlal Agarwal Prabandhan Avum Takniki Mahavidyalay, Patna

Department of Computer Science & Applications

Session 2023-2026

Date:_____

APPROVAL CERTIFICATE

The project report entitled **"Tour and Travel Management System",** being submitted by

Amit kumar (202344400151)has been examined by us and is hereby approved for the award of degree "**Bachelor of Science in Information Technology**", for which it has been submitted. It is understood that by this approval the undersigned do not necessarily endorse or approve any statement made, the opinion expressed or conclusion drawn therein, but approve the project only for the purpose for which it has been submitted.

(Internal Examiner) (External Examiner)

Date: Date:

Swatantrata Senani Shankarlal Agarwal Prabandhan Avum Takniki Mahavidyalay, Patna

Department of Computer Science & Applications

Session 2023-2026

Date:_____

DECLARATION

I, **Amit kumar** hereby declare that the work, which is being presented in the project report entitled **"Tour and Travel Management System ",** partial fulfillment of the requirements for the award of degree of "**Bachelor of Science in Information Technology**" submitted in the department of **Computer Science & Applications (SSSAPTM)** is an authentic record of my own work carried under the joint guidance of **Prof. Niraj Kumar Singh Sir**

and Prof. Anjesh Kumar Sir. I have not submitted the matter embodied in this report for the award of any other degree.

Amit kumar

Registration No : **202344400151**

B.Sc.IT 3rd Year

Session-2023-2026

ACKNOWLEDGEMENT

"A journey is easier when you travel together. Interdependence is certainly more valuable than independence."

I would like to thanks, **Prof. Niraj Kumar Singh Sir** and **Prof. Anjesh Kumar Sir**, for providing regular guidance and insight into my project work. I also thank them for all advice he has given me in the past year, and for always having time for me, whenever I needed.

I give special thanks to **Dr. Amit Kumar Shukla Sir, Prof. Raju Upadhyay Sir,** and **Prof. Ravi Kumar Soni Sir** for always being willing to help find solutions to any problems I had with my work.

"The completion of any project depends upon the cooperation, coordination, and combined efforts of several resources of knowledge, inspiration, and energy".

I also extend my deepest gratitude to **Director**, CIMAGE GROUP OF INSTITUITIONS, PATNA, **Dr. Neeraj Agrawal Sir, Dean** CIMAGE GROUP OF INSTITUITIONS, PATNA, **Dr. Neeraj Kumar Sir** and **Centre Head Mrs. Megha Agrawal Ma'am** for providing all the necessary facilities and true encouraging environment to bring out the best in my endeavors.

I express my gratitude and thanks to all the staff members of Computer Science departments for their sincere cooperation in furnishing relevant information to complete this Project well in time successfully.

I extend a special word to my friends, who have been a constant source of inspiration throughout my project work.

Lastly but not least I must express my cordial thank to my parent and family members who gave me the moral support without that it is impossible to complete my project work. With this note, I thank everyone for the support.

(Amit kumar)

Registration No : **202344400151**

B.Sc.IT 3rd Year

Session-2023-2026

CONTENTS

INTRODUCTION 8

OBJECTIVE 9

PROJECT CATEGORY PHP 10

ADVANTAGES OF PHP..... 11

TOOLS/PLATFORM required..... 13

HARDWARE & SOFTWARE REQUIREMENTS 13

PROBLEM DEFINITION 14

REQUIREMENT SPECIFICATIONS 14

PROJECT PLANNING & SCHEDULING 14

GANTT CHART 16

PERT CHART 18

SYSTEM ANALYSIS 1

IDENTIFICATION OF NEED 1

FEASIBILITY STUDY 6

TECHNICAL FEASIBILITY: 7

ECONOMICAL FEASIBILITY: 7

OPERATIONAL FEASIBILITY: 8

ANALYSIS 10

DFD 10

MODULE DESCRIPTION 16

DATA STRUCTURE Snap shot 17

LIST OF REPORTS 22

SCOPE AND FUTURE ENHANCEMENT 23

IMPLEMENTATION METHODOLOGY 23

TESTING 25

LIMITATIONS AND FURTHER ENHANCEMENTS 28

SECURITY MECHANISM 29

SNAPSHOTS 30

SAMPLE PROJECT

INTRODUCTION

The “Tour and Travel Management System” is a web-based application developed using **PHP** as the front-end language and **MySQL** as the back-end database.In today’s fast-paced world, people often experience stress due to their daily routines.Traveling has become one of the best ways to relax and refresh the mind. However, planning a trip manually can be time-consuming and difficult. Therefore, there is a need for an efficient and user-friendly system that can manage all travel-related activities in one place.

This system provides a centralized platform where users can explore different travel packages, view details, and book tours easily. It also allows administrators to manage packages, bookings, and user information efficiently.

PHP is used to create dynamic and interactive web pages, while MySQL is used to store and manage data securely. The system ensures data accuracy, reduces manual work, and improves overall efficiency.

This project has been developed as part of the academic curriculum at **Swatantrata Senani Shankarlal Agarwal Prabandhan Avum Takniki Mahavidyalay, Patna**, with the aim of providing a practical solution to real-world travel management problems.

OBJECTIVE

The main objective of the project entitled "Tour and Travel Management System" is to develop an efficient and user-friendly platform to manage travel-related activities in an organized and automated way.

The objectives of this system are:

- To provide users with detailed information about various travel packages.
- To allow users to easily book tour packages online.
- To maintain records of users, bookings, and packages in a structured database.
- To enable administrators to manage travel packages, bookings, and customer details efficiently.
- To reduce manual work and minimize errors in managing travel data.
- To provide a secure system for storing and retrieving user and booking information.

- To generate reports related to bookings, users, and tour packages.

PROJECT CATEGORY PHP & MYSQL

The Tour and Travel Management System is developed using PHP as the server -side scripting language and MySQL as the database management system.

PHP is a widely used open-source scripting language that is especially suited for web development. It can be embedded into HTML and is used to create dynamic and interactive web pages. PHP is efficient, flexible, and compatible with various web servers, making it ideal for developing web-based applications.

MySQL is a relational database management system that is used to store and manage data in a structured format. It supports SQL (Structured Query Language) for efficient data handling such as inserting, updating, deleting, and retrieving records.

In this project, PHP handles the application logic such as user authentication, booking process, and admin operations, while MySQL manages the storage of data including user details, tour packages, and booking records.

The combination of PHP and MySQL provides a secure, reliable, and efficient platform for developing the Tour and Travel Management System.

ADVANTAGES OF PHP & MYSQL

1. **Easy to Learn and Use:**

   PHP is simple and easy to understand, making it suitable for beginners as well as professionals. It allows faster development of web applications.

2. **Open Source:**

   Both PHP and MySQL are open-source technologies, which means they are free to use and do not require any licensing cost.

3. **Platform Independent:**

   PHP applications can run on different operating systems such as Windows, Linux, and macOS without any major changes.

4. **Strong Database Support:**

   PHP provides excellent support for MySQL, allowing easy connection and smooth data handling for storing and retrieving information.

5. **Fast Performance:**

   PHP executes quickly on the server, and MySQL efficiently manages large amounts of data, making the system fast and responsive.

6. **Security:**

   With proper coding practices, PHP and MySQL provide secure data handling, protecting user information and preventing unauthorized access.

7. **Scalability:**

   The system can be easily expanded to include new features such as payment gateway, notifications, and mobile applications.

8. **Wide Community Support:**

PHP and MySQL have a large developer community, which makes it easy to find resources, tutorials, and solutions to problems.

9. **Integration Capability:**

   PHP can be easily integrated with HTML, CSS, JavaScript, and other technologies to build dynamic and interactive web applications.

TOOLS/PLATFORM REQUIRED

Operating System

- Windows 7, Windows 10, or above
- Linux (optional)

HARDWARE & SOFTWARE REQUIREMENTS

Hardware Requirements:

- Processor: Intel i3 or above
- RAM: Minimum 4 GB
- Hard Disk: Minimum 20 GB free space
- Stable Internet Connection

Software Requirements:

- XAMPP (Apache Server, PHP, MySQL)
- Web Browser (Google Chrome, Microsoft Edge)
- Code Editor (VS Code / Notepad++)

- phpMyAdmin (for database management)

PROBLEM DEFINITION

In traditional systems, travel data is managed manually, which leads to errors and inefficiency. So, this system is developed to automate booking and package management in a secure and user-friendly way.

REQUIREMENT SPECIFICATIONS

A Software Requirements Specification (SRS) is a complete description of the behavior of the system to be developed. It includes a set of use cases that describe all the interactions the users will have with the software. Use cases are also known as functional requirements. In addition to use cases, the SRS also contains non-functional (or supplementary) requirements. Nonfunctional requirements are requirements which impose constraints on the design or implementation (such as performance engineering requirements, quality standards, or design constraints).

The general requirements of the project are:

- **To maintain user registration and login details**
- **To manage tour package information**
- **To record booking and enquiry details**
- **To provide an admin dashboard for system management**

- **To maintain backup of important data**

PROJECT PLANNING & SCHEDULING

Project planning is part of project management, which relates to the use of schedules such as Gantt charts to plan and subsequently report progress within the project environment.

Initially, the project scope is defined and the appropriate methods for completing the project are determined. Following this step, the durations for the various tasks necessary to complete the work are listed and grouped into a work breakdown structure. The logical dependencies between tasks are defined using an activity network diagram that enables identification of the critical path. Float or slack time in the schedule can be calculated using software. Then the necessary resources can be estimated and costs for each activity can be allocated to each resource, giving the total project cost. At this stage, the project plan may be optimized to achieve the appropriate balance between resource usage and project duration to comply with the project objectives. Once established and agreed, the plan becomes what is known as the baseline. Progress will be measured against the baseline throughout the life of the project. Analyzing progress compared to the baseline is known as earned value management.

The PROJECT SCHEDULE is a calendar that links the tasks to be done with the resources that will do them. Before a project schedule can be created, the project manager must have a work breakdown structure (WBS), an effort estimate for each task, and a resource list with availability for each resource. If these are not yet available, it may be possible to create something that looks like a schedule, but it will essentially be a work of fiction. A project manager's time is better spent on working with the team to create a WBS and estimates (using a consensus-driven estimation method like Wideband Delphi than on trying to build a project schedule without them. The reason for this is that a schedule itself is an estimate: each date in the

schedule is estimated, and if those dates do not have the buy-in of the people who are going to do the work, the schedule will almost certainly be inaccurate.

GANTT CHART

Gantt charts (developed by Henry L. Gantt) are a project control technique that can be used for several purposes including scheduling, budgeting and resource planning. A Gantt chart is a bar chart with each bar representing an activity.

The bars are drawn against a time line. The length of each bar is proportional to the length of time planned for the activity. Gantt chart can take different phase depending on their intended use. The Gantt chart of **Tour and Travel Management System** is drawn for the time management. The Gantt chart is drawn below:

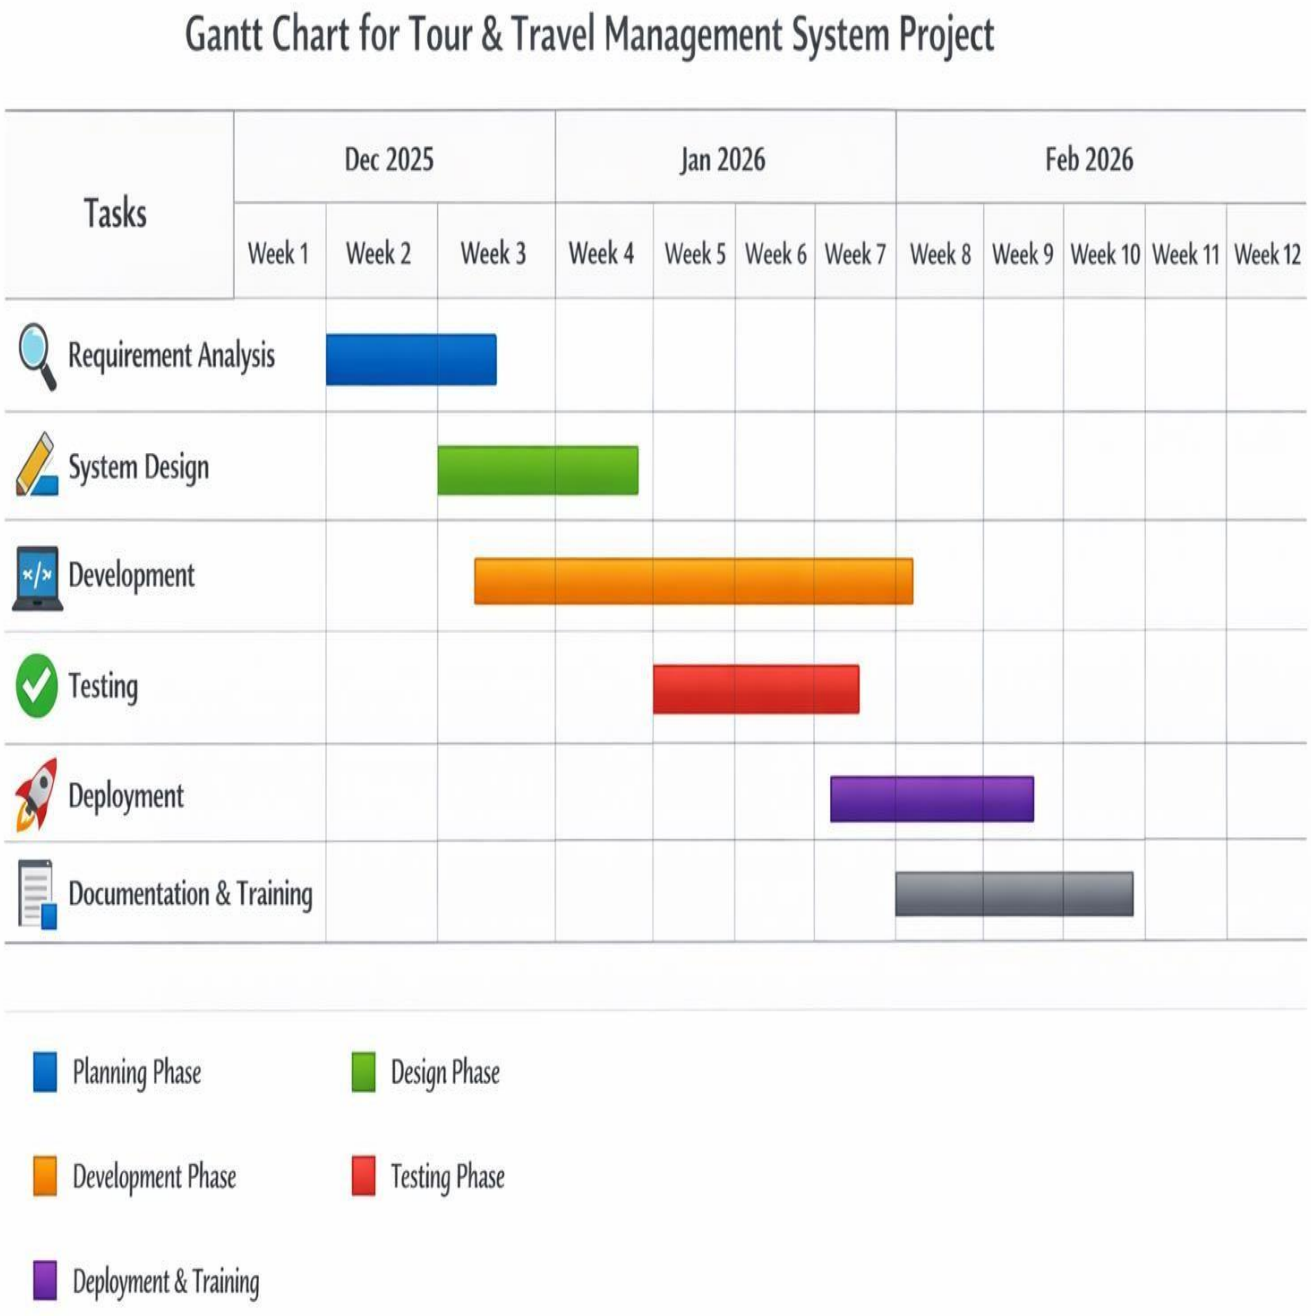
Gantt Chart for Tour & Travel Management System Project
Tasks
Dec 2025
Jan 2026
Feb 2026
Week 1
Week 2
Week 3
Week 4
Week 5
Week 6
Week 7
Week 8
Week 9
Week 10
Week 11
Week 12
Requirement Analysis
System Design
Development
Testing
Deployment
Documentation & Training
Planning Phase
Design Phase
Development Phase
Testing Phase
Deployment & Training

PERT CHART

PERT (Project Evaluation and Review Technique) charts consist of a

network of boxes and arrows. The boxes represent activities and the arrows represent task dependencies.

PERT is organized by events and activities or tasks. PERT have more advantages and they are likely to be used for more complex projects. Through PERT chart the various task paths are defined. PERT enables the calculation of critical path. Each path consists of combination of tasks, which must be completed. The time and the cost associated with each task along a path are calculated, and the path that requires the greatest amount of elapsed time is the critical path. Calculation of the critical path enables project manager to monitor this series of task more closely than others to shift resources to it, if it begins to fall behind schedule.

PERT controls time and cost during the project and also facilitate finding the right balance between completing a project on time and completing it within the budget. There are thus not one but many critical paths, depending on the permutations of the estimates for each task. This makes analysis of critical path in PERT charts very complex. The PERT chart representation of the **Tour and Travel Management System** is shown below.

SYSTEM ANALYSIS

IDENTIFICATION OF NEED

To Important Indication for software we use the Principles of Requirement Engineering. Requirement engineering provides the appropriate mechanism for understanding what the customer wants, analyzing need, assessing feasibility, negotiating a reasonable solution, specifying the solution unambiguously, validating the specification and managing the requirement as they are transformed into an operational system. The requirement engineering process can be described in five distinct steps:

Requirement elicitation.

Requirement analysis & negotiation.

Requirement specification.

System Modeling.

Requirement validation.

Requirement Management.

In other words we can say that requirement analysis is a software task that bridges the gap between system level requirement engineering and software design.

Requirement analysis allows the software engineering to refine the software allocation and build models of the data, functional and

behavioral domains that will be treated by software. Requirement analysis provides the software designer with a representation of information, function and behavior that can be translated into data, architectural, interface and component level design; finally the requirement specification provides the developer and the customer with the means to assess quality once software is built.

The most commonly used requirement elicitation technique is to conduct a meeting or interview. The first meeting between a software engineer and customer can be likened to the awareness of a first date between to adolescents. Neither person knows what to

say or ask; Both are worried that what they do say will be misinterpreted; both are thinking about where it might lead (Both likely have radically different expectation here); Both want to get the think over with, but at the same time, both want it to be a success.

Here according to this principle the analyst starts by asking context-free-questions. That is a set of question that will lead to a basic understanding of the problem, the people who want a solution, the nature of solution that is desired, and the effectiveness of the first encounter itself. The first set of Context-free question focuses on the customer, the overall goals, and the benefits. For example, the analyst might ask: -

Who is behind the request for this Work?

Who will use the solution?

What will be economic benefit of a successful solution?

Is there another source for the solution that you need?

The next set of questions enables the software engineer to gain a better Understanding of the problem and the customer to voice his or her perceptions about a solution: -

How would you characterize “good” output that would be generated by a successful solution?

What problem(s) will this solution address?

Can you show me (or describe) the environment in which the solution will be used?

Will special performance issues or constraints affect the way the solution is approached?

The final set of question focuses on the effectiveness of the meeting:

Are you the right person to answer these questions? Are your answers? Official”?
Are my questions relevant to the problem that you have?

Am I asking too many questions?

Can anyone else provide additional information?

Should I be asking you anything else?

According to the above concepts I went to institution and met its staffs, management, and some persons related with the organizational work, which advised me related with my project such as details of agent, policy related information will be cater this system.

Preliminary Investigation: -

The first step in the system development life cycle is the preliminary investigation to determine the feasibility of the System. The purpose of the preliminary investigation is to evaluate project requests. It is not a design study nor does it includes the collection of details top describe the business system in all respect. Rather, it is collecting of information that helps committee members to evaluate the merits of the project request and make an informed judgment about the feasibility of the proposed project.

Here for the Tour and Travel Management System, I have worked on the preliminary investigation that accomplished the following objectives: -

Clarify and understand the project request.

Determine the size of the project.

Assess costs and benefits of alternative approaches.

Determine the technical and operational; feasibility of alternative approaches.

Report the findings to management, with recommendation outlining the acceptances or rejection of the proposal.

Considering above criteria I also keep in mind that the requirements are clearly understandable when the clarification of project request is enquired. The data of the Ngo Management System, which are collected by me during preliminary investigation, are through Reviewing organization Documents Onsite observation and

Conducting interviews.

FEASIBILITY STUDY

Not everything imaginable is feasible, not even in software, even as it may appear to outsiders. Feasibility is the determination of whether or not a project is wrong doing. On the contrary, software feasibility has seven solid dimensions as below: -

- **Technical feasibility.**
- **Operational feasibility.**
- **Economic feasibility.**
- **Social feasibility.**
- **Management feasibility.**
- **Legal feasibility. • Time feasibility.**

The process followed in making this determination is called a feasibility study. The type of study determines if a project can and should be taken. Once it has been determined that a project is feasible, that analyst can go ahead and prepare the project specification which finalizes project requirements. Generally, feasibility studies are undertaken within tight time constraints and normally culminate in a written and oral feasibility report. The contents and recommendation of such a study will be used as a sound basis for deciding whether to proceed, postpone or cancel the project. Thus, since the feasibility study may lead to the commitment of large resources, it becomes

necessary that it should be conducted competently and that no fundamental errors of judgment are made.

In other words we can say that a feasibility study is conducted to select the best system that meets performance requirement. This contains and identification description, an evaluation of candidate system and the selection of best system for the job. The system required a statement of constraints; the identification of specific system objective and a description of outputs define performance.

TECHNICAL FEASIBILITY: -

Technical feasibility is concerned with specifying equipment and software that will successfully satisfy the user requirements. My project is fit in technical feasibility because it requires neither too much heavy configuration system for its run nor in its development.

Following hardware and software components are used in the development of proposed system.

The same configuration system is also meets all the requirements to run or for implements to run or for implementation of the system. Though I have also tested this software for that systems whose configuration is lower than the above specified

ECONOMICAL FEASIBILITY: -

Economic analysis is the most frequently used technique for evaluation of the effectiveness of a proposed system. More commonly known as Cost/Benefit analysis, the procedure is to determine the benefits and saving that are expected from a proposed system and compare them with costs. If benefits outweigh costs, a decision is taken to design and implement the system. Other weight costs, a decision is taken to design and implement the system. Otherwise, further justification or alternative in the proposed system will have to be made if is to have a chance of being approved. This is an ongoing effort that improves in accuracy at each phase of the system life cycle.

Before establishing Economical Feasibility so as to justify the expenses that different organization working under this category has to bear for this Software. It is crystal clear that the user or Customer of this Software has no need to invest heavy amount for this software. As my project has been written in such a language, which is a platform

Independent. It has also the feature of WORM. It means it possess the technology of Write Once & Read Many.

There is no any heavy expense on the maintenance of this Software. Also there is no need to expense a heavy amount on the set of "Very Expert Personals" because it is very easy and user-friendly software. It is fully tighten protection of Secret Password and User Name for unauthorized access of this Software.

For different types of Process or Operation, Reports or Query and Output also, there is no need of heavy expenditure.

OPERATIONAL FEASIBILITY: -

My project is also fit in Operational Feasibility Study. As I have explained before this about Technical Feasibility and Economical Feasibility, this Software is very easy and user-friendly.

I have used a very easy menu system and also used some control buttons in the easy way by which one can choose the options on his desire.

Though this is fully protected with the security by word (Password and user name), if both are matched only then one can get access of this software.

Various Reports, Forms and Queries can be generated on the fingertips for the user.

In nutshell we can say that it has following operational features:

1. It is User-Friendly.
2. It is having less paperwork.
3. Efficient tractability.
4. Query can be generated.
5. Various Reports and Forms can be generated.
6. Fully protected by Password and User name for unauthorized access.

ANALYSIS

System Analysis refers into the process of examining a situation with the intent of improving it through better procedures and methods. System Analysis is the process of planning a new System to either replace or complement an existing system.

DFD

The DFD is an excellent communication tool for analysts to model processes and functional requirements. Used effectively, it is a useful and easy to understand modeling tool. It has broad application

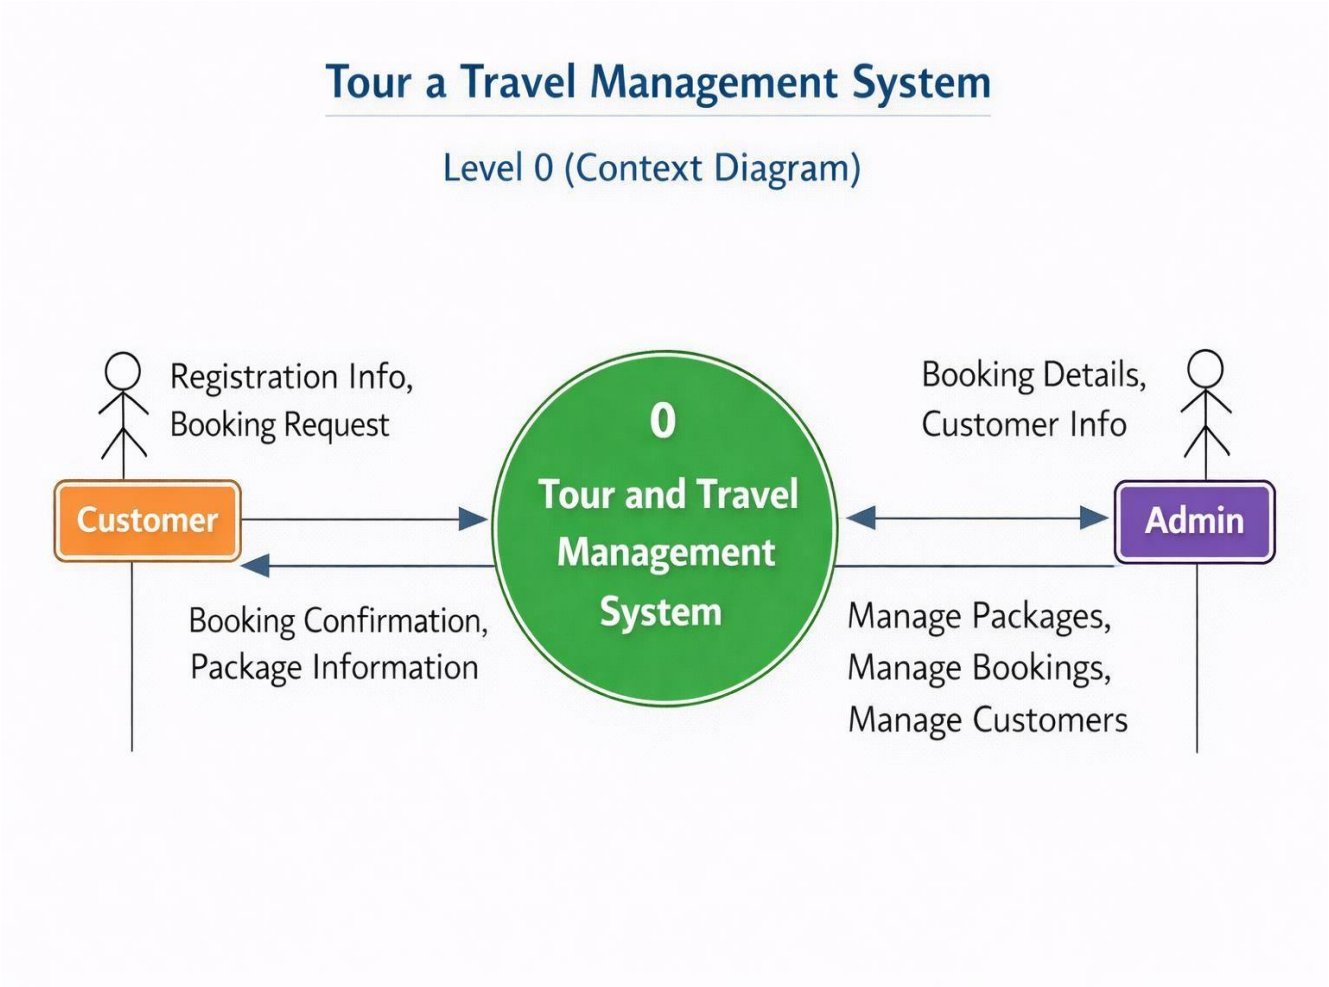
Tour a Travel Management System
Level 0 (Context Diagram)
Registration Info,
Booking Request
Customer
0
Tour and Travel
Management
System
Booking Details,
Customer Info
Admin
Booking Confirmation,
Package Information
Manage Packages,
Manage Bookings,
Manage Customers

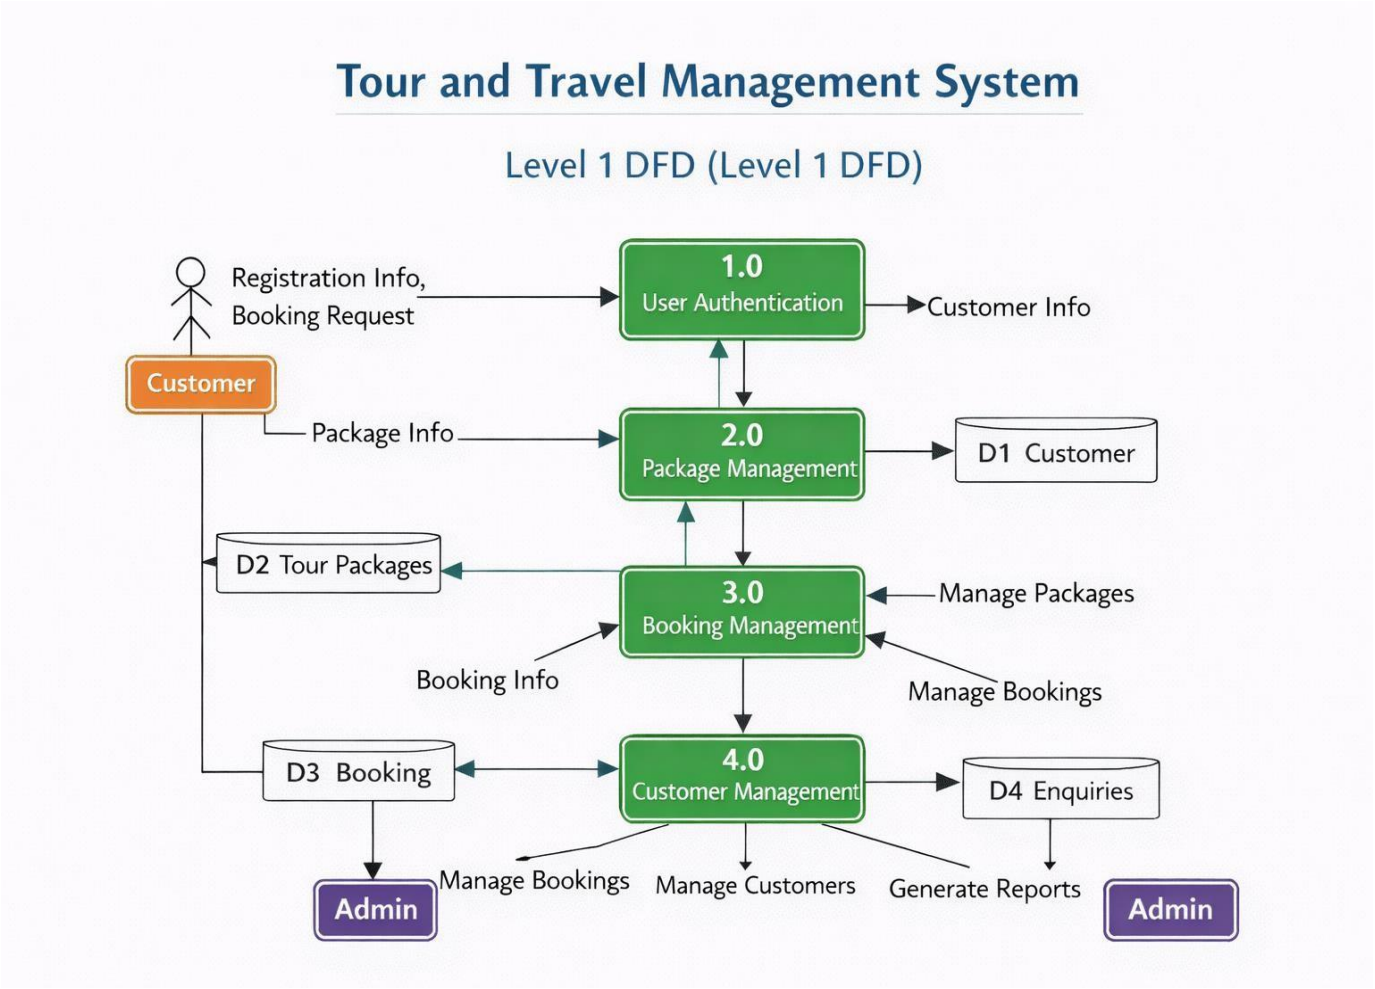
Tour and Travel Management System
Level 1 DFD (Level 1 DFD)
Registration Info,
Booking Request
1.0
User Authentication
Customer Info
Customer
Package Info
2.0
Package Management
D1 Customer
D2 Tour Packages
3.0
Booking Management
Manage Packages
Booking Info
Manage Bookings
D3 Booking
4.0
Customer Management
D4 Enquiries
Admin
Manage Bookings
Manage Customers
Generate Reports
Admin

MODULE DESCRIPTION

These are the following Modules in the project:-

1. 👤 **User Module**
   This module manages all user-related activities such as registration, login, and profile management.
   Users can create accounts, log in securely, and explore available tour packages.

2. **Tour Package Module**
   This module handles all tour package information including package name, location, price, duration, and details.
   Users can view different travel packages and select according to their preferences.

3. 📅 **Booking Module**
   This module allows users to book tour packages.
   It stores booking details such as booking date, package ID, user ID, and status of booking.

4. 🛠 **Admin Module**

This module is used by the administrator to manage the entire system. Admin can add, update, delete tour packages, manage users, and control bookings.

5. 💬 **Enquiry Module**

This module allows users to send queries or messages regarding packages. Admin can view and respond to user enquiries.

6. 🔐 **Authentication & Security Module**

This module ensures secure login using user credentials (email & password). It maintains session management and protects user data.

7. 📊 **Report Module**

This module generates reports such as:

- Booking reports
- User details
- Package details

It helps admin analyze system data effectively.

DATA STRUCTURE SNAP SHOT

DATA DICTIONERY:- The data dictionary stores description of data items and structures, as well as systems processes. Data dictionary used for database design in this project is mentioned. Care was taken during the database design for future expansion of school's need.

User Details (tblusers)

Field	Type	Null	Key	Default	Extra
id	int	NO		NULL	
FullName	varchar(100)	YES		NULL	
MobileNumber	char(10)	YES		NULL	
EmailId	varchar(70)	YES		NULL	
Password	varchar(100)	YES		NULL	
RegDate	timestamp	YES		CURRENT_TIMESTAMP	DEFAULT_GENERATED
UpdationDate	timestamp	YES		NULL	on update CURRENT_TIMESTAMP

Admin Details (admin)

Result Grid | Filter Rows: | Export: | Wrap C

	Field	Type	Null	Key	Default	Extra
▶	id	int	NO		NULL	
	UserName	varchar(100)	YES		NULL	
	Name	varchar(250)	YES		NULL	
	EmailId	varchar(250)	YES		NULL	
	MobileNumber	bigint	YES		NULL	
	Password	varchar(100)	YES		NULL	
	updationDate	timestamp	YES		NULL	

Package Details (tbltourpackages):-

Field	Type	Null	Key	Default	Extra
PackageId	int	NO		NULL	
PackageName	varchar(200)	YES		NULL	
PackageType	varchar(150)	YES		NULL	
PackageLocation	varchar(100)	YES		NULL	
PackagePrice	int	YES		NULL	
PackageFetures	varchar(255)	YES		NULL	
PackageDetails	mediumtext	YES		NULL	
PackageImage	varchar(100)	YES		NULL	
Creationdate	timestamp	YES		CURRENT_TIMESTAMP	DEFAULT_GENERATED
UpdationDate	timestamp	YES		NULL	on update CURRENT_TIMESTAMP

Booking Details (tblbooking)

Field	Type	Null	Key	Default	Extra
BookingId	int	NO		NULL	
PackageId	int	YES		NULL	
UserEmail	varchar(100)	YES		NULL	
FromDate	varchar(100)	YES		NULL	
ToDate	varchar(100)	YES		NULL	
Comment	mediumtext	YES		NULL	
RegDate	timestamp	YES		CURRENT_TIMESTAMP	DEFAULT_GENERATED
status	int	YES		NULL	
CancelledBy	varchar(5)	YES		NULL	
UpdationDate	timestamp	YES		NULL	on update CURRENT_TIMESTAMP

Enquiry Details (tblenquiry)

Field	Type	Null	Key	Default	Extra
id	int	NO		NULL	
FullName	varchar(100)	YES		NULL	
EmailId	varchar(100)	YES		NULL	
MobileNumber	char(10)	YES		NULL	
Subject	varchar(100)	YES		NULL	
Description	mediumtext	YES		NULL	
PostingDate	timestamp	YES		CURRENT_TIMESTAMP	DEFAULT_GENERATED
Status	int	timestamp		NULL	

LIST OF REPORTS

The following reports will be generated:-

1. **User Registration Report**

   This report contains details of all registered users of the system such as name, email, and mobile number.

2. **Booking Report**

   This report shows all booking details including:

   - User name
   - Package name
   - Booking date

- Travel dates
- Status (Confirmed/Cancelled)

3□Package Report

This report displays all available tour packages with details such as:

- Package name
- Location
- Price
- Features

4□Enquiry Report

This report contains all user enquiries including:

- User name
- Email
- Subject
- Message

5□Invoice / Payment Report

This report shows:

- Booking invoice
- Package price
- Total amount
- Payment status

SCOPE AND FUTURE ENHANCEMENT

There is always a scope of betterment and the present system is not an exception. The project uses almost similar processes as existing travel systems; if users require any additional features, they can be

implemented easily because the project is flexible and upgradeable. The project can also be used as a sub-system for larger travel or tourism platforms. The main future scope is as follows:-

- To store a large amount of travel and user data for future use.
- Reducing manual efforts in managing bookings and packages.
- Reducing the time required for booking and management processes.
- It provides accurate information about users, packages, bookings, and enquiries.

IMPLEMENTATION METHODOLOGY

Implementation of a tested system is done on the actual environment with the required hardware, software, and user support. To implement this software, the following are necessary:

This project runs on internet or intranet, so internet-supported technologies are used. For implementing this software, a web server is required. The system is developed using PHP and runs on Apache server (XAMPP) or can be deployed on hosting platforms like InfinityFree. Since this project is web-based, it requires a web browser which acts as the interface, such as Google Chrome, Mozilla Firefox, or any modern browser. For back-end operations, MySQL database is used to handle all database queries and updates as required by the software.

In future, more advanced technologies and databases can be integrated.

The project is developed using web technologies like HTML, CSS, JavaScript, and PHP, so it requires a standard processor, sufficient RAM, and basic hardware configuration.

- Create separate admin user for this application: An admin account is created to manage the system securely. This ensures that only authorized users can access and control the system data.

- Create required tables: The required database tables such as users, packages, bookings, and enquiries are created using SQL queries as defined in the database design section.

- Create distributable set of files: The complete project files are organized and uploaded to the server or hosting platform for proper deployment and execution of the system.

TESTING

Software testing consists of the following stages.

a) TEST PLAN DEVELOPMENT:-

The importance of software testing and its implications need not be emphasized. Software testing is a critical element of software quality assurance and represents the ultimate review of specifications, design and coding. The main objective of testing is to uncover a host of errors, systematically, with minimum effort and time. It improves the reliability of the software.

b) TESTING STRATEGY:-

A testing strategy explains how to conduct a test to uncover all the errors with minimum possible time and effort. It should be flexible enough to promote customization that may be necessary in due course of development process.

c) UNIT TESTING:-

Unit testing focuses on verifying each module of the system independently. Each module such as user login, package management, booking system, and enquiry system is tested separately. Input values including valid and invalid data are provided to check the correctness of each module. If incorrect login details are entered, the system displays an error message such as "Invalid Email or Password". All identified errors were corrected before moving to the next stage.

INTEGRATION TESTING:-

It is a systematic technique for constructing different program module in to an integrated software structure. This test uncovers the errors during integration process. The integration aspect is tested after integrating all the modules and validated.

VALIDATION TESTING:-

After integration testing, the system is validated according to the specified requirements. The system is tested using different input conditions to ensure

reliability and correctness. Random and boundary values are used to check system performance and validate that it meets user requirements.

TEST CASE DESIGN

The techniques that are used in deriving the test cases are explained below.

CONDITION TESTING:-

Condition testing is used to test logical conditions in the system. It checks conditions such as login validation, booking confirmation, and data input validation to ensure correct system behavior.

BOUNDARY VALUE ANALYSIS:-

Boundary value analysis tests the system at extreme input values. For example, testing booking with minimum and maximum number of persons or checking input limits ensures that the system handles edge cases properly without errors.

EQUIVALENCE PARTITIONING:-

Equivalence partitioning divides input data into valid and invalid groups. Test cases are created for each group to ensure that the system behaves correctly for both valid and invalid inputs such as correct and incorrect login details or valid and invalid booking data.

LIMITATIONS:

Despite its usefulness, the system has certain limitations and challenges in implementation. The main limitations are mentioned below:

- No online payment integration is currently available.
- The system depends on internet connectivity for proper functioning.
- Security features are basic and can be enhanced further.
- Limited scalability for handling very large user traffic.

RECOMMENDED AREAS FOR FURTHER RESEARCH

Considering future improvements, the following areas can be explored to enhance the system:

1.There is scope for future enhancement in areas like real-time booking system, advanced search filters, and customer relationship management.

2.Features like online payment gateways, digital authentication, and secure transaction systems can be further developed and integrated to improve functionality.

In future, standard security measures and advanced technologies can be implemented to improve system performance, reliability, and user experience.

SECURITY MECHANISM

Implementation of security is a key issue in any software development. Different applications use different kinds of security mechanisms according to their needs. In the Tour and Travel Management System, the implementation of security is maintained at the user level. The system authenticates users using their username (email) and password.

A user is allowed to access the system only if they are an authorized user with valid login credentials. It is the system administrator who is responsible for managing access. The admin can grant or restrict access by managing user accounts and system data.

Another important level of security is at the data level. Data validation and constraints are applied in the database to ensure that only valid and correct data is stored in the tables.

All user information and system data are stored securely, and access to sensitive information is controlled through an authentication system. A user must provide valid login credentials to access the system features.

The administrator has higher privileges and can manage users, packages, and bookings, while a normal user has limited access. The system also provides the facility to change passwords as per user requirements. For security purposes, the password field is stored in encrypted form (e.g., MD5) in the databases.

SNAPSHOT

Index.php

```
<?php
session_start(); error_reporting(0);
include('includes/config.php');
?>
<!DOCTYPE HTML>
<html> <head>
<title>TMS | Tour and Travel Website</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />

<script type="applijewelleryion/x-javascript"> addEventListener("load",
function() { setTimeout(hideURLbar, 0); }, false); function hideURLbar(){
window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600'
rel='stylesheet' type='text/css'>
<link
href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300'
rel='stylesheet' type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet'
type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
        <script>
                new WOW().init();
```

```
        </script>
<!--//end-animate-->
</head>
<body>
<?php include('includes/header.php');?>
<div class="banner">
        <div class="container">
                <!-- <h1 class="wow zoomIn animated animated" data-wow-
delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name:
zoomIn;" style="color:#000 !important"> TMS - Tour and Travel Management
System</h1> -->
        </div>
</div>

<!---holiday---->

                        <div class="container" style="margin-top:50px;">
  <h2 style="text-align:center;color:#00f5ff;margin-bottom:30px;">
    Popular Tour Packages
  </h2>

  <div class="row">

<?php
$sql = "SELECT * FROM tbltourpackages LIMIT 6";
$query = $dbh->prepare($sql);
$query->execute();
$results = $query->fetchAll(PDO::FETCH_OBJ);

foreach ($results as $result)
{
?>
    <div class="col-md-4">
      <div class="package-card">
        <img src="admin/pacakgeimages/<?php echo htmlentities($result-
>PackageImage); ?>" class="img-responsive">
```

```
      <h4><?php echo htmlentities($result->PackageName); ?></h4>
      <p><?php echo htmlentities($result->PackageLocation); ?></p>
      <p><strong>₹<?php echo htmlentities($result->PackagePrice);
?></strong></p>

      <a href="package-details.php?pkgid=<?php echo htmlentities($result-
>PackageId); ?>"
         class="btn btn-info">
         View Details
      </a>
     </div>
   </div>
<?php } ?>




<div><a href="package-list.php" class="view">View More Packages</a></div>
</div>
                        <div class="clearfix"></div>
         </div>



<!--- routes ---->
<div class="routes">
         <div class="container">
  <div class="col-md-4 routes-left wow fadeInRight animated" datawow-
delay=".5s">
                        <div class="rou-left">
                                <a href="#"><i class="glyphicon glyphicon-
listalt"></i></a>
                        </div>
                        <div class="rou-rgt wow fadeInDown animated" data-
wowdelay=".5s">
```

```
                <h3>8000</h3>
                <p>Enquiries</p>
            </div>
                <div class="clearfix"></div>
        </div>
        <div class="col-md-4 routes-left">
            <div class="rou-left">
                <a href="#"><i class="fa fa-user"></i></a>
            </div>
            <div class="rou-rgt">
                <h3>1500</h3>
                <p>Registered users</p>
            </div>
                <div class="clearfix"></div>
        </div>
         <div class="col-md-4 routes-left wow fadeInRight animated" data-
wow-delay=".5s">
            <div class="rou-left">
                <a href="#"><i class="fa fa-ticket"></i></a>
            </div>
```

```
                    <div class="rou-rgt">
                        <h3>7,00,00+</h3>
                        <p>Booking</p>
                    </div>
                        <div class="clearfix"></div>
                </div>
                <div class="clearfix"></div>
            </div>
</div>

<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin --> <!--
write us -->
<?php include('includes/write-us.php');?>
<!-- //write us -->
 <script>
$(document).ready(function () {
    $('.navbar-toggle').on('click', function () {
        $('#bs-example-navbar-collapse-1').toggleClass('force-horizontal');
    });
});
</script>

</body>
</html>
```

profile.php

```
<?php
session_start(); error_reporting(0);
include('includes/config.php');
```

```
if(strlen($_SESSION['login'])==0)
        {
header('location:index.php');
} else{
if(isset($_POST['submit6']))
        {
$name=$_POST['name'];
$mobileno=$_POST['mobileno'];
$email=$_SESSION['login'];

$sql="update tblusers set FullName=:name,MobileNumber=:mobileno where
EmailId=:email";
$query = $dbh->prepare($sql);
$query->bindParam(':name',$name,PDO::PARAM_STR);
$query->bindParam(':mobileno',$mobileno,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->execute();
$msg="Profile Updated Successfully";
}
?>
<!DOCTYPE HTML>
<html> <head>
<title>TMS | Tour and travel Management System</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load",
function() { setTimeout(hideURLbar, 0); }, false); function hideURLbar(){
window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600'
rel='stylesheet' type='text/css'>
<link
href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300'
rel='stylesheet' type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet'
type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
```

```
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
```

```
<script src="js/wow.min.js"></script>
        <script>                new
WOW().init(); </script>

  <style>
                .errorWrap {
   padding: 10px;
margin: 0 0 20px 0;
background: #fff;
   border-left: 4px solid #dd3d36;
   -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);     box-
shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
.succWrap{
padding: 10px;
margin: 0 0 20px 0;
background: #fff;
   border-left: 4px solid #5cb85c;
   -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);     box-
shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
                </style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
        <div class="container">
                <h1 class="wow zoomIn animated animated" data-wow-
delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name:
zoomIn;">TMS-Tour and Travel Management System</h1>
        </div>
```

```
</div>
<!--- /banner-1 ---->
<!--- privacy ---->
<div class="privacy">
        <div class="container">
                <h3 class="wow fadeInDown animated animated" data-wow-
delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name:
fadeInDown;">My Profile!!</h3>
                <form name="chngpwd" method="post">
```



```
                <?php if($error){?><div
class="errorWrap"><strong>ERROR</strong>:<?php echo
htmlentities($error); ?> </div><?php }
                                else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo
htmlentities($msg); ?> </div><?php }?>

<?php
$useremail=$_SESSION['login'];
$sql = "SELECT * from tblusers where EmailId=:useremail";
$query = $dbh -> prepare($sql);
$query -> bindParam(':useremail',$useremail, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{       ?>

        <p style="width: 350px;">

                        <b>Name</b>  <input type="text" name="name"
value="<?php echo htmlentities($result->FullName);?>" class="form-control"
id="name" required="">
        </p>

<p style="width: 350px;">
<b>Mobile Number</b>
```

```
<input type="text" class="form-control" name="mobileno" maxlength="10"
value="<?php echo htmlentities($result->MobileNumber);?>" id="mobileno"
required="">
</p>

<p style="width: 350px;">
<b>Email Id</b>
          <input type="email" class="form-control" name="email" value="<?php
echo htmlentities($result->EmailId);?>" id="email" readonly>
                        </p>
<p style="width: 350px;">
<b>Last Updation Date : </b>
<?php echo htmlentities($result->UpdationDate);?>
</p>
```



```
<p style="width: 350px;">
<b>Reg Date :</b>
<?php echo htmlentities($result->RegDate);?>
                        </p>
<?php }} ?>

                        <p style="width: 350px;">
<button type="submit" name="submit6" class="btn-primary
btn">Updtae</button>
                        </p>
                        </form>


        </div>
</div>
<!--- /privacy ---->
<!--- footer-top ---->
<!--- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
```

```
<!-- //signin --> <!--
write us -->
<?php include('includes/write-us.php');?>
</body>
</html>
<?php } ?>
```

header.php

```
<?php if($_SESSION['login'])
{?>
<div class="top-header">
        <div class="container">
  <ul class="tp-hd-lft wow fadeInLeft animated" data-wowdelay=".5s">
   <li class="hm"><a href="index.php"><i class="fa fahome"></i></a></li>
                <li class="prnt"><a href="profile.php">My Profile</a></li
```



```
| >
                                <li class="prnt"><a href="change-
password.php">Change Password</a></li>
                        <li class="prnt"><a href="tour-history.php">My Tour
History</a></li>
                        <li class="prnt"><a href="issuetickets.php">Raised
Tickets</a></li>
                </ul>
  <ul class="tp-hd-rgt wow fadeInRight animated" data-wowdelay=".5s">
                        <li class="tol">Welcome :</li>
                        <li class="sig"><?php echo
htmlentities($_SESSION['login']);?></li>
                        <li class="sigi"><a href="logout.php" >/ Logout</a></li>
        </ul>
                <div class="clearfix"></div>
        </div>
</div><?php } else {?>
<div class="top-header">
        <div class="container">
  <ul class="tp-hd-lft wow fadeInLeft animated" data-wowdelay=".5s">
   <li class="hm"><a href="index.php"><i class="fa fahome"></i></a></li>
                                <li class="hm"><a href="admin/index.php">Admin
Login</a></li>
```

```
                </ul>
  <ul class="tp-hd-rgt wow fadeInRight animated" data-wowdelay=".5s">
                        <li class="tol">Toll Number : 9835800175</li>

                        <li class="sig"><a href="signup.php">Sign Up</a></li>
                <li class="sigi"><a href="#" data-toggle="modal"
datatarget="#myModal4" >/ Sign In</a></li>
        </ul>
                <div class="clearfix"></div>
          </div>
</div>
<?php }?>
<!--- /top-header ---->
<!--- header ---->

<div class="header">
          <div class="container">
  <div class="logo wow fadeInDown animated" data-wowdelay=".5s">
                        <a href="index.php">Tour and Travel <span>Management
```

```
System</span></a>
                </div>

  <!-- <div class="lock fadeInDown animated" data-wowdelay=".5s">
                        <li><i class="fa fa-lock"></i></li>
          <li><div class="securetxt">SAFE &amp; SECURE </div></li>
                        <div class="clearfix"></div>
                </div>
                <div class="clearfix"></div> -->
        </div>
</div>
<!--- /header ---->
<!--- footer-btm ---->
<div class="footer-btm wow fadeInLeft animated" data-wow-delay=".5s">
        <div class="container">
        <div class="navigation">
                        <nav class="navbar navbar-default">
                                <!-- Brand and toggle get grouped for better mobile
display -->
                                <div class="navbar-header">
                                  <button type="button" class="navbar-toggle
collapsed" data-toggle="collapse" data-target="#bs-example-navbar-
collapse1">
                                        <span class="sr-only">Toggle navigation</span>
                                       <span class="icon-bar"></span>
                                       <span class="icon-bar"></span>
                                       <span class="icon-bar"></span>
                                  </button>
                                </div>
                                <!-- Collect the nav links, forms, and other content for
toggling -->

    <div class="collapse navbar-collapse nav-wil" id="bsexample-navbar-
collapse-1">
                                       <nav class="cl-effect-1">
                                              <ul class="nav navbar-nav">
```

```
                                                <li><a
href="index.php">Home</a></li>
                                                <li><a
href="page.php?type=aboutus">About</a></li>
                                                    <li><a
href="packagelist.php">Tour Packages</a></li>
                                                    <li><a
href="page.php?type=privacy">Privacy Policy</a></li>
                                                    <li><a
href="page.php?type=terms">Terms of Use</a></li>
                                                    <li><a
href="page.php?type=contact">Contact Us</a></li>
                                                      <?php if($_SESSION['login'])
{?>
                                                    <li>Need Help?<a href="#"
data-toggle="modal" data-target="#myModal3"> / Write Us </a>  </li>
                                                    <?php } else { ?>
                                                    <li><a href="enquiry.php">
 Enquiry </a>  </li>
                                                    <?php } ?>
                                                    <div class="clearfix"></div>

                                        </ul>
                                    </nav>
                                </div><!-- /.navbar-collapse -->
                            </nav>
                        </div>

                        <div class="clearfix"></div>
                    </div>
                </div>
```


config.php

```
<?php
// DB credentials.
```

```
define('DB_HOST','localhost');
define('DB_USER','root');
define('DB_PASS','');
define('DB_NAME','tms'); //
Establish database connection.
try {
$dbh = new PDO("mysql:host=".DB_HOST.";dbname=".DB_NAME,DB_USER,
DB_PASS,array(PDO::MYSQL_ATTR_INIT_COMMAND => "SET NAMES
'utf8'"));
}
catch (PDOException $e)
{
exit("Error: " . $e->getMessage());
}
?>
```


footer.php

```
<!--- /footer-top ---->
<!---copy-right ---->
<div class="copy-right">
        <div class="container">

                <div class="footer-social-icons wow fadeInDown animated
animated" data-wow-delay=".5s" style="visibility: visible; animation-delay:
0.5s; animation-name: fadeInDown;">
                        <ul>
                                <li><a class="facebook"
href="#"><span>Facebook</span></a></li>
                                <li><a class="twitter"
href="#"><span>Twitter</span></a></li>
                                <li><a class="flickr"
href="https://github.com/Amitsharma01"><span>Github</span></a></li>
                                <li><a class="googleplus"
href="#"><span>Google+</span></a></li>
                                <li><a class="dribbble"
```

```
href="https://www.instagram.com/amitsharmaji8409?igsh=a28ybXJ5bjVvcmxp"><span>Instagram</span></a></li>
                    </ul>
                </div>
                <p class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;"> © 2026 Tour and Travel Management System
Developed by Amit Kumar (BSc IT)
. All Rights Reserved </p>
        </div>
</div>
```

signin.php

```
<?php
session_start();
```

```
if(isset($_POST['signin']))
{
$email=$_POST['email'];
```

```
$password=md5($_POST['password']);
$sql ="SELECT EmailId,Password FROM tblusers WHERE EmailId=:email and
Password=:password";
$query= $dbh -> prepare($sql);
$query-> bindParam(':email', $email, PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
$query-> execute();
$results=$query->fetchAll(PDO::FETCH_OBJ); if($query->rowCount()
> 0)
{
$_SESSION['login']=$_POST['email'];
echo "<script type='text/javascript'> document.location = 'package-list.php';
</script>";
} else{

        echo "<script>alert('Invalid Details');</script>";

}

}

?>

<div class="modal fade" id="myModal4" tabindex="-1" role="dialog"
arialabelledby="myModalLabel">
                                <div class="modal-dialog" role="document">
                                        <div class="modal-content modal-info">
                                                <div class="modal-header">
      <button type="button" class="close" data-dismiss="modal" aria-
label="Close"><span aria-
hidden="true">×</span></button>
                                                </div>
                                                <div class="modal-body modal-spa">
                                                        <div class="login-grids">
                                                                <div class="login">
                                                                        <div class="login-right">
                                                                                <form
method="post">
                                                                                        <h3>Sign
```

```
In</h3>
            <input type="email" name="email" id="email" placeholder="Enter your
Email"  required="">
          <input type="password" name="password" id="password"
placeholder="Password" value="" required="">
                                                                                <h4><a
href="forgot-password.php">Forgot password</a></h4>

                                                                                <input
type="submit" name="signin" value="SIGNIN">
                                                                                    </form>
                                                                            </div>
                                                                            <div
class="clearfix"></div>
                                                                    </div>
                                                                      <p>By logging in you agree to
our <a href="page.php?type=terms">Terms and Conditions</a> and <a
href="page.php?type=privacy">Privacy Policy</a></p>
                                                                  </div>
                                                              </div>
                                                          </div>
                                                      </div>
                                                  </div>
```

signup.php

```
<?php
session_start();
include('includes/config.php'); error_reporting(0);

if(isset($_POST['submit']))
{
$fname = $_POST['fname'];
$mnumber = $_POST['mobilenumber'];
$email = strtolower($_POST['email']);
$mnumber = $_POST['mobilenumber'];
$password = $_POST['password'];
```

```
// 🔘 ADD THIS BLOCK HERE 👇

// ❌ GMAIL VALIDATION
if (!preg_match('/^[a-z0-9._%+-]+@gmail\.com,@outlook\.com$/', $email)) {
echo "<script>alert('Only Gmail addresses are allowed');</script>";
exit();
}

// 🔘 THEN CONTINUE YOUR CODE

// ❌ EMAIL FORMAT
if(!filter_var($email, FILTER_VALIDATE_EMAIL)){
   echo "<script>alert('Invalid Email Format');</script>";
exit();
}
$password = $_POST['password'];


// ❌ PASSWORD LENGTH
if(strlen($password) < 8){
   echo "<script>alert('Password must be at least 8 characters');</script>";
exit();
}

// ❌ MOBILE VALIDATION
if(!preg_match('/^[0-9]{10}$/', $mnumber)){
   echo "<script>alert('Mobile must be 10 digits');</script>";
exit();
}

// ❌ EMAIL EXISTS
$sql1 = "SELECT EmailId FROM tblusers WHERE EmailId=:email";
$query1 = $dbh->prepare($sql1);
$query1->bindParam(':email', $email, PDO::PARAM_STR);
```

```
$query1->execute(); if($query1->rowCount()
> 0){
   echo "<script>alert('Email already exists');</script>";
exit();
}

// ❌ MOBILE EXISTS
$sql2 = "SELECT MobileNumber FROM tblusers WHERE
MobileNumber=:mnumber";
$query2 = $dbh->prepare($sql2);
$query2->bindParam(':mnumber', $mnumber, PDO::PARAM_STR);
$query2->execute(); if($query2->rowCount()
> 0){
   echo "<script>alert('Mobile already exists');</script>";
exit();
}
// ❌ USER EXISTS
$sql3 = "SELECT FullName FROM tblusers WHERE FullName=:fname";
$query3 = $dbh->prepare($sql3);
$query3->bindParam(':fname', $fname, PDO::PARAM_STR);
$query3->execute(); if($query3->rowCount()
> 0){
   echo "<script>alert('Username already exists');</script>";
exit();
}

// ✅ INSERT
$password = md5($password);

$sql="INSERT INTO tblusers(FullName,MobileNumber,EmailId,Password)
VALUES(:fname,:mnumber,:email,:password)";
$query = $dbh->prepare($sql);

$query->bindParam(':fname',$fname,PDO::PARAM_STR);
$query->bindParam(':mnumber',$mnumber,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->bindParam(':password',$password,PDO::PARAM_STR);
```

```
$query->execute();

echo "<script>alert('Registration Successful');
window.location='thankyou.php';</script>";
}
?>
<!DOCTYPE html>
<html>
<head>
   <title>Signup</title>
</head>

<body>

<div class="container-box">
<h2>Create Account</h2>
```



```
   <form method="post">

      <input style="color: black; font-weight: bold;" type="text" name="fname"
placeholder="Full Name" required>

      <input style="color: black; font-weight: bold;" type="text"
name="mobilenumber" placeholder="Mobile Number" maxlength="10"
required>

      <input style="color: black; font-weight: bold;" type="email" name="email"
placeholder="Email" required>

      <input style="color: black; font-weight: bold;" type="password"
name="password" placeholder="Password (min 8 chars)" required>

      <input style="color: black; font-weight: bold;" type="submit"
name="submit" value="Register">

   </form>
```

```
    <br>
    <a href="index.php">Back to home</a>
</div>

<script>
let submitBtn = document.getElementById("submit");

function checkEmail() {
    let email = document.getElementById("email").value;

    fetch("check_email.php", {
method: "POST",
        headers: {"Content-Type": "application/x-www-form-urlencoded"},
body: "email=" + email
    })
    .then(res => res.text())
.then(data => {
        document.getElementById("email-status").innerHTML = data;

        if(data.includes("exists")){
            submitBtn.disabled = true;
        } else {
            submitBtn.disabled = false;
        }
    });
}
```

```
function checkMobile() {
   let mobile = document.getElementById("mobile").value;

   fetch("check_mobile.php", {
method: "POST",
      headers: {"Content-Type": "application/x-www-form-urlencoded"},
body: "mobile=" + mobile
   })
   .then(res => res.text())
.then(data => {
      document.getElementById("mobile-status").innerHTML = data;

      if(data.includes("exists")){
         submitBtn.disabled = true;
      } else {
         submitBtn.disabled = false;
      }
   });
}

function checkUser() {
   let fname = document.getElementById("fname").value;

   fetch("check_user.php", {
method: "POST",
      headers: {"Content-Type": "application/x-www-form-urlencoded"},
body: "fname=" + fname
   })
   .then(res => res.text())
.then(data => {
      document.getElementById("user-status").innerHTML = data;

      if(data.includes("exists")){
         submitBtn.disabled = true;
      } else {
         submitBtn.disabled = false;
```

```
        }
    });
}
</script>

</body>
</html>
```

thankyou.php

```
<?php
session_start(); error_reporting(0);
include('includes/config.php');
?>
<!DOCTYPE HTML>
<html> <head>
<title>TMS | Confirmation </title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="applijewelleryion/x-javascript"> addEventListener("load",
function() { setTimeout(hideURLbar, 0); }, false); function hideURLbar(){
window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600'
rel='stylesheet' type='text/css'>
<link
href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300'
rel='stylesheet' type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet'
type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
```



```
--
--
--
```

```
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
        <script>
                new WOW().init();
        </script>
<!--//end-animate-->
</head>
<body>
<?php include('includes/header.php');?>
<div class="banner-1 ">
        <div class="container">
                <h1 class="wow zoomIn animated animated" data-wow-
delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name:
zoomIn;"> TMS- Tour and Travel Management System</h1>
        </div>
</div>
<!--- /banner-1 ---->
<!--- contact ---->
<div class="contact">
        <div class="container">
        <h3> Confirmation</h3>
                <div class="col-md-10 contact-left">
                        <div class="con-top animated wow fadeInUp animated"
data-wow-duration="1200ms" data-wow-delay="500ms" style="visibility:
visible; animation-duration: 1200ms; animation-delay: 500ms;
animationname: fadeInUp;">


            <h4>  <?php echo htmlentities($_SESSION['msg']);?></h4>

                        </div>

                        <div class="clearfix"></div>
        </div>
</div>
```

```
<!--- /contact ---->
<?php include('includes/footer.php');?>
<!-- sign -->
<?php include('includes/signup.php');?>
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin --> <!--
write us -->
<?php include('includes/write-us.php');?>
<!-- //write us -->
</body>
</html>
```

database

```
-- phpMyAdmin SQL Dump version
   5.2.1
   https://www.phpmyadmin.net/
-- Host: 127.0.0.1
-- Generation Time: Feb 05, 2026 at 08:45 PM
-- Server version: 10.4.32-MariaDB
-- PHP Version: 8.2.12

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";


/*!40101 SET
@OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET
@OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET
@OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;
```



```
--
--
--
```

```
--
-- Database: `tms`
--

-- --------------------------------------------------------

--
-- Table structure for table `admin`
--

CREATE TABLE `admin` (
  `id` int(11) NOT NULL,
  `UserName` varchar(100) DEFAULT NULL,
  `Name` varchar(250) DEFAULT NULL,
  `EmailId` varchar(250) DEFAULT NULL,
  `MobileNumber` bigint(10) DEFAULT NULL,
  `Password` varchar(100) DEFAULT NULL,
  `updationDate` timestamp NULL DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `admin`
--

INSERT INTO `admin` (`id`, `UserName`, `Name`, `EmailId`,
`MobileNumber`, `Password`, `updationDate`) VALUES
(1, 'admin', 'Administrator', 'test@gmail.com', 7894561239,
'f925916e2754e5e03f75dd58a5733251', '2025-10-09 11:18:49');

-- --------------------------------------------------------

--
-- Table structure for table `tblbooking`
--
```

```
CREATE TABLE `tblbooking` (
  `BookingId` int(11) NOT NULL,
  `PackageId` int(11) DEFAULT NULL,
  `UserEmail` varchar(100) DEFAULT NULL,
  `FromDate` varchar(100) DEFAULT NULL,
  `ToDate` varchar(100) DEFAULT NULL,
  `Comment` mediumtext DEFAULT NULL,
  `RegDate` timestamp NULL DEFAULT current_timestamp(),
  `status` int(11) DEFAULT NULL,
  `CancelledBy` varchar(5) DEFAULT NULL,
  `UpdationDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblbooking`
--

INSERT INTO `tblbooking` (`BookingId`, `PackageId`, `UserEmail`,
`FromDate`, `ToDate`, `Comment`, `RegDate`, `status`, `CancelledBy`,
`UpdationDate`) VALUES
(1, 2, 'garima12@gmail.com', '2025-11-20', '2025-11-25', 'NA', '2025-11-04 18:02:10',
1, NULL, '2025-11-05 06:25:07'),
(2, 4, 'test@gmail.com', '2025-12-01', '2025-12-05', 'Hello', '2025-11-04 18:02:58', 1,
NULL, '2025-11-05 06:25:04'),
(3, 9, 'test@gmail.com', '2025-12-20', '2025-12-25', 'NA', '2025-11-04 18:03:26', 2,
'a', '2026-01-12 06:03:28');

-- --------------------------------------------------------
```

Table structure for table `tblenquiry`


```
--
--
--
```

```
CREATE TABLE `tblenquiry` (
  `id` int(11) NOT NULL,
  `FullName` varchar(100) DEFAULT NULL,
  `EmailId` varchar(100) DEFAULT NULL,
  `MobileNumber` char(10) DEFAULT NULL,
  `Subject` varchar(100) DEFAULT NULL,
  `Description` mediumtext DEFAULT NULL,
  `PostingDate` timestamp NULL DEFAULT current_timestamp(),
  `Status` int(1) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblenquiry`
--

INSERT INTO `tblenquiry` (`id`, `FullName`, `EmailId`, `MobileNumber`,
`Subject`, `Description`, `PostingDate`, `Status`) VALUES
(3, 'Amit Kumar', 'kumaramit983580@gmail.com', '8409108604', 'no',
'asddtyrkdfduuyfghdrydcvbyuky', '2026-01-14 09:26:32', NULL);

-- -------------------------------------------------------

--
-- Table structure for table `tblissues`
--

CREATE TABLE `tblissues` (
  `id` int(11) NOT NULL,
  `UserEmail` varchar(100) DEFAULT NULL,
  `Issue` varchar(100) DEFAULT NULL,
  `Description` mediumtext DEFAULT NULL,
  `PostingDate` timestamp NULL DEFAULT current_timestamp(),
  `AdminRemark` mediumtext DEFAULT NULL,
```



```
--
--
--
```

```
  `AdminremarkDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

-- --------------------------------------------------------


   Table structure for table `tblpages`

CREATE TABLE `tblpages` (
  `id` int(11) NOT NULL,
  `type` varchar(255) DEFAULT '',
  `detail` longtext DEFAULT NULL
) ENGINE=MyISAM DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblpages`
--

INSERT INTO `tblpages` (`id`, `type`, `detail`) VALUES
-- --------------------------------------------------------

--
-- Table structure for table `tbltourpackages`
--

CREATE TABLE `tbltourpackages` (
  `PackageId` int(11) NOT NULL,
  `PackageName` varchar(200) DEFAULT NULL,
  `PackageType` varchar(150) DEFAULT NULL,
  `PackageLocation` varchar(100) DEFAULT NULL,
  `PackagePrice` int(11) DEFAULT NULL,
  `PackageFetures` varchar(255) DEFAULT NULL,
  `PackageDetails` mediumtext DEFAULT NULL,
  `PackageImage` varchar(100) DEFAULT NULL,
```



```
--
--
--
```

```
  `Creationdate` timestamp NULL DEFAULT current_timestamp(),
`UpdationDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tbltourpackages`
--

INSERT INTO `tbltourpackages` (`PackageId`, `PackageName`,
`PackageType`, `PackageLocation`, `PackagePrice`, `PackageFetures`,
`PackageDetails`, `PackageImage`, `Creationdate`, `UpdationDate`) VALUES
-- phpMyAdmin SQL Dump version
   5.2.1
   https://www.phpmyadmin.net/
-- Host: 127.0.0.1
-- Generation Time: Feb 05, 2026 at 08:45 PM
-- Server version: 10.4.32-MariaDB
-- PHP Version: 8.2.12

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";


/*!40101 SET
@OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET
@OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET
@OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;

--
-- Database: `tms`
--
```

```
-- ----------------------------------------------------------

--
-- Table structure for table `admin`
--

CREATE TABLE `admin` (
  `id` int(11) NOT NULL,
  `UserName` varchar(100) DEFAULT NULL,
  `Name` varchar(250) DEFAULT NULL,
  `EmailId` varchar(250) DEFAULT NULL,
  `MobileNumber` bigint(10) DEFAULT NULL,
  `Password` varchar(100) DEFAULT NULL,
  `updationDate` timestamp NULL DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `admin`
--

INSERT INTO `admin` (`id`, `UserName`, `Name`, `EmailId`,
`MobileNumber`, `Password`, `updationDate`) VALUES
(1, 'admin', 'Administrator', 'test@gmail.com', 7894561239,
'f925916e2754e5e03f75dd58a5733251', '2025-10-09 11:18:49');

-- ----------------------------------------------------------

--
-- Table structure for table `tblbooking`
--

CREATE TABLE `tblbooking` (
  `BookingId` int(11) NOT NULL,
  `PackageId` int(11) DEFAULT NULL,
```



```
--
--
--
```

```
  `UserEmail` varchar(100) DEFAULT NULL,
  `FromDate` varchar(100) DEFAULT NULL,
  `ToDate` varchar(100) DEFAULT NULL,
  `Comment` mediumtext DEFAULT NULL,
  `RegDate` timestamp NULL DEFAULT current_timestamp(),
  `status` int(11) DEFAULT NULL,
  `CancelledBy` varchar(5) DEFAULT NULL,
  `UpdationDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblbooking`
--

INSERT INTO `tblbooking` (`BookingId`, `PackageId`, `UserEmail`,
`FromDate`, `ToDate`, `Comment`, `RegDate`, `status`, `CancelledBy`,
`UpdationDate`) VALUES
(1, 2, 'garima12@gmail.com', '2025-11-20', '2025-11-25', 'NA', '2025-11-04 18:02:10',
1, NULL, '2025-11-05 06:25:07'),
(2, 4, 'test@gmail.com', '2025-12-01', '2025-12-05', 'Hello', '2025-11-04 18:02:58', 1,
NULL, '2025-11-05 06:25:04'),
(3, 9, 'test@gmail.com', '2025-12-20', '2025-12-25', 'NA', '2025-11-04 18:03:26', 2,
'a', '2026-01-12 06:03:28');

-- --------------------------------------------------------


   Table structure for table `tblenquiry`

CREATE TABLE `tblenquiry` (
  `id` int(11) NOT NULL,
  `FullName` varchar(100) DEFAULT NULL,
  `EmailId` varchar(100) DEFAULT NULL,
  `MobileNumber` char(10) DEFAULT NULL,
  `Subject` varchar(100) DEFAULT NULL,
```

```
  `Description` mediumtext DEFAULT NULL,
  `PostingDate` timestamp NULL DEFAULT current_timestamp(),
  `Status` int(1) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblenquiry`
--

INSERT INTO `tblenquiry` (`id`, `FullName`, `EmailId`, `MobileNumber`,
`Subject`, `Description`, `PostingDate`, `Status`) VALUES
(3, 'Amit Kumar', 'kumaramit983580@gmail.com', '8409108604', 'no',
'asddtyrkdfduuyfghdrydcvbyuky', '2026-01-14 09:26:32', NULL);

-- --------------------------------------------------------

--
-- Table structure for table `tblissues`
--

CREATE TABLE `tblissues` (
  `id` int(11) NOT NULL,
  `UserEmail` varchar(100) DEFAULT NULL,
  `Issue` varchar(100) DEFAULT NULL,
  `Description` mediumtext DEFAULT NULL,
  `PostingDate` timestamp NULL DEFAULT current_timestamp(),
  `AdminRemark` mediumtext DEFAULT NULL,
  `AdminremarkDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

-- --------------------------------------------------------

--
-- Table structure for table `tblpages`
```



```
--
--
--
```

--

```
CREATE TABLE `tblpages` (
  `id` int(11) NOT NULL,
  `type` varchar(255) DEFAULT '',
  `detail` longtext DEFAULT NULL
) ENGINE=MyISAM DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblpages`
--

INSERT INTO `tblpages` (`id`, `type`, `detail`) VALUES
-- --------------------------------------------------------

--
-- Table structure for table `tbltourpackages`
--

CREATE TABLE `tbltourpackages` (
  `PackageId` int(11) NOT NULL,
  `PackageName` varchar(200) DEFAULT NULL,
  `PackageType` varchar(150) DEFAULT NULL,
  `PackageLocation` varchar(100) DEFAULT NULL,
  `PackagePrice` int(11) DEFAULT NULL,
  `PackageFetures` varchar(255) DEFAULT NULL,
  `PackageDetails` mediumtext DEFAULT NULL,
  `PackageImage` varchar(100) DEFAULT NULL,
  `Creationdate` timestamp NULL DEFAULT current_timestamp(),
`UpdationDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tbltourpackages`
--

INSERT INTO `tbltourpackages` (`PackageId`, `PackageName`,
`PackageType`, `PackageLocation`, `PackagePrice`, `PackageFetures`,
`PackageDetails`, `PackageImage`, `Creationdate`, `UpdationDate`) VALUES
```

(12, 'Golden Triangle Delight (Delhi–Agra)', 'Group Package', 'Delhi and Agra ', 4500, 'Round-trip AC transportation – Accommodation for 2 nights in Delhi, and 1 night in Agra – Daily breakfast at hotels – Guided sightseeing tours –
Visit to Taj Mahal, Amber Fort and City Palace – All applicable taxes included', 'This package offers a perfect introduction to India's rich heritage. Begin your journey in Delhi with visits to India Gate and Qutub Minar. Explore the majestic Taj Mahal in Agra before heading to experience royal palaces, colorful bazaars, and traditional culture.', 'delhi.jpg', '2026-01-12 06:14:58', '2026-01-19 07:06:39'),
(13, 'Heritage & Culture Explorer (Student Package)', 'Student Group Package', 'Amritsar,Punjab', 14999, 'AC transportation throughout the tour
Accommodation (shared 3?/budget hotel) starting from Delhi to Amritsar , punjab', 'Experience the spiritual and cultural richness of Amritsar with this budget-friendly package. The tour includes a visit to the world-famous Golden Temple, where you can experience peace and devotion. Pay tribute to freedom fighters at Jallianwala Bagh and witness the patriotic Wagah Border Retreat Ceremony. Comfortable accommodation and guided local sightseeing make this package ideal for students, families, and first-time travelers.', 'amritsar.jpg', '2026-01-12 06:18:24', '2026-01-19 07:17:01'),
(14, 'Banaras Spiritual & Cultural Tour (Budget Package)', 'Domestic Group Package', 'Varanasi (Banaras), Uttar Pradesh, India', 9999, '2 Nights / 3 Days accommodation Daily breakfast Ganga Aarti at Dashashwamedh Ghat Visit to Kashi Vishwanath Temple Sarnath sightseeing Local city tour by cab All applicable taxes included', 'This spiritual tour of Banaras offers a deep cultural and religious experience. Witness the divine Ganga Aarti, visit the sacred Kashi Vishwanath Temple, and explore Sarnath, where Lord Buddha gave his first sermon. This budget package is ideal for students, pilgrims, and spiritual travelers.', 'banaras.jpg', '2026-01-19 07:11:11', '2026-01-19 07:12:07'),
(15, 'Kerala Backwaters & Nature Escape (Student Special)', 'Domestic Group Package', 'Munnar, Alleppey & Kochi, Kerala, India', 9999, '3 Nights / 4 Days accommodation Daily breakfast Houseboat ride in Alleppey Tea garden visit in Munnar Sightseeing in Kochi Local transportation All applicable taxes included', 'Explore the serene beauty of Kerala with lush green hills, calm backwaters, and scenic landscapes. This package includes a relaxing houseboat cruise, hill station visit to Munnar, and sightseeing in Kochi. Perfect for students and nature lovers.', 'kerela.jpg', '2026-01-19 07:13:25',
NULL),
(16, 'Bihar Heritage & Buddhist Circuit Tour', 'Domestic Group Package', 'Bodh

Gaya, Nalanda & Rajgir, Bihar, India', 8999, '2 Nights / 3 Days accommodation Daily breakfast Mahabodhi Temple visit Nalanda University ruins Rajgir sightseeing Local transportation All applicable taxes included', 'This heritage tour covers the most important Buddhist destinations in Bihar. Visit Mahabodhi Temple in Bodh Gaya, explore ancient Nalanda University, and enjoy peaceful surroundings in Rajgir. A perfect educational and spiritual tour

for students.', 'bihar.png', '2026-01-19 07:14:53', NULL),
(17, 'Rajasthan Royal Heritage Tour (Group Package)', 'Domestic Group Package', 'Jaipur, Jodhpur & Udaipur, Rajasthan, India', 16999, '4 Nights / 5 Days accommodation Daily breakfast Visit to Amber Fort, City Palace Mehrangarh Fort sightseeing Lake Pichola boat ride Local sightseeing by cab All applicable taxes included', 'Experience the royal culture of Rajasthan with grand palaces, forts, and traditional heritage. Visit Jaipur's Amber Fort, Jodhpur's Mehrangarh Fort, and enjoy a romantic boat ride in Udaipur. Ideal for students and heritage lovers.', 'rajasthan.avif', '2026-01-19 07:16:09', '202601-19 07:16:33');

-- ----------

--
-- Table structure for table `tblusers`
--

```
CREATE TABLE `tblusers` (
  `id` int(11) NOT NULL,
  `FullName` varchar(100) DEFAULT NULL,
  `MobileNumber` char(10) DEFAULT NULL,
  `EmailId` varchar(70) DEFAULT NULL,
  `Password` varchar(100) DEFAULT NULL,
  `RegDate` timestamp NULL DEFAULT current_timestamp(),
`UpdationDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;
```

--

-- Dumping data for table `tblusers`
--

INSERT INTO `tblusers` (`id`, `FullName`, `MobileNumber`, `EmailId`, `Password`, `RegDate`, `UpdationDate`) VALUES
(1, 'Manju Srivatav', '4456464654', 'manju@gmail.com', '202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04 17:59:41'),
(2, 'Kishan', '9871987979', 'kishan@gmail.com', '202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04 17:59:49'),
(3, 'Salvi Chandra', '1398756416', 'salvi@gmail.com', '202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04 17:59:49'),

(4, 'Abir', '4789756456', 'abir@gmail.com', '202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04 17:59:49'),

```
(5, 'Test', '1987894654', 'test@gmail.com', 'f925916e2754e5e03f75dd58a5733251',
'2025-10-10 06:33:20', '2025-11-04 17:59:49'),
(9, 'Test Sample', '4654654564', 'testsample@gmail.com',
'202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04
17:59:49'),
(10, 'Garima Singh', '1425362540', 'garima12@gmail.com',
'f925916e2754e5e03f75dd58a5733251', '2025-10-10 06:33:20', '2025-11-04
17:59:49');

--
-- Indexes for dumped tables
--

--
-- Indexes for table `admin`
--
ALTER TABLE `admin`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tblbooking`
--
ALTER TABLE `tblbooking`
  ADD PRIMARY KEY (`BookingId`);

--
-- Indexes for table `tblenquiry`
--
ALTER TABLE `tblenquiry`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tblissues`
--
ALTER TABLE `tblissues`
  ADD PRIMARY KEY (`id`);
```

```
--
-- Indexes for table `tblpages`
--
ALTER TABLE `tblpages`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tbltourpackages`
--
ALTER TABLE `tbltourpackages`
  ADD PRIMARY KEY (`PackageId`);

--
-- Indexes for table `tblusers`
--
ALTER TABLE `tblusers`
  ADD PRIMARY KEY (`id`),
  ADD KEY `EmailId` (`EmailId`),
  ADD KEY `EmailId_2` (`EmailId`);

--
-- AUTO_INCREMENT for dumped tables
--

--
-- AUTO_INCREMENT for table `admin`
--
ALTER TABLE `admin`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=2;

--
-- AUTO_INCREMENT for table `tblbooking`
--
ALTER TABLE `tblbooking`
```

```
  MODIFY `BookingId` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=4;

--
-- AUTO_INCREMENT for table `tblenquiry`
--
ALTER TABLE `tblenquiry`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=4;

--
-- AUTO_INCREMENT for table `tblissues`
--
ALTER TABLE `tblissues`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `tblpages`
--
ALTER TABLE `tblpages`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=22;

--
-- AUTO_INCREMENT for table `tbltourpackages`
--
ALTER TABLE `tbltourpackages`
  MODIFY `PackageId` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=18;

--
-- AUTO_INCREMENT for table `tblusers`
--
ALTER TABLE `tblusers`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
```

```
AUTO_INCREMENT=14;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT
*/;
/*!40101 SET
CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET
COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;


-- -------------------------------------------------------

--
-- Table structure for table `tblusers`
--

CREATE TABLE `tblusers` (
  `id` int(11) NOT NULL,
  `FullName` varchar(100) DEFAULT NULL,
  `MobileNumber` char(10) DEFAULT NULL,
  `EmailId` varchar(70) DEFAULT NULL,
  `Password` varchar(100) DEFAULT NULL,
  `RegDate` timestamp NULL DEFAULT current_timestamp(),
`UpdationDate` timestamp NULL DEFAULT NULL ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `tblusers`
--

INSERT INTO `tblusers` (`id`, `FullName`, `MobileNumber`, `EmailId`,
`Password`, `RegDate`, `UpdationDate`) VALUES
(1, 'Manju Srivatav', '4456464654', 'manju@gmail.com',
```

```
'202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04
17:59:41'),
(2, 'Kishan', '9871987979', 'kishan@gmail.com',
'202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04
17:59:49'),
(3, 'Salvi Chandra', '1398756416', 'salvi@gmail.com',
'202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04
17:59:49'),
(4, 'Abir', '4789756456', 'abir@gmail.com',
'202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04
17:59:49'),
(5, 'Test', '1987894654', 'test@gmail.com', 'f925916e2754e5e03f75dd58a5733251',
'2025-10-10 06:33:20', '2025-11-04 17:59:49'),
(9, 'Test Sample', '4654654564', 'testsample@gmail.com',
'202cb962ac59075b964b07152d234b70', '2025-10-10 06:33:20', '2025-11-04
17:59:49'),
(10, 'Garima Singh', '1425362540', 'garima12@gmail.com',
'f925916e2754e5e03f75dd58a5733251', '2025-10-10 06:33:20', '2025-11-04
17:59:49');

--
-- Indexes for dumped tables
--

--
-- Indexes for table `admin`
--
ALTER TABLE `admin`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tblbooking`
--
ALTER TABLE `tblbooking`
  ADD PRIMARY KEY (`BookingId`);
```

```
--
-- Indexes for table `tblenquiry`
--
ALTER TABLE `tblenquiry`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tblissues`
--
ALTER TABLE `tblissues`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tblpages`
--
ALTER TABLE `tblpages`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `tbltourpackages`
--
ALTER TABLE `tbltourpackages`
  ADD PRIMARY KEY (`PackageId`);

--
-- Indexes for table `tblusers`
--
ALTER TABLE `tblusers`
  ADD PRIMARY KEY (`id`),
  ADD KEY `EmailId` (`EmailId`),
  ADD KEY `EmailId_2` (`EmailId`);

--
-- AUTO_INCREMENT for dumped tables
--
```

```
--
-- AUTO_INCREMENT for table `admin`
--
ALTER TABLE `admin`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=2;

--
-- AUTO_INCREMENT for table `tblbooking`
--
ALTER TABLE `tblbooking`
  MODIFY `BookingId` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=4;

--
-- AUTO_INCREMENT for table `tblenquiry`
--
ALTER TABLE `tblenquiry`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=4;

--
-- AUTO_INCREMENT for table `tblissues`
--
ALTER TABLE `tblissues`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `tblpages`
--
ALTER TABLE `tblpages`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=22;

--
```

```
-- AUTO_INCREMENT for table `tbltourpackages`
--
ALTER TABLE `tbltourpackages`
  MODIFY `PackageId` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=18;

--
-- AUTO_INCREMENT for table `tblusers`
--
ALTER TABLE `tblusers`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=14;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT
*/;
/*!40101 SET
CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET
COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

```
<!-- Admin Login Credentials // Username: admin // Password: admin123 -->
```

```
<?php session_start();
include('includes/config.php')
; if(isset($_POST['login']))
  {
$uname=$_POST['username'];
$password=md5($_POST['password']);
$sql ="SELECT UserName,Password FROM admin WHERE UserName=:uname and
Password=:password";
$query= $dbh -> prepare($sql);
$query-> bindParam(':uname', $uname, PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
$query-> execute();
$results=$query->fetchAll(PDO::FETCH_OBJ); if($query-
>rowCount() > 0)
  {
$_SESSION['alogin']=$_POST['username'];
echo "<script type='text/javascript'> document.location = 'dashboard.php'; </script>"; }
else{


      echo "<script>alert('Invalid Details');</script>";


  }


  }


  ?>
```

```
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Sign in</title>

<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" /> <script
type="application/x-javascript"> addEventListener("load", function() {

setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>

<!-- Bootstrap Core CSS -->

<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' /> <!--
Custom CSS -->
<!-- <link href="css/style.css" rel='stylesheet' type='text/css' /> -->
<link href="css/style.css?v=adminloginfix1" rel="stylesheet">
<link rel="stylesheet" href="css/morris.css" type="text/css"/>

<!-- Graph CSS -->
<link href="css/font-awesome.css" rel="stylesheet">
<link rel="stylesheet" href="css/jquery-ui.css">
<!-- jQuery -->
<script src="js/jquery-2.1.4.min.js"></script>

<!-- //jQuery -->
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet'

type='text/css'/>

<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>

<!-- lined-icons -->

<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<!-- //lined-icons -->
</head>
<body>

    <div class="main-wthree"> <div
    class="container">

    <div class="sin-w3-agile">
        <h2>Sign In</h2>
        <form method="post">
            <div class="username">
                <span class="username">Username:</span>
                <input type="text" name="username" class="name" placeholder="" required="">

                <div class="clearfix"></div>
            </div>
            <div>
            <a href="forgot-password.php" style="color: #fff;">Forgot Password</a></div> <br>

            <div class="password-agileits">
                <span class="username">Password:</span>
```

```
            <input type="password" name="password" class="password" placeholder="" required="">
              <div class="clearfix"></div>
            </div>



            <div class="login-w3">
                  <input type="submit" class="login" name="login" value="Sign In">
            </div>
            <div class="clearfix"></div>
          </form>
              <div class="back">
                  <a href="../index.php" style="color: #fff;">Back to home</a>
              </div>



      </div>
      </div>
      </div>
   </body>
</html>
```

dashboard.php

```
<?php
session_start();
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
      {
header('location:index.php');
  }
else{
?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Dashboard</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" /> <script
type="application/x-javascript"> addEventListener("load", function() {
```

```
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>

<!-- Bootstrap Core CSS -->
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />

<!-- Custom CSS -->
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<!-- Graph CSS -->
<link href="css/font-awesome.css" rel="stylesheet">

<!-- jQuery -->
<script src="js/jquery-2.1.4.min.js"></script>

<!-- //jQuery -->
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet'

type='text/css'/>

<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet'
type='text/css'> <!-- lined-icons -->
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' /> <!--
//lined-icons -->
</head>
<script>          document.addEventListener("DOMContentLoaded",

 function        ()        {        document.querySelectorAll(".four-text

 h4").forEach(counter => { let target = parseInt(counter.innerText); if

 (isNaN(target)) return;



        let count = 0;

        let step = Math.max(1, Math.floor(target / 40));



        let timer = setInterval(() => { count

            += step; if (count >= target) {

            counter.innerText   =   target;

            clearInterval(timer);

            } else {
                counter.innerText = count;

            }

         }, 20);

     });

 });
</script>
<body>
```

```
    <div class="page-container">
    <!--/content-inner-->
<div class="left-content">
        <div class="mother-grid-inner">
<!--header start here-->
<?php include('includes/header.php');?>
<!--header end here-->
         <ol class="breadcrumb">
              <li class="breadcrumb-item"><a href="index.html">Home</a> <i class="fa fa-angle-
right"></i></li>
             </ol>
<!--four-grids here-->
         <div class="four-grids">
            <a href="manage-users.php" target="_blank">
                  <div class="col-md-4 four-grid">
                     <div class="four-agileits">
                        <div class="icon">
                           <i class="glyphicon glyphicon-user" aria-hidden="true"></i>
                        </div>
                        <div class="four-text">
                           <h3>User</h3>


                           <?php $sql = "SELECT id from tblusers";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=$query->rowCount();
                  ?>          <h4> <?php echo htmlentities($cnt);?> </h4>



                        </div>


                     </div>
                  </div>
               </a>


<a href="manageissues.php" target="_blank">
```

```
<div class="col-md-4 four-grid">
<div class="four-w3ls">
<div class="icon">
<i class="glyphicon glyphicon-folder-open" aria-hidden="true"></i>
</div>
<div class="four-text">
<h3>Issues Riaised</h3>
<?php $sql5 = "SELECT id from tblissues";
$query5= $dbh -> prepare($sql5);
$query5->execute();
$results5=$query5->fetchAll(PDO::FETCH_OBJ);
$cnt5=$query5->rowCount();
?>
<h4><?php echo htmlentities($cnt5);?></h4>

</div>

</div>
</div></a>

<a href="manage-packages.php" target="_blank">
<div class="col-md-4 four-grid">
<div class="four-wthree">
<div class="icon">
<i class="glyphicon glyphicon-briefcase" aria-hidden="true"></i>
</div>
<div class="four-text">
<h3>Toatal packages</h3>
<?php $sql3 = "SELECT PackageId from
tbltourpackages";
$query3= $dbh -> prepare($sql3);
$query3->execute();
$results3=$query3->fetchAll(PDO::FETCH_OBJ);
$cnt3=$query3->rowCount();
?>
<h4><?php echo htmlentities($cnt3);?></h4>
</div>
```

```
                    </div>

                  </div>
                    <div class="clearfix"></div>
              </div>

</a>



    <a href="manage-enquires.php" target="_blank">
    <div class="four-grids">
          <div class="col-md-4 four-grid">
                    <div class="four-agileinfo">

                      <div class="icon">
                        <i class="glyphicon glyphicon-folder-open" aria-hidden="true"></i>
                      </div>
                      <div class="four-text">

                        <h3>Enquiries</h3>

                                    <?php $sql2 = "SELECT id from tblenquiry";
$query2= $dbh -> prepare($sql2);
$query2->execute();
$results2=$query2->fetchAll(PDO::FETCH_OBJ);
$cnt2=$query2->rowCount();

                  ?>
                        <h4><?php echo htmlentities($cnt2);?></h4>



                      </div>



                    </div>
                  </div>
              </a>
      <a href="manage-enquires.php" target="_blank">
              <div class="col-md-4 four-grid">
                      <div class="four-agileits">

                        <div class="icon">
```

```
                <i class="glyphicon glyphicon-folder-open" aria-hidden="true"></i>
            </div>
            <div class="four-text">
                <h3>New Enquiries</h3>



                <?php $sql ="SELECT id from tblenquiry where (Status is null || Status='')";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);

$newenq=$query->rowCount();
        ?>     <h4> <?php echo htmlentities($newenq);?> </h4> </div>
            </div>
         </div></a>



    <a href="manage-enquires.php" target="_blank">
            <div class="col-md-4 four-grid">
            <div class="four-w3ls">
                <div class="icon">

                <i class="glyphicon glyphicon-folder-open" aria-hidden="true"></i>
                </div>
                <div class="four-text">
                <h3>Read Enquiries</h3>
                        <?php $sql5 ="SELECT id from tblenquiry where (Status='1')";

$query5= $dbh -> prepare($sql5);
$query5->execute();
$results5=$query5->fetchAll(PDO::FETCH_OBJ);
$redenq=$query5->rowCount();

        ?>
                <h4><?php echo htmlentities($redenq);?></h4>



                </div>



            </div>
          </div>
        </a>
  <div class="clearfix"></div>

        </div>
    <div class="four-grids">
```

```
        <a href="manage-bookings.php" target="_blank">
                                <div class="col-md-3 four-grid">
                    <div class="four-agileinfo">
                        <div class="icon">
                            <i class="glyphicon glyphicon-list-alt" aria-hidden="true"></i>
                        </div>
                        <div class="four-text">
                            <h3>Bookings</h3>
                                    <?php $sql1 = "SELECT BookingId from tblbooking";
$query1 = $dbh -> prepare($sql1);
$query1->execute();
$results1=$query1->fetchAll(PDO::FETCH_OBJ);
$cnt1=$query1->rowCount();
                    ?>
                            <h4><?php echo htmlentities($cnt1);?></h4>



                        </div>



                    </div>
                </div></a>
        <a href="manage-bookings.php" target="_blank">
        <div class="col-md-3 four-grid">
                    <div class="four-wthree" style="color:#ffc107 !important">
                        <div class="icon">
                            <i class="glyphicon glyphicon-list-alt" aria-hidden="true"></i>
                        </div>
                        <div class="four-text">
                            <h3>New Bookings</h3>



                            <?php $sql ="SELECT BookingId from tblbooking where (status is null ||
status='')";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$newbookings=$query->rowCount();
                    ?>     <h4> <?php echo htmlentities($newbookings);?> </h4> </div>
                        </div>
                    </div>
</a>
```

```
    <a href="manage-bookings.php" target="_blank">



        <div class="col-md-3 four-grid">
                    <div class="four-agileits">
                        <div class="icon">
                            <i class="glyphicon glyphicon-list-alt" aria-hidden="true"></i>
                        </div>
                        <div class="four-text">
                            <h3>Cancelled Bookings</h3>



                            <?php $sql ="SELECT BookingId from tblbooking where (status='2')"; $query
= $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cancelbooking=$query->rowCount();
                    ?>     <h4> <?php echo htmlentities($cancelbooking);?> </h4> </div>

                        </div>
                    </div>
</a>
    <a href="manage-bookings.php" target="_blank">
                        <div class="col-md-3 four-grid">

                        <div class="four-w3ls">
                            <div class="icon">
                                <i class="glyphicon glyphicon-list-alt" aria-hidden="true"></i>
                            </div>
                            <div class="four-text">

                                <h3>Confirmed Bookings</h3>



                                <?php $sql ="SELECT BookingId from tblbooking where (status='1')";
$query = $dbh -> prepare($sql);
$query->execute();

$results=$query->fetchAll(PDO::FETCH_OBJ);

$cancelbooking=$query->rowCount();
                    ?>     <h4> <?php echo htmlentities($cancelbooking);?> </h4> </div>
                        </div>

                    </div>
                </a>
                    <div class="clearfix"></div>
```

```
                </div>
<!--//four-grids here-->




<div class="inner-block">



</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
</div>
</div>



        <!--/sidebar-menu-->
            <?php include('includes/sidebarmenu.php');?>
                    <div class="clearfix"></div>
                </div> <script>
                var toggle = true;


                $(".sidebar-icon").click(function() { if
                  (toggle)
                  {
                  $(".page-container").addClass("sidebar-collapsed").removeClass("sidebar-


collapsed-back");
                    $("#menu span").css({"position":"absolute"});
                  }
                  else
                  {
                  $(".page-container").removeClass("sidebar-collapsed").addClass("sidebar-


collapsed-back");
                    setTimeout(function() {
                      $("#menu span").css({"position":"relative"});
                    }, 400);
                  }
```

```
                    toggle = !toggle;
                });
            </script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
    <script src="js/bootstrap.min.js"></script>
    <!-- /Bootstrap Core JavaScript -->
<!-- morris JavaScript -->
<script src="js/raphael-min.js"></script>
<script src="js/morris.js"></script>
<script>
    $(document).ready(function() {
        //BOX BUTTON SHOW AND CLOSE
       jQuery('.small-graph-box').hover(function() {
          jQuery(this).find('.box-button').fadeIn('fast');
       }, function() { jQuery(this).find('.box-
          button').fadeOut('fast');
       });
       jQuery('.small-graph-box .box-close').click(function() {
          jQuery(this).closest('.small-graph-box').fadeOut(200);
          return false;
       });



        //CHARTS function gd(year,
        day, month) {
           return new Date(year, month - 1, day).getTime();
        }
```

```
graphArea2 = Morris.Area({
    element: 'hero-area', padding:
    10,
behaveLikeLine:       true,
gridEnabled:          false,
gridLineColor:
'#dddddd', axes: true,
resize: true,
smooth:true,
pointSize: 0,
lineWidth: 0,
fillOpacity:0.85,
    data: [
        {period: '2014 Q1', iphone: 2668, ipad: null, itouch: 2649},
        {period: '2014 Q2', iphone: 15780, ipad: 13799, itouch: 12051},
        {period: '2014 Q3', iphone: 12920, ipad: 10975, itouch: 9910},
        {period: '2014 Q4', iphone: 8770, ipad: 6600, itouch: 6695},
        {period: '2015 Q1', iphone: 10820, ipad: 10924, itouch: 12300},
        {period: '2015 Q2', iphone: 9680, ipad: 9010, itouch: 7891},
        {period: '2015 Q3', iphone: 4830, ipad: 3805, itouch: 1598},
        {period: '2015 Q4', iphone: 15083, ipad: 8977, itouch: 5185},
        {period: '2016 Q1', iphone: 10697, ipad: 4470, itouch: 2038},
        {period: '2016 Q2', iphone: 8442, ipad: 5723, itouch: 1801}
    ],
    lineColors:['#ff4a43','#a2d200','#22beef'
    ], xkey: 'period', redraw: true,
    ykeys: ['iphone', 'ipad', 'itouch'],
    labels: ['All Visitors', 'Returning Visitors', 'Unique Visitors'],
    pointSize: 2,
    hideHover: 'auto', resize:
    true
});
```

```
    });
    </script>
  </body>
  </html>
<?php } ?>
header.php
<div class="header-main">
                <div class="logo-w3-agile">
                        <h1><a href="dashboard.php">Tour and Travel Website</a></h1> </div>




                  <div class="profile_details w3l">
                        <ul>
                          <li class="dropdown profile_details_drop">
                              <a href="#" class="dropdown-toggle" data-toggle="dropdown" aria-
expanded="false">


                                  <div class="profile_img">
                                      <span class="prfil-img"><img src="images/User-icon.png" alt="">

</span>

                                      <div class="user-name">
                                          <p>Welcome</p>

                                          <span>Administrator</span>
                                      </div>
                                      <i class="fa fa-angle-down"></i>
                                      <i class="fa fa-angle-up"></i>
                                      <div class="clearfix"></div>

                                  </div>
                              </a>
                              <ul class="dropdown-menu drp-mnu">
                                  <li> <a href="profile.php"><i class="fa fa-lock"></i> Profile</a>



                                  <li> <a href="change-password.php"><i class="fa fa-lock"></i>



                                  <li> <a href="logout.php"><i class="fa fa-sign-out"></i> Logout</a>



                              </ul>
```

```
</li>


Setting</a> </li>


</li>
                                    </li>
                                </ul>
                            </div>


                        <div class="clearfix"> </div>
                    </div>
```

footer.php

```
<div class="copyrights">
    <p>© 2026 Tour and Travel Management System Developed by Amit Kumar (BSc IT) . All Rights
Reserved | <a href="#">TMS</a> </p>
</div>
```

sidemenubar.php

```
<div class="sidebar-menu">
                <header class="logo1">
                   <a href="#" class="sidebar-icon"> <span class="fa fa-bars"></span> </a>

                </header>
                   <div style="border-top:1px ridge rgba(255, 255, 255, 0.15)"></div>
                     <div class="menu">
                            <ul id="menu" >
                               <li><a href="dashboard.php"><i class="fa fa-tachometer"></i>

<span>Dashboard</span><div class="clearfix"></div></a></li>



                            <li id="menu-academico" ><a href="#"><i class="fa fa-list-ul" aria-

hidden="true"></i><span> Tour Packages</span> <span class="fa fa-angle-right" style="float:

right"></span><div class="clearfix"></div></a>

                                 <ul id="menu-academico-sub" >
                                <li id="menu-academico-avaliacoes" ><a href="create-

package.php">Create</a></li>

                                 <li id="menu-academico-avaliacoes" ><a href="manage-

packages.php">Manage</a></li>
                                 </ul>
                               </li>
                            <li id="menu-academico" ><a href="manage-users.php"><i class="fa fa-

users" aria-hidden="true"></i><span>Manage Users</span><div class="clearfix"></div></a>

</li>



                            <li><a href="manage-bookings.php"><i class="fa fa-list" aria-

hidden="true"></i> <span>Manage Booking</span><div class="clearfix"></div></a></li>

                              <li><a href="manageissues.php"><i class="fa fa-table"></i>
   <span>Manage Issues</span><div class="clearfix"></div></a></li>
                            <li><a href="manage-enquires.php"><i class="fa fa-file-text-o" aria-

hidden="true"></i> <span>Manage Enquiries</span><div class="clearfix"></div></a></li>

                            <li><a href="manage-pages.php"><i class="fa fa-file-text-o" aria-

hidden="true"></i> <span>Manage Pages</span><div class="clearfix"></div></a></li>



                            </ul>
                           </div>
```

```
                    </div>
```

usr-booking.php \

```
<?php session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
    {
header('location:index.php');
  }
else{
   // code for cancel if(isset($_REQUEST['bkid']))
    {
$bid=intval($_GET['bkid']);
$status=2;
$cancelby='a';
  $sql = "UPDATE tblbooking SET status=:status,CancelledBy=:cancelby WHERE BookingId=:bid";
$query = $dbh->prepare($sql);
$query -> bindParam(':status',$status, PDO::PARAM_STR);
$query -> bindParam(':cancelby',$cancelby , PDO::PARAM_STR);
$query-> bindParam(':bid',$bid, PDO::PARAM_STR);
$query -> execute();


$msg="Booking Cancelled successfully";
  }


if(isset($_REQUEST['bckid']))
    {
$bcid=intval($_GET['bckid']);
$status=1;
$cancelby='a';
```

```
$sql = "UPDATE tblbooking SET status=:status WHERE BookingId=:bcid";
$query = $dbh->prepare($sql);

$query -> bindParam(':status',$status, PDO::PARAM_STR);
$query-> bindParam(':bcid',$bcid, PDO::PARAM_STR);
$query -> execute();
$msg="Booking Confirm successfully";

  }









      ?>
<!DOCTYPE HTML>
<html>
<head>

<title>TMS | Admin manage Bookings</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" /> <script
type="application/x-javascript"> addEventListener("load", function() {

setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>

<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>

<link rel="stylesheet" type="text/css" href="css/table-style.css" />
<link rel="stylesheet" type="text/css" href="css/basictable.css" />
<script type="text/javascript" src="js/jquery.basictable.min.js"></script>
<script type="text/javascript">
     $(document).ready(function() {

       $('#table').basictable();



       $('#table-breakpoint').basictable({

         breakpoint: 768

       });
```

```
        $('#table-swap-axis').basictable({
          swapAxis: true
        });


        $('#table-force-off').basictable({
          forceResponsive: false
        });


        $('#table-no-resize').basictable({
          noResize: true
        });


        $('#table-two-axis').basictable();


        $('#table-max-height').basictable({
          tableWrapper: true
        });
      });
</script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet'
type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' /> <style>
          .errorWrap { padding:
      10px; margin:
      0 0 20px 0;
      background: #fff;
      border-left: 4px solid #dd3d36;
      -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1); box-shadow:
      0 1px 1px 0 rgba(0,0,0,.1);
  }
  .succWrap{ padding: 10px; margin:
      0 0 20px 0; background:
```

```
    #fff;

    border-left: 4px solid #5cb85c;

    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1); box-shadow:
    0 1px 1px 0 rgba(0,0,0,.1);

 }
        </style>
</head>
<body>
    <div class="page-container">

    <!--/content-inner-->
<div class="left-content">
        <div class="mother-grid-inner">
            <!--header start here-->
                <?php include('includes/header.php');?>

                    <div class="clearfix"> </div>
                </div>
<!--heder end here-->
<ol class="breadcrumb">
                <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-

right"></i>Manage Bookings</li>

            </ol>
<div class="agile-grids">
                <!-- tables -->
                <?php if($error){?><div class="errorWrap"><strong>ERROR</strong>:<?php echo

htmlentities($error); ?> </div><?php }

                else if($msg){?><div class="succWrap"><strong>SUCCESS</strong>:<?php echo

htmlentities($msg); ?> </div><?php }?>

                <div class="agile-tables">
                    <div class="w3l-table-info">

                      <h2>Manage <?php echo $_GET['uname'];?>'s Bookings</h2>

                        <table id="table">
                        <thead>
                          <tr>
                          <th>Booikn id</th>

                            <th>Name</th>
                            <th>Mobile No.</th>
                            <th>Email Id</th>
                            <th>RegDate </th>
                            <th>From /To </th>
                            <th>Comment </th>
                            <th>Status </th>
                            <th>Action </th>

                          </tr>
```

```
                    </thead>
                    <tbody>
<?php $uid=$_GET['uid'];
$sql = "SELECT tblbooking.BookingId as bookid,tblusers.FullName as fname,tblusers.MobileNumber
as mnumber,tblusers.EmailId as email,tbltourpackages.PackageName as
pckname,tblbooking.PackageId as pid,tblbooking.FromDate as fdate,tblbooking.ToDate as
tdate,tblbooking.Comment as comment,tblbooking.status as status,tblbooking.CancelledBy as
cancelby,tblbooking.UpdationDate as upddate from tblbooking
  left join tblusers on tblbooking.UserEmail=tblusers.EmailId
left join tbltourpackages on tbltourpackages.PackageId=tblbooking.PackageId where
tblbooking.UserEmail='$uid'";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1; if($query->rowCount()
> 0)
 {
foreach($results as $result)
{            ?>
                    <tr>
                      <td>#BK-<?php echo htmlentities($result->bookid);?></td>
                      <td><?php echo htmlentities($result->fname);?></td>
                      <td><?php echo htmlentities($result->mnumber);?></td>
                      <td><?php echo htmlentities($result->email);?></td>
                      <td><a href="update-package.php?pid=<?php echo htmlentities($result->pid);?
>"><?php echo htmlentities($result->pckname);?></a></td>
                    <td><?php echo htmlentities($result->fdate);?> To <?php echo
htmlentities($result->tdate);?></td>
          <td><?php echo htmlentities($result->comment);?></td>      <td><?php
if($result->status==0)


 {
echo "Pending";
 }
if($result->status==1)
 {
echo "Confirmed";
 }
if($result->status==2 and $result->cancelby=='a')
```

```
 {
echo "Canceled by you at " .$result->upddate;

 }
if($result->status==2 and $result->cancelby=='u')

 {
echo "Canceled by User at " .$result->upddate;



 }
?></td>



<?php if($result->status==2)

 {
    ?><td>Cancelled</td>
<?php } elseif($result->status==1)

 {
    ?><td>Confirmed</td>
<?php }




else {?>
<td><a href="manage-bookings.php?bkid=<?php echo htmlentities($result->bookid);?>" onclick="return confirm('Do you really want to cancel booking')" >Cancel</a> / <a href="manage-bookings.php?bckid=<?php echo htmlentities($result->bookid);?>" onclick="return confirm('booking has been confirm')" >Confirm</a></td>
<?php }?>



                 </tr>
                <?php $cnt=$cnt+1;} }?>
               </tbody>
              </table>
            </div>
          </table>
```

```
            </div>
<!-- script-for sticky-nav -->
         <script>
        $(document).ready(function()          {          var
            navoffeset=$(".header-main").offset().top;
            $(window).scroll(function(){                    var
            scrollpos=$(window).scrollTop(); if(scrollpos
            >=navoffeset){
                $(".header-main").addClass("fixed");
              }else{
                $(".header-main").removeClass("fixed");
              }
            });



        });
        </script>
        <!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">



</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
   <!--//content-inner-->
        <!--/sidebar-menu-->
                    <?php include('includes/sidebarmenu.php');?>
                        <div class="clearfix"></div>
                      </div> <script>
                      var toggle = true;


                      $(".sidebar-icon").click(function() { if
                        (toggle)
                        {
```

```
$(".page-container").addClass("sidebar-collapsed").removeClass("sidebar-

collapsed-back");
  $("#menu span").css({"position":"absolute"});

}
else

{
$(".page-container").removeClass("sidebar-collapsed").addClass("sidebar-

collapsed-back");
  setTimeout(function() {
    $("#menu span").css({"position":"relative"});
  }, 400);

}



        toggle = !toggle;

    });
</script>
```

```
<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>

<!-- Bootstrap Core JavaScript -->
    <script src="js/bootstrap.min.js"></script>
    <!-- /Bootstrap Core JavaScript -->



</body>

</html>
<?php } ?>
```

BIBLIOGRAPHY

- Software Engineering by Roger S. Pressman
- MySQL: The Complete Reference
- HTML, CSS and JavaScript Web Publishing by Steven Holzner
- PHP and MySQL Web Development by Luke Welling & Laura Thomson

REFERENCES

- https://www.w3schools.com
- https://www.php.net
- https://dev.mysql.com/doc
- https://getbootstrap.com
- https://stackoverflow.com