

Advanced Shiny

David Granjon

2019-02-05

Contents

1	Prerequisites	5
2	Introduction	7
3	Advance Design	9
3.1	Selecting a good template	9
3.2	About htmltools	9
3.3	Template Skeleton	12
3.4	Example	12

Chapter 1

Prerequisites

This book requires to be already familiar with R and Shiny. If not, we strongly recommend to read ...

Chapter 2

Introduction

You can label chapter and section titles using `{#label}` after them, e.g., we can reference Chapter 2. If you do not manually label them, there will be automatic labels anyway, e.g., Chapter ??.

Figures and tables with captions will be placed in `figure` and `table` environments, respectively.

```
par(mar = c(4, 4, .1, .1))
plot(pressure, type = 'b', pch = 19)
```

Reference a figure by its code chunk label with the `fig:` prefix, e.g., see Figure 2.1. Similarly, you can reference tables generated from `knitr::kable()`, e.g., see Table 2.1.

```
knitr::kable(
  head(iris, 20), caption = 'Here is a nice table!',
  booktabs = TRUE
)
```

You can write citations, too. For example, we are using the **bookdown** package (Xie, 2018) in this sample book, which was built on top of R Markdown and **knitr** (Xie, 2015).

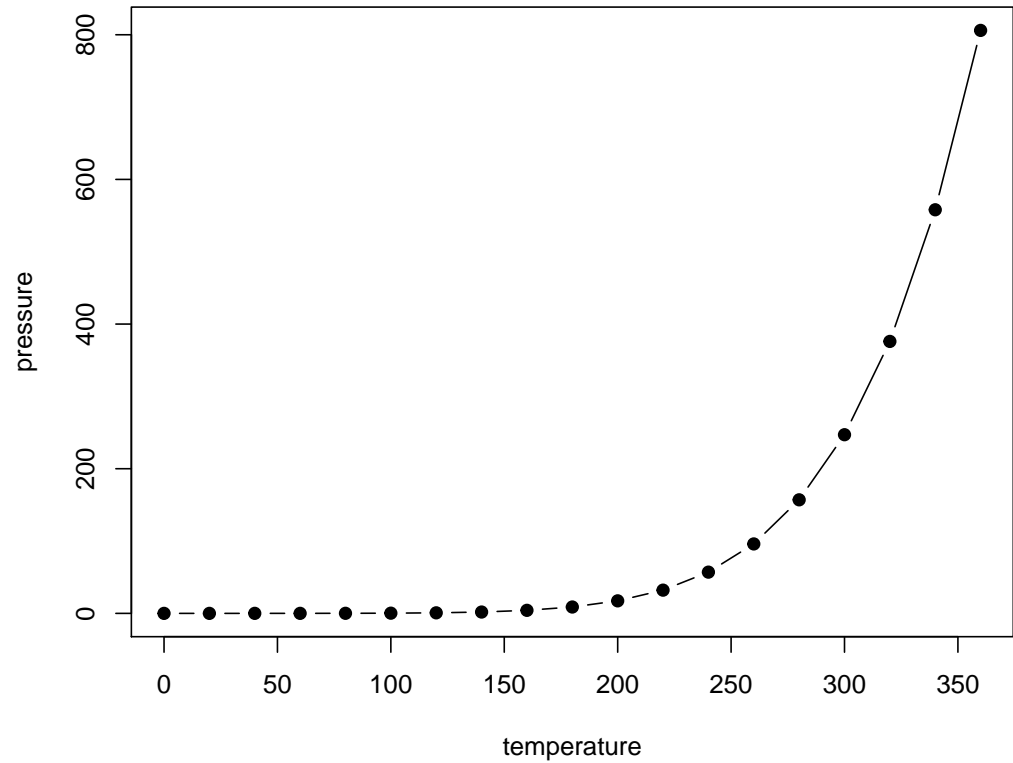


Figure 2.1: Here is a nice figure!

Table 2.1: Here is a nice table!				
Sepal.Length	Sepal.Width	Petal.Length	Petal.Width	Species
5.1	3.5	1.4	0.2	setosa
4.9	3.0	1.4	0.2	setosa
4.7	3.2	1.3	0.2	setosa
4.6	3.1	1.5	0.2	setosa
5.0	3.6	1.4	0.2	setosa
5.4	3.9	1.7	0.4	setosa
4.6	3.4	1.4	0.3	setosa
5.0	3.4	1.5	0.2	setosa
4.4	2.9	1.4	0.2	setosa
4.9	3.1	1.5	0.1	setosa
5.4	3.7	1.5	0.2	setosa
4.8	3.4	1.6	0.2	setosa
4.8	3.0	1.4	0.1	setosa
4.3	3.0	1.1	0.1	setosa
5.8	4.0	1.2	0.2	setosa
5.7	4.4	1.5	0.4	setosa
5.4	3.9	1.3	0.4	setosa
5.1	3.5	1.4	0.3	setosa
5.7	3.8	1.7	0.3	setosa
5.1	3.8	1.5	0.3	setosa

Chapter 3

Advance Design

In this chapter, you will learn how to build your own html templates taken from the web and package them, so that they can be re-used at any time by anybody.

3.1 Selecting a good template

There exists tons of HTML templates over the web. However, only a few part will be suitable for shiny, mainly because of what follows:

- shiny is built on top of bootstrap 3 (HTML, CSS and Javascript framework), meaning that going for another framework might not be straightforward. However, shinymaterial and shiny.semantic are examples showing this can be possible.
- shiny relies on jQuery (currently v 1.12.4 for shiny, whereas the latest version is 3.3.1). Consequently, all templates based upon React, Vue and other Javascript framework will not be natively supported. Again, there exist some examples for React with shiny and more generally, the reactR package developed by Kent Russell (? on Twitter) and Alan Dipert from RStudio.

See the github repository for more details about all dependencies related to the shiny package.

Therefore in the following, we will restrict ourself to Bootstrap (3 and 4) together with jQuery. Don't be disappointed since there is still a lot to say.

Notes: As shiny depends on Bootstrap 3.3.7, we recommend the user who would like to experiment Bootstrap 4 features to be particularly careful about potential incompatibilities. See a working example here with bs4Dash.

A good source of **open source** HTML templates is Colorlib and Creative Tim. You might also buy your template, but forget about the packaging option, which would be illegal in this particular case, unless you have a legal agreement with the author (very unlikely however).

3.2 About htmltools

While building a custom html template, you will need to know more about the wonderful htmltools developed by Winston Chang, member of the shiny core team. It has the same spirit as devtools, that is, making your web developer life easier. What follows does not have the pretention to be an exhaustive guide about this package. Yet, it will provide you with the main tools to be more efficient.

3.2.1 HTML Tags

Both shiny and htmltools contain tags. However, by experience, htmltools contains more exported tags than shiny. For instance, the HTML `<nav></nav>` tag, namely `tags$nav()` in R is not included in the shiny package but in htmltools.

Within your package code, your tags will be like:

```
# we use htmltools tags instead of shiny
htmltools::tags$div(...)
```

If you had to gather multiple tags together, prefer `tagList()` as `list()`, although the HTML output is the same. The first has the `shiny.tag.list` class in addition to `list`.

3.2.1.1 Notations

Whether to use `tags$div` or `div` is the tag is exported by default. For instance, you could use `htmltools::div` but not `htmltools::nav` since `nav` does not have a dedicated function (only for `p`, `h1`, `h2`, `h3`, `h4`, `h5`, `h6`, `a`, `br`, `div`, `span`, `pre`, `code`, `img`, `strong`, `em`, `hr`). Rather use `htmltools::tags$nav`. Alternatively, there exists a function (in shiny and htmltools) called `withTags()`. Wrapping your code in this function enables you to use `withTags(nav(), ...)` instead of `tags$nav()`.

3.2.1.2 Alternative way to write tags

htmltools and shiny come with the `HTML()` function that you can feed with raw HTML:

```
HTML('<div>Blabla</div>')
# will render exactly like
div("Blabla")

# but there class is different
class(HTML('<div>Blabla</div>'))
class(div("Blabla"))
```

You will not be able to use tag related functions, as in the following parts. Therefore, I strongly recommend using R and not mixing HTML in R.

3.2.1.3 Tags structure

According to the htmltools `tag()` function, a tag has: - a name such as `span`, `div`, `h1` ... - attributes, which you can access with `tag$attribs` - children, which you can access with `tag$children` - a class, namely “shiny.tag”

For instance:

```
# create the tag
myTag <- div(
  class = "divclass",
  id = "first",
  h1("Here comes your baby"),
  span(class = "child", id = "baby", "Ouinnnnnn")
)

# access its name
myTag$name
```

```
# access its attributes (id and class)
myTag$attrs

# access children (returns a list of 2 elements)
myTag$children
```

How to modify the class of the second child?

```
second_children <- myTag$children[[2]]
second_children$attrs$class <- "adult"
myTag
```

```
# Hummm, this is not working ...
```

The code above is wrong. Indeed, by assigning `myTag$children[[2]]` to `second_children`, `second_children$attrs$class <- "adult"` modifies the class of the copy and not the original object. Only one way:

```
myTag$children[[2]]$attrs$class <- "adult"
myTag
```

For strongly nested tags, you will see that the following section contains amazing functions, such as `tagAppendChild()`.

3.2.1.4 Useful functions for Tags

htmltools and shiny have powerful functions to easily add attributes to tags, check for existing attributes, get attributes and add other tags to a list of tags.

- `tagAppendAttributes()`: this function allow you to add a new attribute to the current tag. For instance, assuming you created a `div` for which you forgot to add an `id` attribute:

```
mydiv <- div("Where is my brain")
mydiv <- tagAppendAttributes(mydiv, id = "here_it_is")
```

You can pass as many attributes as you want, including non standard attributes such as `data-toggle` (see Bootstrap 3 tabs for instance):

```
mydiv <- tagAppendAttributes(mydiv, `data-toggle` = "tabs")
# even though you could proceed as follows
mydiv$attrs[["aria-controls"]] <- "home"
```

- `tagHasAttribute()`: to check if a tag has a specific attribute

```
# I want to know if div has a class
mydiv <- div(class = "myclass")
has_class <- tagHasAttribute(mydiv, "class")
has_class

# if you are familiar with %>%
has_class <- mydiv %>% tagHasAttribute("class")
has_class
```

- `tagGetAttribute()`: to get the value of the targeted attributes, if it exists, otherwise `NULL`.

```
mydiv <- div(class = "test")
# returns the class
tagGetAttribute(mydiv, "class")
```

```
# returns NULL
tagGetAttribute(mydiv, "id")
```

- `tagAppendChild()` and `tagAppendChildren()`: add other tags to an existing tag. Whereas `tagAppendChild()` only takes on tag, you can pass a list of tags to `tagAppendChildren()`.

```
mydiv <- div(class = "parent", id = "mother", "Not the mama!!!")
otherTag <- span("I am your child")
mydiv <- tagAppendChild(mydiv, otherTag)
```

You might wonder why there is no `tagRemoveChild()` or `tagRemoveAttributes()`.

3.2.1.5 Other interesting functions

The `brighter` package written by Colin Fay contains very neat functions to edit your tags. Particularly, the `tagRemoveAttributes()`

```
remotes::install_github("Thinkr-open/brighter")
library(brighter)
```

```
mydiv <- div(class = "test", id = "coucou", "Prout")
tagRemoveAttributes(mydiv, "class", "id")
```

Up to you to create new functions to add in this package and do a nice PR.

3.2.2 Dependency utilities

When creating a new template, you sometimes need to import custom HTML dependencies that do not come along with shiny. No problem, `htmltools` is here for you (`shiny` also contains these functions).

3.2.2.1 The dirty approach

3.2.2.2 The clean approach

3.3 Template Skeleton

3.4 Example

Bibliography

Xie, Y. (2015). *Dynamic Documents with R and knitr*. Chapman and Hall/CRC, Boca Raton, Florida, 2nd edition. ISBN 978-1498716963.

Xie, Y. (2018). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.8.