

NAME:- BHAVANI SANKAR

REG.NO:- 192411238

SESSION 4 LAB EXPERIMENTS

In a string *S* of lowercase letters, these letters form consecutive groups of the same

character. For example, a string like *s* = "abbxxxzzyy" has the groups "a", "bb",

"xxxx", "z", and "yy". A group is identified by an interval [start, end], where start

and end denote the start and end indices (inclusive) of the group. In the above

example, "xxxx" has the interval [3,6]. A group is considered large if it has 3 or

more characters. Return the intervals of every large group sorted in increasing order by start index.

Example 1:

Input: *s* = "abbxxxzzyy"

Output: [[3,6]]

Explanation: "xxxx" is the only large group with start index 3 and end index 6.

Example 2:

Input: *s* = "abc"

Output: []

Explanation: We have groups "a", "b", and "c", none of which are large groups.

4. "The Game of Life, also known simply as Life, is a cellular automaton devised by

the British mathematician John Horton Conway in 1970." The board is made up

of an $m \times n$ grid of cells, where each cell has an initial state: live (represented by a

1) or dead (represented by a 0). Each cell interacts with its eight neighbors (horizontal, vertical, diagonal) using the following four rules

Any live cell with fewer than two live neighbors dies as if caused by under-population.

Any live cell with two or three live neighbors lives on to the next generation.

Any live cell with more than three live neighbors dies, as if by over-population.

Any dead cell with exactly three live neighbors becomes a live cell, as if by reproduction.

The next state is created by applying the above rules simultaneously to every cell in the current state, where births and deaths occur simultaneously. Given the current state of the $m \times n$ grid board, return the next state.

Example 1:

Input: board = [[0,1,0],[0,0,1],[1,1,1],[0,0,0]]

Output: [[0,0,0],[1,0,1],[0,1,1],[0,1,0]]

Example 2:

Input: board = [[1,1],[1,0]]

Output: [[1,1],[1,1]]

5. We stack glasses in a pyramid, where the first row has 1 glass, the second row has

2 glasses, and so on until the 100 th row. Each glass holds one cup of champagne.

Then, some champagne is poured into the first glass at the top. When the topmost glass is full, any excess liquid poured will fall equally to the glass immediately to the left and right of it. When those glasses become full, any excess champagne will fall equally to the left and right of those glasses, and so on.

(A glass at the bottom row has its excess champagne fall on the floor.) For example, after one cup of champagne is poured, the top most glass is full. After two cups of champagne are poured, the two glasses on the second row are half full. After three cups of champagne are poured, those two cups become full - there are 3 full glasses total now. After four cups of champagne are poured, the third row has the middle glass half full, and the two outside glasses are a quarter full, as pictured below.

Now after pouring some non-negative integer cups of champagne, return how full the j th glass in the i th row is (both i and j are 0-indexed.)

Example 1:

Input: poured = 1, query_row = 1, query_glass = 1

Output: 0.00000

Explanation: We poured 1 cup of champagne to the top glass of the tower (which is indexed as (0, 0)). There will be no excess liquid so all the glasses under the top glass will remain empty.

Example 2:

Input: poured = 2, query_row = 1, query_glass = 1

Output: 0.50000

Explanation: We poured 2 cups of champagne to the top glass of the tower (which is indexed as (0, 0)). There is one cup of excess liquid. The glass indexed as (1, 0) and the glass indexed as (1, 1) will share the excess

liquid equally, and each will get half cup of champagne.

ANSWERS

1st CODE:-

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main() {
```

```
    char s[100];
```

```
    int i, start, len;
```

```
    printf("Enter a string: ");
```

```
    scanf("%99s", s);
```

```
    len = strlen(s);
```

```
    printf("Large groups [start, end]:\n");
```

```
    i = 0;
```

```
    while (i < len) {
```

```
        start = i;
```

```
        while (i < len && s[i] == s[start])
```

```
            i++;
```

```
        if (i - start >= 3)
```

```
            printf("[%d, %d]\n", start, i - 1);
```

```
}  
  
return 0;  
}
```

OUTPUT:-

```
Output  
  
Enter a string: abbxxxxzzy  
Large groups [start, end]:  
[3, 6]
```

2nd CODE:-

```
#include <stdio.h>  
  
int main() {  
    int m, n, i, j, x, y, count;  
    int board[20][20], next[20][20];  
  
    printf("Enter rows and columns: ");  
    scanf("%d%d", &m, &n);  
  
    printf("Enter the board (0 or 1):\n");  
    for (i = 0; i < m; i++)  
        for (j = 0; j < n; j++)  
            scanf("%d", &board[i][j]);
```

```

for (i = 0; i < m; i++) {
    for (j = 0; j < n; j++) {
        count = 0;

        for (x = i - 1; x <= i + 1; x++) {
            for (y = j - 1; y <= j + 1; y++) {
                if (x >= 0 && x < m &&
                    y >= 0 && y < n &&
                    !(x == i && y == j))
                    count += board[x][y];
            }
        }

        if (board[i][j] == 1) {
            if (count == 2 || count == 3)
                next[i][j] = 1;
            else
                next[i][j] = 0;
        } else {
            if (count == 3)
                next[i][j] = 1;
            else
                next[i][j] = 0;
        }
    }
}

```

```

printf("Next generation:\n");
for (i = 0; i < m; i++) {
    for (j = 0; j < n; j++)
        printf("%d ", next[i][j]);
    printf("\n");
}

return 0;
}

```

OUTPUT:-

```

Output

Enter rows and columns: 4 3
Enter the board (0 or 1):
0 1 0
0 0 1
1 1 1
0 0 0
Next generation:
0 0 0
1 0 1
0 1 1
0 1 0

```

3rd CODE:-

```
#include <stdio.h>
```

```
int main() {
```

```
double dp[101][101] = {0};
int poured, query_row, query_glass;
int i, j;

printf("Enter poured cups, query row and glass: ");
scanf("%d%d%d", &poured, &query_row, &query_glass);

dp[0][0] = poured;

for (i = 0; i < query_row; i++) {
    for (j = 0; j <= i; j++) {
        if (dp[i][j] > 1.0) {
            double excess = (dp[i][j] - 1.0) / 2.0;

            dp[i + 1][j] += excess;
            dp[i + 1][j + 1] += excess;
        }
    }
}

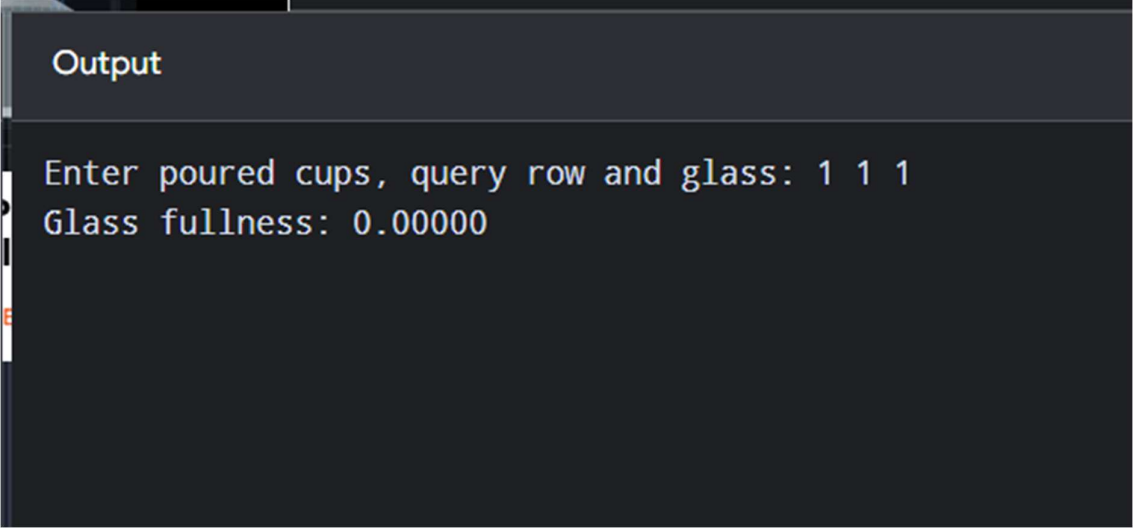
if (dp[query_row][query_glass] > 1.0)
    dp[query_row][query_glass] = 1.0;

printf("Glass fullness: %.5f\n",
        dp[query_row][query_glass]);

return 0;
```

}

OUTPUT:-

A screenshot of a terminal window with a dark background. The title bar at the top says "Output". The terminal shows two lines of text: "Enter poured cups, query row and glass: 1 1 1" and "Glass fullness: 0.00000".

```
Output
Enter poured cups, query row and glass: 1 1 1
Glass fullness: 0.00000
```