

Example



2026-02-14

Inhaltsverzeichnis

h1 Heading 8-)	3
h2 Heading	3
h3 Heading	3
Horizontal Rules	3
Typographic replacements	4
Emphasis	4
Blockquotes	4
Lists	4
Code	4
Tables	5
Links	5
Images	6
Plugins	7
Emojies	7
Subscript / Superscript	8
<ins>	8
<mark>	8
Footnotes	8
Definition lists	8
Abbreviations	8
Custom containers	8

Advertisement

:)

-

pica -

high

qual-

ity

and

fast

image

resize

in

browser.

- **ba-**

belfish

-

devel-

oper

friendly

i18n

with

plu-

rals

sup-

port

and

easy

syn-

tax.

You

will

like

those

projects!

h1 Heading 8-)


h2 Heading

h3 Heading

h4 Heading

h5 Heading **h6** Heading

Horizontal Rules



Typographic replacements

Enable typographer option to see result.

(c) (C) (r) (R) (tm) (TM) (p) (P) +-

test.. test... test..... test?..... test!....

!!!!!! ????? „ – —

“Smartypants, double quotes” and ‘single quotes’

Emphasis

This is bold text

This is bold text

This is italic text

This is italic text

~~Strikethrough~~

Blockquotes

Blockquotes can also be nested... > ...by using additional greater-than signs right next to each other... > > ...or with spaces between arrows.

Lists

Unordered

- Create a list by starting a line with +, -, or *
- Sub-lists are made by indenting 2 spaces:
 - Marker character change forces new list start:
 - * Ac tristique libero volutpat at
 - * Facilisis in pretium nisl aliquet
 - * Nulla volutpat aliquam velit
- Very easy!

Ordered

1. Lorem ipsum dolor sit amet
2. Consectetur adipiscing elit
3. Integer molestie lorem at massa
4. You can use sequential numbers...
5. ...or keep all the numbers as 1.

Start numbering with offset:

57. foo
58. bar

Code

Inline `code`

Indented code

```
// Some comments
line 1 of code
line 2 of code
line 3 of code
```

Block code “fences”

Sample text here...

Syntax highlighting

```
var foo = function (bar) {
  return bar++;
};

console.log(foo(5));
```

Tables

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

Right aligned columns

	Option	Description
	data	path to data files to supply the data that will be passed into templates.
	engine	engine to be used for processing templates. Handlebars is the default.
	ext	extension to be used for dest files.


Links

link text

link with title

Autoconverted link <https://github.com/nodeca/pica> (enable linkify to see)

Images

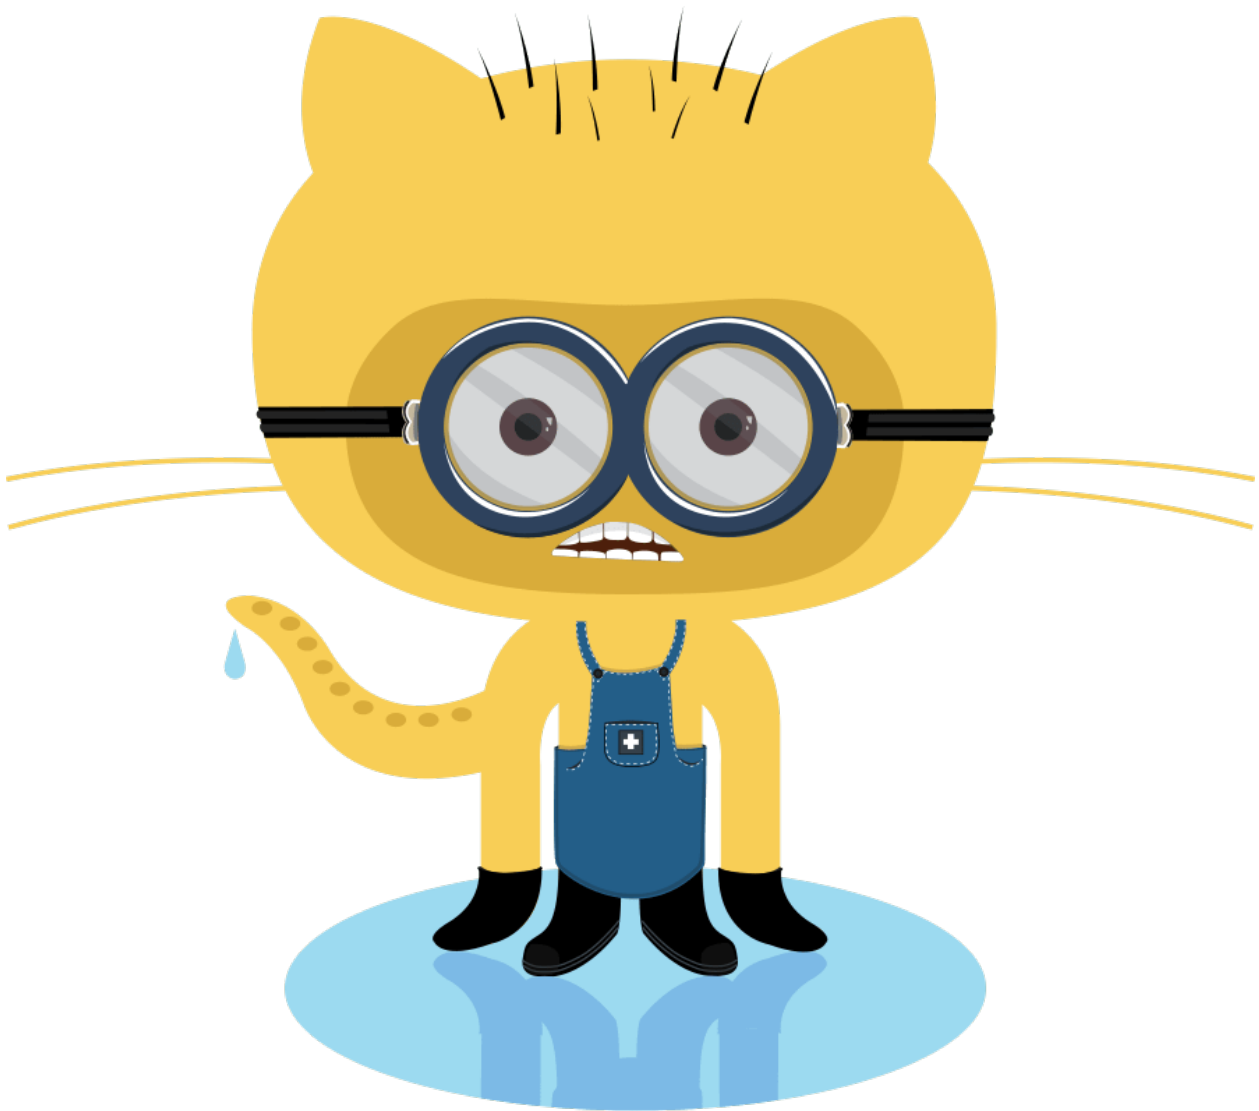

Like links, Images also have a footnote style syntax



Figure 1: Alt text

With a reference later in the document defining the URL location:

Plugins

The killer feature of `markdown-it` is very effective support of syntax plugins.

Emojies

Classic markup: `:wink:` `:cry:` `:laughing:` `:yum:`

Shortcuts (emoticons): `:-)` `:-(` `8-)` `;`

see how to change output with twemoji.

Subscript / Superscript

- 19th
- H₂O

<ins>

++Inserted text++

<mark>

==Marked text==

Footnotes

Footnote 1 link¹.

Footnote 2 link².

Inline footnote³ definition.

Duplicated footnote reference⁴.

Definition lists

Term 1 Definition 1 with lazy continuation.

Term 2 with *inline markup* Definition 2

{ some code, part of Definition 2 }

Third paragraph of definition 2.

Compact style:

Term 1 Definition 1

Term 2 Definition 2a

Definition 2b

Abbreviations

This is HTML abbreviation example.

It converts “HTML”, but keep intact partial entries like “xxxHTMLyyy” and so on.

*[HTML]: Hyper Text Markup Language

Custom containers

here be dragons

¹Footnote **can have markup**
and multiple paragraphs.

²Footnote text.

³Text of inline footnote

⁴Footnote text.