


Level 2 — /commander topic dispatch

robot_commander / commander · ROS node /commander

Blue: node internals Gray: ROS interfaces

Four subscriptions · source-derived · default namespace, no launch remappings

TOPICS · external publishers

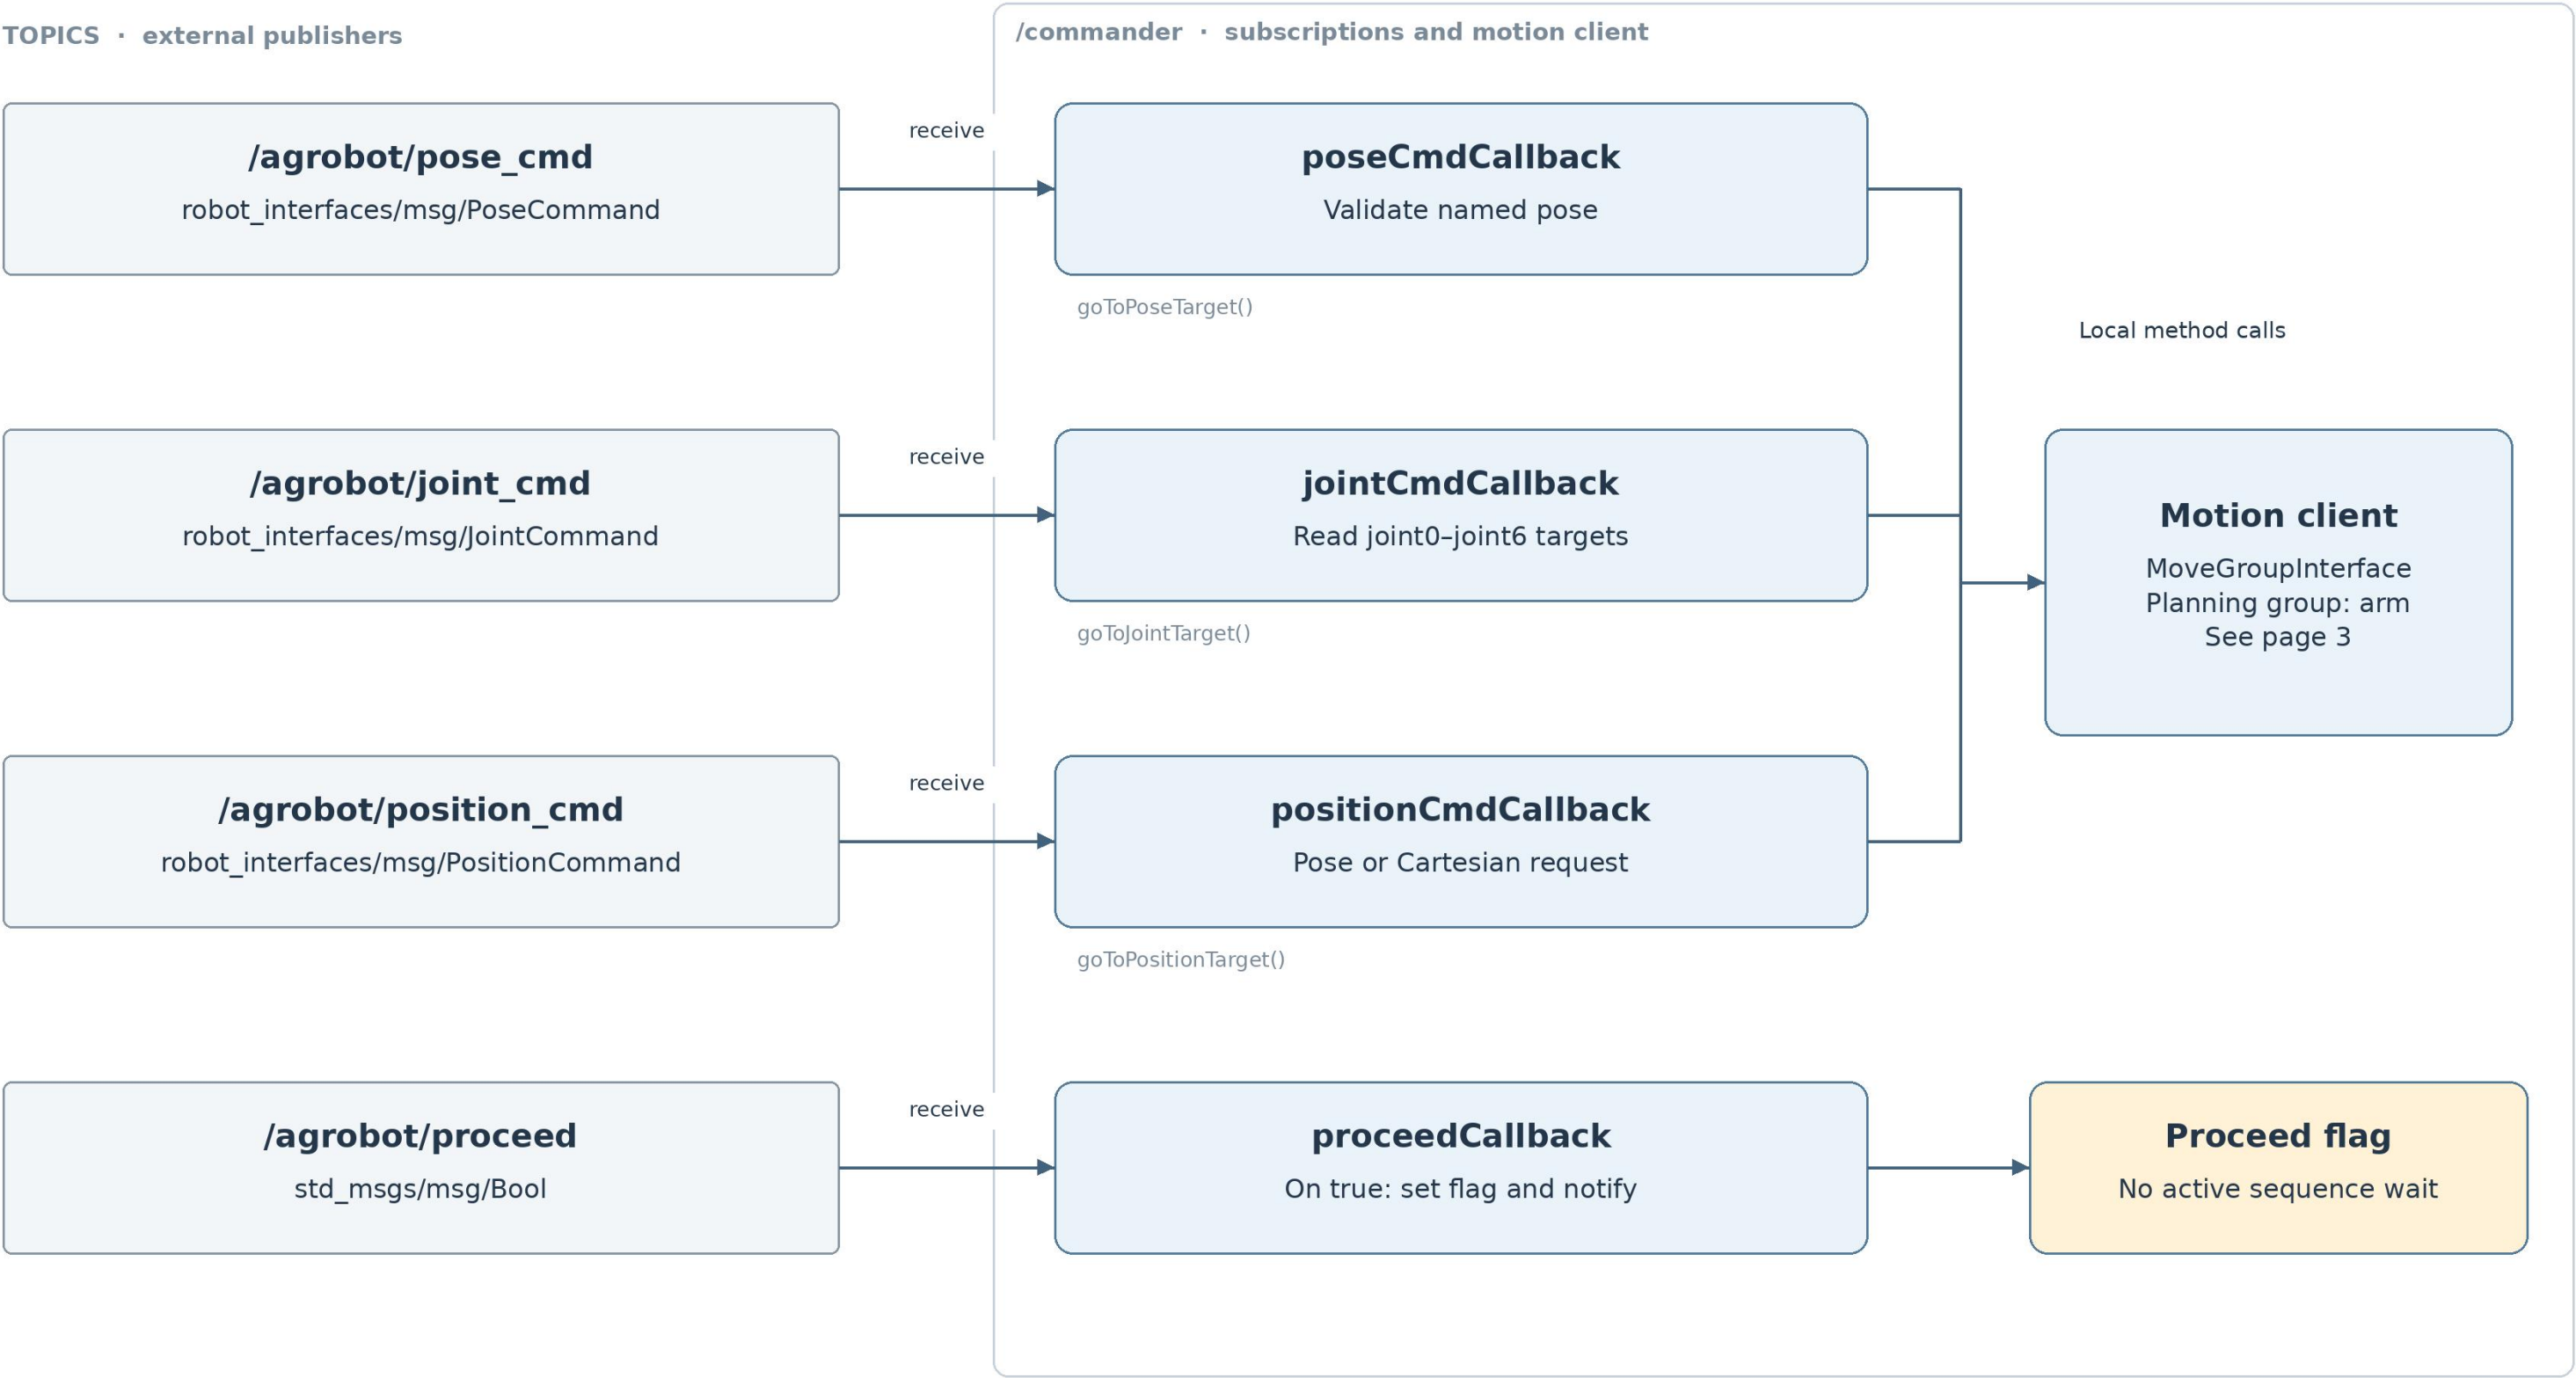

`waitForProceed()` exists, but `executeSequence()` never calls it.


Source evidence

Agrobot/src/robot_commander/src/commander.cpp:35–59 — endpoint registration; :158–190 — subscription callbacks.
Same file:68–131 — target helpers; :237–246,277–317 — unused wait helper and active pick sequence.
Agrobot/src/robot_interfaces/msg/{PoseCommand,JointCommand,PositionCommand}.msg — message definitions.
Agrobot/src/robot_commander/launch/commander.launch.py:8–12 — executable and MoveIt parameters; commander.cpp:347 — node name.

Level 2 — /commander pick action

robot_commander / commander · ROS node /commander
Action server callbacks and per-goal worker · motion steps remain collapsed

Blue: node internals Gray: ROS interfaces

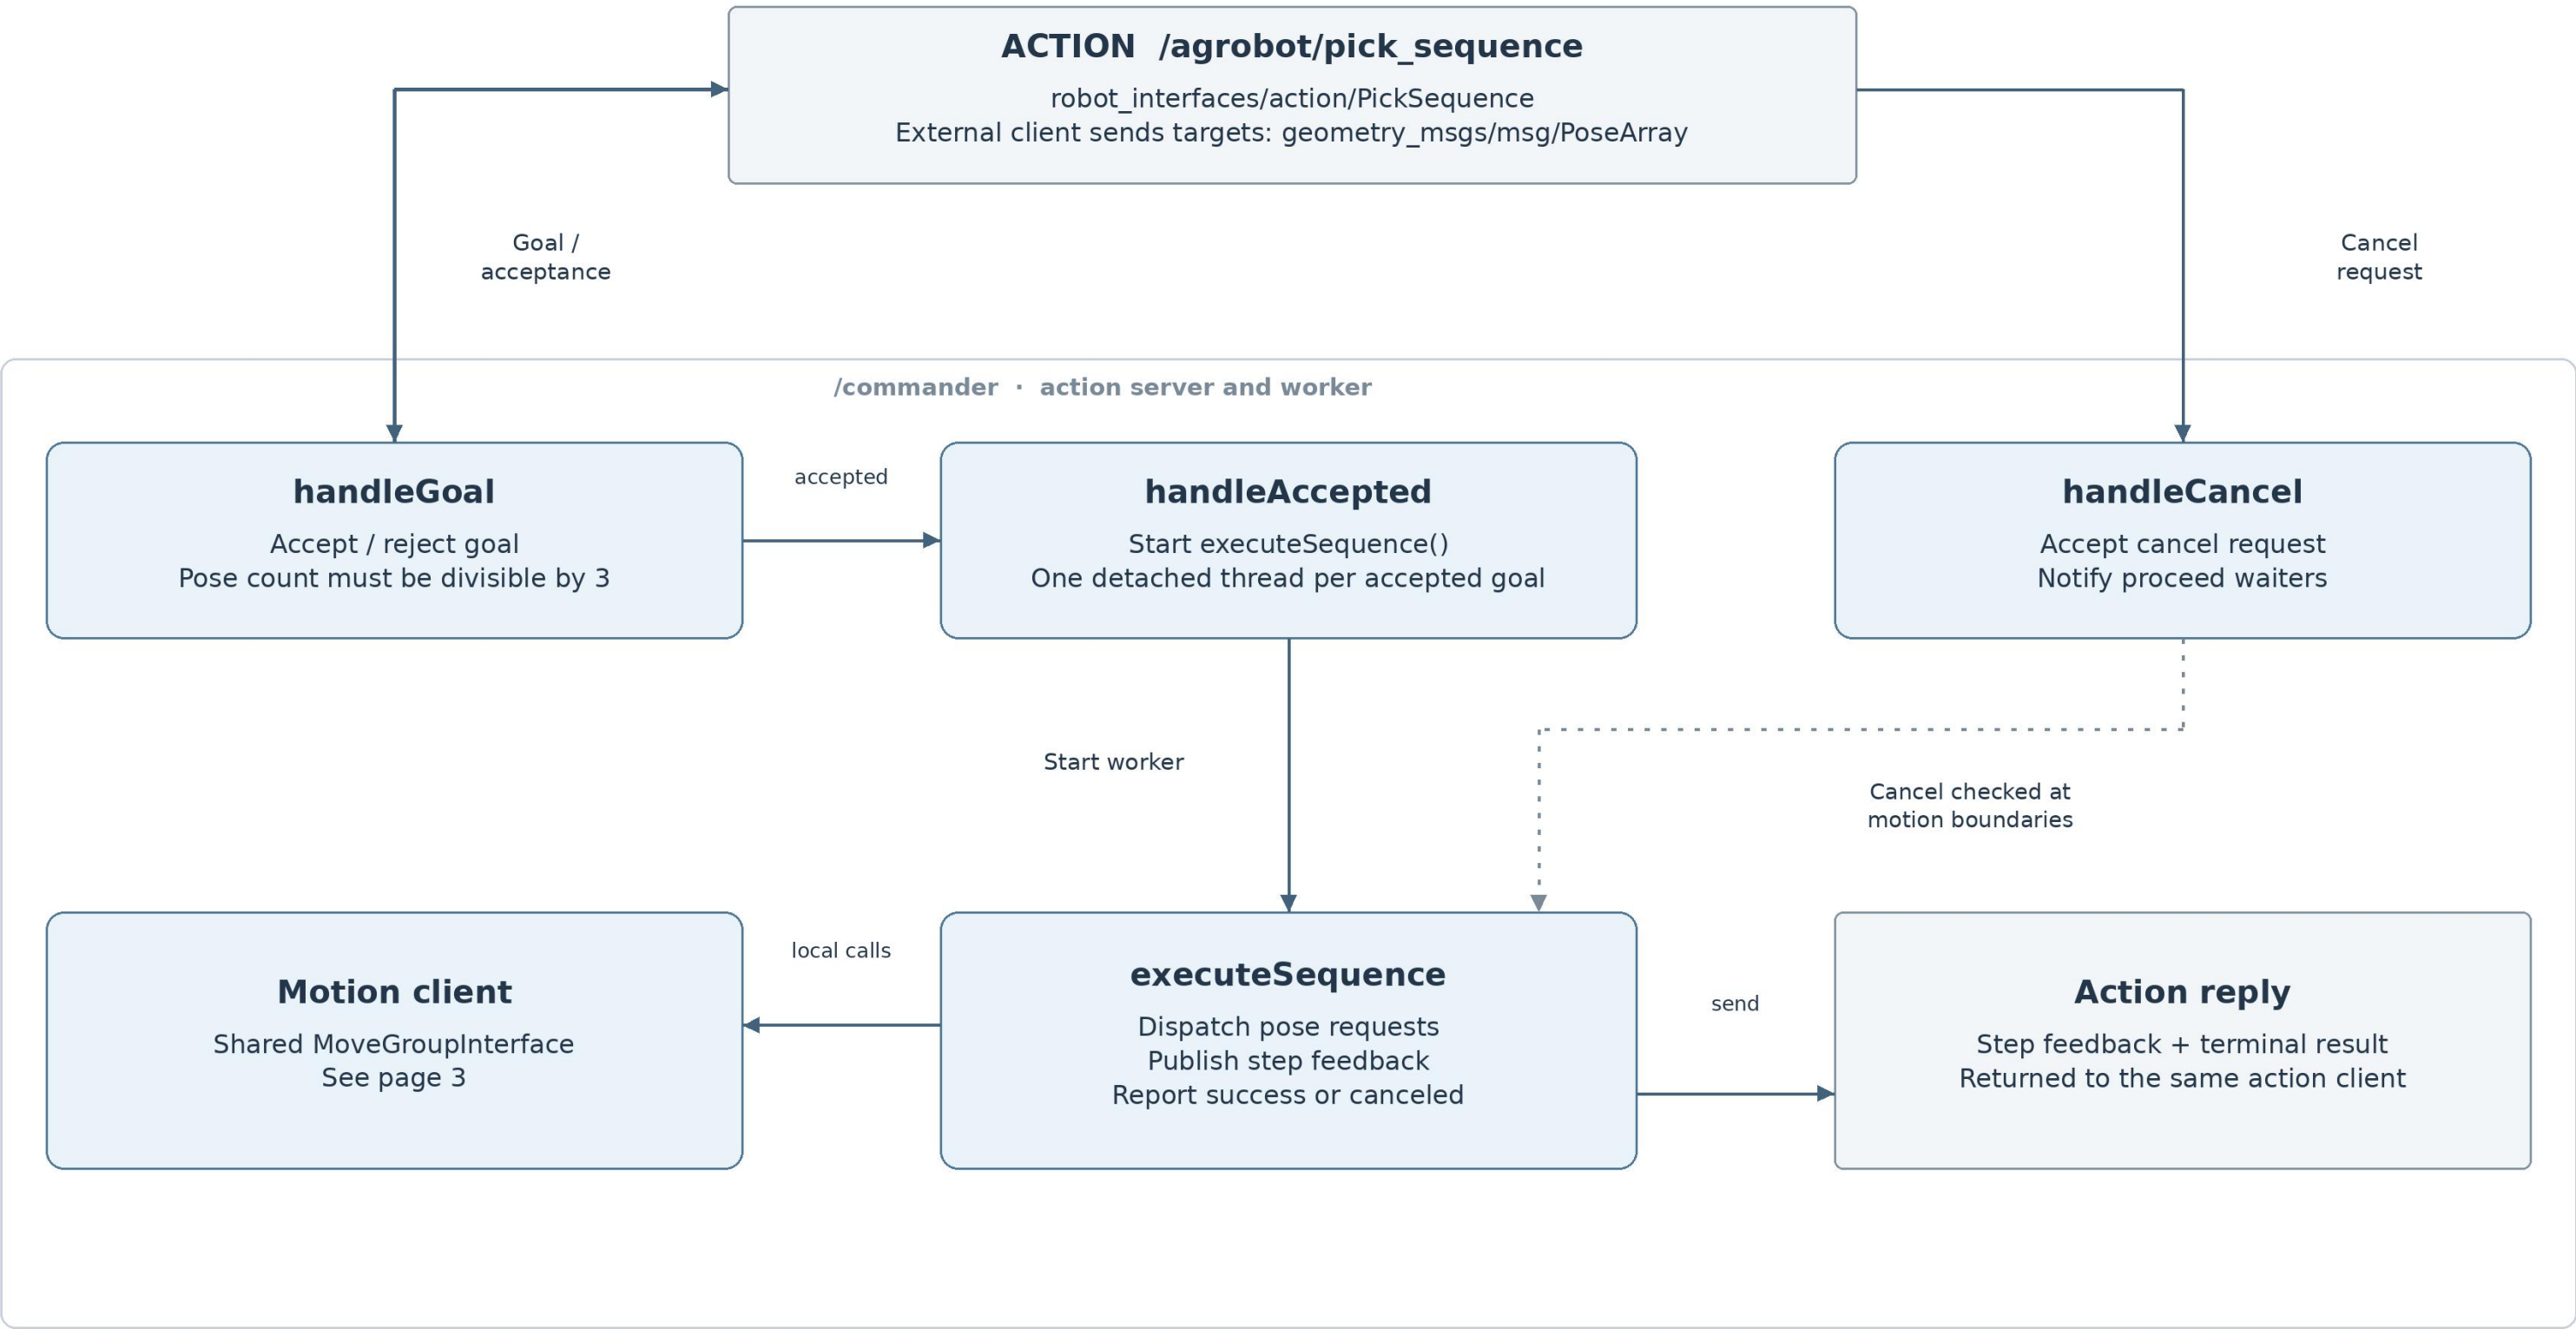


Reported success does not verify MoveIt execution results. Cancellation is not forwarded to MoveIt.
No /agrobot/pick_targets subscriber or topic-to-action adapter is implemented here.

Source evidence
Agrobot/src/robot_commander/src/commander.cpp:53-59 — action registration; :196-222 — goal, cancel and accepted callbacks.
Same file:228-234,249-317 — feedback, motion dispatch, cancellation checks and terminal result.
Same file:324-335 — planning result checked; execute() result discarded. No MoveGroupInterface::stop() call.
Agrobot/src/robot_interfaces/action/PickSequence.action:1-12 — goal, result and feedback schema.

Level 2 — /commander MoveIt connections

robot_commander / commander · ROS node /commander
MoveGroupInterface is a library client inside /commander; /move_group is a separate ROS node

Blue: node internals Gray: ROS interfaces

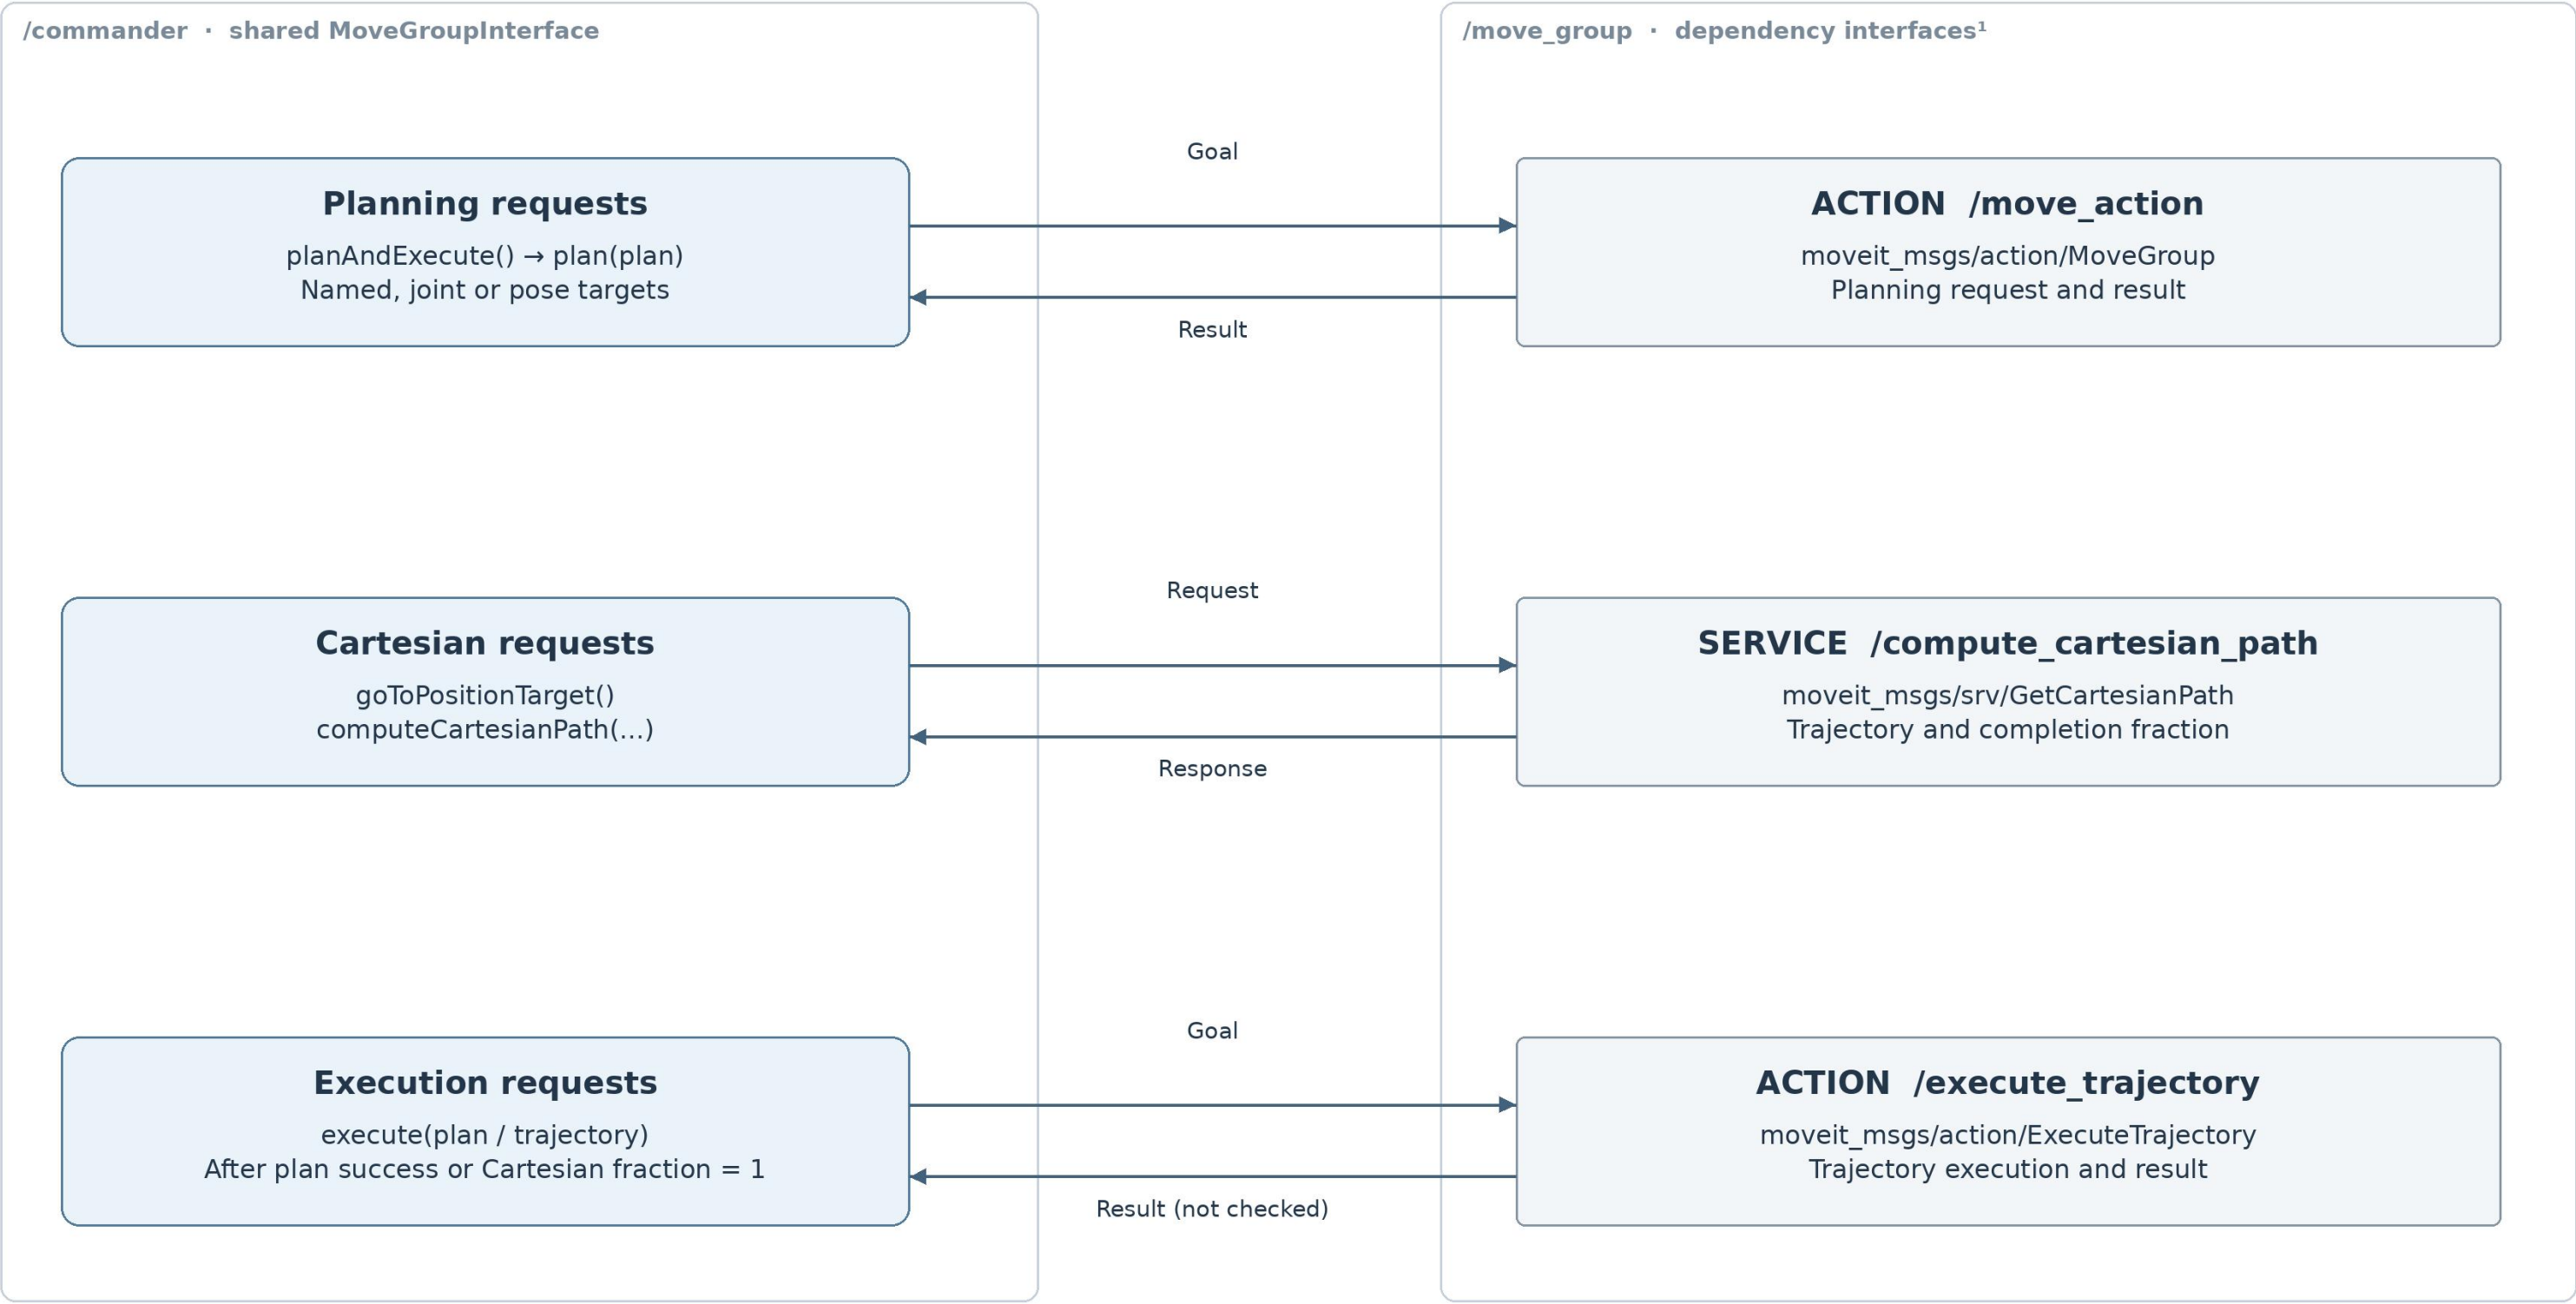

Motion can originate in topic callbacks or pick-action workers; they share the same client object.

¹ Endpoint names are installed MoveIt defaults, not runtime observations. No timers or application service server are created here.

Source evidence
Agrobot/src/robot_commander/src/commander.cpp:39–42 — client and planning group; :68–131,324–335 — planning and execution APIs.
Same file:219–222,347–350 — detached action worker and rclcpp::spin(node). Callback internals are outside this Level 2 view.
/opt/ros/jazzy/include/moveit_ros_move_group/moveit/move_group/capability_names.hpp:45–58 — default endpoint names.
/opt/ros/jazzy/include/moveit_ros_planning_interface/moveit/move_group_interface/move_group_interface.hpp — dependency client API.