Coding Workshop
(This document is work in progress)
Last edit: 19. October, 2026

Philipp Koller, Stand: 19. Oktober 2026

Coding + Type Handout

Checklist 3
Project Setup 4
Get Variable Font Info 5
Variable 5
Font 5
Write HTML Code (index.html) 6
Open your website in the browser 8
Write CSS Code (style.css) 9
Write JS Code (script.js) 10

Philipp Koller, Stand: 19. Oktober 2026

Checklist

- Keep files clean; pay attention to spaces & indents!
- Make sure all files are saved
  before checking browser and refresh!
- Check console! You might find an error that helps!
  Open Context Menu: Right click anywhere on the page
  Choose inspect (usually at the bottom of context menu)

Project Setup

Step by step guide

Create a Folder in Finder
(choose a good place)


1




Workshop

2


Drag Folder onto VSC Icon
Visual Code Studio Icon in Docs (bottom Bar)



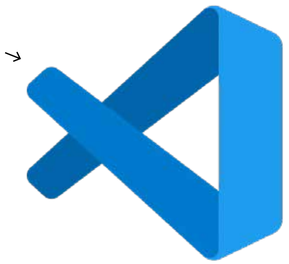

3

Create this files with right click > New File...
– index.html
– style.css

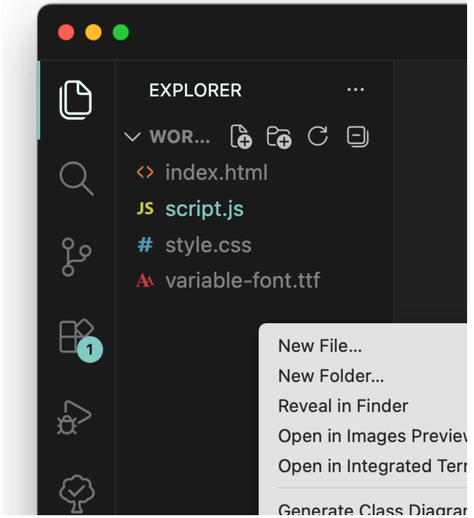

4




Start HTML Code:
Type html on line 1
> in the pop-up
> select html:5
> hit enter

File Structure

```
workshop
  ├─index.html
  ├─style.css
  ├─script.js
  └─RobotoFlex.ttf
```

Get Variable Font Info

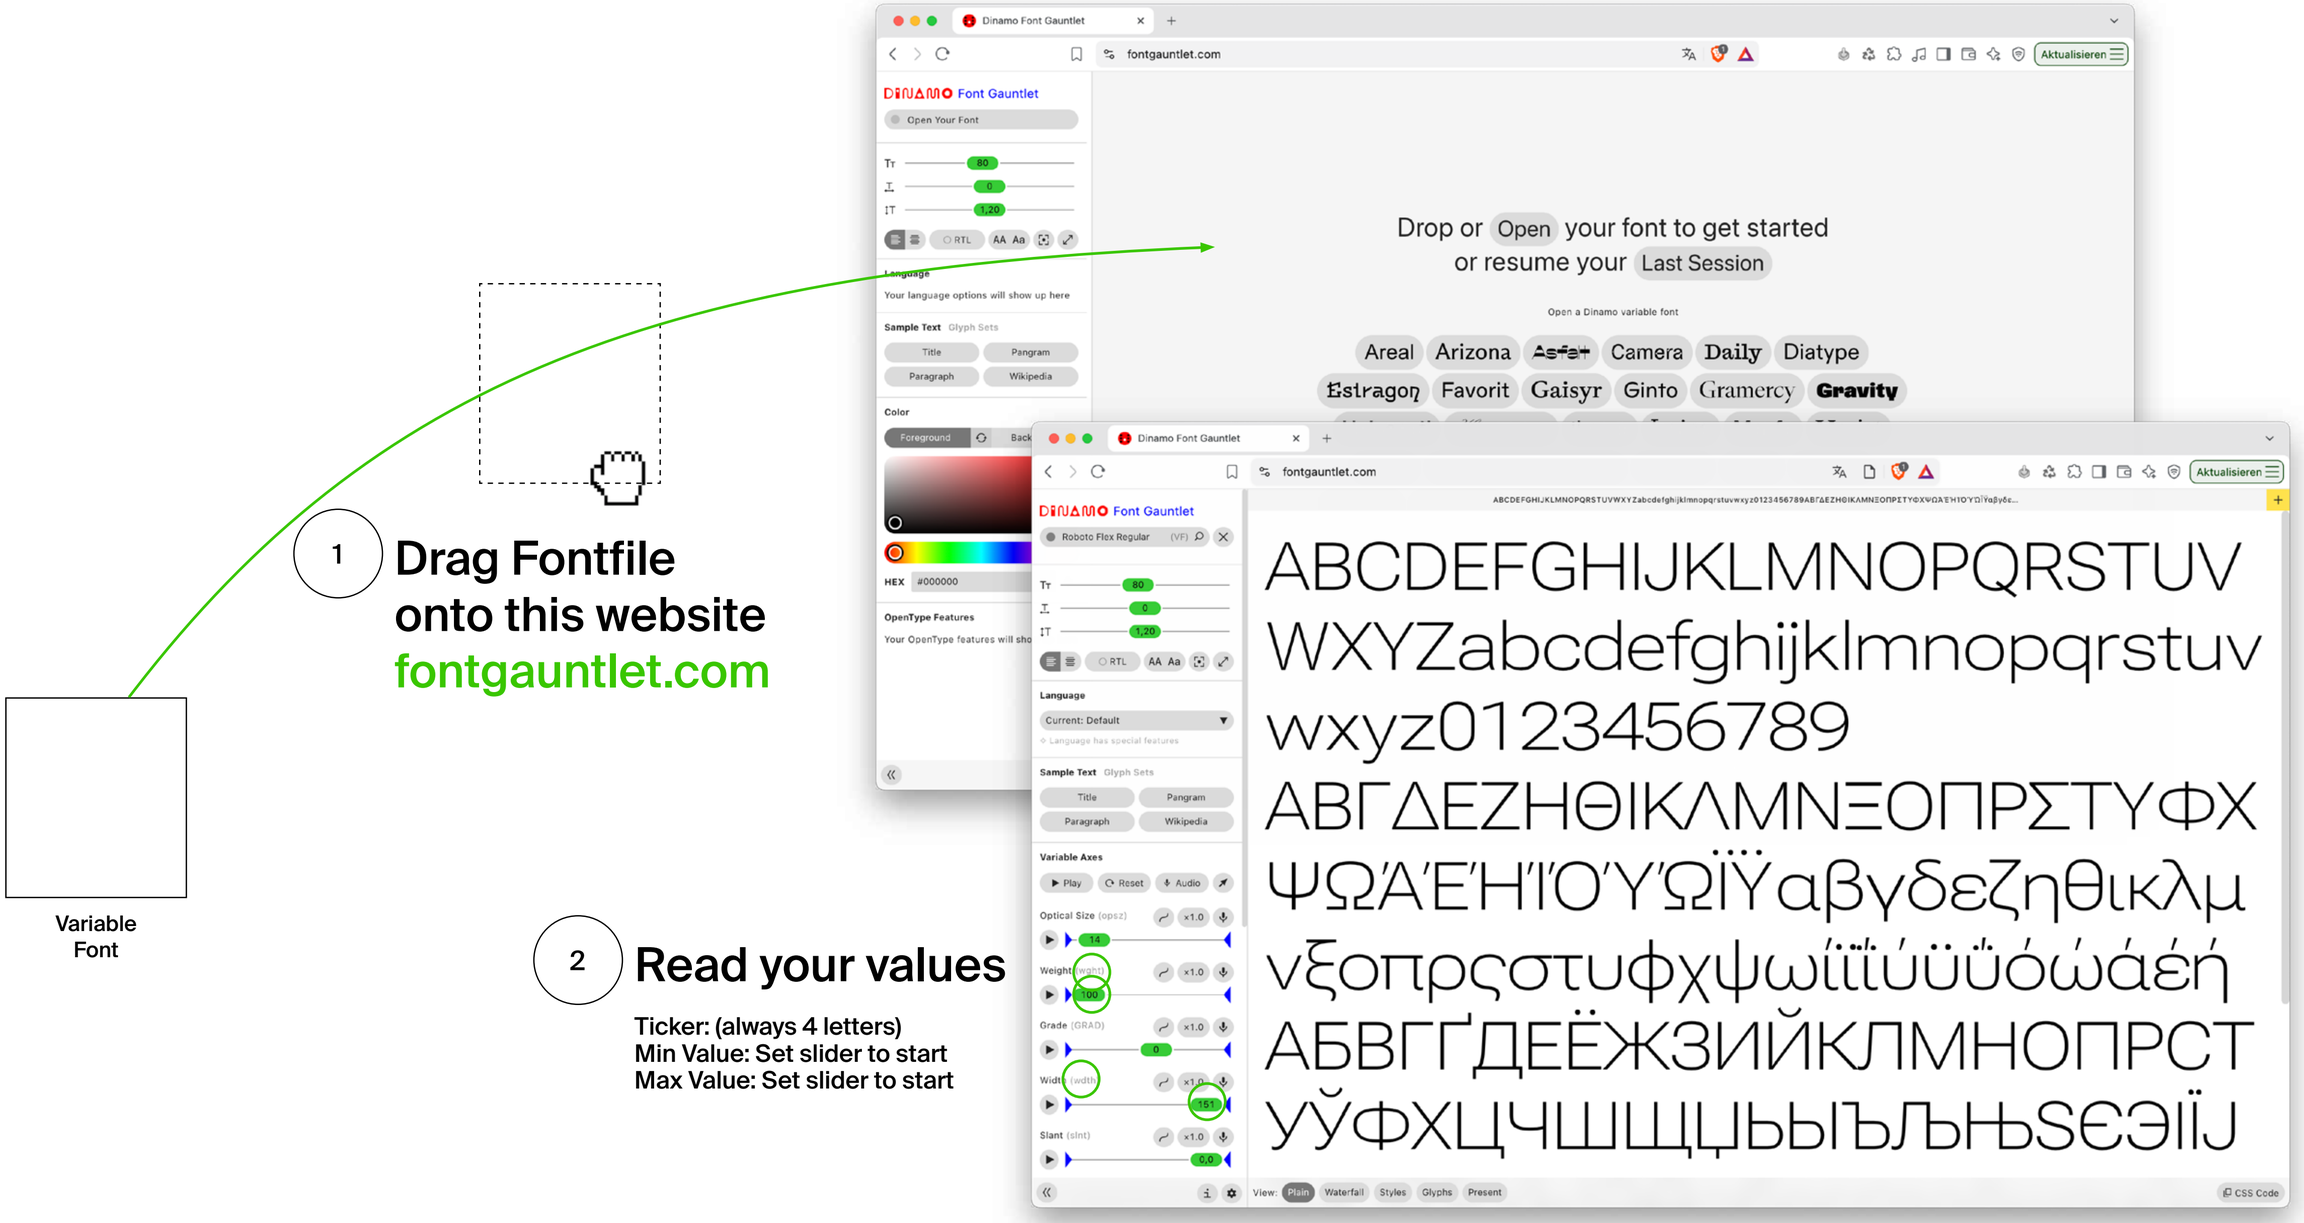

Variable Font

1 **Drag Fontfile onto this website fontgauntlet.com**


2 **Read your values**

Ticker: (always 4 letters)
Min Value: Set slider to start
Max Value: Set slider to start

Philipp Koller, Stand: 19. Oktober 2026

Write HTML Code (index.html)

Step 1

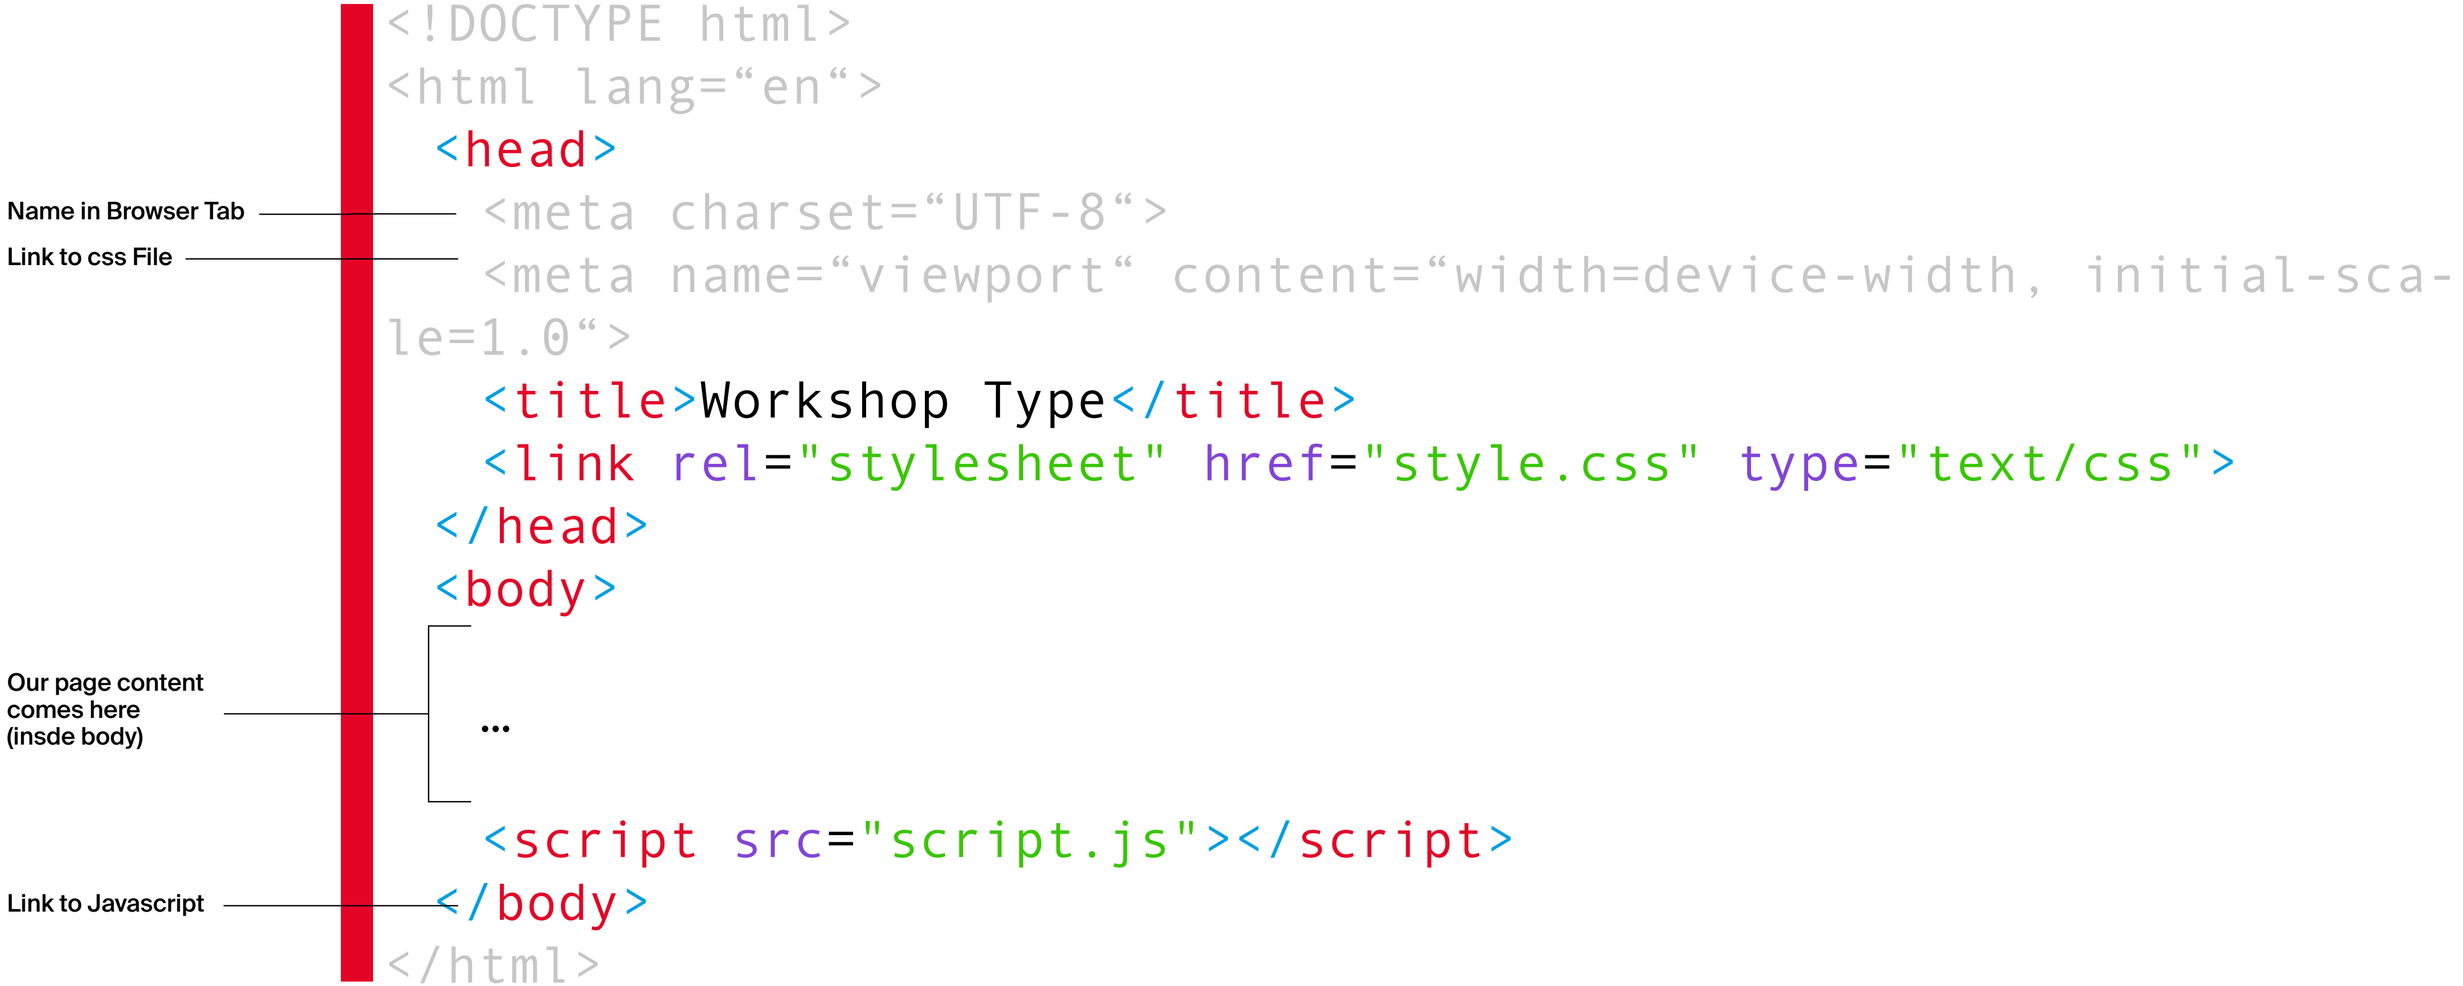

Write HTML Code (index.html)

Step 2


```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Workshop Type</title>
    <link rel="stylesheet" href="style.css" type="text/css">
  </head>
  <body>
    <div id="container">
      Hello Variable
    </div>
    <div id="controls">
      <label>
        Font Size
        <input id="fontSize" type="range" min="4" max="100"/>
      </label>
      <label>
        Font Weight
        <input id="fontWeight" type="range" min="100" max="1000" />
      </label>
      <label>
        Font Width
        <input id="fontWidth" type="range" min="25" max="151" />
      </label>
    </div>
    <script src="script.js"></script>
  </body>
</html>
```

Control to change font size and variable settings


Check values from your font on font gauntlet

Open your website in the browser

Drag index.html on to your browser icon in the docs
Visual Code Studio Icon in Docs (bottom Bar)

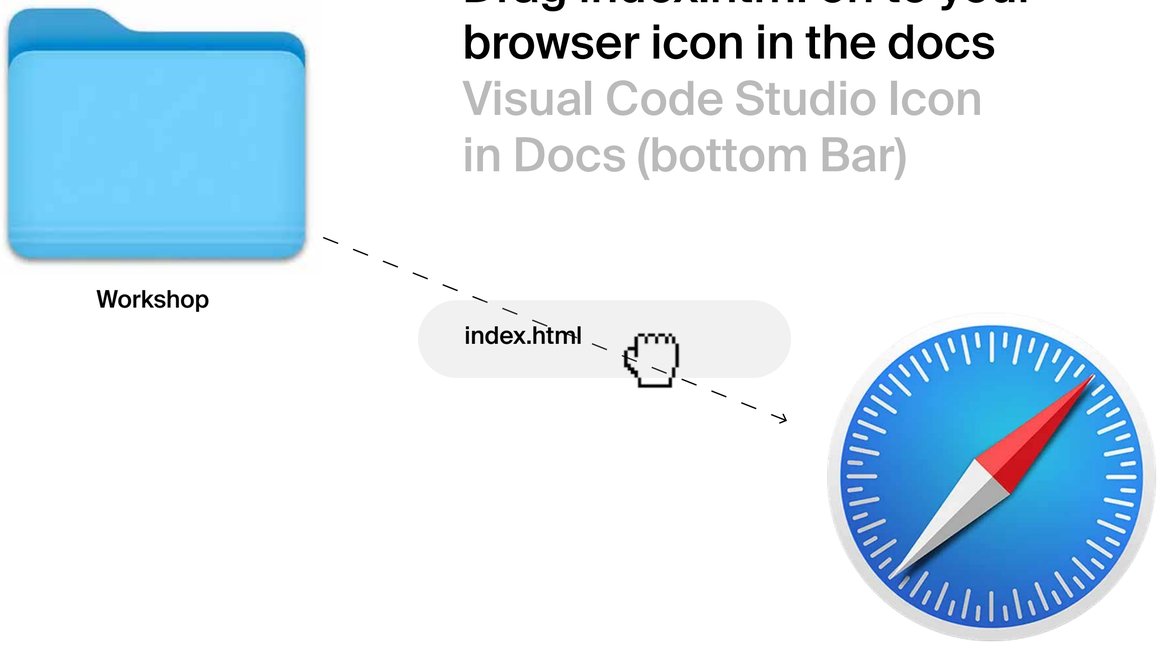

Should look like this:

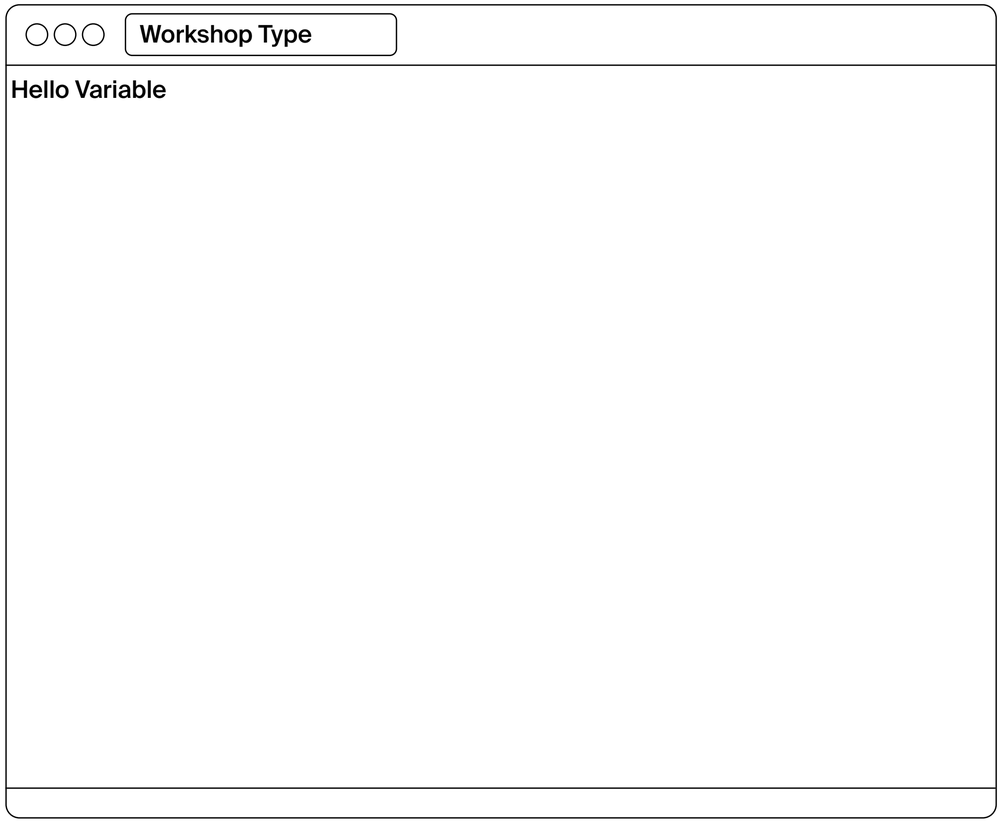

Write CSS Code (style.css)

Import Font

Overwrite
Browser defaults

Variable
Font
Preview

Font
Settings

Fill screen
Size

Center
Word on
screen

```css
@font-face {
    font-family: "VariableFont";
    src: url(variable-font.ttf);
}

*{
    margin: 0;
    padding: 0;
}

#container{
    font-family: "VariableFont";
    font-size: 10vw;
    font-variation-settings: "wght" 100, "wdth" 51;
    width: 100vw;
    height: 100vh;
    display: flex;
    justify-content: center;
    align-items: center;
}
```

Write JS Code (script.js)

Change
Font SIze

Change two
variable axis
in parallel

```
const container = document.getElementById("container")
const fontSize = document.getElementById("fontSize")

fontSize.addEventListener("input", (e) => {
  const value = e.currentTarget.value
  container.style.fontSize = value + "px"
})

let wght = 200
let wdth = 51
const fontWeight = document.getElementById("fontWeight")

fontWeight.addEventListener("input", (e) => {
  wght = e.currentTarget.value
  const fontVariationSettings = '"wght" ' + wght + ', "wdth" ' + wdth
  container.style.fontVariationSettings = fontVariationSettings
})

const fontWidth = document.getElementById("fontWidth")

fontWidth.addEventListener("input", (e) => {
    wdth = e.currentTarget.value
    const fontVariationSettings = '"wght" ' + wght + ', "wdth" ' + wdth
    container.style.fontVariationSettings = fontVariationSettings
})
```

Check values
from your font on
font gauntlet