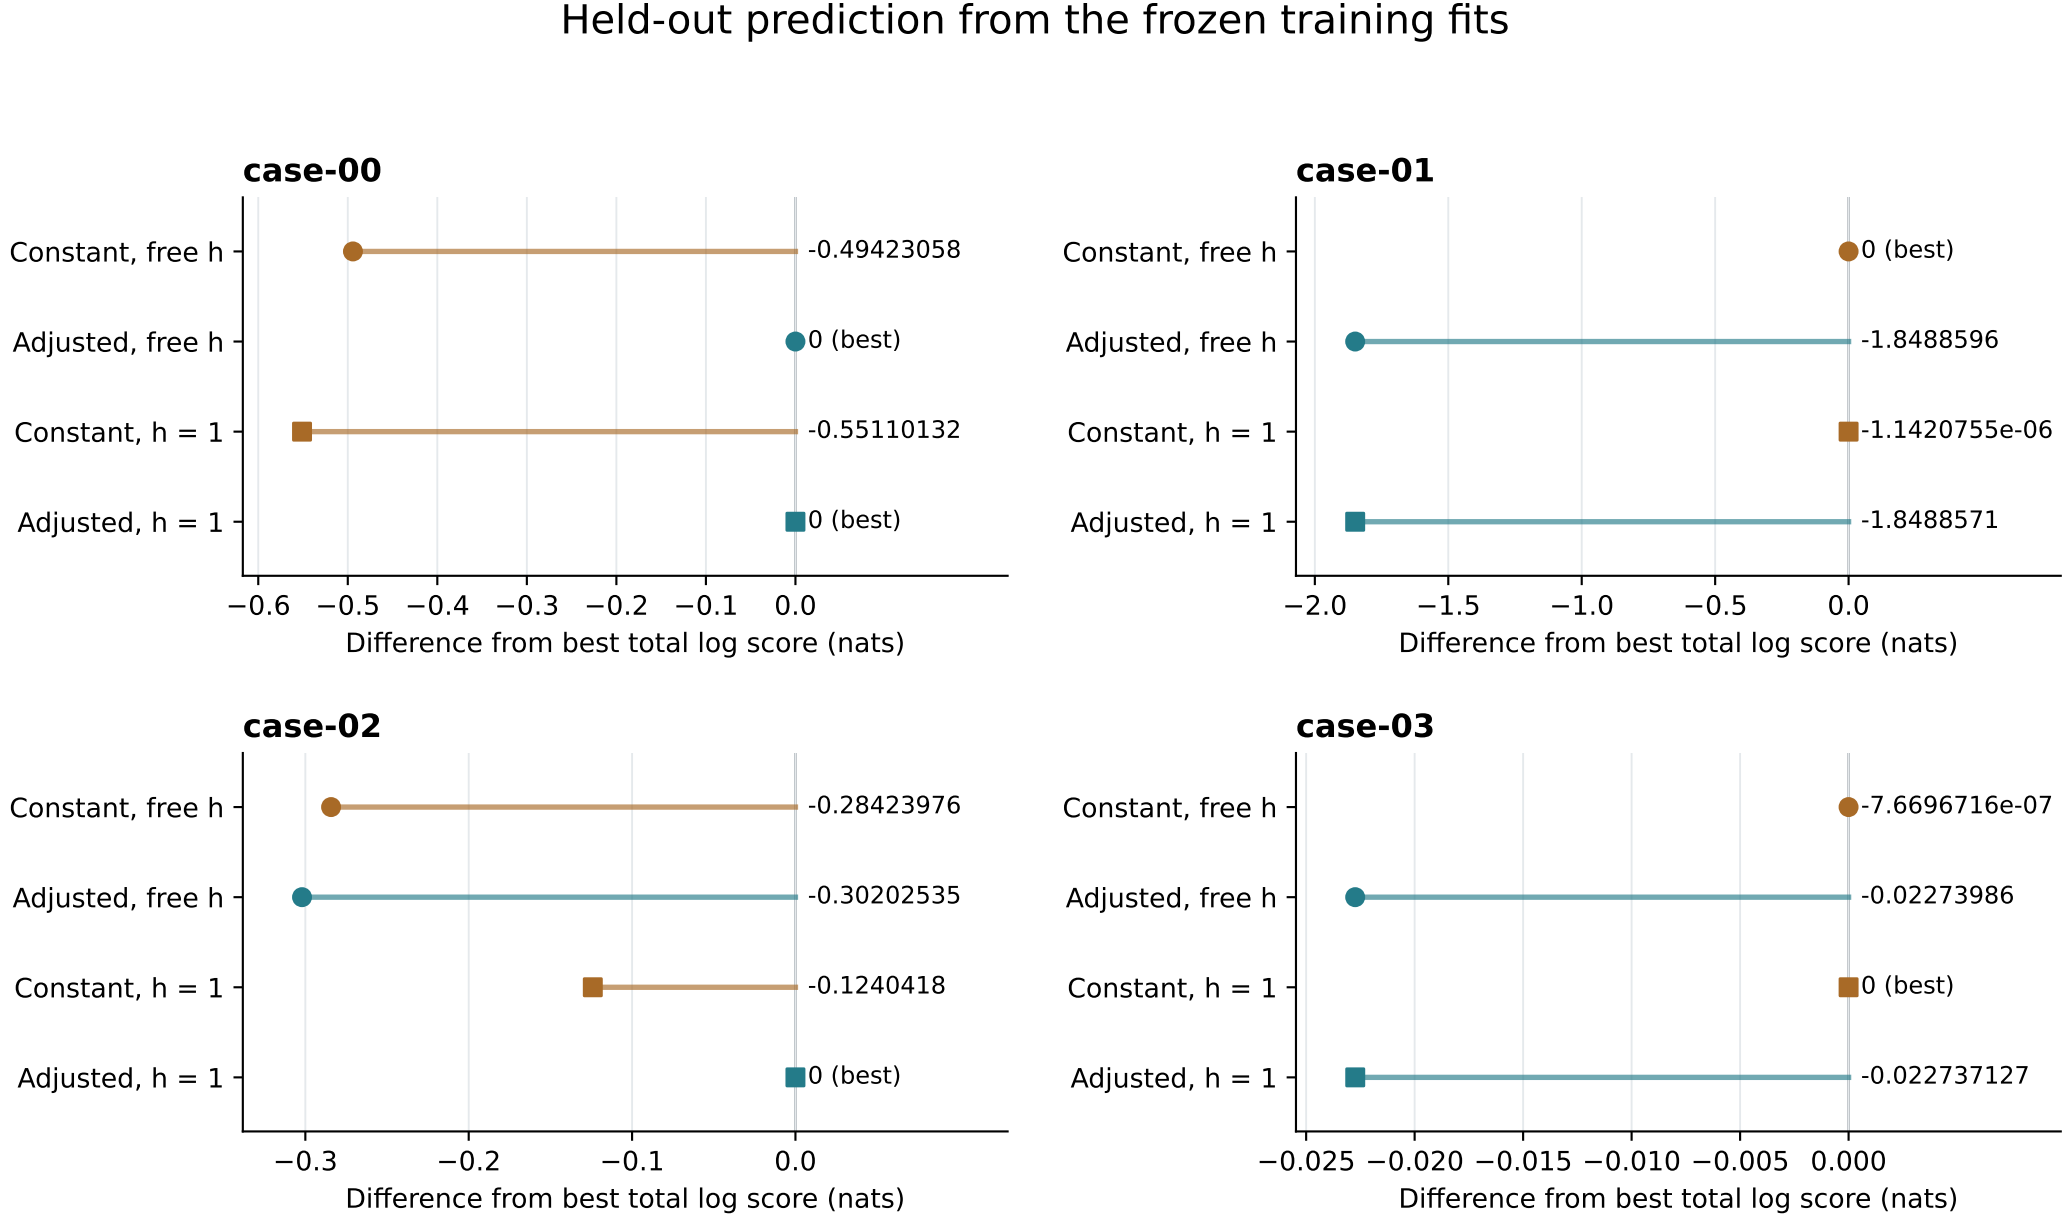
Held-out prediction from the frozen training fits
case-00
Constant, free h
Adjusted, free h
Constant, h = 1
Adjusted, h = 1
-0.49423058
0 (best)
-0.55110132
0 (best)
−0.6 −0.5 −0.4 −0.3 −0.2 −0.1 0.0
Difference from best total log score (nats)
case-01
Constant, free h
Adjusted, free h
Constant, h = 1
Adjusted, h = 1
0 (best)
-1.8488596
-1.1420755e-06
-1.8488571
−2.0 −1.5 −1.0 −0.5 0.0
Difference from best total log score (nats)
case-02
Constant, free h
Adjusted, free h
Constant, h = 1
Adjusted, h = 1
-0.28423976
-0.30202535
-0.1240418
0 (best)
−0.3 −0.2 −0.1 0.0
Difference from best total log score (nats)
case-03
Constant, free h
Adjusted, free h
Constant, h = 1
Adjusted, h = 1
-7.6696716e-07
-0.02273986
0 (best)
-0.022737127
−0.025 −0.020 −0.015 −0.010 −0.005 0.000
Difference from best total log score (nats)
40 sites in eight reserved clusters per case. Panel scales differ. Labels retain small score differences.
The same case-level spatial process links training and holdout; no independent-site uncertainty interval is implied.