

SCORE: A Framework for Synthesizing Complete, Owned, Responsive Environments

J.P. Kardolus, Babon Innovations B.V., Utrecht, The Netherlands

Working draft, 8 October 2026

Abstract

World models and one-shot 3D generators produce a convincing place from a sentence or a picture, but not a world a creator can build on: a stream of frames, or one fused scene without separate objects, collision or clear rights. SCORE is a world generation framework that builds the whole world instead. A creator picks references, a concept and a style; coding agents and open models turn those picks, offline and in batches, through stages with explicit and checkable outputs, into one canonical scene that engines and simulators load and that keeps the creator’s edits across regeneration. Because every stage’s output is kept, the work is retraceable: the creator can see which stage limited a result, rerun or fix just that stage, and regenerate from there. Four mechanisms make the output coherent and cheap to get right: deterministic checks before every paid step, a parts check that decides between code and generation with one model per real-world object, a shared rule-based surface library that keeps shape and surface apart, and review tools that put every stage’s output in front of the creator, who decides at a few fixed points. We apply the same route to four worlds of different kinds.

Gap: Figure 1, teaser. Four worlds made with SCORE (the game world of 2099, a stylised underwater world, a simulation world for robots, a third-person fantasy world), each as its picked concept beside the finished world in its engine. Waits on the four worlds being finished and accepted by their creators.

1 Introduction

Interactive 3D worlds are the material of games, film previsualisation and embodied AI, where agents are trained and tested in simulators [1]. Building one is still expensive: every object must be modelled, surfaced, placed, given collision and behaviour, and kept in one style, and the world must remain editable as the project changes. Generative models promise to take over much of this work, and two lines of research pursue that promise by generating the world itself.

Learned world models generate it as frames. Genie learns an interactive environment from video [2], and Genie 3 renders a world a person can move through in real time, with a constrained range of actions and minutes of continuous interaction among its stated limits [3]; what it produces cannot be opened in an engine or an editor. 3D world generators produce geometry instead. WorldGen turns a text prompt into a traversable, decomposed scene for standard game engines [4], but most such outputs are “static monolithic assets with limited editability and physical interaction” [5], which WorldAct and WorldSculpt address by recovering separate objects after the fact [5, 6]. In both lines the generated result is the end product: when part of it is wrong, the creator can regenerate or repair the whole, but cannot see which step limited it or fix that step alone.

A third line keeps the world explicit. Infinigen and Infinigen Indoors build every asset from procedural rules, with materials as generators of their own, which yields real geometry and full

control, but only the content those rules describe [7, 8]. Holodeck has a language model write layout constraints that a solver satisfies over retrieved assets [1], and SceneCraft, recursive code world models, WorldClaw and AutoUE let agents write scenes or whole games as programs [9–12]. LEGO-Anything shows what such agents need: rebuilding a scene from one picture, coding agents start weakly, regress while editing and judge their own geometry unreliably, and grounded tools rather than further training close much of that gap [13]. These systems rebuild existing scenes or draw on fixed asset libraries, and none keeps one style across objects made by different models, a problem the field names as open [14, 15] and that Hunyuan3D Studio addresses only at the input picture [16].

SCORE joins the two approaches: generative models make the content, while the world itself is built explicitly, offline and in batches, into one scene the creator owns. Its input is a creator’s picks (references, a concept, a style), and its output is a world that engines and simulators load. In between, coding agents and open models work through fixed stages, from a dimensioned plan and an inventory of every object to one model per object, surfaces from a shared rule-based library, and sound. Every stage’s output is kept, so the work is retraceable: when a result falls short, the creator can see whether the close-up, the 3D shape or the surface limited it, rerun or fix that stage alone, and regenerate everything downstream, with manual fixes held in edit layers that survive regeneration. Deterministic checks run before every paid stage, so faults are caught where they are cheapest, and every model in the route allows commercial use of its output.

This paper makes three contributions:

- **The SCORE framework:** staged, cached generation from a creator’s picks into one canonical scene with a generated base layer and the creator’s edit layers (Section 2).
- **Four mechanisms** that keep generated worlds coherent and cheap to get right: checks before spending, a parts check with one model per real-world object, shape and surface kept apart, and review tools for the creator (Section 3).
- **Evidence across four worlds of different kinds**, with time, cost and faults caught before spending at every stage, and an evaluation on a shared benchmark (Sections 4 and 5).

2 The SCORE framework

SCORE’s input is the creator’s picks: references, a concept picture and a style for each place. Its output is a world an engine loads. Between them lie stages whose outputs can be inspected, cached and checked. A world is generated once, offline, in cloud batches; nothing is generated while the world is played, and one world spans the scales its story needs: the game world of 2099 holds rooms, the ground of the Moon and the ground of Mars. Scales far from those, such as galaxies or cells, make worlds of their own, each with its own solvers.

The stages are concept, dimensioned plan, inventory, close-ups, shape, surfaces, sound, assembly and review. Each writes an explicit output: a plan in metres, an inventory row for every object with its parent, one clean picture per object, one model per object, baked surfaces, sounds. Each output is cached, so changing one pick reruns only the stages downstream of it.

Retraceable stages. Every stage’s output is kept and can be inspected, so the creator can move back and forth between stages and see which one limited a result: a bad close-up, a bad 3D shape or a bad surface. That stage alone can be rerun, or fixed by hand at that stage; the stages downstream then rerun from there, and manual fixes are kept, because they live in the scene’s edit layers.

All stages write one canonical scene: an OpenUSD stage [17] with glTF geometry [18]. Every object carries its kind, place in metres, collision, the library surface of each part, its sound, and

tags for what a person can do with it, such as door, seat, terminal or airlock. The framework owns a generated base layer and may rewrite it; the creator’s changes live in edit layers above it, so regenerating replaces the base and keeps every edit. Engines and simulators load the same stage through thin adapters.

Gap: Figure 2, the framework. The stages with their cached outputs, the scene’s base and edit layers, and the engine adapters. To be drawn with the scene export, which is being built in the framework repository.

3 Key mechanisms

3.1 Checks before spending

A fault costs nothing in the plan, cents at a picture, tens of cents and an hour at a 3D model, and an evening of the creator’s time once a place is built and played. Every paid stage is therefore gated by deterministic checks on real geometry, never by an agent’s judgement, and a failure sends work back one stage, never forward with a flag. The checks cover the room (leaks, blocked openings, pieces off their surface, doors that do not separate their sides), the inventory against the concept, each model (closed, thick enough, straight), the surfaces against the palette and budget, and the assembled scene, including any visible mesh the route did not make (Appendix D).

3.2 Code or pipeline: the parts check

Picture-to-3D models build chunky solids well and flat panels, thin beams and openings badly; agent-written code builders are exact, light and straight but show only the parts the agent wrote. SCORE decides per object kind with the **parts check**: a kind is built in code only when its code build shows every part its clean close-up shows; otherwise it is generated from the close-up with Pixa3D [19] and made solid. Composites are split before anything is made, one model per real-world object, so a console is a desk carrying its monitors and keyboards rather than one fused mesh.

3.3 Shape and surface apart

Models and code give shape only. Every part takes one surface from a shared library of ProcFunc functions [20] built on Infinigen’s shaders [7], coloured from the place’s palette, with wear, dirt and seed as named settings. A room has one wear setting, applied from causes such as edges and foot traffic, so every piece in it agrees on what worn steel looks like. Parts of a generated model come from PartCrafter [21]; each part takes one library surface, and the picture only chooses which. Sound is made the same way: surfaces carry their footsteps and impacts, rooms their echo, objects their own sound, generated in one batch by MOSS-SoundEffect [22] and chosen against its prompt by CLAP [23] (Appendix F). The surface and sound libraries grow with each world and are reused in the next.

3.4 Review tools for the creator

The creator picks references, concept and style, and reviews each place; nothing else waits on a person. SCORE supplies the review tools: pages that show each stage’s outputs side by side, before and after shots from the same cameras, in-engine walkthroughs, and the results of every check. How the creator forms a judgement with them is the creator’s own. The creator’s reviews are what steered the mechanisms above (Appendix C).

Gap: Figure 3, one place through the stages. One place from concept to finished world, with the output of each stage and the checks that fired on it. Waits on a place built and accepted on the final route.

4 Results across worlds

We build four worlds with the same route: the game world of 2099 (a Moon base, its surroundings, a Mars camp and a prologue on Earth), a stylised underwater world, a simulation world for robots and a third-person fantasy world.

Gap: Table 1, results per world and stage. For each world: places, wall time, cost in GPU time and picture calls, models built in code and generated, and faults caught before spending at each stage against faults found after. Waits on world 1 being finished and reviewed by its creator (most places are built, none after its first room yet reviewed in play) and on worlds 2 to 4. Per-place records are in Appendix B.

Gap: Figure 4, one place per world. A representative place from each world beside its concept, from the concept’s own camera. Waits on the same worlds; all places are in Appendix A.

5 Evaluation

Gap: LEGO-Bench. Scores on LEGO-Bench [13], the benchmark of scenes rebuilt from pictures. Waits on the benchmark’s code release and on SCORE’s scene export with its Blender adapter.

Gap: ablations. The route with and without the optional world step (a walkable whole-room reference made from the concept), and with checks before spending switched off, on the same places: concept coverage, density of the built room, cost, faults after spending, and the creator’s review. Waits on the route running from the framework repository.

Gap: style coherence. A measure of whether a place keeps one style, from rendered frames (colour distance to the palette per kind of source, lightness spread, ink density), validated against the creator’s reviews. Designed, not built.

6 Limitations and outlook

Code builders are clean but need an agent to write one per kind of object, which does not scale as well as generation. A concept shows one side of a place, so built places come out sparser than their concepts; the concept-density check catches this but does not fix it, and the optional world step is meant to. Daily quotas on picture models, not compute cost, set the pace of a build. Next, the simulation world needs masses, friction and joints written into the scene for robots, and worlds at scales far from the human one, from galaxies to cells, need open solvers wrapped as stages of their own, with orbital dynamics through REBOUND [24] as the first.

References

- [1] Yue Yang, Fan-Yun Sun, Luca Weihs, Eli VanderBilt, Alvaro Herrasti, Winson Han, Jiajun Wu, Nick Haber, et al. Holodeck: Language guided generation of 3D embodied AI environments. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. arXiv:2312.09067.

- [2] Jake Bruce, Michael Dennis, Ashley Edwards, Jack Parker-Holder, et al. Genie: Generative interactive environments. *arXiv preprint arXiv:2402.15391*, 2024.
- [3] Jack Parker-Holder and Shlomi Fruchter. Genie 3: A new frontier for world models. Google DeepMind blog, August 2025. URL <https://deepmind.google/blog/genie-3-a-new-frontier-for-world-models/>. Vendor material.
- [4] Dilin Wang, Hyunyoung Jung, Tom Monnier, Kihyuk Sohn, et al. WorldGen: From text to traversable and interactive 3D worlds. *arXiv preprint arXiv:2511.16825*, 2025.
- [5] Jichen Hu, Jiawei Guo, Jiazhong Cen, Chen Yang, Sikuang Li, and Wei Shen. WorldAct: Activating monolithic 3D worlds into interactive-ready object-centric scenes. *arXiv preprint arXiv:2605.15843*, 2026.
- [6] Muyao Niu, Jixuan He, Ruihan Yu, Lian Fu, et al. WorldSculpt: Generating compositional worlds from grounded videos. *arXiv preprint arXiv:2609.05416*, 2026.
- [7] Alexander Raistrick, Lahav Lipson, Zeyu Ma, Lingjie Mei, Mingzhe Wang, Yiming Zuo, Karhan Kayan, Hongyu Wen, Beining Han, Yihan Wang, Alejandro Newell, Hei Law, Ankit Goyal, Kaiyu Yang, and Jia Deng. Infinite photorealistic worlds using procedural generation. *arXiv preprint arXiv:2306.09310*, 2023.
- [8] Alexander Raistrick, Lingjie Mei, Karhan Kayan, David Yan, Yiming Zuo, Beining Han, Hongyu Wen, Meenal Parakh, Stamatis Alexandropoulos, Lahav Lipson, Zeyu Ma, and Jia Deng. Infinigen Indoors: Photorealistic indoor scenes using procedural generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. arXiv:2406.11824.
- [9] Ziniu Hu, Ahmet Iscen, Aashi Jain, Thomas Kipf, et al. SceneCraft: An LLM agent for synthesizing 3D scene as Blender code. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2403.01248.
- [10] Zhiqi Li, Yuxuan Liao, and Bo Zhu. Recursive code world models: Building complex worlds through recursive scene programs. *arXiv preprint arXiv:2609.11499*, 2026.
- [11] Chunchao Guo, Jinpeng Li, Yang Li, and Zilong Huang. WorldClaw: Agentic 3D open-world generation at scale. *arXiv preprint arXiv:2608.05248*, 2026.
- [12] Lei Yin, Wentao Cheng, Zhida Qin, Tianyu Huang, et al. AutoUE: Automated generation of 3D games in Unreal Engine via multi-agent systems. *arXiv preprint arXiv:2603.07106*, 2026.
- [13] Xirui Li, Peng Shi, Mingwen Dong, Sheng Zhang, Zhuoyan Xu, Dongkyu Lee, Shuaichen Chang, Yi Xiang, Lin Pan, and Jiarong Jiang. LEGO-Anything: Coding agents for 3D scene reconstruction. *arXiv preprint arXiv:2609.36380*, 2026.
- [14] Jiafeng Wu, Zhuofan Lou, Jian Liu, Dazhao Du, Chunchao Guo, and Song Guo. From visual synthesis to interactive worlds: Toward production-ready 3D asset generation. *arXiv preprint arXiv:2604.23629*, 2026.
- [15] Zhifei Yang, Guangyao Zhai, Keyang Lu, YuYang Yin, Chao Zhang, Zhen Xiao, Jieyi Long, and Nassir Navab. FlowScene: Style-consistent indoor scene generation with multimodal graph rectified flow. *arXiv preprint arXiv:2603.19598*, 2026.

- [16] Biwen Lei, Yang Li, Xinhai Liu, et al. Hunyuan3D Studio: End-to-end AI pipeline for game-ready 3D asset generation. *arXiv preprint arXiv:2509.12815*, 2025.
- [17] Pixar Animation Studios and Alliance for OpenUSD. OpenUSD: Universal scene description, 2026. URL <https://openusd.org/>.
- [18] The Khronos Group. glTF 2.0 specification, 2021. URL <https://registry.khronos.org/glTF/specs/2.0/glTF-2.0.html>.
- [19] Dong-Yang Li, Wang Zhao, Yuxin Chen, Wenbo Hu, Meng-Hao Guo, Fang-Lue Zhang, Ying Shan, and Shi-Min Hu. Pixal3D: Pixel-aligned 3D generation from images. *arXiv preprint arXiv:2605.10922*, 2026.
- [20] Alexander Raistrick, Karhan Kayan, Jack Nugent, David Yan, Lingjie Mei, Meenal Parakh, Hongyu Wen, Dylan Li, Yiming Zuo, Erich Liang, and Jia Deng. ProcFunc: Function-oriented abstractions for procedural 3D generation in Python. *arXiv preprint arXiv:2604.26943*, 2026.
- [21] Yuchen Lin, Chenguo Lin, Panwang Pan, Honglei Yan, Yiqiang Feng, Yadong Mu, and Katerina Fragkiadaki. PartCrafter: Structured 3D mesh generation via compositional latent diffusion transformers. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. arXiv:2506.05573.
- [22] OpenMOSS-Team. MOSS-SoundEffect v2.0. Hugging Face, 2026. URL <https://huggingface.co/OpenMOSS-Team/MOSS-SoundEffect-v2.0>. Apache-2.0.
- [23] Yusong Wu, Ke Chen, Tianyu Zhang, et al. Large-scale contrastive language-audio pretraining with feature fusion and keyword-to-caption augmentation. *arXiv preprint arXiv:2211.06687*, 2022.
- [24] Hanno Rein and Shang-Fei Liu. REBOUND: An open-source multi-purpose N-body code for collisional dynamics. *Astronomy & Astrophysics*, 537:A128, 2012. arXiv:1110.4876.
- [25] Google. Gemini 3 Pro Image (“Nano Banana Pro”) through the Gemini API, 2026. URL <https://ai.google.dev/>. Paid service. Vendor material.
- [26] Oriane Siméoni, Huy V. Vo, Maximilian Seitzer, et al. DINOv3. *arXiv preprint arXiv:2508.10104*, 2025.
- [27] Lihe Yang, Bingyi Kang, Zilong Huang, et al. Depth Anything V2. *arXiv preprint arXiv:2406.09414*, 2024.
- [28] World Labs. Terms of Service, 2026. URL <https://docs.worldlabs.ai/terms-of-service>. Last updated 21 January 2026; accessed 2026-10-08. Vendor material.
- [29] Anthropic. Claude Code, 2026. URL <https://www.anthropic.com/claude-code>. Paid subscription. Vendor material.

Appendix

A Per-world demos

Gap. Every place of every world as its concept beside the finished build, plus links to demo videos and playable builds. Waits on the worlds.

B Detailed per-stage results

Gap. For every place: wall time, cost, models in code and generated, and each fault caught before or found after spending, by stage and check. World 1’s per-place records exist for 21 place runs but are not results until the world is finished and reviewed; worlds 2 to 4 are not started.

C Development history: the hub

The mechanisms of Section 3 came out of six rounds on one room, the central hub of the game 2099, on 6 and 7 October 2026, each answering the creator’s verdict on the last (Table C1). The first two rounds were decided by side-by-side comparison of the old and new route on the same cameras.

Table C1. The hub’s six rounds. Cost: rented GPU time (€) and picture calls (\$). Frame time: mean on an RTX 5080 at night, 1600×900.

Round	Change	Creator’s verdict	Cost	Frame time
1, two walls, A/B	surface library, routing by shape, room checks	preferred the new route (“Y looks much cleaner”)	€0.88	7.81 ms vs 7.53
2, two walls, A/B	71-variant library, shared texture sets, roof check	preferred the new route again	€1.70	8.05 ms vs 8.24
3, whole room	route end to end, 74 models	old models still loaded; labels and floor fittings wrong	€1.67	6.78 ms (old 9.22)
4, whole room	detail through the pipeline, picture colours kept	“pretty much all of this became messy”	€8.50, \$5.09	9.6 ms
5, eight pieces, A/B	shape only from the pipeline, library surfaces, parts check	new method preferred for door, notice board, porthole; three pieces still wrong	€0.21	not run
6, whole room	round 5 everywhere, one model per object, straightness check	“this looks amazing, I have no negative feedback”	€3.48, \$1.07	5.6 ms

Three findings shaped the method. Deterministic checks catch what agents miss: in round one, light leaking through walls and roof fell from 1.53 percent of 5,817 rays to zero and colour noise within surfaces from a median of 31.1 to 3.2 percent; but only walking the loaded room showed 26 old models still in it, which became the made-only check. Keeping each picture’s colours made every piece bring its own wear, so surfaces now come only from the library. Generated composites melted their parts together and generated boxes leaned (a locker by 13 degrees), which led to one

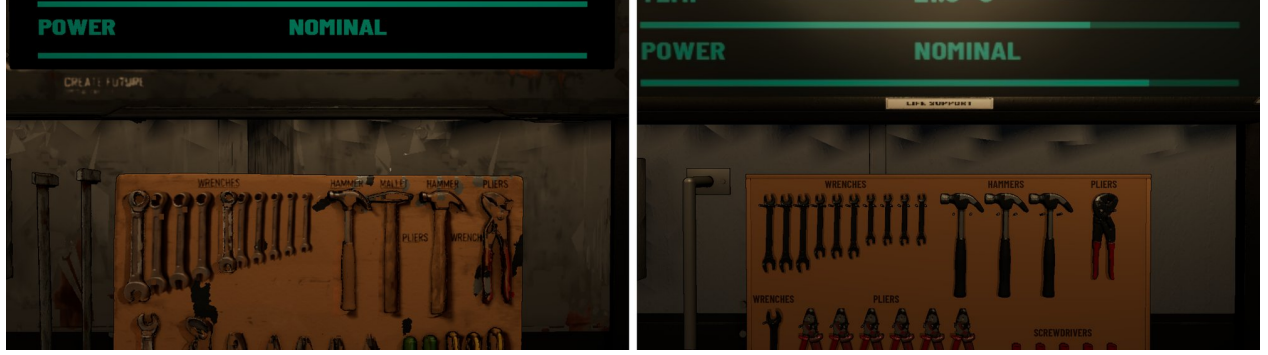


Figure 1: The hub’s tool board in round four (left: one generated model with its picture’s colours over library surfaces) and round six (right: a code-built board carrying 26 separately made tools, library surfaces only). Same camera and build.

model per object and the straightness check (shown below). Round six drew 0.45 million triangles against round four’s 1.96 million and took 187 MB on disk against 487.

D Check details

- **Room checks**, about two seconds a room on the laid-out meshes: rays leaving through walls and roof (leak), pieces in front of a real opening, roof and wall gear more than 3 cm off its surface or turned more than 5 degrees from it, and the piece, triangle and lamp budget.
- **Door check**: every door stands in a wall or partition that fully separates its two sides, read as a walk on a grid.
- **Concept-density check**: the concept is cut into crops; every visible element has an inventory row or a written reason; after the build the place is shot from the concept’s camera beside the concept.
- **Parts check**: each close-up part at least 10 percent visible from in front in the code build, and no label over a part.
- **Model check**: closed solids with walls of at least 3 mm; a generated box fails when a side tilts more than 2 degrees or warps; a solid step that grows its box more than 3 percent past the model stops itself.
- **Palette sweep and storage budget**: every model’s colours against the place’s library palette; 250 MB on disk and 640 MB of textures on the GPU per room.
- **Scene and made-only checks** in the engine: what floats, sinks or overlaps, and any visible mesh the route did not make, which can never be waived.

E Models and licences

Every model must allow commercial use of its output (Table E1). Licences were read for their commercial-use clauses.

Table E1. Models in the route.

Model	Role	Licence
Nano Banana Pro [25]	concepts, close-ups, ground skins	paid API
Pixal3D [19]	picture to 3D	MIT; DINOv3 licence [26] for its encoder
PartCrafter [21]	parts	MIT; its non-commercial background remover not used
Depth Anything V2 Small [27]	ground relief	Apache-2.0
ProcFunc, Infinigen shaders	surfaces	BSD-3-Clause
MOSS-SoundEffect v2.0, CLAP	sound	Apache-2.0
World Labs Marble [28]	optional world step	paid; outputs owned by paid users

Picture-to-3D, parts, surface bakes, sound, checks and assembly are automatic. Coding agents (Claude Code [29]) write the plans, inventories and every code builder; in the hub’s final round 86 of its 98 models were code. Hand steps remained: some generated objects turned to face the right way by eye, a few labels placed by hand before a rule replaced that. Concepts and verdicts are the creator’s picks.

F Surface library and sound

The library holds families of variants (painted, steel, aluminium, rubber, plastic, cable, fabric, composite, glass, screen, light and print; 71 variants from 14 ProcFunc recipes after the hub’s second round), each a recipe with settings, coloured only from palette tokens and baked to base colour, metal-roughness and normal maps at a texel density by reach. Wear has three levels and comes from causes: edges, and kicks within 32 cm of the floor a piece stands on. Every sound has a brief written from its object; four takes are generated, scored by CLAP against the prompt less measured faults (clipping, unsteady loops, bad joins), and levelled to one loudness per kind under a -3 dBTP true peak. A creator may swap any take; for the game 2099 all 61 sounds were generated as 244 takes in one batch for €1.61, and the creator kept recordings for three kinds (breathing, a sliding door, steps on steel).

G Cost and infrastructure

Every heavy step runs on rented machines deleted after each batch: NVIDIA L4 cards for picture-to-3D, parts and bakes, processor machines when cards are out of stock. The engine’s tests, shots and frame-time bench also run on rented machines; a full test run took 542 s there against 596 s locally, and L4 frame times convert to the local RTX 5080 by a measured factor of 3.47. Pictures cost about \$0.134 each at the resolution used. The binding limit in practice was the picture model’s shared daily quota of 250 pictures, not compute.

Gap: cost tables. Cost per batch kind and per world, reconciled with the cloud bill. Waits on the worlds; the per-place figures so far are floors from the build logs.