





class (owl:Class); range of an owl:ObjectProperty

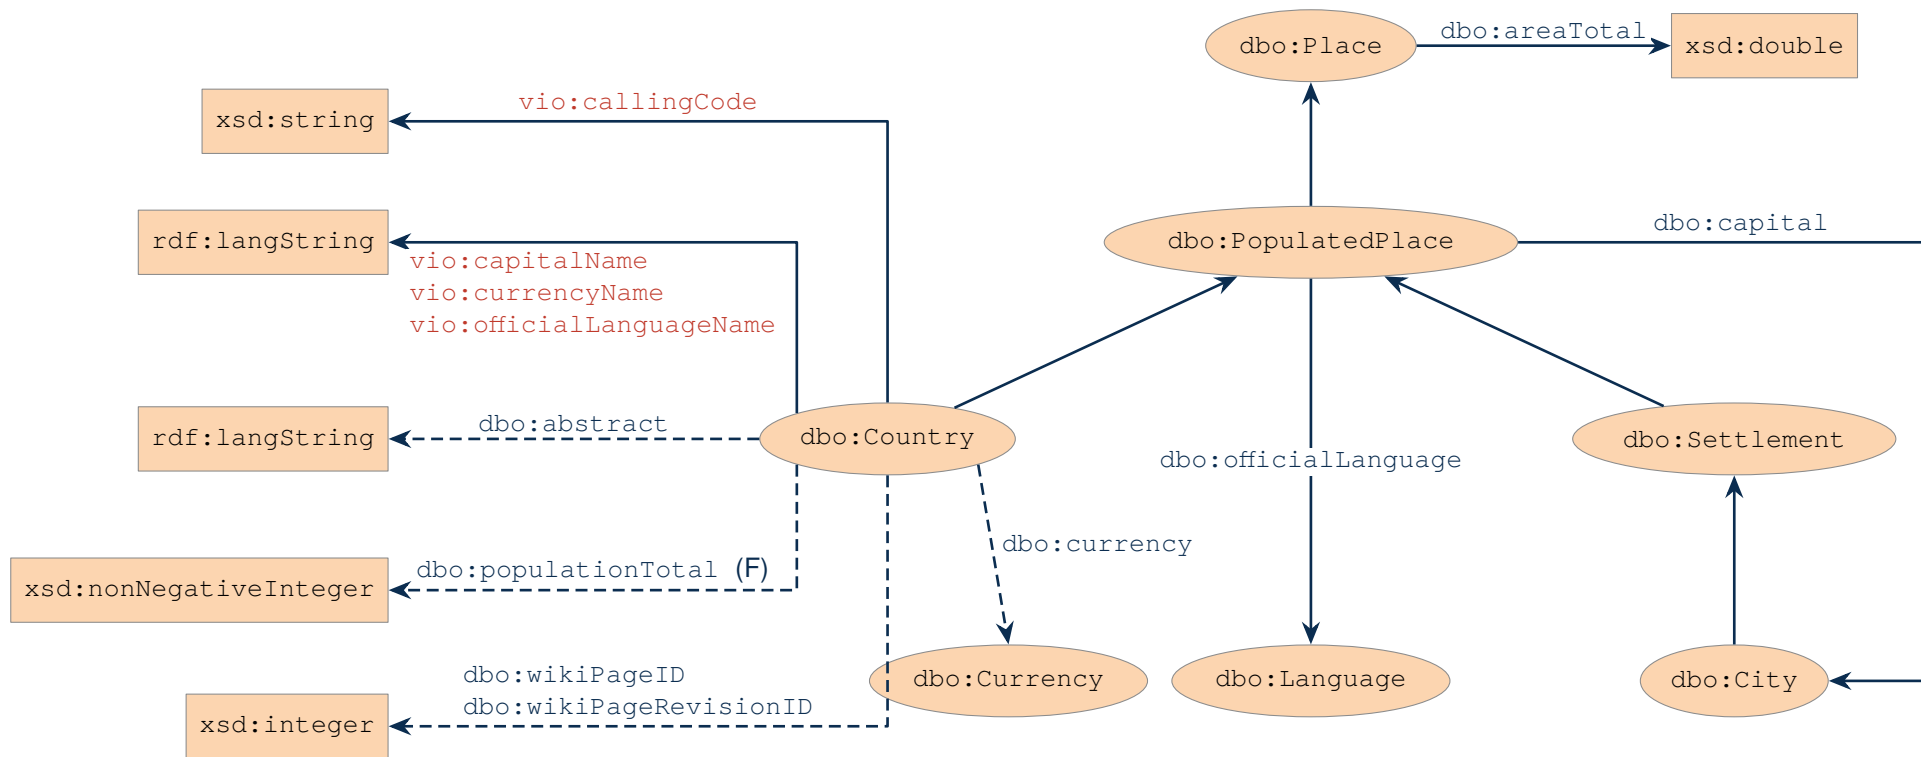

datatype: range of an owl:DatatypeProperty



unlabelled arrow = rdfs:subClassOf



property, from its rdfs:domain to its rdfs:range



no rdfs:domain declared; drawn from the class it is used on

dbo: reused DBpedia term    vio: new term of this project    (F) owl:FunctionalProperty

dbo: = <http://dbpedia.org/ontology/>, re-declared with the domain, range and hierarchy of the DBpedia Ontology; vio: = <http://vi.dbpedia.org/ontology/>. Also used in the data (W3C, FOAF and PROV vocabularies, not re-declared): rdf:type, rdfs:label, owl:sameAs, foaf:isPrimaryTopicOf, prov:wasDerivedFrom.