


(a) Repulsion and update ordering

UMAP

ibUMAP

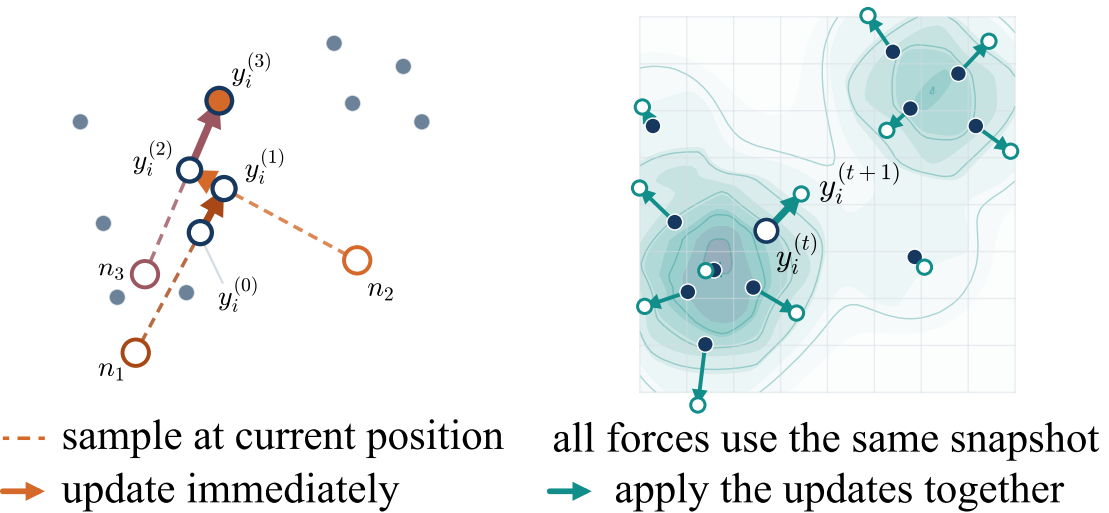


(b) Three moments, one scalar kernel

Source

P2M

FFT

M2P

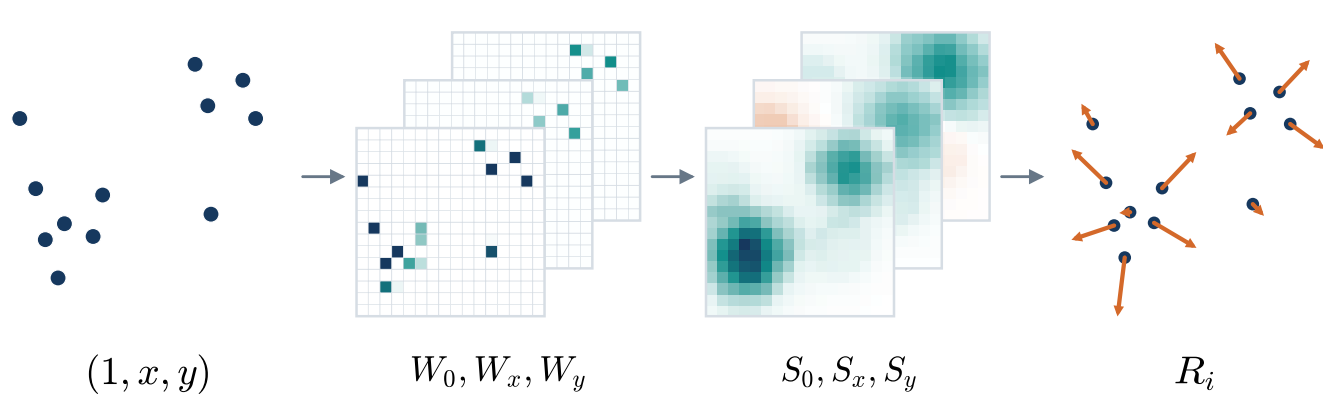

$$R_i = y_i S_0(y_i) - [S_x(y_i), S_y(y_i)]^\top$$