


(a) Repulsion and update ordering

UMAP

ibUMAP

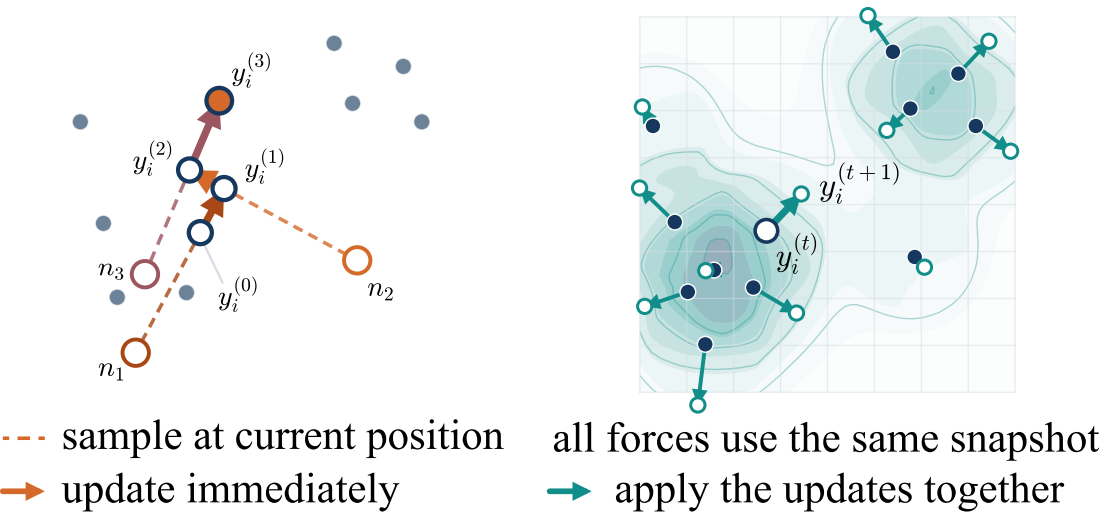


(b) Three moments, one scalar kernel

Source

P2M

FFT

M2P

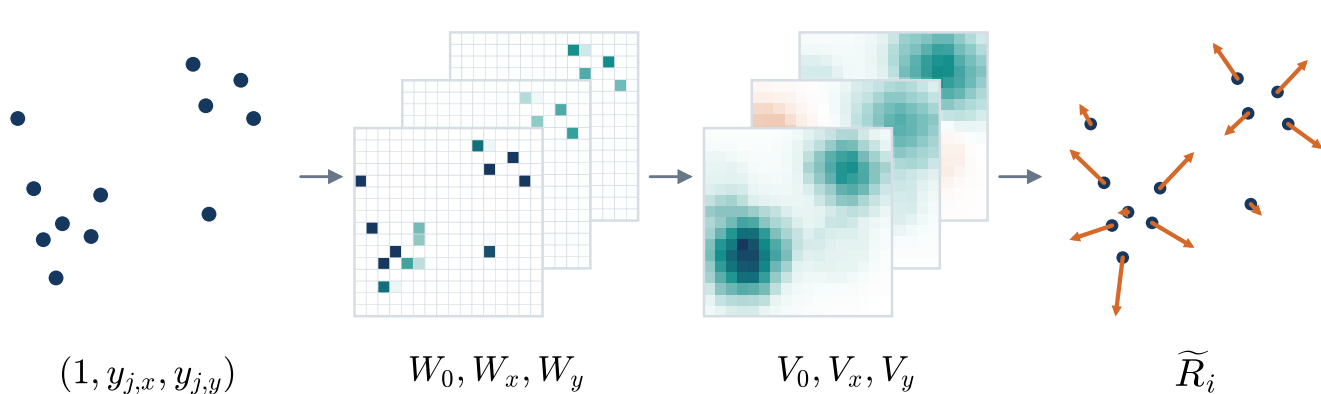

$$\tilde{R}_i = y_i \tilde{S}_0(y_i) - (\tilde{S}_x(y_i), \tilde{S}_y(y_i))^{\top}$$