

API Documentation

API Documentation

December 20, 2009

Contents

Contents	1
1 Module xformslib.library	12
1.1 Functions	12
1.2 Variables	99
1.3 Class XFormsLoadError	100
1.3.1 Methods	100
1.3.2 Properties	101
1.4 Class XFormsTypeError	101
1.4.1 Methods	101
1.4.2 Properties	101
2 Module xformslib.xfdata	103
2.1 Variables	103
2.2 Class FL_PUP_ENTRY	134
2.2.1 Methods	134
2.2.2 Properties	134
2.2.3 Class Variables	134
2.3 Class FL_PUP_ENTRY	135
2.3.1 Methods	135
2.3.2 Properties	135
2.3.3 Class Variables	135
2.4 Class XExtData	136
2.4.1 Methods	136
2.4.2 Properties	136
2.4.3 Class Variables	137
2.5 Class Visual	137
2.5.1 Methods	137
2.5.2 Properties	138
2.5.3 Class Variables	138
2.6 Class XVisualInfo	139
2.6.1 Methods	139
2.6.2 Properties	139
2.6.3 Class Variables	139
2.7 Class FL_FORM_	140
2.7.1 Methods	140
2.7.2 Properties	141

2.7.3	Class Variables	141
2.8	Class FL_FORM_	144
2.8.1	Methods	144
2.8.2	Properties	144
2.8.3	Class Variables	144
2.9	Class FL_OBJECT_	147
2.9.1	Methods	147
2.9.2	Properties	148
2.9.3	Class Variables	148
2.10	Class FL_OBJECT_	152
2.10.1	Methods	152
2.10.2	Properties	152
2.10.3	Class Variables	152
2.11	Class FL_pixmap_	156
2.11.1	Methods	156
2.11.2	Properties	156
2.11.3	Class Variables	157
2.12	Class FL_pixmap_	157
2.12.1	Methods	158
2.12.2	Properties	158
2.12.3	Class Variables	158
2.13	Class FD_Any	159
2.13.1	Methods	159
2.13.2	Properties	159
2.13.3	Class Variables	159
2.14	Class XFontProp	160
2.14.1	Methods	160
2.14.2	Properties	160
2.14.3	Class Variables	161
2.15	Class XCharStruct	161
2.15.1	Methods	161
2.15.2	Properties	161
2.15.3	Class Variables	162
2.16	Class XFontStruct	162
2.16.1	Methods	162
2.16.2	Properties	163
2.16.3	Class Variables	163
2.17	Class GC	164
2.17.1	Methods	164
2.17.2	Properties	164
2.18	Class FL_State	165
2.18.1	Methods	165
2.18.2	Properties	165
2.18.3	Class Variables	165
2.19	Class FL_State	167
2.19.1	Methods	167
2.19.2	Properties	167
2.19.3	Class Variables	167
2.20	Class FL_FONT	169
2.20.1	Methods	169
2.20.2	Properties	169

2.20.3	Class Variables	169
2.21	Class XPoint	170
2.21.1	Methods	170
2.21.2	Properties	170
2.21.3	Class Variables	171
2.22	Class XPoint	171
2.22.1	Methods	171
2.22.2	Properties	171
2.22.3	Class Variables	172
2.23	Class XRectangle	172
2.23.1	Methods	172
2.23.2	Properties	173
2.23.3	Class Variables	173
2.24	Class XRectangle	173
2.24.1	Methods	173
2.24.2	Properties	174
2.24.3	Class Variables	174
2.25	Class FL_RESOURCE	174
2.25.1	Methods	174
2.25.2	Properties	175
2.25.3	Class Variables	175
2.26	Class XrmOptionDescRec	176
2.26.1	Methods	176
2.26.2	Properties	176
2.26.3	Class Variables	176
2.27	Class XrmOptionDescList	177
2.27.1	Methods	177
2.27.2	Properties	177
2.28	Class XrmOptionDescRec	178
2.28.1	Methods	178
2.28.2	Properties	178
2.28.3	Class Variables	178
2.29	Class FL_RESOURCE	179
2.29.1	Methods	179
2.29.2	Properties	179
2.29.3	Class Variables	179
2.30	Class FL_IOP_T	180
2.30.1	Methods	180
2.30.2	Properties	180
2.30.3	Class Variables	181
2.31	Class FL_RGB2PIXEL_	182
2.31.1	Methods	183
2.31.2	Properties	183
2.31.3	Class Variables	183
2.32	Class FL_RGB2PIXEL_	184
2.32.1	Methods	184
2.32.2	Properties	184
2.32.3	Class Variables	185
2.33	Class FL_POPUP_	185
2.33.1	Methods	185
2.33.2	Properties	186

2.33.3	Class Variables	186
2.34	Class FL_POPUP_	188
2.34.1	Methods	188
2.34.2	Properties	189
2.34.3	Class Variables	189
2.35	Class FL_POPUP_ENTRY_	191
2.35.1	Methods	191
2.35.2	Properties	192
2.35.3	Class Variables	192
2.36	Class FL_POPUP_ENTRY_	193
2.36.1	Methods	194
2.36.2	Properties	194
2.36.3	Class Variables	194
2.37	Class FL_POPUP_RETURN_	196
2.37.1	Methods	196
2.37.2	Properties	196
2.37.3	Class Variables	196
2.38	Class FL_POPUP_RETURN_	197
2.38.1	Methods	197
2.38.2	Properties	198
2.38.3	Class Variables	198
2.39	Class FL_POPUP_ITEM	198
2.39.1	Methods	199
2.39.2	Properties	199
2.39.3	Class Variables	199
2.40	Class FL_BUTTON_SPEC	200
2.40.1	Methods	200
2.40.2	Properties	200
2.40.3	Class Variables	200
2.41	Class FL_BUTTON_SPEC	201
2.41.1	Methods	202
2.41.2	Properties	202
2.41.3	Class Variables	202
2.42	Class XSetWindowAttributes	203
2.42.1	Methods	203
2.42.2	Properties	204
2.42.3	Class Variables	204
2.43	Class GLXContext	205
2.43.1	Methods	205
2.43.2	Properties	205
2.43.3	Class Variables	205
2.44	Class FL_Dirlist	206
2.44.1	Methods	206
2.44.2	Properties	206
2.44.3	Class Variables	206
2.45	Class FLPS_CONTROL	207
2.45.1	Methods	207
2.45.2	Properties	207
2.45.3	Class Variables	207
2.46	Class FD_CMDLOG	209
2.46.1	Methods	209

2.46.2	Properties	209
2.46.3	Class Variables	209
2.47	Class FD_FSELECTOR	210
2.47.1	Methods	210
2.47.2	Properties	210
2.47.3	Class Variables	211
2.48	Class FL_EditKeymap	212
2.48.1	Methods	212
2.48.2	Properties	212
2.48.3	Class Variables	212
2.49	Class flimage.text_	214
2.49.1	Methods	214
2.49.2	Properties	214
2.49.3	Class Variables	214
2.50	Class flimage.text_	215
2.50.1	Methods	215
2.50.2	Properties	216
2.50.3	Class Variables	216
2.51	Class flimage.marker_	217
2.51.1	Methods	217
2.51.2	Properties	217
2.51.3	Class Variables	217
2.52	Class flimage.marker_	218
2.52.1	Methods	218
2.52.2	Properties	219
2.52.3	Class Variables	219
2.53	Class flimage.setup_	220
2.53.1	Methods	220
2.53.2	Properties	220
2.53.3	Class Variables	221
2.54	Class FLIMAGESETUP	222
2.54.1	Methods	222
2.54.2	Properties	222
2.55	Class _IO_FILE	223
2.55.1	Methods	223
2.55.2	Properties	223
2.56	Class flimage_	223
2.56.1	Methods	224
2.56.2	Properties	224
2.56.3	Class Variables	224
2.57	Class flimage_	231
2.57.1	Methods	231
2.57.2	Properties	231
2.57.3	Class Variables	231
2.58	Class flimage.setup_	238
2.58.1	Methods	238
2.58.2	Properties	239
2.58.3	Class Variables	239
2.59	Class FLIMAGE_JPEG_OPTION	240
2.59.1	Methods	240
2.59.2	Properties	240

2.59.3	Class Variables	240
2.60	Class FLIMAGE_FORMAT_INFO	241
2.60.1	Methods	241
2.60.2	Properties	241
2.60.3	Class Variables	242
2.61	Class XWindowAttributes	242
2.61.1	Methods	242
2.61.2	Properties	243
2.61.3	Class Variables	243
2.62	Class XExtCodes	244
2.62.1	Methods	244
2.62.2	Properties	245
2.62.3	Class Variables	245
2.63	Class XPixmapFormatValues	245
2.63.1	Methods	245
2.63.2	Properties	246
2.63.3	Class Variables	246
2.64	Class XGCValues	246
2.64.1	Methods	246
2.64.2	Properties	247
2.64.3	Class Variables	247
2.65	Class Depth	248
2.65.1	Methods	248
2.65.2	Properties	249
2.65.3	Class Variables	249
2.66	Class Screen	249
2.66.1	Methods	250
2.66.2	Properties	250
2.66.3	Class Variables	250
2.67	Class ScreenFormat	251
2.67.1	Methods	251
2.67.2	Properties	252
2.67.3	Class Variables	252
2.68	Class XHostAddress	252
2.68.1	Methods	253
2.68.2	Properties	253
2.68.3	Class Variables	253
2.69	Class XServerInterpretedAddress	254
2.69.1	Methods	254
2.69.2	Properties	254
2.69.3	Class Variables	254
2.70	Class funcs	255
2.70.1	Methods	255
2.70.2	Properties	255
2.70.3	Class Variables	255
2.71	Class XImage	256
2.71.1	Methods	256
2.71.2	Properties	256
2.71.3	Class Variables	257
2.72	Class XWindowChanges	258
2.72.1	Methods	258

2.72.2	Properties	258
2.72.3	Class Variables	258
2.73	Class XColor	259
2.73.1	Methods	259
2.73.2	Properties	260
2.73.3	Class Variables	260
2.74	Class XSegment	260
2.74.1	Methods	260
2.74.2	Properties	261
2.74.3	Class Variables	261
2.75	Class XArc	261
2.75.1	Methods	262
2.75.2	Properties	262
2.75.3	Class Variables	262
2.76	Class XKeyboardControl	263
2.76.1	Methods	263
2.76.2	Properties	263
2.76.3	Class Variables	263
2.77	Class XKeyboardState	264
2.77.1	Methods	264
2.77.2	Properties	264
2.77.3	Class Variables	265
2.78	Class XTimeCoord	265
2.78.1	Methods	265
2.78.2	Properties	266
2.78.3	Class Variables	266
2.79	Class XModifierKeymap	266
2.79.1	Methods	266
2.79.2	Properties	267
2.79.3	Class Variables	267
2.80	Class XDisplay	267
2.80.1	Methods	267
2.80.2	Properties	268
2.80.3	Class Variables	268
2.81	Class XKeyEvent	268
2.81.1	Methods	268
2.81.2	Properties	269
2.81.3	Class Variables	269
2.82	Class XKeyEvent	270
2.82.1	Methods	270
2.82.2	Properties	270
2.82.3	Class Variables	270
2.83	Class XKeyEvent	272
2.83.1	Methods	272
2.83.2	Properties	272
2.83.3	Class Variables	272
2.84	Class XButtonEvent	273
2.84.1	Methods	273
2.84.2	Properties	274
2.84.3	Class Variables	274
2.85	Class XButtonEvent	275

2.85.1	Methods	275
2.85.2	Properties	275
2.85.3	Class Variables	276
2.86	Class XButtonEvent	277
2.86.1	Methods	277
2.86.2	Properties	277
2.86.3	Class Variables	277
2.87	Class XMotionEvent	278
2.87.1	Methods	278
2.87.2	Properties	279
2.87.3	Class Variables	279
2.88	Class XMotionEvent	280
2.88.1	Methods	280
2.88.2	Properties	280
2.88.3	Class Variables	281
2.89	Class XCrossingEvent	282
2.89.1	Methods	282
2.89.2	Properties	282
2.89.3	Class Variables	282
2.90	Class XCrossingEvent	283
2.90.1	Methods	284
2.90.2	Properties	284
2.90.3	Class Variables	284
2.91	Class XCrossingEvent	285
2.91.1	Methods	285
2.91.2	Properties	286
2.91.3	Class Variables	286
2.92	Class XFocusChangeEvent	287
2.92.1	Methods	287
2.92.2	Properties	287
2.92.3	Class Variables	288
2.93	Class XFocusChangeEvent	288
2.93.1	Methods	288
2.93.2	Properties	289
2.93.3	Class Variables	289
2.94	Class XFocusChangeEvent	290
2.94.1	Methods	290
2.94.2	Properties	290
2.94.3	Class Variables	290
2.95	Class XKeymapEvent	291
2.95.1	Methods	291
2.95.2	Properties	291
2.95.3	Class Variables	292
2.96	Class XExposeEvent	292
2.96.1	Methods	292
2.96.2	Properties	293
2.96.3	Class Variables	293
2.97	Class XGraphicsExposeEvent	294
2.97.1	Methods	294
2.97.2	Properties	294
2.97.3	Class Variables	294

2.98 Class XNoExposeEvent	295
2.98.1 Methods	295
2.98.2 Properties	296
2.98.3 Class Variables	296
2.99 Class XVisibilityEvent	296
2.99.1 Methods	297
2.99.2 Properties	297
2.99.3 Class Variables	297
2.100 Class XCreateWindowEvent	298
2.100.1 Methods	298
2.100.2 Properties	298
2.100.3 Class Variables	298
2.101 Class XDestroyWindowEvent	299
2.101.1 Methods	299
2.101.2 Properties	300
2.101.3 Class Variables	300
2.102 Class XUnmapEvent	300
2.102.1 Methods	301
2.102.2 Properties	301
2.102.3 Class Variables	301
2.103 Class XMapEvent	302
2.103.1 Methods	302
2.103.2 Properties	302
2.103.3 Class Variables	302
2.104 Class XMapRequestEvent	303
2.104.1 Methods	303
2.104.2 Properties	303
2.104.3 Class Variables	304
2.105 Class XReparentEvent	304
2.105.1 Methods	304
2.105.2 Properties	305
2.105.3 Class Variables	305
2.106 Class XConfigureEvent	306
2.106.1 Methods	306
2.106.2 Properties	306
2.106.3 Class Variables	306
2.107 Class XGravityEvent	307
2.107.1 Methods	307
2.107.2 Properties	308
2.107.3 Class Variables	308
2.108 Class XResizeRequestEvent	309
2.108.1 Methods	309
2.108.2 Properties	309
2.108.3 Class Variables	309
2.109 Class XConfigureRequestEvent	310
2.109.1 Methods	310
2.109.2 Properties	310
2.109.3 Class Variables	311
2.110 Class XCirculateEvent	312
2.110.1 Methods	312
2.110.2 Properties	312

2.110.3 Class Variables	312
2.111 Class XCirculateRequestEvent	313
2.111.1 Methods	313
2.111.2 Properties	313
2.111.3 Class Variables	314
2.112 Class XPropertyEvent	314
2.112.1 Methods	314
2.112.2 Properties	315
2.112.3 Class Variables	315
2.113 Class XSelectionClearEvent	316
2.113.1 Methods	316
2.113.2 Properties	316
2.113.3 Class Variables	316
2.114 Class XSelectionRequestEvent	317
2.114.1 Methods	317
2.114.2 Properties	317
2.114.3 Class Variables	318
2.115 Class XSelectionEvent	318
2.115.1 Methods	319
2.115.2 Properties	319
2.115.3 Class Variables	319
2.116 Class XColormapEvent	320
2.116.1 Methods	320
2.116.2 Properties	320
2.116.3 Class Variables	320
2.117 Class N19XClientMessageEvent4DOT_71E	321
2.117.1 Methods	321
2.117.2 Properties	322
2.117.3 Class Variables	322
2.118 Class XClientMessageEvent	322
2.118.1 Methods	322
2.118.2 Properties	323
2.118.3 Class Variables	323
2.119 Class XMappingEvent	324
2.119.1 Methods	324
2.119.2 Properties	324
2.119.3 Class Variables	324
2.120 Class XErrorEvent	325
2.120.1 Methods	325
2.120.2 Properties	325
2.120.3 Class Variables	326
2.121 Class XAnyEvent	326
2.121.1 Methods	326
2.121.2 Properties	327
2.121.3 Class Variables	327
2.122 Class XGenericEvent	328
2.122.1 Methods	328
2.122.2 Properties	328
2.122.3 Class Variables	328
2.123 Class XGenericEventCookie	329
2.123.1 Methods	329

2.123.2 Properties	329
2.123.3 Class Variables	330
2.124 Class _XEvent	330
2.124.1 Methods	330
2.124.2 Properties	331
2.124.3 Class Variables	331
Index	334

1 Module `xformslib.library`

`xforms-python` Python wrapper for XForms (X11) GUI C toolkit library using `ctypes`

Copyright (C) 2009 Luca Lazzaroni "LukenShiro" <lukenshiro@ngi.it>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation, version 2.1 of the License.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU LGPL along with this program. If not, see <<http://www.gnu.org/licenses/>>.

See CREDITS file to read acknowledgements and thanks to XForms, `ctypes` and other developers.

Version: 0.3.1.1.0.93pre1

1.1 Functions

`get_xforms_version()`

Return version string of installed XForms library/header

`verify_version_compatibility()`

verify compatibility between `xforms-python` version and XForms version

`warn_deprecated_function(altfunc='')`

Warns the user when a function is deprecated and should not be used anymore. If a param is provided it may advise the user about an alternative function.

`func_do_nothing_placeholder(cfunction)`

Print a warning if called function doesn't exist

`keep_cfunc_refs(*cfunclist)`

Adds a reference for `_cfunc_refs` list of values

`keep_elem_refs(*elemlist)`

Adds a reference for `_elem_refs` list of values

`load_so_libforms()`

Load `libforms.so` else raise an error -> library instance

`load_so_libflimage()`

Load `libflimage.so` else raise an error -> library instance

load_so_libformsgl()

Load libformsGL.so else raise an error -> library instance

load_so_libx11()

Load libX11.so.6 else raise an error -> library instance

cfuncproto(*library, cfuncname, retval, arglist, doc=''*)

Prototype for C function to be wrapped in python

convert_to_string(*paramname*)

Converts paramname to python str and to ctypes c.char_p

convert_to_int(*paramname*)

Converts paramname to python int and to ctypes c.int

convert_to_FL_Coord(*paramname*)

Converts paramname to python int and to ctypes c.int

convert_to_uint(*paramname*)

Converts paramname to python int and to ctypes c.uint

convert_to_long(*paramname*)

Converts paramname to python long and to ctypes c.long

convert_to_ulong(*paramname*)

Converts paramname to python long and to ctypes c.ulong

convert_to_FL_COLOR(*paramname*)

Converts paramname to python long and to ctypes c.ulong

convert_to_Window(*paramname*)

Converts paramname to python long and to ctypes c.ulong

convert_to_Pixmap(*paramname*)

Converts paramname to python long and to ctypes c.ulong

convert_to_double(*paramname*)

Converts paramname to python float and to ctypes c.double

convert_to_float(*paramname*)Converts *paramname* to python float and to ctypes `c_float`**convert_to_ubyte**(*paramname*)Converts *paramname* to ctypes `c_ubyte`**make_int_and_pointer**()Makes a ctypes `c_int` and its pointer, and returns both**make_FL_Coord_and_pointer**()Makes a ctypes `c_int` and its pointer, and returns both**make_uint_and_pointer**()Makes a ctypes `c_uint` and its pointer, and returns both**make_long_and_pointer**()Makes a ctypes `c_long` and its pointer, and returns both**make_ulong_and_pointer**()Makes a ctypes `c_ulong` and its pointer, and returns both**make_Pixmap_and_pointer**()Makes a ctypes `c_uint` and its pointer, and returns both**make_float_and_pointer**()Makes a ctypes `c_float` and its pointer, and returns both**make_double_and_pointer**()Makes a ctypes `c_double` and its pointer, and returns both**check_admitted_listvalues**(*paramname*, **valueslist*)Check if *paramname* value is valid in accordance to a list of admissible values.**FL_IS_UPBOX**(*t*)**FL_IS_DOWNBOX**(*t*)**FL_TO_DOWNBOX**(*t*)**special_style**(*a*)

`fl_object_returned(pObject)`

`fl_add_io_callback(fd, mask, py_callback, data)`

Registers an input callback function when input is available from *fd*.

@params:

<*fd*> : a valid file descriptor in a unix system

<*mask*> : under what circumstance the input callback should be invoked
(`FL_READ`, `FL_WRITE` or `FL_EXCEPT`)

<*py_callback*> : python function to be invoked under mask condition

<*data*> : argument to be passed to function

`fl_remove_io_callback(fd, mask, py_cb)`

Removes the registered callback function when input is available from *fd*.

@params:

<*fd*> : a valid file descriptor in a unix system

<*mask*> : under what circumstance the input callback should be removed
(`FL_READ`, `FL_WRITE`, `FL_EXCEPT`)

<*py_cb*> : python function to be invoked under mask condition

`fl_add_signal_callback(sglnum, py_cb, data)`

Handles the receipt of a signal by registering a callback function that gets called when a signal is caught (only 1 function per signal)

@params:

<*sglnum*> : signal number (e.g. `signal.SIGALRM`, `signal.SIGINT`, etc.)

<*py_cb*> : python function to be invoked after catching the signal

<*data*> : argument to be passed to function

`fl_remove_signal_callback(sglnum)`

Removes a previously registered callback function related to a signal

`fl_signal_caught(sglnum)`

Informs the main loop of the delivery of the signal *signum*, the signal is received by the application program

@params:

<*sglnum*> : signal number (e.g. `signal.SIGALRM`, `signal.SIGINT`, etc.)

fl_app_signal_direct(*y*)

Changes the default behavior of the built-in signal facilities (to be called with a true value for flag prior to any use of `fl_add_signal_callback(...)`)

@params:

<y> : flag (e.g. True, False)

fl_add_timeout(*msec, py_callback, data*)

Adds a timeout callback after a specified elapsed time

Return Value

timer ID

fl_remove_timeout(*idnum*)

Removes a timeout callback function (created with `fl_add_timeout`)

fl_library_version()

Returns consolidated version informations

Return Value

<version_rev> : computed as 1000 * version + revision <ver> : version (e.g. 1 in 1.x.yy) <rev> : revision (e.g. 0 in x.0.yy)

(*type=version_rev ID, ver, rev*)

fl_bgn_form(*formtype, w, h*)

Starts the definition of a form call

@params:

<formtype> : type of box that is used as a background (e.g. FL_DOWN_BOX, FL_BORDER_BOX, FL_SHADOW_BOX, etc.)

<w> : width of the new form

<h> : height of the new form

Return Value

pForm

fl_end_form()

Ends the definition for a form call, after all required objects have been added to a form call

fl_do_forms()

Starts the main loop of the program and returns only when the state of an object changes that has no callback bound to it.

Return Value

pObject

fl_check_forms()

Returns None immediately unless the state of one of the object (without a callback bound to it) changed.

Return Value
pObject

fl_do_only_forms()

Starts the main loop of the program and returns only when the state of an object changes that has no callback bound to it. It does not handle user events generated by application windows opened via `fl_winopen()` or similar routines.

Return Value
pObject

fl_check_only_forms()

Returns None immediately unless the state of one of the object (without a callback bound to it) changed. It does not handle user events generated by application windows opened via `fl_winopen()` or similar routines.

Return Value
pObject

fl_freeze_form(pForm)

It does not temporarily redraw a form while changes are being made, so all changes made are instead buffered internally.

@params:
<pForm> : pointer to form not to be re-drawn temporarily

fl_set_focus_object(pForm, pObject)

Sets the input focus in form to object pObject.

fl_get_focus_object(pForm)

Obtains the object that has the focus on a form

Return Value
pObject

fl_reset_focus_object(pObject)

Override the FL_UNFOCUS event.

fl_set_object_focus(*pForm, pObject*)

 Sets the input focus in form to object pObject.

fl_set_form_atclose(*pForm, py_fmclose, data*)

 Calls a callback function before closing the form.
Return Value

FormAtclose func

fl_set_atclose(*py_fmclose, data*)

 Calls a callback function before terminating the application.
Return Value

FormAtclose func

fl_set_form_atactivate(*pForm, py_cb, data*)

 Register a callback that is called when activation status of a forms is enabled,
@params:

<pForm> : activated form

<py_cb> : python callback function called

<data> : argument to be passed to function

Return Value

FormAtactivate func

fl_set_form_atdeactivate(*pForm, py_cb, data*)

 Register a callback that is called when activation status of a forms is disabled
@params:

<pForm> : pointer to de-activated form

<py_cb> : python callback function called

<data> : argument to be passed to function

Return Value

FormAtdeactivate func

fl_unfreeze_form(*pForm*)

 All changes made in the meantime in a form are drawn at once, reverting previous freeze
@params:

<pForm> : pointer to form to be re-drawn after freezing

fl_deactivate_form(*pForm*)

Deactivates form temporarily, without hiding it, but not allowing the user to interact with elements contained in form (buttons, etc.)

@params:

<pForm> : pointer to form to be de-activated

fl_activate_form(*pForm*)

Re-activates form, allowing the user to interact again with elements contained in form (buttons, etc.)

<pForm> : pointer to form to be re-activated

fl_deactivate_all_forms()

De-activates all current forms.

fl_activate_all_forms()

Re-activates all current forms.

fl_freeze_all_forms()

It does not temporarily redraw all current forms while changes are being made, so all changes made are instead buffered internally.

fl_unfreeze_all_forms()

All changes made in the meantime in all current forms are drawn at once, reverting previous freeze.

fl_scale_form(*pForm*, *xsc*, *ysc*)

Scales a form and the objects on it in size and position, indicating a scaling factor in x- and y-direction with respect to the current size.

@params:

<pForm> : pointer to form to be scaled

<xsc> : scaling factor in horizontal direction

<ysc> : scaling factor in vertical direction

fl_set_form_position(*pForm*, *x*, *y*)

Sets position of form, when placing a form on the screen with FL_PLACE_GEOMETRY as place argument.

@params:

<pForm> : pointer to form whose position is to be set
 <x> : horizontal position
 <y> : vertical position

fl_set_form_title(*pForm*, *name*)

Changes the form title (and the icon name) after it is shown.

fl_set_app_mainform(*pForm*)

fl_get_app_mainform()

Return Value

pForm

fl_set_app_nomainform(*flag*)

fl_set_form_callback(*pForm*, *py_callback*, *data*)

Sets the callback routine for the form.

fl_set_form_call_back(*pForm*, *py_callback*, *data*)

Sets the callback routine for the form.

fl_set_form_size(*pForm*, *w*, *h*)

Sets the size of form.

fl_set_form_hotspot(*pForm*, *x*, *y*)

Sets the position of the hotspot of a form.

fl_set_form_hotobject(*pForm*, *pObject*)

fl_set_form_minsize(*pForm*, *w*, *h*)

fl_set_form_maxsize(*pForm*, *w*, *h*)

fl_set_form_event_cmask(*pForm*, *cmask*)

fl_get_form_event_cmask(*pForm*)

Return Value

compress mask for form

(*type*=*cmask ID*)

fl_set_form_geometry(*pForm*, *x*, *y*, *w*, *h*)

fl_set_initial_placement(*pForm*, *x*, *y*, *w*, *h*)

fl_show_form(*pForm*, *place*, *border*, *name*)

Shows the form.

Return Value

window

fl_hide_form(*pForm*)

Hides the form.

fl_free_form(*pForm*)

Frees the memory used by a form together with all its objects.

fl_redraw_form(*pForm*)

Draws a form.

fl_set_form_dblbuffer(*pForm*, *y*)

fl_prepare_form_window(*pForm*, *place*, *border*, *name*)

Displays a particular form, returns its window handle.

Return Value

window ID

fl_show_form_window(*pForm*)

Return Value

window ID

fl_adjust_form_size(*pForm*)

Similar to `fit_object_label`, but will do it for all objects and has a smaller threshold. Mainly intended for compensation for font size variations

@params:

<pForm> : pointer to form

Return Value

max_factor id

fl_form_is_visible(*pForm*)

Return if form is visible

Return Value

state id

fl_form_is_iconified(*pForm*)

Returns if a forms window is in iconified state

Return Value

state id

fl_register_raw_callback(*pForm*, *mask*, *py_rcb*)

Register pre-emptive event handlers

Return Value

raw_callback func

fl_register_call_back(*pForm*, *mask*, *py_rcb*)

Register pre-emptive event handlers

Return Value

raw_callback func

fl_bgn_group()

Starts a group definition.

Return Value

pObject

fl_end_group()

Ends a group definition.

fl_addto_group(*pGroup*)

Reopens a group to allow addition of further objects

Parameters

`pGroup`: pointer to group object to reopen

Return Value

`pForm`

fl_set_object_boxtype(*pObject*, *boxtype*)

Sets the boxtype of the object.

fl_set_object_bw(*pObject*, *bw*)

Sets the borderwidth of an object

fl_get_object_bw(*pObject*)

Returns the borderwidth of an object

Return Value

`bw`

fl_set_object_resize(*pObject*, *what*)

Sets the resize property of an object.

fl_get_object_resize(*pObject*)

Returns the resize property of an object.

Return Value

`what`

fl_set_object_gravity(*pObject*, *nw*, *se*)

Sets the gravity properties of an object

fl_get_object_gravity(*pObject*)

Returns the gravity properties of an object

Return Value

`nw`, `se`

fl_set_object_lsize(*pObject*, *lsize*)

Sets the label size of an object

fl_set_object_lstyle(*pObject*, *lstyle*)

Sets the label style of an object.

fl_set_object_lcol(*pObject*, *lcolr*)

Sets the label color of an object.

fl_set_object_return(*pObject*, *when*)

Function for setting the conditions under which an object gets returned (or its callback invoked). If the object has to do additional work on setting the condition (e.g. it has child objects that also need to be set) it has to set up its own function that then will be called in the end. This function should only be called once an object has been created completely!

Return Value

ID num

fl_notify_object(*pObject*, *cause*)

fl_set_object_lalign(*pObject*, *align*)

Sets alignment of an object.

fl_set_object_shortcut(*pObject*, *sstr*, *showit*)

fl_set_object_shortcutkey(*pObject*, *keysym*)

fl_set_object_dblbuffer(*pObject*, *y*)

fl_set_object_color(*pObject*, *colr1*, *colr2*)

fl_set_object_label(*pObject*, *label*)

fl_set_object_helper(*pObject*, *tip*)

fl_set_object_position(*pObject*, *x*, *y*)

fl_get_object_size(*pObject*)

Return Value

w, h

fl_set_object_size(*pObject*, *w*, *h*)

fl_set_object_automatic(*pObject*, *flag*)

fl_draw_object_label(*pObject*)

fl_draw_object_label_outside(*pObject*)

fl_get_object_component(*pObjectComposite*, *objclass*, *compontype*, *numb*)

Return Value
pObject

fl_for_all_objects(*pForm*, *py_cb*, *v*)

fl_draw_object_outside_label(*pObject*)

fl_set_object_dblick(*pObject*, *timeout*)

fl_set_object_geometry(*pObject*, *x*, *y*, *w*, *h*)

fl_move_object(*pObject*, *dx*, *dy*)

fl_set_object_lcolor(*pObject*, *lcolor*)

Sets the label color of an object.

fl_fit_object_label(*pObject*, *xmargin*, *ymargin*)

fl_get_object_geometry(*pObject*)

Return Value
x, y, w, h

fl_get_object_position(*pObject*)

Return Value
x, y

fl_get_object_label(*pObject*)

Return Value
labelname_string

fl_get_object_bbox(*pObject*)

Return Value
x, y, w, h

fl_compute_object_geometry(*pObject*)

Return Value
x, y, w, h

fl_call_object_callback(*pObject*)

fl_set_object_prehandler(*pObject*, *py_phandler*)

Return Value

pHandlerPtr

fl_set_object_posthandler(*pObject*, *py_post*)

Return Value

pHandlerPtr

fl_set_object_callback(*pObject*, *py_callback*, *argum*)

Calls a callback function bound to an object, if a condition is met.

<pObject> : an object reference (form, button, etc..)

<py_callback> : a python function with no () and no args to be used as callback; the callee is e.g.: somename(obj, data)

<argum> : argument being passed to function

Return Value

c_callback func

fl_set_object_align(*pObject*, *align*)

Sets alignment of an object.

fl_set_call_back(*pObject*, *py_callback*, *argum*)

Calls a callback function bound to an object, if a condition is met.

<pObject> : an object reference (form, button, etc..)

<py_callback> : a python function with no () and no args to be used as callback; the callee is e.g.: somename(obj, data)

<argum> : argument being passed to function

Return Value

c_callback func

fl_redraw_object(*pObject*)

fl_scale_object(*pObject*, *xs*, *ys*)

fl_show_object(*pObject*)

fl_hide_object(*pObject*)

fl_free_object(*pObject*)

fl_delete_object(*pObject*)

fl_get_object_return_state(*pObject*)

Return Value

ID num

fl_trigger_object(*pObject*)

fl_activate_object(*pObject*)

fl_deactivate_object(*pObject*)

fl_enumerate_fonts(*py_output, shortform*)

Return Value

ID num

fl_set_font_name(*n, name*)

Return Value

ID num

fl_set_font(*numb, size*)

fl_get_char_height(*style, size*)

Return Value

height num., asc, desc

fl_get_char_width(*style, size*)

Return Value

width num

fl_get_string_height(*style, size, strng, strglen*)

Return Value

height num., asc, desc

fl_get_string_width(*style, size, s, strglen*)

Return Value

width num

fl_get_string_widthTAB(*style, size, s, strglen*)

Return Value

width num

fl_get_string_dimension(*fntstyle, fntsize, s, strglen*)

Return Value

width, height

fl_get_string_size(*fontstyle, fontsize, s, strlen*)

Return Value

width, height

fl_get_align_xy(*align, x, y, w, h, xsize, ysize, xoff, yoff*)

Return Value

xx, yy

fl_drw_text(*align, x, y, w, h, color, style, size, txtstr*)

fl_drw_text_beside(*align, x, y, w, h, color, style, size, txtstr*)

fl_drw_text_cursor(*align, x, y, w, h, color, style, size, txtstr, cc, pos*)

fl_drw_box(*style, x, y, w, h, color, bwIn*)

fl_add_symbol(*name, py_drawit, scalable*)

Return Value

num

fl_draw_symbol(*label, x, y, w, h, color*)

Return Value

num

fl_mapcolor(*color, r, g, b*)

Return Value

num

fl_mapcolorname(*color, name*)

Return Value

num

fl_mapcolor_name(*color, name*)

Return Value

num

fl_free_colors(*c, n*)

fl_free_pixels(*pix, n*)

fl_set_color_leak(*y*)

fl_getmcolor(*colr*)**Return Value**

num., r, g, b

fl_get_pixel(*colr*)**Return Value**

pixel num

fl_get_fcolor(*colr*)**Return Value**

pixel num

fl_get_icm_color(*colr*)**Return Value**

r, g, b

fl_set_icm_color(*colr*, *r*, *g*, *b*)**fl_color**(*colr*)**fl_bk_color**(*colr*)**fl_textcolor**(*colr*)**fl_bk_textcolor**(*colr*)**fl_set_gamma**(*r*, *g*, *b*)**fl_show_errors**(*y*)**FL_max**(*a*, *b*)**FL_min**(*a*, *b*)**FL_abs**(*a*)**FL_nint**(*a*)**FL_clamp**(*a*, *amin*, *amax*)**FL_crnd**(*a*)

fl_add_object(*pForm*, *pObject*)

fl_addto_form(*pForm*)

Return Value
pForm

fl_make_object(*objclass*, *objtype*, *x*, *y*, *w*, *h*, *label*, *py_handle*)

Return Value
pObject

fl_add_child(*pObject1*, *pObject2*)

fl_set_coordunit(*u*)

fl_set_border_width(*bw*)

fl_set_scrollbar_type(*t*)

fl_set_thinscrollbar(*t*)

fl_flip_yorigin()

fl_get_coordunit()

Return Value
coord_unit num

fl_get_border_width()

Return Value
width num

fl_ringbell(*percent*)

fl_gettime()

Return Value
sec, usec

fl_now()

Return Value
string

fl_whoami()

Return Value
string

fl_mouse_button()**Return Value**

num

fl_strdup(*strng*)**Return Value**

string

fl_set_err_logfp(*pFile*)**fl_set_error_handler(*py_user_func*)****fl_get_cmdline_args(*p1*)****Return Value**

string

fl_set_error_logfp(*pFile*)**fl_mousebutton()****Return Value**

num

fl_free(*p1*)**fl_msleep(*msec*)****Return Value**

num

FL_is_gray(*v*)**FL_is_rgb(*v*)****fl_get_vclass()****fl_get_form_vclass(*a*)****fl_get_gc()****fl_mode_capable(*mode, warn*)****Return Value**

mode num

fl_default_win()

`fl_default_window()``fl_rectangle(fill, x, y, w, h, colr)``fl_rectbound(x, y, w, h, colr)``fl_rectf(x, y, w, h, colr)``fl_rect(x, y, w, h, colr)``fl_roundrectangle(fill, x, y, w, h, colr)``fl_roundrectf(x, y, w, h, colr)``fl_roundrect(x, y, w, h, colr)``fl_polygon(fill, xp, n, colr)``fl_polyf(xp, n, colr)``fl_polyl(xp, n, colr)``fl_polybound(xp, n, colr)``fl_lines(xp, n, colr)``fl_line(xi, yi, xf, yf, colr)``fl_point(x, y, colr)``fl_points(pPoint, np, colr)``fl_simple_line(xi, yi, xf, yf, colr)``fl_dashedlinestyle(dash, ndash)``fl_update_display(block)``fl_diagline(x, y, w, h, colr)``fl_linewidth(n)`

fl_linestyle(*n*)

fl_drawmode(*request*)

fl_get_linewidth()

Return Value

width num

fl_get_linestyle()

Return Value

style num

fl_get_drawmode()

Return Value

mode num

fl_set_linewidth(*n*)

fl_set_linestyle(*n*)

fl_set_drawmode(*request*)

fl_oval(*fill, x, y, w, h, colr*)

fl_ovalbound(*x, y, w, h, colr*)

fl_ovalarc(*fill, x, y, w, h, t0, dt, colr*)

fl_ovalf(*x, y, w, h, colr*)

fl_ovall(*x, y, w, h, colr*)

fl_oval_bound(*x, y, w, h, colr*)

fl_circf(*x, y, r, colr*)

fl_circ(*x, y, r, colr*)

fl_pieslice(*fill, x, y, w, h, a1, a2, colr*)

fl_arcf(*x, y, r, a1, a2, colr*)

fl_arc(*x, y, r, a1, a2, colr*)

fl_drw_frame(*style, x, y, w, h, colr, bw*)

fl_drw_checkbox(*boxtype, x, y, w, h, colr, bw*)

fl_get_fontstruct(*style, size*)

Return Value

XFontStruct class

fl_get_font_struct(*style, size*)

Return Value

XFontStruct class

fl_get_fntstruct(*style, size*)

Return Value

XFontStruct class

fl_get_mouse()

Return Value

window, x, y, keymask

fl_set_mouse(*mx, my*)

fl_get_win_mouse(*win*)

Return Value

window, x, y, keymask

fl_get_form_mouse(*pForm*)

Return Value

window, x, y, keymask

fl_win_to_form(*win*)

Return Value

pForm

fl_set_form_icon(*pForm, icon, mask*)

fl_get_decoration_sizes(*pForm*)

Return Value

size num., top, right, bottom, left

XRaiseWindow(*pDisplay*, *win*)**Return Value**

num

fl_raise_form(*pForm*)**XLowerWindow**(*pDisplay*, *win*)**Return Value**

num

fl_lower_form(*pForm*)**XSetForeground**(*pDisplay*, *p2*, *p3*)**Return Value**

num

fl_set_foreground(*gc*, *c*)**XSetBackground**(*pDisplay*, *p2*, *p3*)**Return Value**

num

fl_set_background(*gc*, *c*)**fl_wincreate**(*label*)**Return Value**

window

fl_winshow(*win*)**Return Value**

window

fl_winopen(*label*)**Return Value**

window

fl_winhide(*win*)**fl_winclose**(*win*)**fl_winset**(*win*)

fl_winreparent(*win*, *newparent*)**Return Value**

num

fl_winfocus(*win*)**fl_winget**()**Return Value**

window

fl_iconify(*win*)**Return Value**

num

fl_winresize(*win*, *neww*, *newh*)**fl_winmove**(*win*, *dx*, *dy*)**fl_winreshape**(*win*, *dx*, *dy*, *w*, *h*)**fl_winicon**(*win*, *icon*, *mask*)**fl_winbackground**(*win*, *bkcolr*)**fl_winstepunit**(*win*, *dx*, *dy*)**fl_winisvalid**(*win*)**Return Value**

num

fl_wintitle(*win*, *title*)**fl_winicontitle**(*win*, *title*)**fl_winposition**(*x*, *y*)**fl_pref_winposition**(*x*, *y*)**fl_win_background**(*win*, *bkcolr*)**fl_set_winstepunit**(*win*, *dx*, *dy*)**fl_winminsize**(*win*, *w*, *h*)

`fl_winmaxsize(win, w, h)`

`fl_winaspect(win, x, y)`

`fl_reset_winconstraints(win)`

`fl_winsize(w, h)`

`fl_initial_winsize(w, h)`

`fl_pref_winsize(w, h)`

`fl_initial_winstate(state)`

`fl_create_colormap(pXVisualInfo, nfill)`

Return Value
colormap

`fl_wingeometry(x, y, w, h)`

`fl_pref_wingeometry(x, y, w, h)`

`fl_initial_wingeometry(x, y, w, h)`

`fl_noborder()`

`fl_transient()`

`fl_get_winsize(win)`

Return Value
w, h

`fl_get_winorigin(win)`

Return Value
x, y

`fl_get_wingeometry(win)`

Return Value
x, y, w, h

fl_get_win_size(*win*)**Return Value**

w, h

fl_get_win_origin(*win*)**Return Value**

x, y

fl_get_win_geometry(*win*)**Return Value**

x, y, w, h

fl_initial_winposition(*x, y*)**fl_get_display**()**FL_FormDisplay**(*pForm*)**FL_ObjectDisplay**(*object*)**FL_IS_CANVAS**(*pObject*)**FL_ObjWin**(*pObject*)**fl_get_real_object_window**(*pObject*)**Return Value**

window

FL_OBJECT_WID(*pObject*)**fl_XNextEvent**(*pXEvent*)**Return Value**

event num

fl_XPeekEvent(*pXEvent*)**Return Value**

event num

fl_XEventsQueued(*mode*)**Return Value**

event num

fl_XPutBackEvent(*pXEvent*)

fl_last_event()**Return Value**

event

fl_set_event_callback(*py_callback, userdata*)**Return Value**

event callback

fl_set_idle_callback(*py_callback, userdata*)**Return Value**

event callback func

fl_addto_selected_xevent(*win, mask*)**Return Value**

num

fl_remove_selected_xevent(*win, mask*)**Return Value**

num

fl_add_selected_xevent(*win, mask*)**Return Value**

num

fl_set_idle_delta(*delta*)**fl_add_event_callback(*win, ev, py_wincb, userdata*)****Return Value**

event callback

fl_remove_event_callback(*win, ev*)**fl_activate_event_callbacks(*win*)****fl_print_xevent_name(*where, pXEvent*)****Return Value**

pXEvent

metakey_down(*mask*)**shiftkey_down(*mask*)****controlkey_down(*mask*)**

button_down(*mask*)

fl_initialize(*numargs, args, applclass, apploptions, numapplopts*)

Return Value

pDisplay

fl_finish()

fl_get_resource(*rname, cname, dtype, defval, val, size*)

Return Value

string

fl_set_resource(*resstr, val*)

fl_get_app_resources(*pResource, n*)

fl_set_graphics_mode(*mode, doublebuf*)

fl_set_visualID(*idnum*)

fl_keysym_pressed(*keysym*)

Return Value

num

fl_keypressed(*keysym*)

Return Value

num

fl_set_defaults(*mask, pIopt*)

fl_set_tabstop(*s*)

fl_get_defaults(*pIopt*)

fl_get_visual_depth()

Return Value

depth num

fl_vclass_name(*n*)

Return Value

name string

fl_vclass_val(*val*)

Return Value

num

fl_set_ul_property(*prop, thickness*)

fl_set_clipping(*x, y, w, h*)

fl_set_gc_clipping(*gc, x, y, w, h*)

fl_unset_gc_clipping(*gc*)

fl_set_clippings(*pRect, n*)

fl_unset_clipping()

fl_set_text_clipping(*x, y, w, h*)

fl_unset_text_clipping()

FL_PCCLAMP(*a*)

fl_popup_add(*win, p2*)

Return Value

pPopup

fl_popup_add_entries(*pPopup, entrytxt*)

Return Value

pPopupEntry

fl_popup_insert_entries(*pPopup, pPopupEntry, entrytxt*)

Return Value

pPopupEntry

fl_popup_create(*win, p2, pPopupItem*)

Return Value

pPopup

fl_popup_delete(*pPopup*)

Return Value

num

fl_popup_entry_delete(*pPopupEntry*)**Return Value**

num

fl_popup_do(*pPopup*)**Return Value**

pPopupReturn

fl_popup_set_position(*pPopup*, *p2*, *p3*)**fl_popup_get_policy**(*pPopup*)**Return Value**

num

fl_popup_set_policy(*pPopup*, *p2*)**Return Value**

num

fl_popup_set_callback(*pPopup*, *py_cb*)**Return Value**

popup callback func

fl_popup_get_title_font(*pPopup*)**Return Value**

style, size

fl_popup_set_title_font(*pPopup*, *style*, *size*)**fl_popup_entry_get_font**(*pPopup*)**Return Value**

style, size

fl_popup_entry_set_font(*pPopup*, *style*, *size*)**fl_popup_get_bw**(*pPopup*)**Return Value**

num

fl_popup_set_bw(*pPopup*, *p2*)**Return Value**

num

fl_popup_get_color(*pPopup*, *p2*)**Return Value**

color

fl_popup_set_color(*pPopup*, *p2*, *colr*)**Return Value**

color

fl_popup_set_cursor(*pPopup*, *p2*)**fl_popup_get_title**(*pPopup*)**Return Value**

title string

fl_popup_set_title(*pPopup*, *title*)**Return Value**

popup

fl_popup_entry_set_callback(*pPopupEntry*, *py_puch*)**Return Value**

popup_callback

fl_popup_entry_set_enter_callback(*pPopupEntry*, *py_puch*)**Return Value**

popup_callback

fl_popup_entry_set_leave_callback(*pPopupEntry*, *py_puch*)**Return Value**

popup_callback

fl_popup_entry_get_state(*pPopupEntry*)**Return Value**

state num

fl_popup_entry_set_state(*pPopupEntry*, *p2*)**Return Value**

state num

fl_popup_entry_clear_state(*pPopupEntry*, *p2*)**Return Value**

state num

fl_popup_entry_raise_state(*pPopupEntry*, *p2*)

Return Value

state num

fl_popup_entry_toggle_state(*pPopupEntry*, *p2*)

Return Value

num

fl_popup_entry_set_text(*p1*, *txtstr*)

Return Value

num

fl_popup_entry_set_shortcut(*pPopupEntry*, *sctext*)

fl_popup_entry_set_value(*pPopupEntry*, *p2*)

Return Value

num

fl_popup_entry_set_user_data(*pPopupEntry*, *data*)

Return Value

??

fl_popup_entry_get_by_position(*pPopup*, *numpos*)

Return Value

pPopupEntry

fl_popup_entry_get_by_value(*pPopup*, *val*)

Return Value

pPopupEntry

fl_popup_entry_get_by_user_data(*pPopup*, *p2*)

Return Value

pPopupEntry

fl_popup_entry_get_by_text(*pPopup*, *text*)

Return Value

pPopupEntry

fl_popup_entry_get_by_label(*pPopup*, *label*)

Return Value

pPopupEntry

fl_popup_entry_get_group(*pPopupEntry*)**Return Value**

num

fl_popup_entry_set_group(*pPopupEntry*, *num*)**Return Value**

num

fl_popup_entry_get_subpopup(*pPopupEntry*)**Return Value**

pPopup

fl_popup_entry_set_subpopup(*pPopupEntry*, *pPopup*)**Return Value**

pPopup

fl_popup_get_size(*pPopup*)**Return Value**

size num., w, h

fl_popup_get_min_width(*pPopup*)**Return Value**

width num

fl_popup_set_min_width(*p1*, *p2*)**Return Value**

width num

fl_create_bitmap(*bitmaptypes*, *x*, *y*, *w*, *h*, *label*)**Return Value**

pObject

fl_add_bitmap(*bitmaptypes*, *x*, *y*, *w*, *h*, *label*)**Return Value**

pObject

fl_set_bitmap_data(*pObject*, *w*, *h*, *data*)**fl_set_bitmap_file**(*pObject*, *fname*)**fl_read_bitmapfile**(*win*, *filename*, *w*, *h*, *hotx*, *hoty*)**Return Value**

pixmap

XCreateBitmapFromData(*pDisplay*, *p2*, *p3*, *p4*, *p5*)

Return Value

pixmap

fl_create_from_bitmapdata(*win*, *data*, *w*, *h*)

fl_set_bitmap_datafile(*pObject*, *fname*)

fl_create_pixmap(*pixmaptype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_pixmap(*pixmaptype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_set_pixmap_data(*pObject*, *bits*)

fl_set_pixmap_file(*pObject*, *fname*)

fl_set_pixmap_align(*pObject*, *align*, *xmargin*, *ymargin*)

fl_set_pixmap_pixmap(*pObject*, *idnum*, *mask*)

fl_set_pixmap_colorcloseness(*red*, *green*, *blue*)

fl_free_pixmap_pixmap(*pObject*)

fl_get_pixmap_pixmap(*pObject*)

Return Value

pixmap, p, m

fl_read_pixmapfile(*win*, *filename*, *tran*)

Return Value

pixmap, w, h, shapemask, hotx, hoty

fl_create_from_pixmapdata(*win*, *data*, *w*, *h*, *sm*, *hotx*, *hoty*, *tran*)

Return Value

pixmap

XFreePixmap(*pDisplay*, *pixmap*)

Return Value

num

fl_free_pixmap(*idnum*)

fl_create_box(*boxtype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_box(*boxtype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_create_browser(*browsertype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_browser(*browsertype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_clear_browser(*pObject*)

fl_add_browser_line(*pObject*, *newtext*)

fl_addto_browser(*pObject*, *newtext*)

fl_addto_browser_chars(*pObject*, *browsertext*)

fl_append_browser(*pObject*, *browsertext*)

fl_insert_browser_line(*pObject*, *linenumb*, *newtext*)

fl_delete_browser_line(*pObject*, *linenumb*)

fl_replace_browser_line(*pObject*, *linenumb*, *newtext*)

fl_get_browser_line(*pObject*, *linenumb*)

Return Value
line string

fl_load_browser(*pObject*, *filename*)

Return Value
num

fl_select_browser_line(*pObject*, *line*)

fl_deselect_browser_line(*pObject*, *line*)

fl_deselect_browser(*pObject*)

fl_isselected_browser_line(*pObject*, *line*)

Return Value

num

fl_get_browser_topline(*pObject*)

Return Value

num

fl_get_browser(*pObject*)

Return Value

num

fl_get_browser_maxline(*pObject*)

Return Value

line num

fl_get_browser_screenlines(*pObject*)

Return Value

lines num

fl_set_browser_topline(*pObject*, *topline*)

fl_set_browser_fontsize(*pObject*, *size*)

fl_set_browser_fontstyle(*pObject*, *style*)

fl_set_browser_specialkey(*pObject*, *specialkey*)

fl_set_browser_vscrollbar(*pObject*, *on*)

fl_set_browser_hscrollbar(*pObject*, *on*)

fl_set_browser_line_selectable(*pObject*, *line*, *flag*)

fl_get_browser_dimension(*pObject*)

Return Value

x, y, w, h

fl_set_browser_dbclick_callback(*pObject*, *py_cb*, *argum*)

`fl_get_browser_xoffset(pObject)`

Return Value

coord num

`fl_get_browser_rel_xoffset(pObject)`

Return Value

num

`fl_set_browser_xoffset(pObject, npixels)`

`fl_set_browser_rel_xoffset(pObject, val)`

`fl_get_browser_yoffset(pObject)`

Return Value

coord num

`fl_get_browser_rel_yoffset(pObject)`

Return Value

num

`fl_set_browser_yoffset(pObject, npixels)`

`fl_set_browser_rel_yoffset(pObject, val)`

`fl_set_browser_scrollbarsize(pObject, hh, vw)`

`fl_show_browser_line(pObject, j)`

`fl_set_default_browser_maxlinelength(n)`

Return Value

length num

`fl_set_browser_hscroll_callback(pObject, py_cb, data)`

`fl_set_browser_vscroll_callback(pObject, py_cb, data)`

`fl_get_browser_line_yoffset(pObject, line)`

Return Value

num

`fl_get_browser_hscroll_callback(pObject)`

Return Value

callback

fl_get_browser_vscroll_callback(*pObject*)

Return Value
callback

fl_create_button(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_roundbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_round3dbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_lightbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_checkbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_bitmapbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_pixmapbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_scrollbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_create_labelbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_add_roundbutton(*buttontype, x, y, w, h, label*)

Return Value
pObject

fl_add_round3dbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_lightbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_checkbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_button(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_bitmapbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_scrollbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_labelbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_set_bitmapbutton_file(*pObject*, *fname*)

fl_set_bitmapbutton_data(*pObject*, *w*, *h*, *bits*)

fl_set_bitmapbutton_datafile(*pObject*, *fname*)

fl_add_pixmapbutton(*buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_set_pixmapbutton_focus_outline(*pObject*, *yes*)

fl_set_pixmapbutton_data(*pObject*, *bits*)

fl_set_pixmapbutton_file(*pObject*, *fname*)

fl_set_pixmapbutton_pixmap(*pObject*, *idnum*, *mask*)

fl_get_pixmapbutton_pixmap(*pObject*)

Return Value

pixmap, p, m

fl_set_pixmapbutton_align(*pObject*, *align*, *xmargin*, *ymargin*)

fl_free_pixmapbutton_pixmap(*pObject*)

fl_set_pixmapbutton_datafile(*pObject*, *fname*)

fl_set_pixmapbutton_show_focus(*pObject*, *yes*)

fl_set_pixmapbutton_focus_data(*pObject*, *bits*)

fl_set_pixmapbutton_focus_file(*pObject*, *fname*)

fl_set_pixmapbutton_focus_pixmap(*pObject*, *idnum*, *mask*)

fl_get_button(*pObject*)

Return Value

num

fl_set_button(*pObject*, *pushed*)

fl_get_button_numb(*pObject*)

Return Value

num

fl_set_button_shortcut(*pObject*, *sstr*, *showit*)

fl_create_generic_button(*objclass*, *buttontype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_button_class(*bclass*, *py_drawit*, *py_cleanup*)

fl_set_button_mouse_buttons(*pObject*, *buttons*)

fl_get_button_mouse_buttons(*pObject*)

Return Value

buttons

fl_create_generic_canvas(*canvasclass, canvastype, x, y, w, h, label*)

Return Value
pObject

fl_add_canvas(*canvastype, x, y, w, h, label*)

Return Value
pObject

fl_create_canvas(*canvastype, x, y, w, h, label*)

Return Value
pObject

fl_set_canvas_decoration(*pObject, boxtype*)

Sets the boxtype of the object.

fl_set_canvas_colormap(*pObject, colormap*)

fl_set_canvas_visual(*pObject, vi*)

fl_set_canvas_depth(*pObject, depth*)

fl_set_canvas_attributes(*pObject, mask, pXSetWindowAttributes*)

fl_add_canvas_handler(*pObject, ev, py_handler, udata*)

Return Value
canvas handler

fl_get_canvas_id(*pObject*)

Return Value
window

fl_get_canvas_colormap(*pObject*)

Return Value
colormap

fl_get_canvas_depth(*pObject*)

Return Value
depth num

fl_remove_canvas_handler(*pObject, ev, py_handler*)

fl_hide_canvas(*pObject*)

`fl_share_canvas_colormap(pObject, colormap)`

`fl_clear_canvas(pObject)`

`fl_modify_canvas_prop(pObject, py-init, py-activate, py-cleanup)`

`fl_canvas_yield_to_shortcut(pObject, yes)`

`fl_create_glcanvas(canvastype, x, y, w, h, label)`

Return Value

`pObject`

`fl_add_glcanvas(canvastype, x, y, w, h, label)`

Return Value

`pObject`

`fl_set_glcanvas_defaults(config)`

`fl_set_glcanvas_defaults(config):`

`fl_get_glcanvas_defaults(config)`

`fl_get_glcanvas_defaults(config):`

`fl_set_glcanvas_attributes(pObject, config)`

`fl_get_glcanvas_attributes(pObject, attributes)`

`fl_set_glcanvas_direct(pObject, direct)`

`fl_activate_glcanvas(pObject)`

`fl_get_glcanvas_xvisualinfo(pObject)`

Return Value

`xvisualinfo` class

`fl_get_glcanvas_context(pObject)`

Return Value

`glxcontext` class

`fl_glwincreate(config, pGLXContext, w, h)`

Return Value

window

fl_glwinopen(*config*, *pGLXContext*, *w*, *h*)

Return Value
window

fl_create_chart(*charttype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_chart(*charttype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_clear_chart(*pObject*)

fl_add_chart_value(*pObject*, *val*, *labeltext*, *col*)

fl_insert_chart_value(*pObject*, *indx*, *val*, *labeltext*, *col*)

fl_replace_chart_value(*pObject*, *indx*, *val*, *labeltext*, *col*)

fl_set_chart_bounds(*pObject*, *minbound*, *maxbound*)

fl_get_chart_bounds(*pObject*)

Return Value
minbound, maxbound

fl_set_chart_maxnumb(*pObject*, *maxnumb*)

fl_set_chart_autosize(*pObject*, *autosize*)

fl_set_chart_lstyle(*pObject*, *lstyle*)

fl_set_chart_lsize(*pObject*, *lsize*)

fl_set_chart_lcolor(*pObject*, *colr*)

fl_set_chart_baseline(*pObject*, *yesno*)

fl_set_chart_lcol(*pObject*, *colr*)

fl_create_choice(*choicetype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_choice(*choicetype, x, y, w, h, label*)

Return Value
pObject

fl_clear_choice(*pObject*)

fl_addto_choice(*pObject, choicetext*)

Return Value
num

fl_replace_choice(*pObject, numb, choicetext*)

fl_delete_choice(*pObject, numb*)

fl_set_choice(*pObject, choice*)

fl_set_choice_text(*pObject, choicetext*)

fl_get_choice(*pObject*)

Return Value
num

fl_get_choice_item_text(*pObject, n*)

Return Value
text string

fl_get_choice_maxitems(*pObject*)

Return Value
items num

fl_get_choice_text(*pObject*)

Return Value
text string

fl_set_choice_fontsize(*pObject, size*)

fl_set_choice_fontstyle(*pObject, style*)

fl_set_choice_align(*pObject, align*)

fl_get_choice_item_mode(*pObject, item*)

Return Value
mode num


```
fl_set_choice_item_mode(pObject, item, mode)
```

```
fl_set_choice_item_shortcut(pObject, item, sstext)
```

```
fl_set_choice_entries(pObject, pPopupEntry)
```

Return Value

`num`

```
fl_set_choice_notitle(pObject, n)
```

Return Value

`num`

```
fl_stuff_clipboard(pObject, clipbdtype, data, size, py_lose_callback)
```

Return Value

`num`

```
fl_request_clipboard(pObject, clipbdtype, py_got_it_callback)
```

Return Value

`num`

```
fl_create_clock(clocktype, x, y, w, h, s)
```

Return Value

`pObject`

```
fl_add_clock(clocktype, x, y, w, h, s)
```

Return Value

`pObject`

```
fl_get_clock(pObject)
```

Return Value

`hr, mn, sec`

```
fl_set_clock_adjustment(pObject, offset)
```

Return Value

`num`

```
fl_set_clock_ampm(pObject, y)
```

```
fl_create_counter(countertype, x, y, w, h, label)
```

Return Value

`pObject`

fl_add_counter(*countertype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_set_counter_value(*pObject*, *val*)

fl_set_counter_bounds(*pObject*, *minbound*, *maxbound*)

fl_set_counter_step(*pObject*, *s*, *l*)

fl_set_counter_precision(*pObject*, *prec*)

fl_get_counter_precision(*pObject*)
Return Value
num

fl_set_counter_return(*pObject*, *how*)

fl_get_counter_value(*pObject*)
Return Value
num

fl_get_counter_bounds(*pObject*)
Return Value
minbound, maxbound

fl_get_counter_step(*pObject*)
Return Value
s, l

fl_set_counter_filter(*pObject*, *filter*)

fl_get_counter_repeat(*pObject*)
Return Value
num

fl_set_counter_repeat(*pObject*, *msec*)

fl_get_counter_min_repeat(*pObject*)
Return Value
num

fl_set_counter_min_repeat(*pObject*, *msec*)

fl_get_counter_speedjump(*pObject*)

Return Value

num

fl_set_counter_speedjump(*pObject*, *yesno*)

fl_set_cursor(*win*, *numb*)

fl_set_cursor_color(*numb*, *fgcolr*, *bgcolr*)

fl_create_bitmap_cursor(*source*, *maskstr*, *w*, *h*, *hotx*, *hoty*)

Return Value

num

fl_create_animated_cursor(*curnames*, *timeout*)

Return Value

num

fl_get_cursor_byname(*numb*)

Return Value

cursor

fl_create_dial(*dialtype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_dial(*dialtype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_set_dial_value(*pObject*, *val*)

fl_get_dial_value(*pObject*)

Return Value

num

fl_set_dial_bounds(*pObject*, *minbound*, *maxbound*)

fl_get_dial_bounds(*pObject*)

Return Value

minbound, *maxbound*

fl_set_dial_step(*pObject*, *value*)

fl_set_dial_return(*pObject*, *value*)

fl_set_dial_angles(*pObject*, *angmin*, *angmax*)

fl_set_dial_cross(*pObject*, *flag*)

fl_set_dial_crossover(*pObject*, *flag*)

fl_set_dial_direction(*pObject*, *directn*)

fl_get_dirlist(*directory*, *pattern*, *rescan*)

Return Value
pDirList, n

fl_set_dirlist_filter(*py_filter*)

Return Value
dirlist_filter func

fl_set_dirlist_sort(*method*)

Return Value
num

fl_set_dirlist_filterdir(*yes*)

Return Value
num

fl_free_dirlist(*pDirList*)

fl_free_all_dirlist()

fl_is_valid_dir(*name*)

Return Value
num

fl_fmtime(*timestr*)

Return Value
num

fl_fix_dirname(*directory*)

Return Value
dirname string

flps_init()**Return Value**

flps_control class

fl_object_ps_dump(*pObject*, *fname*)**Return Value**

num

fl_addto_formbrowser(*pObject*, *pForm*)**Return Value**

num

fl_delete_formbrowser_bynumber(*pObject*, *num*)**Return Value**

pForm

fl_delete_formbrowser(*pObject*, *pFormCandidate*)**Return Value**

num

fl_replace_formbrowser(*pObject*, *num*, *pForm*)**fl_insert_formbrowser(*pObject*, *line*, *pFormNew*)****Return Value**

num

fl_get_formbrowser_area(*pObject*)**Return Value**

num., x, y, w, h

fl_set_formbrowser_scroll(*pObject*, *how*)**fl_set_formbrowser_hscrollbar(*pObject*, *how*)****fl_set_formbrowser_vscrollbar(*pObject*, *how*)****fl_get_formbrowser_topform(*pObject*)****Return Value**

pForm

fl_set_formbrowser_topform(*pObject*, *pForm*)**Return Value**

num

fl_set_formbrowser_topform_bynumber(*pObject*, *n*)

Return Value
pForm

fl_set_formbrowser_xoffset(*pObject*, *offset*)

Return Value
num

fl_set_formbrowser_yoffset(*pObject*, *offset*)

Return Value
num

fl_get_formbrowser_xoffset(*pObject*)

Return Value
num

fl_get_formbrowser_yoffset(*pObject*)

Return Value
num

fl_find_formbrowser_form_number(*pObject*, *pFormCandidate*)

Return Value
num

fl_add_formbrowser(*frmbrwstype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_create_formbrowser(*frmbrwstype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_get_formbrowser_numforms(*pObject*)

Return Value
forms num

fl_get_formbrowser_form(*pObject*, *n*)

Return Value
pForm

fl_create_frame(*frametype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_frame(*frametype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_create_labelframe(*frametype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_labelframe(*frametype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_create_free(*freetype*, *x*, *y*, *w*, *h*, *label*, *py_handle*)

Return Value
pObject

fl_add_free(*freetype*, *x*, *y*, *w*, *h*, *label*, *py_handle*)

Return Value
pObject

fl_set_goodies_font(*style*, *size*)

fl_show_message(*p1*, *p2*, *p3*)

fl_show_messages(*p1*)

fl_show_msg(*p1*)

fl_hide_message()

fl_hide_msg()

fl_hide_messages()

fl_show_question(*p1*, *p2*)

Return Value
num

fl_hide_question()

fl_show_alert(*p1*, *p2*, *p3*, *p4*)

fl_show_alert2(*c*, *fmt*)

```
fl_hide_alert()
```

```
fl_show_input(p1, p2)
```

Return Value
input string

```
fl_hide_input()
```

```
fl_show_simple_input(p1, p2)
```

Return Value
input string

```
fl_show_colormap(oldcolr)
```

Shows a colormap color selector from which the user can select a color. `<oldcolr>` : color num.

Return Value
colormap num

```
fl_show_choices(p1, p2, p3, p4, p5, p6)
```

Return Value
num

```
fl_show_choice(p1, p2, p3, p4, p5, p6, p7, p8)
```

Return Value
num

```
fl_hide_choice()
```

```
fl_set_choices_shortcut(p1, p2, p3)
```

```
fl_set_choice_shortcut(p1, p2, p3)
```

```
fl_show_oneliner(p1, p2, p3)
```

```
fl_hide_oneliner()
```

```
fl_set_oneliner_font(p1, p2)
```

```
fl_set_oneliner_color(p1, p2)
```

```
fl_set_tooltip_font(p1, p2)
```

```
fl_set_tooltip_color(p1, p2)
```


`fl_set_tooltip_boxtype(p1)`

`fl_set_tooltip_lalign(p1)`

`fl_exe_command(p1, p2)`

Return Value

num

`fl_end_command(p1)`

Return Value

num

`fl_check_command(p1)`

Return Value

num

`fl_popen(p1, p2)`

Return Value

FILE ptr

`fl_pclose(p1)`

Return Value

num

`fl_end_all_command()`

Return Value

num

`fl_show_command_log(p1)`

`fl_hide_command_log()`

`fl_clear_command_log()`

`fl_addto_command_log(p1)`

`fl_set_command_log_position(p1, p2)`

`fl_get_command_log_fdstruct()`

Return Value

pCmdlog

fl_open_command(*p1*, *p2*)**Return Value**

num

fl_close_command(*p1*)**Return Value**

num

fl_use_fselector(*p1*)**Return Value**

num

fl_show_fselector(*p1*, *p2*, *p3*, *p4*)**Return Value**

fselector string

fl_set_fselector_fontsize(*p1*)**fl_set_fselector_fontstyle**(*p1*)**fl_set_fselector_placement**(*p1*)**fl_set_fselector_border**(*p1*)**fl_set_fselector_transient**(*b*)**fl_set_fselector_callback**(*py_cb*, *p2*)**fl_get_filename**()**Return Value**

filename string

fl_get_directory()**Return Value**

directory string

fl_get_pattern()**Return Value**

pattern string

fl_set_directory(*p1*)**Return Value**

num

`fl_set_pattern(p1)`

`fl_refresh_fselector()`

`fl_add_fselector_appbutton(p1, py_fn, p3)`

`fl_remove_fselector_appbutton(p1)`

`fl_disable_fselector_cache(p1)`

`fl_invalidate_fselector_cache()`

`fl_get_fselector_form()`

Return Value
pForm

`fl_get_fselector_fdstruct()`

Return Value
fselector class

`fl_hide_fselector()`

`fl_set_fselector_filetype_marker(p1, p2, p3, p4, p5)`

`fl_show_file_selector(p1, p2, p3, p4)`

Return Value
fselector string

`fl_set_fselector_cb(py_cb, p2)`

`fl_set_fselector_title(s)`

`fl_goodies_atclose(pForm, p2)`

Return Value
num

`fl_create_input(inputtype, x, y, w, h, label)`

Return Value
pObject

`fl_add_input(inputtype, x, y, w, h, label)`

Return Value
pObject

`fl_set_input(pObject, inputstr)`

`fl_set_input_return(pObject, value)`

`fl_set_input_color(pObject, textcolr, curscolr)`

`fl_get_input_color(pObject)`

Return Value

textcolr, *curscolr*

`fl_set_input_scroll(pObject, yes)`

`fl_set_input_cursorpos(pObject, xpos, ypos)`

`fl_set_input_selected(pObject, yes)`

`fl_set_input_selected_range(pObject, begin, end)`

`fl_get_input_selected_range(pObject)`

Return Value

string, *begin*, *end*

`fl_set_input_maxchars(pObject, maxchars)`

`fl_set_input_format(pObject, fmt, sep)`

`fl_set_input_hscrollbar(pObject, pref)`

`fl_set_input_vscrollbar(pObject, pref)`

`fl_set_input_topline(pObject, top)`

`fl_set_input_scrollbarsize(pObject, hh, vw)`

`fl_get_input_scrollbarsize(pObject)`

Return Value

hh, *vw*

`fl_set_input_xoffset(pObject, xoff)`

fl_get_input_xoffset(*pObject*)**Return Value**

num

fl_set_input_fieldchar(*pObject*, *fldchar*)**Return Value**

num

fl_get_input_topline(*pObject*)**Return Value**

num

fl_get_input_screenlines(*pObject*)**Return Value**

num

fl_get_input_cursorpos(*pObject*)**Return Value**

num., x, y

fl_set_input_cursor_visible(*pObject*, *visible*)**fl_get_input_numberoflines**(*pObject*)**Return Value**

lines num

fl_get_input_format(*pObject*)**Return Value**

fmt, sep

fl_get_input(*pObject*)**Return Value**

input string

fl_set_input_filter(*pObject*, *py-validate*)**Return Value**

input_filter func

fl_validate_input(*pObject*)**Return Value**

num

fl_set_input_shortcut(*pObject*, *sstr*, *showit*)

fl_set_input_editkeymap(*pEditKeymap*)

fl_create_menu(*menutype, x, y, w, h, label*)

Return Value

pObject

fl_add_menu(*menutype, x, y, w, h, label*)

Return Value

pObject

fl_clear_menu(*pObject*)

fl_set_menu(*pObject, menustr*)

fl_addto_menu(*pObject, menustr*)

Return Value

num

fl_replace_menu_item(*pObject, numb, itemstr*)

fl_delete_menu_item(*pObject, numb*)

fl_set_menu_item_callback(*pObject, numb, py_cb*)

Return Value

callback

fl_set_menu_item_shortcut(*pObject, numb, itemstr*)

fl_set_menu_item_mode(*pObject, numb, mode*)

fl_show_menu_symbol(*pObject, show*)

fl_set_menu_popup(*pObject, pup*)

fl_get_menu_popup(*pObject*)

Return Value

num

fl_get_menu(*pObject*)

Return Value

num

fl_get_menu_item_text(*pObject*, *numb*)

Return Value
text string

fl_get_menu_maxitems(*pObject*)

Return Value
items num

fl_get_menu_item_mode(*pObject*, *numb*)

Return Value
mode num

fl_get_menu_text(*pObject*)

Return Value
text string

fl_set_menu_entries(*pObject*, *pPopupEntry*)

Return Value
num

fl_set_menu_notitle(*pObject*, *off*)

Return Value
num

fl_set_menu_item_id(*pObject*, *item*, *idnum*)

Return Value
num

fl_create_nmenu(*nmenutype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_nmenu(*nmenutype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_clear_nmenu(*pObject*)

Return Value
num

fl_add_nmenu_items(*pObject*, *itemstr*)

Return Value
pPopupEntry

fl_insert_nmenu_items(*pObject*, *pPopupEntry*, *itemstr*)

Return Value

pPopupEntry

fl_replace_nmenu_item(*pObject*, *pPopupEntry*, *itemstr*)

Return Value

pPopupEntry

fl_delete_nmenu_item(*pObject*, *pPopupEntry*)

Return Value

num

fl_set_nmenu_items(*pObject*, *pPopupItem*)

Return Value

pPopupEntry

fl_get_nmenu_popup(*pObject*)

Return Value

pPopup

fl_set_nmenu_popup(*pObject*, *pPopup*)

Return Value

num

fl_get_nmenu_item(*pObject*)

Return Value

pPopupReturn

fl_get_nmenu_item_by_value(*pObject*, *value*)

Return Value

pPopupEntry

fl_get_nmenu_item_by_label(*pObject*, *label*)

Return Value

pPopupEntry

fl_get_nmenu_item_by_text(*pObject*, *text*)

Return Value

pPopupEntry

fl_set_nmenu_policy(*pObject*, *num*)

Return Value

num

fl_set_nmenu_hl_text_color(*pObject*, *colr*)

Return Value
color

fl_create_positioner(*postype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_positioner(*postype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_set_positioner_xvalue(*pObject*, *val*)

fl_get_positioner_xvalue(*pObject*)

Return Value
floatnum

fl_set_positioner_xbounds(*pObject*, *minbound*, *maxbound*)

fl_get_positioner_xbounds(*pObject*)

Return Value
minbound, maxbound

fl_set_positioner_yvalue(*pObject*, *val*)

fl_get_positioner_yvalue(*pObject*)

Return Value
floatnum

fl_set_positioner_ybounds(*pObject*, *minbound*, *maxbound*)

fl_get_positioner_ybounds(*pObject*)

Return Value
minbound, maxbound

fl_set_positioner_xstep(*pObject*, *value*)

fl_set_positioner_ystep(*pObject*, *value*)

fl_set_positioner_return(*pObject*, *value*)

fl_create_scrollbar(*scrolltype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_scrollbar(*scrolltype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_get_scrollbar_value(*pObject*)

Return Value
floatnum

fl_set_scrollbar_value(*pObject*, *val*)

fl_set_scrollbar_size(*pObject*, *val*)

fl_set_scrollbar_increment(*pObject*, *leftbtnval*, *midlbtnval*)

fl_get_scrollbar_increment(*pObject*)

Return Value
leftbtnval, midlbtnval

fl_set_scrollbar_bounds(*pObject*, *minbound*, *maxbound*)

fl_get_scrollbar_bounds(*pObject*)

Return Value
minbound, maxbound

fl_set_scrollbar_return(*pObject*, *returnnum*)

fl_set_scrollbar_step(*pObject*, *step*)

fl_create_select(*selecttype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_add_select(*selecttype*, *x*, *y*, *w*, *h*, *label*)

Return Value
pObject

fl_clear_select(*pObject*)

fl_add_select_items(*pObject*, *itemstr*)

Return Value

`pPopupEntry`

fl_insert_select_items(*pObject*, *pPopupEntry*, *itemstr*)

Return Value

`pPopupEntry`

fl_replace_select_item(*pObject*, *pPopupEntry*, *itemstr*)

Return Value

`pPopupEntry`

fl_delete_select_item(*pObject*, *pPopupEntry*)

Return Value

`num`

fl_set_select_items(*pObject*, *pPopupItem*)

Return Value

`num`

fl_get_select_popup(*pObject*)

Return Value

`pPopup`

fl_set_select_popup(*pObject*, *pPopup*)

Return Value

`num`

fl_get_select_item(*pObject*)

Return Value

`pPopupReturn`

fl_set_select_item(*pObject*, *pPopupEntry*)

Return Value

`pPopupReturn`

fl_get_select_item_by_value(*pObject*, *value*)

Return Value

`pPopupEntry`

fl_get_select_item_by_label(*pObject*, *label*)

Return Value

`pPopupEntry`

fl_get_select_item_by_text(*pObject*, *txtstr*)

Return Value

pPopupEntry

fl_get_select_text_color(*pObject*)

Return Value

color

fl_set_select_text_color(*pObject*, *colr*)

Return Value

color

fl_get_select_text_font(*pObject*)

Return Value

num, num1, num2

fl_set_select_text_font(*pObject*, *p2*, *p3*)

Return Value

font num

fl_get_select_text_align(*pObject*)

Return Value

num

fl_set_select_text_align(*pObject*, *p2*)

Return Value

num

fl_set_select_policy(*pObject*, *num*)

Return Value

num

fl_create_slider(*slidertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_slider(*slidertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_create_valslider(*slidertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_valslider(*slidertype, x, y, w, h, label*)

Return Value
pObject

fl_set_slider_value(*pObject, val*)

fl_get_slider_value(*pObject*)

Return Value
floatnum

fl_set_slider_bounds(*pObject, minbound, maxbound*)

fl_get_slider_bounds(*pObject*)

Return Value
minbound, maxbound

fl_set_slider_return(*pObject, returnnum*)

fl_set_slider_step(*pObject, value*)

fl_set_slider_increment(*pObject, leftbtnval, midlbtnval*)

fl_get_slider_increment(*pObject*)

Return Value
leftbtnval, midlbtnval

fl_set_slider_size(*pObject, size*)

fl_set_slider_precision(*pObject, precnum*)

fl_set_slider_filter(*pObject, py_filter*)

fl_create_spinner(*spinnertype, x, y, w, h, label*)

Return Value
pObject

fl_add_spinner(*spinnertype, x, y, w, h, label*)

Return Value
pObject

fl_get_spinner_value(*pObject*)

Return Value
floatval

fl_set_spinner_value(*pObject*, *val*)

Return Value

num

fl_set_spinner_bounds(*pObject*, *minbound*, *maxbound*)

fl_get_spinner_bounds(*pObject*)

Return Value

minbound, maxbound

fl_set_spinner_step(*pObject*, *step*)

fl_get_spinner_step(*pObject*)

Return Value

num

fl_set_spinner_precision(*pObject*, *precnum*)

fl_get_spinner_precision(*pObject*)

Return Value

num

fl_get_spinner_input(*pObject*)

Return Value

pObject

fl_get_spinner_up_button(*pObject*)

Return Value

pObject

fl_get_spinner_down_button(*pObject*)

Return Value

pObject

fl_create_tabfolder(*foldertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_tabfolder(*foldertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_addto_tabfolder(*pObject*, *title*, *pForm*)

Return Value
pObject

fl_get_tabfolder_folder_bynumber(*pObject*, *num*)

Return Value
pForm

fl_get_tabfolder_folder_byname(*pObject*, *name*)

Return Value
pForm

fl_delete_folder(*pObject*, *pForm*)

fl_delete_folder_bynumber(*pObject*, *num*)

fl_delete_folder_byname(*pObject*, *name*)

fl_set_folder(*pObject*, *pForm*)

fl_set_folder_byname(*pObject*, *name*)

fl_set_folder_bynumber(*pObject*, *num*)

fl_get_folder(*pObject*)

Return Value
pForm

fl_get_folder_number(*pObject*)

Return Value
folder num

fl_get_folder_name(*pObject*)

Return Value
name string

fl_get_tabfolder_numfolders(*pObject*)

Return Value
num

fl_get_active_folder(*pObject*)

Return Value
pForm

fl_get_active_folder_number(*pObject*)

Return Value

num

fl_get_active_folder_name(*pObject*)

Return Value

name string

fl_get_folder_area(*pObject*)

Return Value

x, y, w, h

fl_replace_folder_bynumber(*pObject, num, pForm*)

fl_set_tabfolder_autofit(*pObject, num*)

Return Value

num

fl_set_default_tabfolder_corner(*n*)

Return Value

num

fl_set_tabfolder_offset(*pObject, offset*)

Return Value

num

fl_create_text(*texttype, x, y, w, h, label*)

Return Value

pObject

fl_add_text(*texttype, x, y, w, h, label*)

Return Value

pObject

fl_get_thumbwheel_value(*pObject*)

Return Value

num

fl_set_thumbwheel_value(*pObject, value*)

fl_get_thumbwheel_step(*pObject*)

Return Value

num

fl_set_thumbwheel_step(*pObject*, *step*)

Return Value

num

fl_set_thumbwheel_return(*pObject*, *when*)

Return Value

num

fl_set_thumbwheel_crossover(*pObject*, *flag*)

Return Value

num

fl_set_thumbwheel_bounds(*pObject*, *minbound*, *maxbound*)

fl_get_thumbwheel_bounds(*pObject*)

Return Value

minbound, *maxbound*

fl_create_thumbwheel(*wheeltype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_thumbwheel(*wheeltype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_create_timer(*timertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_timer(*timertype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_set_timer(*pObject*, *total*)

fl_get_timer(*pObject*)

Return Value

num

fl_set_timer_countup(*pObject*, *yes*)

fl_set_timer_filter(*pObject*, *py_filter*)

Return Value

timer_filter func

fl_suspend_timer(*pObject*)

fl_resume_timer(*pObject*)

fl_setpup_entries(*popupid*, *pPopupEntry*)

Return Value

num

fl_newpup(*win*)

Return Value

num

fl_defpup(*win*, *pupstr*)

Return Value

num

fl_addtopup(*popupid*, *pupstr*)

Return Value

num

fl_setpup_mode(*popupid*, *itemval*, *mode*)

Return Value

num

fl_freepup(*popupid*)

fl_dopup(*popupid*)

Return Value

num

fl_setpup_default_cursor(*cursor*)

Return Value

cursor

fl_setpup_default_color(*fgcolr*, *bgcolr*)

fl_setpup_default_pup_checked_color(*colr*)

fl_setpup_default_pup_checked_color(colr):

fl_setpup_default_fontsize(*size*)

Return Value

num

fl_setpup_default_fontstyle(*style*)

Return Value

num

fl_setpup_fontsize(*size*)

Return Value

num

fl_setpup_fontstyle(*style*)

Return Value

num

fl_setpup_color(*fgcolr*, *bgcolr*)

fl_setpup_default_checkcolor(*colr*)

fl_setpup_default_pup_checked_color(*colr*):

fl_setpup_checkcolor(*colr*)

fl_setpup_default_pup_checked_color(*colr*):

fl_setpup_default_bw(*bw*)

Return Value

num

fl_setpup_shortcut(*popupid*, *itemval*, *hotkeystxt*)

fl_setpup_position(*x*, *y*)

fl_setpup_selection(*popupid*, *itemval*)

fl_setpup_shadow(*popupid*, *flag*)

fl_setpup_softedge(*popupid*, *flag*)

fl_setpup_bw(*popupid*, *bw*)

fl_setpup_title(*popupid*, *title*)

fl_setpup_entercb(*popupid*, *py_cb*, *data*)**Return Value***pup_entercb***fl_setpup_leavecb**(*popupid*, *py_cb*, *data*)**Return Value***pup_leavecb***fl_setpup_pad**(*popupid*, *padw*, *padh*)**fl_setpup_cursor**(*popupid*, *cursor*)**Return Value***cursor***fl_setpup_maxpup**(*newmaxnum*)**Return Value***num***fl_getpup_mode**(*popupid*, *itemval*)**Return Value***num***fl_getpup_text**(*popupid*, *itemval*)**Return Value**

text string

fl_showpup(*popupid*)**fl_hidepup**(*popupid*)**fl_getpup_items**(*popupid*)**Return Value***num***fl_current_pup**()**Return Value***num***fl_setpup_itemcb**(*popupid*, *itemval*, *py_cb*)**Return Value***pup_cb*

fl_setpup_menucb(*popupid*, *py_cb*)

Return Value

pup_cb func

fl_setpup_submenu(*popupid*, *itemval*, *subpopupid*)

fl_setpup(*popupid*, *itemval*, *mode*)

Return Value

num

fl_create_xyplot(*plottype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_add_xyplot(*plottype*, *x*, *y*, *w*, *h*, *label*)

Return Value

pObject

fl_set_xyplot_data(*pObject*, *xlist*, *ylist*, *n*, *title*, *xlabel*, *ylabel*)

fl_set_xyplot_data_double(*pObject*, *x*, *y*, *n*, *title*, *xlabel*, *ylabel*)

fl_set_xyplot_file(*pObject*, *f*, *title*, *xl*, *yl*)

Return Value

num

fl_insert_xyplot_data(*pObject*, *idnum*, *n*, *valx*, *valy*)

fl_add_xyplot_text(*pObject*, *valx*, *valy*, *text*, *al*, *colr*)

fl_delete_xyplot_text(*pObject*, *text*)

fl_set_xyplot_maxoverlays(*pObject*, *maxover*)

Return Value

num

fl_add_xyplot_overlay(*pObject*, *idnum*, *x*, *y*, *n*, *colr*)

fl_add_xyplot_overlay_file(*pObject*, *idnum*, *f*, *colr*)

Return Value

num

fl_set_xyplot_return(*pObject*, *when*)

`fl_set_xyplot_xtics(pObject, major, minor)`

`fl_set_xyplot_ytics(pObject, major, minor)`

`fl_set_xyplot_xbounds(pObject, minbound, maxbound)`

`fl_set_xyplot_ybounds(pObject, minbound, maxbound)`

`fl_get_xyplot_xbounds(pObject)`

Return Value

minbound, *maxbound*

`fl_get_xyplot_ybounds(pObject)`

Return Value

minbound, *maxbound*

`fl_get_xyplot(pObject)`

Return Value

x, *y*, *i*

`fl_get_xyplot_data(pObject)`

Return Value

x, *y*, *n*

`fl_get_xyplot_data_pointer(pObject, idnum)`

Return Value

x, *y*, *n*

`fl_get_xyplot_overlay_data(pObject, idnum)`

Return Value

x, *y*, *n*

`fl_set_xyplot_overlay_type(pObject, idnum, plotype)`

`fl_delete_xyplot_overlay(pObject, idnum)`

`fl_set_xyplot_interpolate(pObject, idnum, deg, grid)`

`fl_set_xyplot_inspect(pObject, yes)`

`fl_set_xyplot_symbolsizes(pObject, n)`

`fl_replace_xyplot_point(pObject, i, valx, valy)`

fl_replace_xyplot_point_in_overlay(*pObject*, *i*, *setID*, *valx*, *valy*)

fl_get_xyplot_xmapping(*pObject*)

Return Value

a, *b*

fl_get_xyplot_ymapping(*pObject*)

Return Value

a, *b*

fl_set_xyplot_keys(*pObject*, *keys*, *valx*, *valy*, *align*)

fl_set_xyplot_key(*pObject*, *idnum*, *keytxt*)

fl_set_xyplot_key_position(*pObject*, *valx*, *valy*, *align*)

fl_set_xyplot_key_font(*pObject*, *style*, *size*)

fl_get_xyplot_numdata(*pObject*, *idnum*)

Return Value

num

fl_set_xyplot_fontsize(*pObject*, *size*)

fl_set_xyplot_fontstyle(*pObject*, *style*)

fl_xyplot_s2w(*pObject*, *sx*, *sy*, *wx*, *wy*)

fl_xyplot_w2s(*pObject*, *wx*, *wy*, *sx*, *sy*)

fl_set_xyplot_xscale(*pObject*, *scale*, *base*)

fl_set_xyplot_yscale(*pObject*, *scale*, *base*)

fl_clear_xyplot(*pObject*)

fl_set_xyplot_linewidth(*pObject*, *idnum*, *lw*)

fl_set_xyplot_xgrid(*pObject*, *xgrid*)

fl_set_xyplot_ygrid(*pObject*, *ygrid*)

fl_set_xyplot_grid_linestyle(*pObject*, *style*)

Return Value

num

fl_set_xyplot_alphaxtics(*pObject*, *m*, *s*)

fl_set_xyplot_alphaytics(*pObject*, *m*, *s*)

fl_set_xyplot_fixed_xaxis(*pObject*, *lm*, *rm*)

fl_set_xyplot_fixed_yaxis(*pObject*, *bm*, *tm*)

fl_interpolate(*wx*, *wy*, *nin*, *x*, *y*, *grid*, *ndeg*)

Return Value

num

fl_spline_interpolate(*wx*, *wy*, *nin*, *x*, *y*, *grid*)

Return Value

num

fl_set_xyplot_symbol(*pObject*, *idnum*, *py-symbol*)

Return Value

xyplot_symbol func

fl_set_xyplot_mark_active(*pObject*, *y*)

Return Value

num

fl_gc_()

Return Value

gc

fl_textgc_()

Return Value

gc

fl_fheight_()

Return Value

num

fl_fdesc_()

Return Value

num

fl_cur_win_()**Return Value**
window**fl_cur_fs_()****Return Value**
XFontStruct class**fl_textgc()****Return Value**
gc**fl_gc()****Return Value**
gc**fl_cur_win()****Return Value**
window**fl_fheight()****Return Value**
num**fl_fdesc()****Return Value**
num**fl_cur_fs()****Return Value**
XFontStruct class**fl_display_()****Return Value**
pDisplay**FL_RGB2GRAY(*r, g, b*)****FL_GETR(*packed*)****FL_IsRGB(*im*)****FL_IsPacked(*im*)**

flimage_setup(*setup*)**flimage_load**(*filename*)**Return Value***pImage***flimage_read**(*pImage*)**Return Value***pImage***flimage_dump**(*pImage*, *p2*, *p3*)**Return Value***num***flimage_close**(*pImage*)**Return Value***num***flimage_alloc**()**Return Value***pImage***flimage_getmem**(*pImage*)**Return Value***num***flimage_is_supported**(*p1*)**Return Value***num***flimage_description_via_filter**(*pImage*, *p2*, *p3*, *p4*)**Return Value***num***flimage_write_via_filter**(*pImage*, *p2*, *p3*, *p4*)**Return Value***num***flimage_free**(*pImage*)**Return Value***num*

flimage_display(*pImage*, *win*)**Return Value**

num

flimage_sdisplay(*pImage*, *win*)**Return Value**

num

flimage_convert(*pImage*, *p2*, *p3*)**Return Value**

num

flimage_type_name(*flimagetype*)**Return Value**

name string

flimage_add_text(*pImage*, *text*, *p3*, *p4*, *p5*, *p6*, *p7*, *p8*, *p9*, *p10*, *p11*)**Return Value**

num

flimage_add_text_struct(*pImage*, *pImageText*)**Return Value**

num

flimage_delete_all_text(*pImage*)**flimage_add_marker**(*pImage*, *text*, *p3*, *p4*, *p5*, *p6*, *p7*, *p8*, *p9*, *p10*, *p11*)**Return Value**

num

flimage_add_marker_struct(*pImage*, *pImageMarker*)**Return Value**

num

flimage_define_marker(*text1*, *pImageMarker*, *text2*)**Return Value**

num

flimage_delete_all_markers(*pImage*)**flimage_render_annotation**(*pImage*, *win*)**Return Value**

num

flimage_error(*pImage*, *text*)

flimage_enable_pnm()

flimage_set_fits_bits(*p1*)

Return Value

num

flimage_jpeg_output_options(*pImageJpegOption*)

flimage_pnm_output_options(*p1*)

flimage_gif_output_options(*p1*)

flimage_ps_options()

Return Value

flps_control class

flimage_jpeg_options(*pImageJpegOption*)

flimage_pnm_options(*p1*)

flimage_gif_options(*p1*)

flimage_get_number_of_formats()

Return Value

num

flimage_get_format_info(*p1*)

Return Value

format_info class instance

fl_get_matrix(*p1*, *p2*, *p3*)

Return Value

?

fl_make_matrix(*p1*, *p2*, *p3*, *p4*)

Return Value

?

fl_free_matrix(*p1*)

fl_init_RGBdatabase(*text*)**Return Value**

num

fl_lookup_RGBcolor(*text*, *p2*, *p3*, *p4*)**Return Value**

num

flimage_add_format(*p1*, *p2*, *p3*, *p4*, *py_fn5*, *py_fn6*, *py_fn7*, *py_fn8*)**Return Value**

num

flimage_set_annotation_support(*p1*, *p2*)**flimage_getcolormap**(*pImage*)**Return Value**

num

fl_select_mediancut_quantizer()**flimage_convolve**(*pImage*, *p2*, *p3*, *p4*)**Return Value**

num

flimage_convolvea(*pImage*, *p2*, *p3*, *p4*)**Return Value**

num

flimage_tint(*pImage*, *p2*, *p3*)**Return Value**

num

flimage_rotate(*pImage*, *p2*, *p3*)**Return Value**

num

flimage_flip(*pImage*, *p2*)**Return Value**

num

flimage_scale(*pImage*, *p2*, *p3*, *p4*)**Return Value**

num

flimage_warp(*pImage*, *p2*, *p3*, *p4*, *p5*)**Return Value**

num

flimage_autocrop(*pImage*, *p2*)**Return Value**

num

flimage_get_autocrop(*pImage*, *bk*)**Return Value**

num., xl, yt, xr, yb

flimage_crop(*pImage*, *p2*, *p3*, *p4*, *p5*)**Return Value**

num

flimage_replace_pixel(*pImage*, *p2*, *p3*)**Return Value**

num

flimage_transform_pixels(*pImage*, *red*, *green*, *blue*)**Return Value**

num

flimage_windowlevel(*pImage*, *p2*, *p3*)**Return Value**

num

flimage_enhance(*pImage*, *p2*)**Return Value**

num

flimage_from_pixmap(*pImage*, *pixmap*)**Return Value**

num

flimage_to_pixmap(*pImage*, *win*)**Return Value**

pixmap

flimage_dup(*pImage*)**Return Value**

pImage

fl_get_submatrix(*in_*, *rows*, *cols*, *r1*, *c1*, *rs*, *cs*, *esize*)

Return Value

?

fl_j2pass_quantize_packed(*p1*, *p2*, *p3*, *p4*, *p5*, *p6*, *p7*, *p8*, *p9*, *pImage*)

Return Value

num

fl_j2pass_quantize_rgb(*p1*, *p2*, *p3*, *p4*, *p5*, *p6*, *p7*, *p8*, *p9*, *p10*, *p11*, *pImage*)

Return Value

num

fl_make_submatrix(*in_*, *rows*, *cols*, *r1*, *c1*, *rs*, *cs*, *esize*)

Return Value

?

fl_pack_bits(*p1*, *p2*, *p3*)

fl_unpack_bits(*p1*, *p2*, *p3*)

fl_value_to_bits(*p1*)

Return Value

num

flimage_add_comments(*pImage*, *p2*, *p3*)

flimage_color_to_pixel(*pImage*, *p2*, *p3*, *p4*, *p5*)

Return Value

num

flimage_combine(*pImage1*, *pImage2*, *p3*)

Return Value

pImage

flimage_display_markers(*pImage*)

flimage_dup_(*pImage*, *p2*)

Return Value

pImage

flimage_enable_bmp()

flimage_enable_fits()

`flimage_enable_genesis()``flimage_enable_gif()``flimage_enable_gzip()``flimage_enable_jpeg()``flimage_enable_png()``flimage_enable_ps()``flimage_enable_sgi()``flimage_enable_tiff()``flimage_enable_xbm()``flimage_enable_xpm()``flimage_enable_xwd()``flimage_free_ci(pImage)``flimage_free_gray(pImage)``flimage_free_linearlut(pImage)``flimage_free_rgb(pImage)``flimage_freemem(pImage)``flimage_get_closest_color_from_map(pImage, p2)`**Return Value**`num``flimage_get_linearlut(pImage)`**Return Value**`num``flimage_invalidate_pixels(pImage)`

fimage_open(*filename*)**Return Value***pImage***fimage_read_annotation**(*pImage*)**Return Value***num***fimage_replace_image**(*pImage*, *p2*, *p3*, *p4*, *p5*, *p6*)**fimage_swapbuffer**(*pImage*)**Return Value***num***fimage_to_ximage**(*pImage*, *win*, *pXWindowAttributes*)**Return Value***num***fimage_write_annotation**(*pImage*)**Return Value***num***flps_apply_gamma**(*p1*)**flps_arc**(*p1*, *p2*, *p3*, *p4*, *p5*, *p6*, *p7*)**flps_circ**(*fill*, *x*, *y*, *r*, *colr*)**flps_color**(*colr*)**flps_draw_box**(*style*, *x*, *y*, *w*, *h*, *colr*, *bwIn*)**flps_draw_checkbox**(*boxtype*, *x*, *y*, *w*, *h*, *colr*, *bw*)**flps_draw_frame**(*style*, *x*, *y*, *w*, *h*, *colr*, *bw*)**flps_draw_symbol**(*label*, *x*, *y*, *w*, *h*, *colr*)**Return Value***num***flps_draw_tbox**(*style*, *x*, *y*, *w*, *h*, *colr*, *bw*)**flps_draw_text**(*align*, *x*, *y*, *w*, *h*, *colr*, *style*, *size*, *text*)

```
flps_draw_text_beside(align, x, y, w, h, colr, style, size, text)
```

```
flps_emit_header(title, npages, xi, yi, xf, yf)
```

```
flps_emit_prolog()
```

```
flps_get_gray255(colr)
```

Return Value
num

```
flps_get_linestyle()
```

Return Value
num

```
flps_get_linewidth()
```

Return Value
width num

```
flps_get_namedcolor(colrname)
```

Return Value
num

```
flps_invalidate_color_cache()
```

```
flps_invalidate_font_cache()
```

```
flps_invalidate_linewidth_cache()
```

```
flps_invalidate_symbol_cache()
```

```
flps_line(xi, yi, xf, yf, colr)
```

```
flps_lines(pPoint, num, colr)
```

```
flps_linestyle(linestyle)
```

```
flps_linewidth(linewidth)
```

```
flps_log(text)
```

```
flps_output(fmt)
```

```
flps_oval(fill, x, y, w, h, colr)
```

```
flps_pieslice(fill, x, y, w, h, t1, t2, colr)
```

```
flps_poly(fill, pPoint, num, colr)
```

```
flps_rectangle(fill, x, y, w, h, colr)
```

```
flps_reset_cache()
```

```
flps_reset_linewidth()
```

```
flps_restore_flps()
```

```
flps_rgbcolor(r, g, b)
```

```
flps_roundrectangle(fill, x, y, w, h, colr)
```

```
flps_set_clipping(x, y, w, h)
```

```
flps_set_font(style, size)
```

```
flps_unset_clipping()
```

```
XCClearWindow(pDisplay, win)
```

Return Value

num


1.2 Variables

Name	Description
<code>__mainversion__</code>	Value: '0.3.1'
<code>__vers_against_xforms__</code>	Value: '1.0.93pre1'
<code>header_filename</code>	Value: '/usr/include/forms.h'
<code>loaded_xlibraries</code>	Value: {'libflimage': None, 'libforms': <CDLL 'libforms.so.2', h...
<code>FL_EVENT</code>	Value: cty.POINTER(FL_OBJECT).in_dll(load_so_libforms(), 'FL_EVE...
<code>fl.current_form</code>	Value: cty.POINTER(FL_FORM).in_dll(load_so_libforms(), 'fl_curre...
<code>fl.display</code>	Value: cty.POINTER(Display).in_dll(load_so_libforms(), 'fl_displ...
<code>fl.screen</code>	Value: c_int(0)
<code>fl.root</code>	Value: c_ulong(0L)

continued on next page

Name	Description
fl_vroot	Value: c_ulong(0L)
fl_scrh	Value: c_int(0)
fl_scrw	Value: c_int(0)
fl_vmode	Value: c_int(-1)
fl_state	Value: cty.POINTER(FL_State).in_dll(load_so.libforms(), 'fl_state')
fl_ul_magic_char	Value: c_char_p(None)
--package--	Value: 'xformslib'

1.3 Class XFormsLoadError

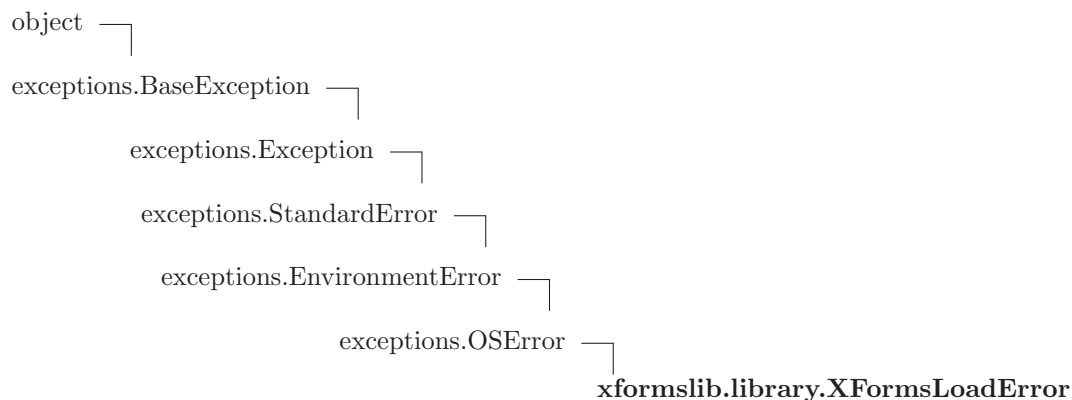

Error in loading shared object library

1.3.1 Methods

Inherited from exceptions.OSError

`__init__()`, `__new__()`

Inherited from exceptions.EnvironmentError

`__reduce__()`, `__str__()`

Inherited from exceptions.BaseException

`__delattr__()`, `__getattribute__()`, `__getitem__()`, `__getslice__()`, `__repr__()`, `__setattr__()`,
`__setstate__()`, `__unicode__()`


Inherited from object

`__format__()`, `__hash__()`, `__reduce_ex__()`, `__sizeof__()`, `__subclasshook__()`

1.3.2 Properties

Name	Description
<i>Inherited from exceptions.EnvironmentError</i> errno, filename, strerror	
<i>Inherited from exceptions.BaseException</i> args, message	
<i>Inherited from object</i> __class__	

1.4 Class XFormsTypeError

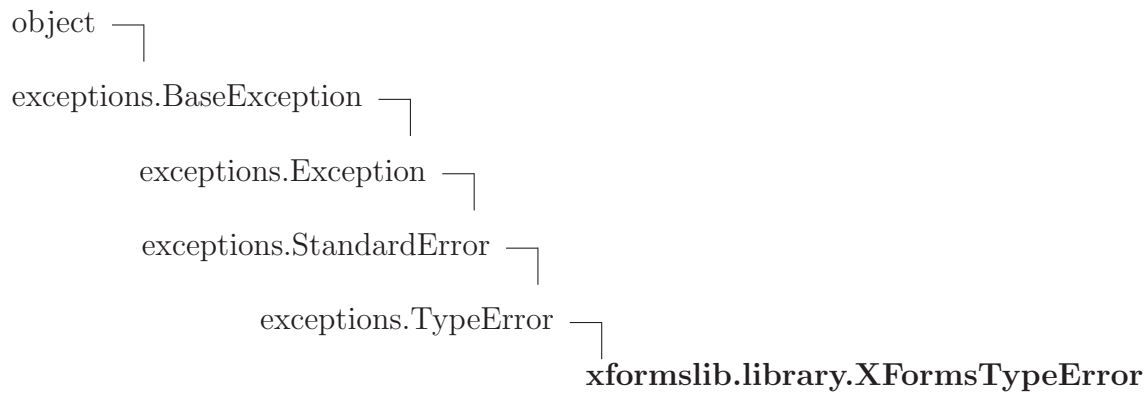

Generic error for type mismatch

1.4.1 Methods

Inherited from exceptions.TypeError

__init__(), __new__()

Inherited from exceptions.BaseException

__delattr__(), __getattr__(), __getitem__(), __getslice__(), __reduce__(), __repr__(),
__setattr__(), __setstate__(), __str__(), __unicode__()

Inherited from object

__format__(), __hash__(), __reduce_ex__(), __sizeof__(), __subclasshook__()

1.4.2 Properties

Name	Description
	<i>Inherited from exceptions.BaseException</i>
	args, message
	<i>Inherited from object</i>
	__class__

2 Module *xformslib.xfdata*

xforms-python Python wrapper for XForms (X11) GUI C toolkit library using *ctypes*

Copyright (C) 2009 Luca Lazzaroni "LukenShiro" <lukenshiro@ngi.it>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation, version 2.1 of the License.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU LGPL along with this program. If not, see <<http://www.gnu.org/licenses/>>.

See CREDITS file to read XForms, *ctypes* and other acknowledgements and thanks.

2.1 Variables

Name	Description
FL_VERSION	Value: 1
FL_REVISION	Value: 0
FL_FIXLEVEL	Value: '93pre1'
FL_INCLUDE_VERSION	Value: 1000
INT_MAX	Value: 2147483647
FL_ON	Value: 1
FL_OK	Value: 1
FL_VALID	Value: 1
FL_PREEMPT	Value: 1
FL_AUTO	Value: 2
FL_WHEN_NEEDED	Value: 2
FL_OFF	Value: 0
FL_CANCEL	Value: 0
FL_INVALID	Value: 0
FL_IGNORE	Value: -1
FL_PATH_MAX	Value: 1024
FL_COORD_PIXEL	Value: 0
FL_COORD_MM	Value: 1
FL_COORD_POINT	Value: 2
FL_COORD_centimM	Value: 3
FL_COORD_centipoint	Value: 4
FL_INVALID_CLASS	Value: 0
FL_BUTTON	Value: 1

continued on next page

Name	Description
FL_LIGHTBUTTON	Value: 2
FL_ROUNDBUTTON	Value: 3
FL_ROUND3DBUTTON	Value: 4
FL_CHECKBUTTON	Value: 5
FL_BITMAPBUTTON	Value: 6
FL_PIXMAPBUTTON	Value: 7
FL_BITMAP	Value: 8
FL_PIXMAP	Value: 9
FL_BOX	Value: 10
FL_TEXT	Value: 11
FL_MENU	Value: 12
FL_CHART	Value: 13
FL_CHOICE	Value: 14
FL_COUNTER	Value: 15
FL_SLIDER	Value: 16
FL_VALSLIDER	Value: 17
FL_INPUT	Value: 18
FL_BROWSER	Value: 19
FL_DIAL	Value: 20
FL_TIMER	Value: 21
FL_CLOCK	Value: 22
FL_POSITIONER	Value: 23
FL_FREE	Value: 24
FL_XY_PLOT	Value: 25
FL_FRAME	Value: 26
FL_LABELFRAME	Value: 27
FL_CANVAS	Value: 28
FL_GLCANVAS	Value: 29
FL_TABFOLDER	Value: 30
FL_SCROLLBAR	Value: 31
FL_SCROLLBUTTON	Value: 32
FL_MENUBAR	Value: 33
FL_TEXTBOX	Value: 34
FL_LABELBUTTON	Value: 35
FL_COMBOBOX	Value: 36
FL_IMAGECANVAS	Value: 37
FL_THUMBWHEEL	Value: 38
FL_COLORWHEEL	Value: 39
FL_FORMBROWSER	Value: 40
FL_SELECT	Value: 41
FL_NMENU	Value: 42
FL_SPINNER	Value: 43

continued on next page

Name	Description
FL_TBOX	Value: 44
FL_CLASS_END	Value: 45
FL_BEGIN_GROUP	Value: 10000
FL_END_GROUP	Value: 20000
FL_USER_CLASS_START	Value: 1001
FL_USER_CLASS_END	Value: 9999
FL_MAX_BW	Value: 10
FL_PLACE_FREE	Value: 0
FL_PLACE_MOUSE	Value: 1
FL_PLACE_CENTER	Value: 2
FL_PLACE_POSITION	Value: 4
FL_PLACE_SIZE	Value: 8
FL_PLACE_GEOMETRY	Value: 16
FL_PLACE_ASPECT	Value: 32
FL_PLACE_FULLSCREEN	Value: 64
FL_PLACE_HOTSPOT	Value: 128
FL_PLACE_ICONIC	Value: 256
FL_FREE_SIZE	Value: 16384
FL_FIX_SIZE	Value: 32768
FL_PLACE_FREE_CENTER	Value: 16386
FL_PLACE_CENTERFREE	Value: 16386
PLACE_list	Value: [0, 1, 2, 4, 8, 16, 32, 64, 128, 256, 16384, 32768, 16386...]
FL_FULLBORDER	Value: 1
FL_TRANSIENT	Value: 2
FL_NOBORDER	Value: 3
DECORATION_list	Value: [1, 2, 3]
FL_NO_BOX	Value: 0
FL_UP_BOX	Value: 1
FL_DOWN_BOX	Value: 2
FL_BORDER_BOX	Value: 3
FL_SHADOW_BOX	Value: 4
FL_FRAME_BOX	Value: 5
FL_ROUNDED_BOX	Value: 6
FL_EMBOSSED_BOX	Value: 7
FL_FLAT_BOX	Value: 8
FL_RFLAT_BOX	Value: 9
FL_RSHADOW_BOX	Value: 10

continued on next page

Name	Description
FL_OVAL_BOX	Value: 11
FL_ROUNDED3D_UPBOX	Value: 12
FL_ROUNDED3D_DOWNBOX	Value: 13
FL_OVAL3D_UPBOX	Value: 14
FL_OVAL3D_DOWNBOX	Value: 15
FL_OVAL3D_FRAMEBOX	Value: 16
FL_OVAL3D_EMBOSSEDBOX	Value: 17
FL_TOPTAB_UPBOX	Value: 18
FL_SELECTED_TOPTAB_UPBOX	Value: 19
FL_BOTTOMTAB_UPBOX	Value: 20
FL_SELECTED_BOTTOMTAB_UPBOX	Value: 21
FL_MAX_BOX_STYLES	Value: 23
BOXTYPE_list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16...]
FL_ALIGN_CENTER	Value: 0
FL_ALIGN_TOP	Value: 1
FL_ALIGN_BOTTOM	Value: 2
FL_ALIGN_LEFT	Value: 4
FL_ALIGN_RIGHT	Value: 8
FL_ALIGN_LEFT_TOP	Value: 5
FL_ALIGN_RIGHT_TOP	Value: 9
FL_ALIGN_LEFT_BOTTOM	Value: 6
FL_ALIGN_RIGHT_BOTTOM	Value: 10
FL_ALIGN_INSIDE	Value: 8192
FL_ALIGN_VERT	Value: 16384
FL_ALIGN_TOP_LEFT	Value: 5
FL_ALIGN_TOP_RIGHT	Value: 9
FL_ALIGN_BOTTOM_LEFT	Value: 6
FL_ALIGN_BOTTOM_RIGHT	Value: 10
ALIGN_list	Value: [0, 1, 2, 4, 8, 5, 9, 6, 10, 8192, 16384]

continued on next page

Name	Description
FL_MBUTTON1	Value: 1
FL_MBUTTON2	Value: 2
FL_MBUTTON3	Value: 3
FL_MBUTTON4	Value: 4
FL_MBUTTON5	Value: 5
FL_LEFT_MOUSE	Value: 1
FL_MIDDLE_MOUSE	Value: 2
FL_RIGHT_MOUSE	Value: 3
FL_SCROLLUP_MOUSE	Value: 4
FL_SCROLLDOWN_MOUSE	Value: 5
FL_LEFTMOUSE	Value: 1
FL_MIDDLEMOUSE	Value: 2
FL_RIGHTMOUSE	Value: 3
FL_SCROLLUPMOUSE	Value: 4
FL_SCROLLDOWNMOUSE	Value: 5
MOUSEBTN_list	Value: [1, 2, 3, 4, 5, 1, 2, 3, 4, 5, 1, 2, 3, 4, 5]
FL_RETURN_NONE	Value: 0
FL_RETURN_CHANGED	Value: 1
FL_RETURN_END	Value: 2
FL_RETURN_END_CHANGED	Value: 4
FL_RETURN_SELECTION	Value: 8
FL_RETURN_DESELECTION	Value: 16
FL_RETURN_TRIGGERED	Value: 1024
FL_RETURN_ALWAYS	Value: -5
RETURN_list	Value: [0, 1, 2, 4, 8, 16, 1024, -5]
FL_BLACK	Value: 0
FL_RED	Value: 1
FL_GREEN	Value: 2
FL_YELLOW	Value: 3
FL_BLUE	Value: 4
FL_MAGENTA	Value: 5
FL_CYAN	Value: 6
FL_WHITE	Value: 7
FL_TOMATO	Value: 8
FL_INDIANRED	Value: 9

continued on next page

Name	Description
FL_SLATEBLUE	Value: 10
FL_COL1	Value: 11
FL_RIGHT_BCOL	Value: 12
FL_BOTTOM_BCOL	Value: 13
FL_TOP_BCOL	Value: 14
FL_LEFT_BCOL	Value: 15
FL_MCOL	Value: 16
FL_INACTIVE	Value: 17
FL_PALEGREEN	Value: 18
FL_DARKGOLD	Value: 19
FL_ORCHID	Value: 20
FL_DARKCYAN	Value: 21
FL_DARKTOMATO	Value: 22
FL_WHEAT	Value: 23
FL_DARKORANGE	Value: 24
FL_DEEPPINK	Value: 25
FL_CHARTREUSE	Value: 26
FL_DARKVIOLET	Value: 27
FL_SPRINGGREEN	Value: 28
FL_DODGERBLUE	Value: 29
FL_LIGHTER_COL1	Value: 30
FL_DARKER_COL1	Value: 31
FL_ALICEBLUE	Value: 32
FL_ANTIQUWHITE	Value: 33
FL_AQUA	Value: 34
FL_AQUAMARINE	Value: 35
FL_AZURE	Value: 36
FL_BEIGE	Value: 37
FL_BISQUE	Value: 38
FL_BLANCHEDALMOND	Value: 39
FL_BLUEVIOLET	Value: 40
FL_BROWN	Value: 41
FL_BURLYWOOD	Value: 42
FL_CADETBLUE	Value: 43
FL_CHOCOLATE	Value: 44
FL_CORAL	Value: 45
FL_CORNFLOWERBLUE	Value: 46
FL_CORNSILK	Value: 47
FL_CRIMSON	Value: 48
FL_DARKBLUE	Value: 49

continued on next page

Name	Description
FL_DARKGOLDENROD	Value: 50
FL_DARKGRAY	Value: 51
FL_DARKGREEN	Value: 52
FL_DARKGREY	Value: 53
FL_DARKKHAKI	Value: 54
FL_DARKMAGENTA	Value: 55
FL_DARKOLIVEGREEN	Value: 56
FL_DARKORCHID	Value: 57
FL_DARKRED	Value: 58
FL_DARKSALMON	Value: 59
FL_DARKSEAGREEN	Value: 60
FL_DARKSLATEBLUE	Value: 61
FL_DARKSLATEGRAY	Value: 62
FL_DARKSLATEGREY	Value: 63
FL_DARKTURQUOISE	Value: 64
FL_DEEPSKYBLUE	Value: 65
FL_DIMGRAY	Value: 66
FL_DIMGREY	Value: 67
FL_FIREBRICK	Value: 68
FL_FLORALWHITE	Value: 69
FL_FORESTGREEN	Value: 70
FL_FUCHSIA	Value: 71
FL_GAINSBORO	Value: 72
FL_GHOSTWHITE	Value: 73
FL_GOLD	Value: 74
FL_GOLDENROD	Value: 75
FL_GRAY	Value: 76
FL_GREENYELLOW	Value: 77
FL_GREY	Value: 78
FL_HONEYDEW	Value: 79
FL_HOTPINK	Value: 80
FL_INDIGO	Value: 81
FL_IVORY	Value: 82
FL_KHAKI	Value: 83
FL_LAVENDER	Value: 84
FL_LAVENDERBLUSH	Value: 85
FL_LAWNGREEN	Value: 86
FL_LEMONCHIFFON	Value: 87
FL_LIGHTBLUE	Value: 88
FL_LIGHTCORAL	Value: 89
FL_LIGHTCYAN	Value: 90
FL_LIGHTGOLDENROD-YELLOW	Value: 91

continued on next page

Name	Description
FL_LIGHTGRAY	Value: 92
FL_LIGHTGREEN	Value: 93
FL_LIGHTGREY	Value: 94
FL_LIGHTPINK	Value: 95
FL_LIGHTSALMON	Value: 96
FL_LIGHTSEAGREEN	Value: 97
FL_LIGHTSKYBLUE	Value: 98
FL_LIGHTSLATEGRAY	Value: 99
FL_LIGHTSLATEGREY	Value: 100
FL_LIGHTSTEELBLUE	Value: 101
FL_LIGHTYELLOW	Value: 102
FL_LIME	Value: 103
FL_LIMEGREEN	Value: 104
FL_LINEN	Value: 105
FL_MAROON	Value: 106
FL_MEDIUMAQUAMAR- INE	Value: 107
FL_MEDIUMBLUE	Value: 108
FL_MEDIUMMORCHID	Value: 109
FL_MEDIUMPURPLE	Value: 110
FL_MEDIUMSEAGREEN	Value: 111
FL_MEDIUMSLATEBLU- E	Value: 112
FL_MEDIUMSPRINGGR- EEN	Value: 113
FL_MEDIUMTURQUOIS- E	Value: 114
FL_MEDIUMVIOLETRE- D	Value: 115
FL_MIDNIGHTBLUE	Value: 116
FL_MINTCREAM	Value: 117
FL_MISTYROSE	Value: 118
FL_MOCCASIN	Value: 119
FL_NAVAJOWHITE	Value: 120
FL_NAVY	Value: 121
FL_OLDLACE	Value: 122
FL_OLIVE	Value: 123
FL_OLIVEDRAB	Value: 124
FL_ORANGE	Value: 125
FL_ORANGERED	Value: 126
FL_PALEGOLDENROD	Value: 127
FL_PALETURQUOISE	Value: 128

continued on next page

Name	Description
FL_PALEVIOLETRED	Value: 129
FL_PAPAYAWHIP	Value: 130
FL_PEACHPUFF	Value: 131
FL_PERU	Value: 132
FL_PINK	Value: 133
FL_PLUM	Value: 134
FL_POWDERBLUE	Value: 135
FL_PURPLE	Value: 136
FL_ROSYBROWN	Value: 137
FL_ROYALBLUE	Value: 138
FL_SADDLEBROWN	Value: 139
FL_SALMON	Value: 140
FL_SANDYBROWN	Value: 141
FL_SEAGREEN	Value: 142
FL_SEASHELL	Value: 143
FL_SIENNA	Value: 144
FL_SILVER	Value: 145
FL_SKYBLUE	Value: 146
FL_SLATEGRAY	Value: 147
FL_SLATEGREY	Value: 148
FL_SNOW	Value: 149
FL_STEELBLUE	Value: 150
FL_TAN	Value: 151
FL_TEAL	Value: 152
FL_THISTLE	Value: 153
FL_TURQUOISE	Value: 154
FL_VIOLET	Value: 155
FL_WHITESMOKE	Value: 156
FL_YELLOWGREEN	Value: 157
FL_FREE_COL1	Value: 256
FL_FREE_COL2	Value: 257
FL_FREE_COL3	Value: 258
FL_FREE_COL4	Value: 259
FL_FREE_COL5	Value: 260
FL_FREE_COL6	Value: 261
FL_FREE_COL7	Value: 262
FL_FREE_COL8	Value: 263
FL_FREE_COL9	Value: 264
FL_FREE_COL10	Value: 265
FL_FREE_COL11	Value: 266
FL_FREE_COL12	Value: 267
FL_FREE_COL13	Value: 268

continued on next page

Name	Description
FL_FREE_COL14	Value: 269
FL_FREE_COL15	Value: 270
FL_FREE_COL16	Value: 271
FL_NOCOLOR	Value: 2147483647
FL_BUILT_IN_COLS	Value: 158
FL_INACTIVE_COL	Value: 17
FL_GRAY16	Value: 12
FL_GRAY35	Value: 13
FL_GRAY80	Value: 14
FL_GRAY90	Value: 15
FL_GRAY63	Value: 11
FL_GRAY75	Value: 16
FL_LCOL	Value: 0
FL_NoColor	Value: 2147483647
FL_DOKERBLUE	Value: 29
COLOR_list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16...
FL_NOEVENT	Value: 0
FL_DRAW	Value: 1
FL_PUSH	Value: 2
FL_RELEASE	Value: 3
FL_ENTER	Value: 4
FL_LEAVE	Value: 5
FL_MOTION	Value: 6
FL_FOCUS	Value: 7
FL_UNFOCUS	Value: 8
FL_KEYPRESS	Value: 9
FL_UPDATE	Value: 10
FL_STEP	Value: 11
FL_SHORTCUT	Value: 12
FL_FREEMEM	Value: 13
FL_OTHER	Value: 14
FL_DRAWLABEL	Value: 15
FL_DBLCLICK	Value: 16
FL_TRPLCLICK	Value: 17
FL_ATTRIB	Value: 18
FL_KEYRELEASE	Value: 19
FL_PS	Value: 20
FL_MOVEORIGIN	Value: 21
FL_RESIZED	Value: 22
FL_MOVE	Value: 6
FL_KEYBOARD	Value: 9

continued on next page

Name	Description
FL_MOUSE	Value: 10
FL_RESIZE_NONE	Value: 0
FL_RESIZE_X	Value: 1
FL_RESIZE_Y	Value: 2
FL_RESIZE_ALL	Value: 3
RESIZE_list	Value: [0, 1, 2, 3]
FL_KEY_NORMAL	Value: 1
FL_KEY_TAB	Value: 2
FL_KEY_SPECIAL	Value: 4
FL_KEY_ALL	Value: 7
FL_ALT_MASK	Value: 33554432
FL_CONTROL_MASK	Value: 67108864
FL_SHIFT_MASK	Value: 134217728
FL_ALT_VAL	Value: 33554432
MAX_SHORTCUTS	Value: 8
KEY_list	Value: [1, 2, 4, 7, 33554432, 67108864, 134217728]
FL_PUP_NONE	Value: 0
FL_PUP_GREY	Value: 1
FL_PUP_BOX	Value: 2
FL_PUP_CHECK	Value: 4
FL_PUP_RADIO	Value: 8
FL_PUP_GRAY	Value: 1
FL_PUP_TOGGLE	Value: 2
FL_PUP_INACTIVE	Value: 1
PUP_list	Value: [0, 1, 2, 4, 8, 1, 2, 1]
FL_MAXFONTS	Value: 48
FL_INVALID_STYLE	Value: -1
FL_NORMAL_STYLE	Value: 0
FL_BOLD_STYLE	Value: 1
FL_ITALIC_STYLE	Value: 2
FL_BOLDITALIC_STYLE	Value: 3
FL_FIXED_STYLE	Value: 4
FL_FIXEDBOLD_STYLE	Value: 5
FL_FIXEDITALIC_STYLE	Value: 6
FL_FIXEDBOLDITALIC_STYLE	Value: 7
FL_TIMES_STYLE	Value: 8
FL_TIMESBOLD_STYLE	Value: 9
FL_TIMESITALIC_STYLE	Value: 10

continued on next page

Name	Description
FL_TIMESBOLDITALIC_STYLE	Value: 11
FL_MISC_STYLE	Value: 12
FL_MISCBOLD_STYLE	Value: 13
FL_MISCITALIC_STYLE	Value: 14
FL_SYMBOL_STYLE	Value: 15
FL_SHADOW_STYLE	Value: 512
FL_ENGRAVED_STYLE	Value: 1024
FL_EMBOSSSED_STYLE	Value: 2048
TEXTSTYLE_list	Value: [-1, 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15...]
FL_TINY_SIZE	Value: 8
FL_SMALL_SIZE	Value: 10
FL_NORMAL_SIZE	Value: 12
FL_MEDIUM_SIZE	Value: 14
FL_LARGE_SIZE	Value: 18
FL_HUGE_SIZE	Value: 24
FL_DEFAULT_SIZE	Value: 10
SIZE_list	Value: [8, 10, 12, 14, 18, 24, 10]
FL_TINY_FONT	Value: 8
FL_SMALL_FONT	Value: 10
FL_NORMAL_FONT	Value: 12
FL_MEDIUM_FONT	Value: 14
FL_LARGE_FONT	Value: 18
FL_HUGE_FONT	Value: 24
FL_NORMAL_FONT1	Value: 10
FL_NORMAL_FONT2	Value: 12
FL_DEFAULT_FONT	Value: 10
FL_BOUND_WIDTH	Value: c_int(1)
FL_CLICK_TIMEOUT	Value: 400
FL_BEING_HIDDEN	Value: -1
FL_HIDDEN	Value: 0
FL_INVISIBLE	Value: 0
FL_VISIBLE	Value: 1
VISIBLE_list	Value: [-1, 0, 0, 1]
FL_READ	Value: 1
FL_WRITE	Value: 2
FL_EXCEPT	Value: 4
ASYNCIO_list	Value: [1, 2, 4]
FL_MAX_MENU_CHOICE_ITEMS	Value: 128
FL_XOR	Value: 6

continued on next page

Name	Description
FL_COPY	Value: 3
FL_AND	Value: 1
DRAWMODE_list	Value: [6, 3, 1]
FL_MINDEPTH	Value: 1
FL_IllegalVisual	Value: -1
FL_StaticGray	Value: 0
FL_GrayScale	Value: 1
FL_StaticColor	Value: 2
FL_PseudoColor	Value: 3
FL_TrueColor	Value: 4
FL_DirectColor	Value: 5
FL_DefaultVisual	Value: 10
TrueColor	Value: 4
DirectColor	Value: 5
GrayScale	Value: 1
GreyScale	Value: 1
StaticGray	Value: 0
StaticGrey	Value: 0
FL_North	Value: 2
FL_NorthEast	Value: 3
FL_NorthWest	Value: 1
FL_South	Value: 8
FL_SouthEast	Value: 9
FL_SouthWest	Value: 7
FL_East	Value: 6
FL_West	Value: 4
FL_NoGravity	Value: 0
FL_ForgetGravity	Value: 0
GRAVITY_list	Value: [2, 3, 1, 8, 9, 7, 6, 4, 0, 0]
FL_MAX_COLORS	Value: 1024
FL_MAX_COLS	Value: 1024
FL_MAX_FONTSIZES	Value: 10
FL_SOLID	Value: 0
FL_USERDASH	Value: 1
FL_USERDOUBLEDASH	Value: 2
FL_DOT	Value: 3
FL_DOTDASH	Value: 4
FL_DASH	Value: 5
FL_LONGDASH	Value: 6
LINE_list	Value: [0, 1, 2, 3, 4, 5, 6]
NoEventMask	Value: 0
KeyPressMask	Value: 1

continued on next page

Name	Description
KeyReleaseMask	Value: 2
ButtonPressMask	Value: 4
ButtonReleaseMask	Value: 8
EnterWindowMask	Value: 16
LeaveWindowMask	Value: 32
PointerMotionMask	Value: 64
PointerMotionHintMask	Value: 128
Button1MotionMask	Value: 256
Button2MotionMask	Value: 512
Button3MotionMask	Value: 1024
Button4MotionMask	Value: 2048
Button5MotionMask	Value: 4096
ButtonMotionMask	Value: 8192
KeymapStateMask	Value: 16384
ExposureMask	Value: 32768
VisibilityChangeMask	Value: 65536
StructureNotifyMask	Value: 131072
ResizeRedirectMask	Value: 262144
SubstructureNotifyMask	Value: 524288
SubstructureRedirectMask	Value: 1048576
FocusChangeMask	Value: 2097152
ColormapChangeMask	Value: 8388608
OwnerGrabButtonMask	Value: 16777216
ShiftMask	Value: 1
LockMask	Value: 2
ControlMask	Value: 4
Mod1Mask	Value: 8
Mod2Mask	Value: 16
Mod3Mask	Value: 32
Mod4Mask	Value: 64
Mod5Mask	Value: 128
Button1Mask	Value: 256
Button2Mask	Value: 512
Button3Mask	Value: 1024
Button4Mask	Value: 2048
Button5Mask	Value: 4096
AnyModifier	Value: 32768
FL_ALL_EVENT	Value: 8319
FL_NONE	Value: 0
FL_SHORT	Value: 10
FL_BOOL	Value: 11
FL_INT	Value: 12

continued on next page

Name	Description
FL_LONG	Value: 13
FL_FLOAT	Value: 14
FL_STRING	Value: 15
RTYPE_list	Value: [0, 10, 11, 12, 13, 14, 15]
XrmoptionNoArg	Value: 0
XrmoptionIsArg	Value: 1
XrmoptionStickyArg	Value: 2
XrmoptionSepArg	Value: 3
XrmoptionResArg	Value: 4
XrmoptionSkipArg	Value: 5
XrmoptionSkipLine	Value: 6
XrmoptionSkipNArgs	Value: 7
my_fl_iopt	Value: FL_IOPT()
buttonLabelSize	Value: 0
sliderLabelSize	Value: 0
inputLabelSize	Value: 0
FL_PDDepth	Value: 2
FL_PDClass	Value: 4
FL_PDDouble	Value: 8
FL_PDSync	Value: 16
FL_PDPrivateMap	Value: 32
FL_PDSScrollbarType	Value: 64
FL_PDPupFontSize	Value: 128
FL_PDButtonFontSize	Value: 256
FL_PDInputFontSize	Value: 512
FL_PDSliderFontSize	Value: 1024
FL_PDVisual	Value: 2048
FL_PDULThickness	Value: 4096
FL_PDULPropWidth	Value: 8192
FL_PDBS	Value: 16384
FL_PDCoordUnit	Value: 32768
FL_PDDebug	Value: 65536
FL_PDSharedMap	Value: 131072
FL_PDStandardMap	Value: 262144
FL_PDBorderWidth	Value: 524288
FL_PDSafe	Value: 1048576
FL_PDMenuFontSize	Value: 2097152
FL_PDBrowserFontSize	Value: 4194304
FL_PDChoiceFontSize	Value: 8388608
FL_PDLabelFontSize	Value: 16777216
FL_PDButtonLabelSize	Value: 256
FL_PDSliderLabelSize	Value: 1024

continued on next page

Name	Description
FL_PDInputLabelSize	Value: 512
FL_PDButtonLabel	Value: 256
FL_POPUP_NORMAL_SELECT	Value: 0
FL_POPUP_DRAG_SELECT	Value: 1
FL_POPUP_NONE	Value: 0
FL_POPUP_DISABLED	Value: 1
FL_POPUP_HIDDEN	Value: 2
FL_POPUP_CHECKED	Value: 4
FL_POPUP_NORMAL	Value: 0
FL_POPUP_TOGGLE	Value: 1
FL_POPUP_RADIO	Value: 2
FL_POPUP_SUB	Value: 3
FL_POPUP_LINE	Value: 4
FL_POPUP_BACKGROUND_COLOR	Value: 0
FL_POPUP_HIGHLIGHT_COLOR	Value: 1
FL_POPUP_TITLE_COLOR	Value: 2
FL_POPUP_TEXT_COLOR	Value: 3
FL_POPUP_HIGHLIGHT_TEXT_COLOR	Value: 4
FL_POPUP_DISABLED_TEXT_COLOR	Value: 5
FL_POPUP_RADIO_COLOR	Value: 6
FL_NORMAL_BITMAP	Value: 0
FL_BITMAP_BOXTYPE	Value: 0
FL_BITMAP_COL1	Value: 11
FL_BITMAP_COL2	Value: 11
FL_BITMAP_LCOL	Value: 0
FL_BITMAP_ALIGN	Value: 2
FL_NORMAL_PIXMAP	Value: 0
FL_NORMAL_BROWSER	Value: 0
FL_SELECT_BROWSER	Value: 1
FL_HOLD_BROWSER	Value: 2
FL_MULTIBROWSER	Value: 3
BROWSERTYPE.list	Value: [0, 1, 2, 3]

continued on next page

Name	Description
FL_BROWSER_BOXTYPE	Value: 2
FL_BROWSER_COL1	Value: 11
FL_BROWSER_COL2	Value: 3
FL_BROWSER_LCOL	Value: 0
FL_BROWSER_ALIGN	Value: 2
FL_BROWSER_SLCOL	Value: 11
FL_BROWSER_FONTSIZE	Value: 10
FL_BROWSER_LINELENGTH	Value: 2147483647
FL_NORMAL_BUTTON	Value: 0
FL_PUSH_BUTTON	Value: 1
FL_RADIO_BUTTON	Value: 2
FL_HIDDEN_BUTTON	Value: 3
FL_TOUCH_BUTTON	Value: 4
FL_INOUT_BUTTON	Value: 5
FL_RETURN_BUTTON	Value: 6
FL_HIDDEN_RET_BUTTON	Value: 7
FL_MENU_BUTTON	Value: 8
FL_TOGGLE_BUTTON	Value: 1
BTNTYPE.list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 8, 1]
FL_BUTTON_BOXTYPE	Value: 1
FL_BUTTON_COL1	Value: 11
FL_BUTTON_COL2	Value: 11
FL_BUTTON_LCOL	Value: 0
FL_BUTTON_ALIGN	Value: 0
FL_BUTTON_MCOL1	Value: 16
FL_BUTTON_MCOL2	Value: 16
FL_BUTTON_BW	Value: c_int(1)
FL_LIGHTBUTTON_BOXTYPE	Value: 1
FL_LIGHTBUTTON_COL1	Value: 11
FL_LIGHTBUTTON_COL2	Value: 3
FL_LIGHTBUTTON_LCOL	Value: 0
FL_LIGHTBUTTON_ALIGN	Value: 0
FL_LIGHTBUTTON_TOPCOL	Value: 11

continued on next page

Name	Description
FL_LIGHTBUTTON_MC-OL	Value: 16
FL_LIGHTBUTTON_MI-NSIZE	Value: 12
FL_ROUNDDBUTTON_BOXTYPE	Value: 0
FL_ROUNDDBUTTON_CO-OL1	Value: 16
FL_ROUNDDBUTTON_CO-OL2	Value: 3
FL_ROUNDDBUTTON_LC-OL	Value: 0
FL_ROUNDDBUTTON_AL-IGN	Value: 0
FL_ROUNDDBUTTON_T-OPCOL	Value: 11
FL_ROUNDDBUTTON_M-COL	Value: 16
FL_ROUND3DBUTTON_-BOXTYPE	Value: 0
FL_ROUND3DBUTTON_-COL1	Value: 11
FL_ROUND3DBUTTON_-COL2	Value: 0
FL_ROUND3DBUTTON_-LCOL	Value: 0
FL_ROUND3DBUTTON_-ALIGN	Value: 0
FL_ROUND3DBUTTON_-TOPCOL	Value: 11
FL_ROUND3DBUTTON_-MCOL	Value: 16
FL_CHECKBUTTON_BOXTYPE	Value: 0
FL_CHECKBUTTON_CO-OL1	Value: 11
FL_CHECKBUTTON_CO-OL2	Value: 3
FL_CHECKBUTTON_LC-OL	Value: 0
FL_CHECKBUTTON_AL-IGN	Value: 0

continued on next page

Name	Description
FL_CHECKBUTTON_TOPCOL	Value: 11
FL_CHECKBUTTON_MCOL	Value: 16
FL_BITMAPBUTTON_BOXTYPE	Value: 1
FL_BITMAPBUTTON_COL1	Value: 11
FL_BITMAPBUTTON_COL2	Value: 4
FL_BITMAPBUTTON_LCOL	Value: 0
FL_BITMAPBUTTON_ALIGN	Value: 2
FL_PIXMAPBUTTON_BOXTYPE	Value: 1
FL_PIXMAPBUTTON_COL1	Value: 11
FL_PIXMAPBUTTON_COL2	Value: 11
FL_PIXMAPBUTTON_LCOL	Value: 0
FL_PIXMAPBUTTON_MCOL1	Value: 16
FL_PIXMAPBUTTON_MCOL2	Value: 16
FL_PIXMAPBUTTON_ALIGN	Value: 2
FL_NORMAL_CANVAS	Value: 0
FL_SCROLLED_CANVAS	Value: 1
CANVASTYPE_list	Value: [0, 1]
FL_CANVAS_BOXTYPE	Value: 2
FL_CANVAS_ALIGN	Value: 1
FL_BAR_CHART	Value: 0
FL_HORBAR_CHART	Value: 1
FL_LINE_CHART	Value: 2
FL_FILL_CHART	Value: 3
FL_SPIKE_CHART	Value: 4
FL_PIE_CHART	Value: 5
FL_SPECIALPIE_CHART	Value: 6

continued on next page

Name	Description
FL_FILLED_CHART	Value: 3
CHARTTYPE_list	Value: [0, 1, 2, 3, 4, 5, 6, 3]
FL_CHART_BOXTYPE	Value: 3
FL_CHART_COL1	Value: 11
FL_CHART_LCOL	Value: 0
FL_CHART_ALIGN	Value: 2
FL_CHART_MAX	Value: 2048
FL_NORMAL_CHOICE	Value: 0
FL_NORMAL_CHOICE2	Value: 1
FL_DROPLIST_CHOICE	Value: 2
FL_BROWSER_CHOICE	Value: 3
FL_SIMPLE_CHOICE	Value: 0
CHOICETYPE_list	Value: [0, 1, 2, 3, 0]
FL_CHOICE_BOXTYPE	Value: 6
FL_CHOICE_COL1	Value: 11
FL_CHOICE_COL2	Value: 0
FL_CHOICE_LCOL	Value: 0
FL_CHOICE_ALIGN	Value: 4
FL_CHOICE_MCOL	Value: 16
FL_CHOICE_MAXITEMS	Value: 128
FL_ANALOG_CLOCK	Value: 0
FL_DIGITAL_CLOCK	Value: 1
CLOCKTYPE_list	Value: [0, 1]
FL_CLOCK_BOXTYPE	Value: 1
FL_CLOCK_COL1	Value: 17
FL_CLOCK_COL2	Value: 13
FL_CLOCK_LCOL	Value: 0
FL_CLOCK_ALIGN	Value: 2
FL_CLOCK_TOPCOL	Value: 11
FL_NORMAL_COUNTER	Value: 0
FL_SIMPLE_COUNTER	Value: 1
COUNTERTYPE_list	Value: [0, 1]
FL_COUNTER_BOXTYPE	Value: 1
FL_COUNTER_COL1	Value: 11
FL_COUNTER_COL2	Value: 4
FL_COUNTER_LCOL	Value: 0
FL_COUNTER_ALIGN	Value: 2
FL_COUNTER_BW	Value: 0
XC_num_glyphs	Value: 154

continued on next page

Name	Description
XC_X_cursor	Value: 0
XC_arrow	Value: 2
XC_based_arrow_down	Value: 4
XC_based_arrow_up	Value: 6
XC_boat	Value: 8
XC_bogosity	Value: 10
XC_bottom_left_corner	Value: 12
XC_bottom_right_corner	Value: 14
XC_bottom_side	Value: 16
XC_bottom_tee	Value: 18
XC_box_spiral	Value: 20
XC_center_ptr	Value: 22
XC_circle	Value: 24
XC_clock	Value: 26
XC_coffee_mug	Value: 28
XC_cross	Value: 30
XC_cross_reverse	Value: 32
XC_crosshair	Value: 34
XC_diamond_cross	Value: 36
XC_dot	Value: 38
XC_dotbox	Value: 40
XC_double_arrow	Value: 42
XC_draft_large	Value: 44
XC_draft_small	Value: 46
XC_draped_box	Value: 48
XC_fleur	Value: 52
XC_gobbler	Value: 54
XC_gumby	Value: 56
XC_hand1	Value: 58
XC_hand2	Value: 60
XC_heart	Value: 62
XC_icon	Value: 64
XC_iron_cross	Value: 66
XC_left_ptr	Value: 68
XC_left_side	Value: 70
XC_left_tee	Value: 72
XC_leftbutton	Value: 74
XC_ll_angle	Value: 76
XC_lr_angle	Value: 78
XC_man	Value: 80
XC_middlebutton	Value: 82
XC_mouse	Value: 84

continued on next page

Name	Description
XC_pencil	Value: 86
XC_pirate	Value: 88
XC_plus	Value: 90
XC_question_arrow	Value: 92
XC_right_ptr	Value: 94
XC_right_side	Value: 96
XC_right_tee	Value: 98
XC_rightbutton	Value: 100
XC_rtl_logo	Value: 102
XC_sailboat	Value: 104
XC_sb_down_arrow	Value: 106
XC_sb_h_double_arrow	Value: 108
XC_sb_left_arrow	Value: 110
XC_sb_right_arrow	Value: 112
XC_sb_up_arrow	Value: 114
XC_sb_v_double_arrow	Value: 116
XC_shuttle	Value: 118
XC_sizing	Value: 120
XC_spider	Value: 122
XC_spraycan	Value: 124
XC_star	Value: 126
XC_target	Value: 128
XC_tcross	Value: 130
XC_top_left_arrow	Value: 132
XC_top_left_corner	Value: 134
XC_top_right_corner	Value: 136
XC_top_side	Value: 138
XC_top_tee	Value: 140
XC_trek	Value: 142
XC_ul_angle	Value: 144
XC_umbrella	Value: 146
XC_ur_angle	Value: 148
XC_watch	Value: 150
XC_xterm	Value: 152
XCursors_list	Value: [2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, ...]
FL_INVISIBLE_CURSOR	Value: -2
FL_DEFAULT_CURSOR	Value: -1
FL_BUSY_CURSOR	Value: 150
FL_CROSSHAIR_CURSOR	Value: 130
FL_KILL_CURSOR	Value: 88

continued on next page

Name	Description
FL_NWARROW_CURSOR	Value: 132
FL_NEARROW_CURSOR	Value: 2
XC_invisible	Value: -2
Cursors_list	Value: [-2, -1, 150, 130, 88, 132, 2]
FL_NORMAL_DIAL	Value: 0
FL_LINE_DIAL	Value: 1
FL_FILL_DIAL	Value: 2
DIALTYPE_list	Value: [0, 1, 2]
FL_DIAL_CW	Value: 0
FL_DIAL_CCW	Value: 1
FL_DIAL_BOXTYPE	Value: 8
FL_DIAL_COL1	Value: 11
FL_DIAL_COL2	Value: 12
FL_DIAL_LCOL	Value: 0
FL_DIAL_ALIGN	Value: 2
FL_DIAL_TOPCOL	Value: 11
FT_FILE	Value: 0
FT_DIR	Value: 1
FT_LINK	Value: 2
FT SOCK	Value: 3
FT_FIFO	Value: 4
FT_BLK	Value: 5
FT_CHR	Value: 6
FT_OTHER	Value: 7
FL_ALPHASORT	Value: 1
FL_RALPHASORT	Value: 2
FL_MTIMESORT	Value: 3
FL_RMTIMESORT	Value: 4
FL_SIZESORT	Value: 5
FL_RSIZESORT	Value: 6
FL_CASEALPHASORT	Value: 7
FL_RCASEALPHASORT	Value: 8
FLPS_AUTO	Value: 0
FLPS_LANDSCAPE	Value: 1
FLPS_PORTRAIT	Value: 2
FLPS_BESTFIT	Value: 3
FLPS_BW	Value: -1
FLPS_GRAYSCALE	Value: 0
FLPS_COLOR	Value: 1
FL_NORMAL_FORMBR-OWSER	Value: 0

continued on next page

Name	Description
FORMBRWSTYPE_list	Value: [0]
FL_SMOOTH_SCROLL	Value: 0
FL_JUMP_SCROLL	Value: 1
FL_FORMBROWSER_BOXTYPE	Value: 2
FL_FORMBROWSER_COL1	Value: 11
FL_FORMBROWSER_ALIGN	Value: 1
FL_NO_FRAME	Value: 0
FL_UP_FRAME	Value: 1
FL_DOWN_FRAME	Value: 2
FL_BORDER_FRAME	Value: 3
FL_SHADOW_FRAME	Value: 4
FL_ENGRAVED_FRAME	Value: 5
FL_ROUNDED_FRAME	Value: 6
FL_EMBOSSED_FRAME	Value: 7
FL_OVAL_FRAME	Value: 8
FRAMETYPE_list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 8]
FL_FRAME_COL1	Value: 0
FL_FRAME_COL2	Value: 11
FL_FRAME_LCOL	Value: 0
FL_NORMAL_FREE	Value: 0
FL_INACTIVE_FREE	Value: 1
FL_INPUT_FREE	Value: 2
FL_CONTINUOUS_FREE	Value: 3
FL_ALL_FREE	Value: 4
FL_SLEEPING_FREE	Value: 1
FREETYPE_list	Value: [0, 1, 2, 3, 4, 1]
FLAlertDismissLabel	Value: 'flAlert.dismiss.label'
FLAlertTitle	Value: 'flAlert.title'
FLQuestionYesLabel	Value: 'flQuestion.yes.label'
FLQuestionNoLabel	Value: 'flQuestion.no.label'
FLQuestionTitle	Value: 'flQuestion.title'
FLOKLabel	Value: 'flInput.ok.label'
FLInputClearLabel	Value: 'flInput.clear.label'
FLInputCancelLabel	Value: 'flInput.cancel.label'
FLInputTitle	Value: 'flInput.title'
FLChoiceTitle	Value: 'flChoice.title'
FL_MAX_FSELECTOR	Value: 6
FL_NORMAL_INPUT	Value: 0

continued on next page

Name	Description
FL_FLOAT_INPUT	Value: 1
FL_INT_INPUT	Value: 2
FL_DATE_INPUT	Value: 3
FL_MULTILINE_INPUT	Value: 4
FL_HIDDEN_INPUT	Value: 5
FL_SECRET_INPUT	Value: 6
INPUTTYPE_list	Value: [0, 1, 2, 3, 4, 5, 6]
FL_INPUT_MMDD	Value: 0
FL_INPUT_DDMM	Value: 1
FL_INPUT_BOXTYPE	Value: 2
FL_INPUT_COL1	Value: 11
FL_INPUT_COL2	Value: 16
FL_INPUT_LCOL	Value: 0
FL_INPUT_ALIGN	Value: 4
FL_INPUT_TCOL	Value: 0
FL_INPUT_CCOL	Value: 4
FL_RINGBELL	Value: 16
FL_TOUCH_MENU	Value: 0
FL_PUSH_MENU	Value: 1
FL_PULLDOWN_MENU	Value: 2
MENUTYPE_list	Value: [0, 1, 2]
FL_MENU_BOXTYPE	Value: 3
FL_MENU_COL1	Value: 11
FL_MENU_COL2	Value: 16
FL_MENU_LCOL	Value: 0
FL_MENU_ALIGN	Value: 0
FL_MENU_MAXITEMS	Value: 128
FL_MENU_MAXSTR	Value: 64
FL_NORMAL_NMENU	Value: 0
FL_NORMAL_TOUCH_N-MENU	Value: 1
FL_BUTTON_NMENU	Value: 2
FL_BUTTON_TOUCH_N-MENU	Value: 3
NMENUTYPE_list	Value: [0, 1, 2, 3]
FL_NORMAL_POSITIONER	Value: 0
FL_OVERLAY_POSITIONER	Value: 1
FL_INVISIBLE_POSITIONER	Value: 2
POSITIONERTYPE_list	Value: [0, 1, 2]

continued on next page

Name	Description
FL_POSITIONER_BOXTYPE	Value: 2
FL_POSITIONER_COL1	Value: 11
FL_POSITIONER_COL2	Value: 1
FL_POSITIONER_LCOL	Value: 0
FL_POSITIONER_ALIGN	Value: 2
FL_VERT_SCROLLBAR	Value: 0
FL_HOR_SCROLLBAR	Value: 1
FL_VERT_THIN_SCROLLBAR	Value: 2
FL_HOR_THIN_SCROLLBAR	Value: 3
FL_VERT_NICE_SCROLLBAR	Value: 4
FL_HOR_NICE_SCROLLBAR	Value: 5
FL_VERT_PLAIN_SCROLLBAR	Value: 6
FL_HOR_PLAIN_SCROLLBAR	Value: 7
FL_HOR_BASIC_SCROLLBAR	Value: 7
FL_VERT_BASIC_SCROLLBAR	Value: 6
FL_NORMAL_SCROLLBAR	Value: 0
FL_THIN_SCROLLBAR	Value: 1
FL_NICE_SCROLLBAR	Value: 2
FL_PLAIN_SCROLLBAR	Value: 3
SCROLLTYPE_list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 7, 6, 0, 1, 2, 3]
FL_NORMAL_SELECT	Value: 0
FL_MENU_SELECT	Value: 1
FL_DROPLIST_SELECT	Value: 2
SELECTTYPE_list	Value: [0, 1, 2]
FL_SELECT_COL1	Value: 11
FL_SELECT_COL2	Value: 16
FL_SELECT_LCOL	Value: 0
FL_SELECT_ALIGN	Value: 4
FL_HOR_FLAG	Value: 1
FL_SCROLL_FLAG	Value: 8

continued on next page

Name	Description
FL_VERT_SLIDER	Value: 0
FL_HOR_SLIDER	Value: 1
FL_VERT_FILL_SLIDER	Value: 2
FL_HOR_FILL_SLIDER	Value: 3
FL_VERT_NICE_SLIDER	Value: 4
FL_HOR_NICE_SLIDER	Value: 5
FL_VERT_BROWSER_SLIDER	Value: 6
FL_HOR_BROWSER_SLIDER	Value: 7
FL_VERT_BROWSER_SLIDER2	Value: 8
FL_HOR_BROWSER_SLIDER2	Value: 9
FL_VERT_THIN_SLIDER	Value: 10
FL_HOR_THIN_SLIDER	Value: 11
FL_VERT_NICE_SLIDER2	Value: 12
FL_HOR_NICE_SLIDER2	Value: 13
FL_VERT_BASIC_SLIDER	Value: 14
FL_HOR_BASIC_SLIDER	Value: 15
SLIDERTYPE_list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 10, 11, 12, 13, 14...]
FL_SLIDER_BW1	Value: c_int(1)
FL_SLIDER_BW2	Value: 0
FL_SLIDER_BOXTYPE	Value: 2
FL_SLIDER_COL1	Value: 11
FL_SLIDER_COL2	Value: 11
FL_SLIDER_LCOL	Value: 0
FL_SLIDER_ALIGN	Value: 2
FL_SLIDER_FINE	Value: 0.25
FL_SLIDER_WIDTH	Value: 0.1
FL_INT_SPINNER	Value: 0
FL_FLOAT_SPINNER	Value: 1
SPINNERTYPE_list	Value: [0, 1]
FL_TOP_TABFOLDER	Value: 0
FL_BOTTOM_TABFOLDER	Value: 1
FL_LEFT_TABFOLDER	Value: 2
FL_RIGHT_TABFOLDER	Value: 3

continued on next page

Name	Description
FL_NORMAL_TABFOLDER	Value: 0
TABFOLDERTYPE_list	Value: [0, 1, 2, 3, 0]
FL_NO	Value: 0
FL_FIT	Value: 1
FL_ENLARGE_ONLY	Value: 2
FL_NORMAL_TEXT	Value: 0
TEXTTYPE_list	Value: [0]
FL_TEXT_BOXTYPE	Value: 8
FL_TEXT_COL1	Value: 11
FL_TEXT_COL2	Value: 16
FL_TEXT_LCOL	Value: 0
FL_TEXT_ALIGN	Value: 4
FL_VERT_THUMBWHEEL	Value: 0
FL_HOR_THUMBWHEEL	Value: 1
THUMBWHEELTYPE_list	Value: [0, 1]
FL_THUMBWHEEL_COL1	Value: 11
FL_THUMBWHEEL_COL2	Value: 11
FL_THUMBWHEEL_LCOL	Value: 0
FL_THUMBWHEEL_BOXTYPE	Value: 3
FL_THUMBWHEEL_ALIGN	Value: 2
FL_NORMAL_TIMER	Value: 0
FL_VALUE_TIMER	Value: 1
FL_HIDDEN_TIMER	Value: 2
TIMERTYPE_list	Value: [0, 1, 2]
FL_TIMER_BOXTYPE	Value: 2
FL_TIMER_COL1	Value: 11
FL_TIMER_COL2	Value: 1
FL_TIMER_LCOL	Value: 0
FL_TIMER_ALIGN	Value: 0
FL_TIMER_BLINKRATE	Value: 0.2
FL_MAXPUPI	Value: 128
FL_PUP_PADH	Value: 4
FL_NORMAL_XY_PLOT	Value: 0

continued on next page

Name	Description
FL_SQUARE_XYPLOT	Value: 1
FL_CIRCLE_XYPLOT	Value: 2
FL_FILL_XYPLOT	Value: 3
FL_POINTS_XYPLOT	Value: 4
FL_DASHED_XYPLOT	Value: 5
FL_IMPULSE_XYPLOT	Value: 6
FL_ACTIVE_XYPLOT	Value: 7
FL_EMPTY_XYPLOT	Value: 8
FL_DOTTED_XYPLOT	Value: 9
FL_DOTDASHED_XYPL- OT	Value: 10
FL_LONGDASHED_XYP- LOT	Value: 11
FL_LINEPOINTS_XYPL- OT	Value: 12
XYPLOTTYPE_list	Value: [0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12]
FL_LINEAR	Value: 0
FL_LOG	Value: 1
FL_GRID_NONE	Value: 0
FL_GRID_MAJOR	Value: 1
FL_GRID_MINOR	Value: 2
FL_XYPLOT_BOXTYPE	Value: 8
FL_XYPLOT_COL1	Value: 11
FL_XYPLOT_LCOL	Value: 0
FL_XYPLOT_ALIGN	Value: 2
FL_MAX_XYPLOTOVE- RLAY	Value: 32
FL_FALSE	Value: 0
FL_TRUE	Value: True
FL_IMAGE_NONE	Value: 0
FL_IMAGE_MONO	Value: 1
FL_IMAGE_GRAY	Value: 2
FL_IMAGE_CI	Value: 4
FL_IMAGE_RGB	Value: 8
FL_IMAGE_PACKED	Value: 16
FL_IMAGE_GRAY16	Value: 32
FL_IMAGE_RGB16	Value: 64
FL_IMAGE_FLEX	Value: 1023
FLIMAGE_NONE	Value: 0
FLIMAGE_MONO	Value: 1
FLIMAGE_GRAY	Value: 2

continued on next page

Name	Description
FLIMAGE_CI	Value: 4
FLIMAGE_RGB	Value: 8
FLIMAGE_PACKED	Value: 16
FLIMAGE_GRAY16	Value: 32
FLIMAGE_RGB16	Value: 64
FLIMAGE_FLEX	Value: 1023
FL_PCBITS	Value: 8
FL_PCMAx	Value: 255
FL_RMASK	Value: 255
FL_RSHIFT	Value: 0
FL_GMASK	Value: 65280
FL_GSHIFT	Value: 8
FL_BMASK	Value: 16711680
FL_BSHIFT	Value: 16
FL_AMASK	Value: 4278190080
FL_ASHIFT	Value: 24
FL_LUTBITS	Value: 12
FLIMAGE_AUTOCOLOR	Value: 2147483647
FLIMAGE_BADCOLOR	Value: 2147483647
FLIMAGE_REPFREQ	Value: 31
FLIMAGE_ERR_NONE	Value: 0
FLIMAGE_ERR_ALLOC	Value: -50
FLIMAGE_ERR_INVALID	Value: -49
FLIMAGE_ERR_ARGUMENT	Value: -48
FLIMAGE_ERR_FILE	Value: -47
FLIMAGE_ERR_INTERNAL	Value: -46
FLIMAGE_ERR_UNKNOWN	Value: -45
FLIMAGE_WRITABLE	Value: 2
FLIMAGE_READABLE	Value: 1
FLIMAGE_SHARPEN	Value: cty.pointer(cty.pointer(cty.c_int(-1)))
FLIMAGE_SMOOTH	Value: cty.pointer(cty.pointer(cty.c_int(-2)))
FL_SMOOTH	Value: cty.pointer(cty.pointer(cty.c_int(-2)))
FL_SHARPEN	Value: cty.pointer(cty.pointer(cty.c_int(-1)))

continued on next page

Name	Description
FLIMAGE_NOSUBPIXEL	Value: 0
FLIMAGE_SUBPIXEL	Value: 1
FLIMAGE_CENTER	Value: 2
FLIMAGE_RIGHT	Value: 8
FLIMAGE_ASPECT	Value: 32
FLIMAGE_NOCENTER	Value: 5
KeyPress	Value: 2
KeyRelease	Value: 3
ButtonPress	Value: 4
ButtonRelease	Value: 5
MotionNotify	Value: 6
EnterNotify	Value: 7
LeaveNotify	Value: 8
FocusIn	Value: 9
FocusOut	Value: 10
KeymapNotify	Value: 11
Expose	Value: 12
GraphicsExpose	Value: 13
NoExpose	Value: 14
VisibilityNotify	Value: 15
CreateNotify	Value: 16
DestroyNotify	Value: 17
UnmapNotify	Value: 18
MapNotify	Value: 19
MapRequest	Value: 20
ReparentNotify	Value: 21
ConfigureNotify	Value: 22
ConfigureRequest	Value: 23
GravityNotify	Value: 24
ResizeRequest	Value: 25
CirculateNotify	Value: 26
CirculateRequest	Value: 27
PropertyNotify	Value: 28
SelectionClear	Value: 29
SelectionRequest	Value: 30
SelectionNotify	Value: 31
EXITVAL	Value: 255
--package--	Value: 'xformslib'

2.2 Class `FL_PUP_ENTRY`



2.2.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.2.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.2.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('text', <class 'ctypes.c_char_p'>), ('callback', <class...</code>
<code>callback</code>	Value: <code><Field type=CFunctionType, ofs=8, size=8></code>
<code>mode</code>	Value: <code><Field type=c_int, ofs=24, size=4></code>

continued on next page

Name	Description
shortcut	Value: <Field type=c_char_p, ofs=16, size=8>
text	Value: <Field type=c_char_p, ofs=0, size=8>

2.3 Class `FL_PUP_ENTRY`



2.3.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.3.2 Properties

Name	Description
<i>Inherited from <code>??.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.3.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('text', <class 'ctypes.c_char_p'>), ('callback', <class...
<code>callback</code>	Value: <Field type=CFunctionType, ofs=8, size=8>
<code>mode</code>	Value: <Field type=c_int, ofs=24, size=4>
<code>shortcut</code>	Value: <Field type=c_char_p, ofs=16, size=8>
<code>text</code>	Value: <Field type=c_char_p, ofs=0, size=8>

2.4 Class `_XExtData`

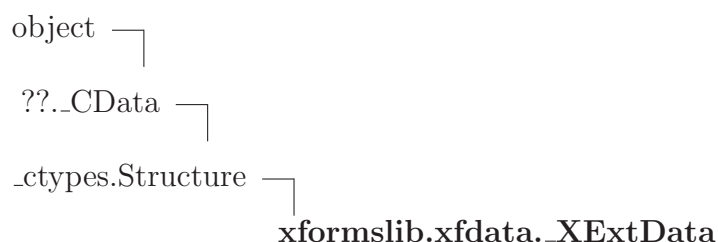

2.4.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.4.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	


continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.4.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('number', <class 'ctypes.c_int'>), ('next', <class 'xfo...
<code>free_private</code>	Value: <Field type=CFunctionType, ofs=16, size=8>
<code>next</code>	Value: <Field type=LP__XExtData, ofs=8, size=8>
<code>number</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>private_data</code>	Value: <Field type=c_char_p, ofs=24, size=8>

2.5 Class Visual

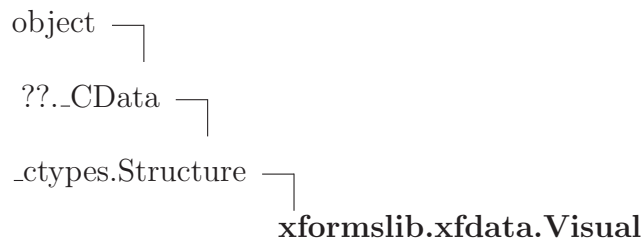

2.5.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.5.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.5.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('ext_data', <class 'xformslib.xfdata.LP_XExtData'>), (...</code>
<code>bits_per_rgb</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>blue_mask</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>c_class</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>ext_data</code>	Value: <code><Field type=LP_XExtData, ofs=0, size=8></code>
<code>green_mask</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>map_entries</code>	Value: <code><Field type=c_int, ofs=52, size=4></code>
<code>red_mask</code>	Value: <code><Field type=c_ulong, ofs=24, size=8></code>
<code>visualid</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>

2.6 Class XVisualInfo

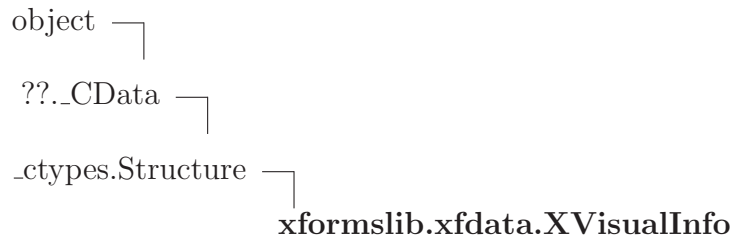

2.6.1 Methods

Inherited from `_ctypes.Structure`

`--init--()`, `--new--()`

Inherited from `??.CData`

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from `object`

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.6.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>--class--</code>	


2.6.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('visual', <class 'xformslib.xfdata.LP_Visual'>), ('visu...</code>
<code>bits_per_rgb</code>	Value: <code><Field type=c_int, ofs=60, size=4></code>
<code>blue_mask</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>

continued on next page

Name	Description
<code>c_class</code>	Value: <Field type=c_int, ofs=24, size=4>
<code>colormap_size</code>	Value: <Field type=c_int, ofs=56, size=4>
<code>depth</code>	Value: <Field type=c_int, ofs=20, size=4>
<code>green_mask</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>red_mask</code>	Value: <Field type=c_ulong, ofs=32, size=8>
<code>screen</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>visual</code>	Value: <Field type=LP_Visual, ofs=0, size=8>
<code>visualid</code>	Value: <Field type=c_ulong, ofs=8, size=8>

2.7 Class `FL_FORM`

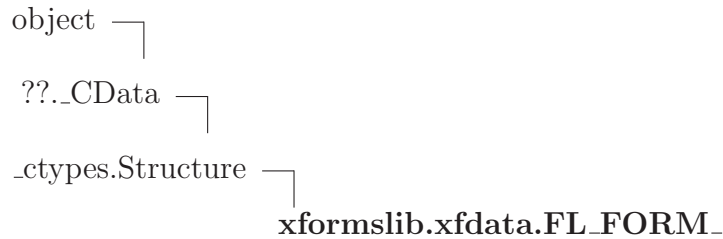

2.7.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.7.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.7.3 Class Variables

Name	Description
<code>_pack_</code>	Value: 4
<code>_fields_</code>	Value: [('fdui', <class 'ctypes.c_void_p'>), ('u_vdata', <class ...
<code>activate_callback</code>	Value: <Field type=CFunctionType, ofs=132, size=8>
<code>activate_data</code>	Value: <Field type=c_void_p, ofs=156, size=8>
<code>all_callback</code>	Value: <Field type=CFunctionType, ofs=204, size=8>
<code>attach_data</code>	Value: <Field type=c_void_p, ofs=344, size=8>
<code>attached</code>	Value: <Field type=c_int, ofs=332, size=4>
<code>child</code>	Value: <Field type=LP_FL_FORM_, ofs=316, size=8>
<code>close_callback</code>	Value: <Field type=CFunctionType, ofs=228, size=8>
<code>close_data</code>	Value: <Field type=c_void_p, ofs=236, size=8>
<code>compress_mask</code>	Value: <Field type=c_ulong, ofs=212, size=8>
<code>crossing_callback</code>	Value: <Field type=CFunctionType, ofs=188, size=8>
<code>deactivate_callback</code>	Value: <Field type=CFunctionType, ofs=140, size=8>
<code>deactivate_data</code>	Value: <Field type=c_void_p, ofs=164, size=8>
<code>deactivated</code>	Value: <Field type=c_int, ofs=272, size=4>
<code>evmask</code>	Value: <Field type=c_ulong, ofs=220, size=8>


continued on next page

Name	Description
fdui	Value: <Field type=c_void_p, ofs=0, size=8>
first	Value: <Field type=LP_FL_OBJECT_, ofs=100, size=8>
flpixmap	Value: <Field type=LP_FL_pixmap_, ofs=244, size=8>
focusobj	Value: <Field type=LP_FL_OBJECT_, ofs=116, size=8>
form_callback	Value: <Field type=CFunctionType, ofs=124, size=8>
form_cb_data	Value: <Field type=c_void_p, ofs=148, size=8>
frozen	Value: <Field type=c_int, ofs=280, size=4>
h	Value: <Field type=c_int, ofs=60, size=4>
h_hr	Value: <Field type=c_double, ofs=92, size=8>
handle_dec_x	Value: <Field type=c_int, ofs=68, size=4>
handle_dec_y	Value: <Field type=c_int, ofs=72, size=4>
has_auto_objects	Value: <Field type=c_int, ofs=296, size=4>
hotx	Value: <Field type=c_int, ofs=76, size=4>
hoty	Value: <Field type=c_int, ofs=80, size=4>
icon_mask	Value: <Field type=c_ulong, ofs=260, size=8>
icon_pixmap	Value: <Field type=c_ulong, ofs=252, size=8>
in_redraw	Value: <Field type=c_int, ofs=64, size=4>
key_callback	Value: <Field type=CFunctionType, ofs=172, size=8>
label	Value: <Field type=c_char_p, ofs=32, size=8>
last	Value: <Field type=LP_FL_OBJECT_, ofs=108, size=8>
motion_callback	Value: <Field type=CFunctionType, ofs=196, size=8>

continued on next page

Name	Description
no_tooltip	Value: <Field type=c_int, ofs=352, size=4>
parent	Value: <Field type=LP_FL_FORM_, ofs=308, size=8>
parent_obj	Value: <Field type=LP_FL_OBJECT_, ofs=324, size=8>
pre_attach	Value: <Field type=CFunctionType, ofs=336, size=8>
prop	Value: <Field type=c_uint, ofs=292, size=4>
push_callback	Value: <Field type=CFunctionType, ofs=180, size=8>
sort_of_modal	Value: <Field type=c_int, ofs=304, size=4>
top	Value: <Field type=c_int, ofs=300, size=4>
u_cdata	Value: <Field type=c_char_p, ofs=16, size=8>
u_ldata	Value: <Field type=c_long, ofs=24, size=8>
u_vdata	Value: <Field type=c_void_p, ofs=8, size=8>
use_pixmap	Value: <Field type=c_int, ofs=276, size=4>
visible	Value: <Field type=c_int, ofs=284, size=4>
vmode	Value: <Field type=c_int, ofs=268, size=4>
w	Value: <Field type=c_int, ofs=56, size=4>
w_hr	Value: <Field type=c_double, ofs=84, size=8>
window	Value: <Field type=c_ulong, ofs=40, size=8>
wm_border	Value: <Field type=c_int, ofs=288, size=4>
x	Value: <Field type=c_int, ofs=48, size=4>
y	Value: <Field type=c_int, ofs=52, size=4>

2.8 Class `FL_FORM`

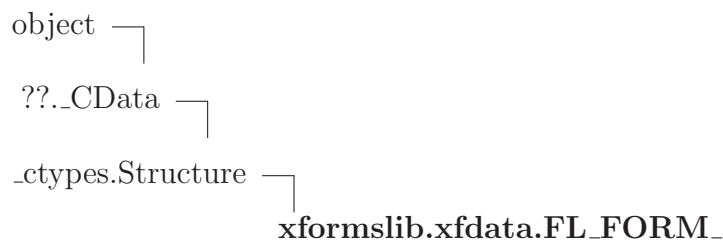

2.8.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.8.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.8.3 Class Variables

Name	Description
<code>_pack_</code>	Value: 4
<code>_fields_</code>	Value: [('fdui', <class 'ctypes.c_void_p'>), ('u_vdata', <class ...
<code>activate_callback</code>	Value: <Field type=CFunctionType, ofs=132, size=8>
<code>activate_data</code>	Value: <Field type=c_void_p, ofs=156, size=8>

continued on next page

Name	Description
all_callback	Value: <Field type=CFunctionType, ofs=204, size=8>
attach_data	Value: <Field type=c_void_p, ofs=344, size=8>
attached	Value: <Field type=c_int, ofs=332, size=4>
child	Value: <Field type=LP_FL_FORM_, ofs=316, size=8>
close_callback	Value: <Field type=CFunctionType, ofs=228, size=8>
close_data	Value: <Field type=c_void_p, ofs=236, size=8>
compress_mask	Value: <Field type=c_ulong, ofs=212, size=8>
crossing_callback	Value: <Field type=CFunctionType, ofs=188, size=8>
deactivate_callback	Value: <Field type=CFunctionType, ofs=140, size=8>
deactivate_data	Value: <Field type=c_void_p, ofs=164, size=8>
deactivated	Value: <Field type=c_int, ofs=272, size=4>
evmask	Value: <Field type=c_ulong, ofs=220, size=8>
fdui	Value: <Field type=c_void_p, ofs=0, size=8>
first	Value: <Field type=LP_FL_OBJECT_, ofs=100, size=8>
flpixmap	Value: <Field type=LP_FL_pixmap_, ofs=244, size=8>
focusobj	Value: <Field type=LP_FL_OBJECT_, ofs=116, size=8>
form_callback	Value: <Field type=CFunctionType, ofs=124, size=8>
form_cb_data	Value: <Field type=c_void_p, ofs=148, size=8>
frozen	Value: <Field type=c_int, ofs=280, size=4>
h	Value: <Field type=c_int, ofs=60, size=4>
h_hr	Value: <Field type=c_double, ofs=92, size=8>

continued on next page

Name	Description
handle_dec_x	Value: <Field type=c_int, ofs=68, size=4>
handle_dec_y	Value: <Field type=c_int, ofs=72, size=4>
has_auto_objects	Value: <Field type=c_int, ofs=296, size=4>
hotx	Value: <Field type=c_int, ofs=76, size=4>
hoty	Value: <Field type=c_int, ofs=80, size=4>
icon_mask	Value: <Field type=c_ulong, ofs=260, size=8>
icon_pixmap	Value: <Field type=c_ulong, ofs=252, size=8>
in_redraw	Value: <Field type=c_int, ofs=64, size=4>
key_callback	Value: <Field type=CFunctionType, ofs=172, size=8>
label	Value: <Field type=c_char_p, ofs=32, size=8>
last	Value: <Field type=LP_FL_OBJECT_, ofs=108, size=8>
motion_callback	Value: <Field type=CFunctionType, ofs=196, size=8>
no_tooltip	Value: <Field type=c_int, ofs=352, size=4>
parent	Value: <Field type=LP_FL_FORM_, ofs=308, size=8>
parent_obj	Value: <Field type=LP_FL_OBJECT_, ofs=324, size=8>
pre_attach	Value: <Field type=CFunctionType, ofs=336, size=8>
prop	Value: <Field type=c_uint, ofs=292, size=4>
push_callback	Value: <Field type=CFunctionType, ofs=180, size=8>
sort_of_modal	Value: <Field type=c_int, ofs=304, size=4>
top	Value: <Field type=c_int, ofs=300, size=4>
u_cdata	Value: <Field type=c_char_p, ofs=16, size=8>

continued on next page

Name	Description
<code>u_ldata</code>	Value: <Field type=c_long, ofs=24, size=8>
<code>u_vdata</code>	Value: <Field type=c_void_p, ofs=8, size=8>
<code>use_pixmap</code>	Value: <Field type=c_int, ofs=276, size=4>
<code>visible</code>	Value: <Field type=c_int, ofs=284, size=4>
<code>vmode</code>	Value: <Field type=c_int, ofs=268, size=4>
<code>w</code>	Value: <Field type=c_int, ofs=56, size=4>
<code>w_hr</code>	Value: <Field type=c_double, ofs=84, size=8>
<code>window</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>wm.border</code>	Value: <Field type=c_int, ofs=288, size=4>
<code>x</code>	Value: <Field type=c_int, ofs=48, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=52, size=4>

2.9 Class `FL_OBJECT_`



2.9.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.9.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.9.3 Class Variables

Name	Description
<code>_pack_</code>	Value: 4
<code>_fields_</code>	Value: [('form', <class 'xformslib.xfdata.LP_FL_FORM_>'), (<code>'u_vd...</code>
<code>active</code>	Value: <Field type=c_int, ofs=324, size=4>
<code>align</code>	Value: <Field type=c_int, ofs=160, size=4>
<code>argument</code>	Value: <Field type=c_long, ofs=196, size=8>
<code>automatic</code>	Value: <Field type=c_int, ofs=340, size=4>
<code>belowmouse</code>	Value: <Field type=c_int, ofs=320, size=4>
<code>boxtype</code>	Value: <Field type=c_int, ofs=40, size=4>
<code>bw</code>	Value: <Field type=c_int, ofs=124, size=4>
<code>c_cdata</code>	Value: <Field type=c_char_p, ofs=376, size=8>
<code>c_ldata</code>	Value: <Field type=c_long, ofs=384, size=8>
<code>c_vdata</code>	Value: <Field type=c_void_p, ofs=368, size=8>
<code>child</code>	Value: <Field type=LP_FL_OBJECT_, ofs=272, size=8>

continued on next page

Name	Description
click_timeout	Value: <Field type=c_ulong, ofs=360, size=8>
clip	Value: <Field type=c_int, ofs=356, size=4>
col1	Value: <Field type=c_ulong, ofs=128, size=8>
col2	Value: <Field type=c_ulong, ofs=136, size=8>
dbl_background	Value: <Field type=c_ulong, ofs=392, size=8>
double_buffer	Value: <Field type=c_int, ofs=308, size=4>
fb1	Value: <Field type=c_double, ofs=84, size=8>
fb2	Value: <Field type=c_double, ofs=116, size=8>
fl1	Value: <Field type=c_double, ofs=60, size=8>
fl2	Value: <Field type=c_double, ofs=92, size=8>
flpixmap	Value: <Field type=LP_FL_pixmap_, ofs=288, size=8>
focus	Value: <Field type=c_int, ofs=316, size=4>
form	Value: <Field type=LP_FL_FORM_, ofs=0, size=8>
fr1	Value: <Field type=c_double, ofs=68, size=8>
fr2	Value: <Field type=c_double, ofs=100, size=8>
ft1	Value: <Field type=c_double, ofs=76, size=8>
ft2	Value: <Field type=c_double, ofs=108, size=8>
group_id	Value: <Field type=c_int, ofs=412, size=4>
h	Value: <Field type=c_int, ofs=56, size=4>
handle	Value: <Field type=CFunctionType, ofs=180, size=8>
how_return	Value: <Field type=c_int, ofs=304, size=4>

continued on next page

Name	Description
input	Value: <Field type=c_int, ofs=328, size=4>
is_under	Value: <Field type=c_int, ofs=352, size=4>
label	Value: <Field type=c_char_p, ofs=144, size=8>
lcol	Value: <Field type=c_ulong, ofs=152, size=8>
lsize	Value: <Field type=c_int, ofs=164, size=4>
lstyle	Value: <Field type=c_int, ofs=168, size=4>
nc	Value: <Field type=LP_FL_OBJECT_, ofs=280, size=8>
next	Value: <Field type=LP_FL_OBJECT_, ofs=256, size=8>
nwgravity	Value: <Field type=c_uint, ofs=240, size=4>
objclass	Value: <Field type=c_int, ofs=32, size=4>
object_callback	Value: <Field type=CFunctionType, ofs=188, size=8>
parent	Value: <Field type=LP_FL_OBJECT_, ofs=264, size=8>
posthandle	Value: <Field type=CFunctionType, ofs=220, size=8>
prehandle	Value: <Field type=CFunctionType, ofs=212, size=8>
prev	Value: <Field type=LP_FL_OBJECT_, ofs=248, size=8>
pushed	Value: <Field type=c_int, ofs=312, size=4>
radio	Value: <Field type=c_int, ofs=336, size=4>
redraw	Value: <Field type=c_int, ofs=344, size=4>
resize	Value: <Field type=c_uint, ofs=236, size=4>
returned	Value: <Field type=c_int, ofs=300, size=4>
sgravity	Value: <Field type=c_uint, ofs=244, size=4>

continued on next page

Name	Description
set_return	Value: <Field type=CFunctionType, ofs=228, size=8>
shortcut	Value: <Field type=LP_c_long, ofs=172, size=8>
spec	Value: <Field type=c_void_p, ofs=204, size=8>
tipID	Value: <Field type=c_int, ofs=408, size=4>
tooltip	Value: <Field type=c_char_p, ofs=400, size=8>
type	Value: <Field type=c_int, ofs=36, size=4>
u_cdata	Value: <Field type=c_char_p, ofs=16, size=8>
u_ldata	Value: <Field type=c_long, ofs=24, size=8>
u_vdata	Value: <Field type=c_void_p, ofs=8, size=8>
use_pixmap	Value: <Field type=c_int, ofs=296, size=4>
visible	Value: <Field type=c_int, ofs=348, size=4>
w	Value: <Field type=c_int, ofs=52, size=4>
want_motion	Value: <Field type=c_int, ofs=416, size=4>
want_update	Value: <Field type=c_int, ofs=420, size=4>
wantkey	Value: <Field type=c_int, ofs=332, size=4>
x	Value: <Field type=c_int, ofs=44, size=4>
y	Value: <Field type=c_int, ofs=48, size=4>

2.10 Class `FL_OBJECT_`



2.10.1 Methods

Inherited from `_ctypes.Structure`

`--init--()`, `--new--()`

Inherited from `??._CData`

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from `object`

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.10.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>--class--</code>	

2.10.3 Class Variables

Name	Description
<code>_pack_</code>	Value: 4
<code>_fields_</code>	Value: [('form', <class 'xformslib.xfdata.LP_FL_FORM_>), ('u_vd...]
<code>active</code>	Value: <Field type=c_int, ofs=324, size=4>
<code>align</code>	Value: <Field type=c_int, ofs=160, size=4>

continued on next page

Name	Description
argument	Value: <Field type=c_long, ofs=196, size=8>
automatic	Value: <Field type=c_int, ofs=340, size=4>
belowmouse	Value: <Field type=c_int, ofs=320, size=4>
boxtype	Value: <Field type=c_int, ofs=40, size=4>
bw	Value: <Field type=c_int, ofs=124, size=4>
c_cdata	Value: <Field type=c_char_p, ofs=376, size=8>
c_ldata	Value: <Field type=c_long, ofs=384, size=8>
c_vdata	Value: <Field type=c_void_p, ofs=368, size=8>
child	Value: <Field type=LP_FL_OBJECT_, ofs=272, size=8>
click_timeout	Value: <Field type=c_ulong, ofs=360, size=8>
clip	Value: <Field type=c_int, ofs=356, size=4>
col1	Value: <Field type=c_ulong, ofs=128, size=8>
col2	Value: <Field type=c_ulong, ofs=136, size=8>
dbl_background	Value: <Field type=c_ulong, ofs=392, size=8>
double_buffer	Value: <Field type=c_int, ofs=308, size=4>
fb1	Value: <Field type=c_double, ofs=84, size=8>
fb2	Value: <Field type=c_double, ofs=116, size=8>
fl1	Value: <Field type=c_double, ofs=60, size=8>
fl2	Value: <Field type=c_double, ofs=92, size=8>
flpixmap	Value: <Field type=LP_FL_pixmap_, ofs=288, size=8>
focus	Value: <Field type=c_int, ofs=316, size=4>

continued on next page

Name	Description
form	Value: <Field type=LP_FL_FORM_, ofs=0, size=8>
fr1	Value: <Field type=c_double, ofs=68, size=8>
fr2	Value: <Field type=c_double, ofs=100, size=8>
ft1	Value: <Field type=c_double, ofs=76, size=8>
ft2	Value: <Field type=c_double, ofs=108, size=8>
group_id	Value: <Field type=c_int, ofs=412, size=4>
h	Value: <Field type=c_int, ofs=56, size=4>
handle	Value: <Field type=CFunctionType, ofs=180, size=8>
how_return	Value: <Field type=c_int, ofs=304, size=4>
input	Value: <Field type=c_int, ofs=328, size=4>
is_under	Value: <Field type=c_int, ofs=352, size=4>
label	Value: <Field type=c_char_p, ofs=144, size=8>
lcol	Value: <Field type=c_ulong, ofs=152, size=8>
lsize	Value: <Field type=c_int, ofs=164, size=4>
lstyle	Value: <Field type=c_int, ofs=168, size=4>
nc	Value: <Field type=LP_FL_OBJECT_, ofs=280, size=8>
next	Value: <Field type=LP_FL_OBJECT_, ofs=256, size=8>
nwgravity	Value: <Field type=c_uint, ofs=240, size=4>
objclass	Value: <Field type=c_int, ofs=32, size=4>
object_callback	Value: <Field type=CFunctionType, ofs=188, size=8>
parent	Value: <Field type=LP_FL_OBJECT_, ofs=264, size=8>


continued on next page

Name	Description
posthandle	Value: <Field type=CFunctionType, ofs=220, size=8>
prehandle	Value: <Field type=CFunctionType, ofs=212, size=8>
prev	Value: <Field type=LP_FL_OBJECT_, ofs=248, size=8>
pushed	Value: <Field type=c_int, ofs=312, size=4>
radio	Value: <Field type=c_int, ofs=336, size=4>
redraw	Value: <Field type=c_int, ofs=344, size=4>
resize	Value: <Field type=c_uint, ofs=236, size=4>
returned	Value: <Field type=c_int, ofs=300, size=4>
segravity	Value: <Field type=c_uint, ofs=244, size=4>
set_return	Value: <Field type=CFunctionType, ofs=228, size=8>
shortcut	Value: <Field type=LP_c_long, ofs=172, size=8>
spec	Value: <Field type=c_void_p, ofs=204, size=8>
tipID	Value: <Field type=c_int, ofs=408, size=4>
tooltip	Value: <Field type=c_char_p, ofs=400, size=8>
type	Value: <Field type=c_int, ofs=36, size=4>
u_cdata	Value: <Field type=c_char_p, ofs=16, size=8>
u_ldata	Value: <Field type=c_long, ofs=24, size=8>
u_vdata	Value: <Field type=c_void_p, ofs=8, size=8>
use_pixmap	Value: <Field type=c_int, ofs=296, size=4>
visible	Value: <Field type=c_int, ofs=348, size=4>
w	Value: <Field type=c_int, ofs=52, size=4>

continued on next page

Name	Description
<code>want_motion</code>	Value: <Field type=c_int, ofs=416, size=4>
<code>want_update</code>	Value: <Field type=c_int, ofs=420, size=4>
<code>wantkey</code>	Value: <Field type=c_int, ofs=332, size=4>
<code>x</code>	Value: <Field type=c_int, ofs=44, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=48, size=4>

2.11 Class `FL_pixmap_`

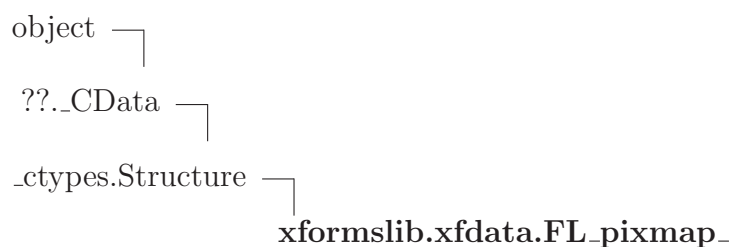

2.11.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.11.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	


continued on next page

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

2.11.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('pixmap', <class 'ctypes.c_ulong'>), ('win', <class 'ct...
<code>dbl_background</code>	Value: <Field type=c_ulong, ofs=48, size=8>
<code>depth</code>	Value: <Field type=c_int, ofs=40, size=4>
<code>h</code>	Value: <Field type=c_int, ofs=36, size=4>
<code>pixel</code>	Value: <Field type=c_ulong, ofs=56, size=8>
<code>pixmap</code>	Value: <Field type=c_ulong, ofs=0, size=8>
<code>visual</code>	Value: <Field type=LP_Visual, ofs=16, size=8>
<code>w</code>	Value: <Field type=c_int, ofs=32, size=4>
<code>win</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>x</code>	Value: <Field type=c_int, ofs=24, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=28, size=4>

2.12 Class `FL_pixmap_`

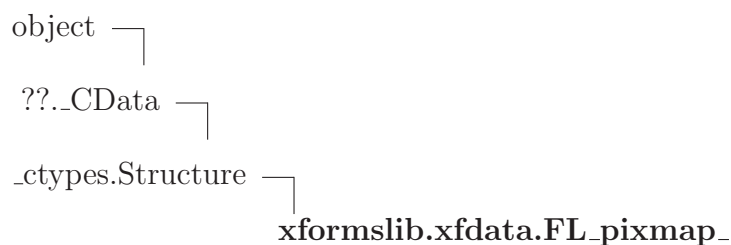

2.12.1 Methods

Inherited from ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.12.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.12.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('pixmap', <class 'ctypes.c_ulong'>), ('win', <class 'ct...
<code>dbl_background</code>	Value: <Field type=c_ulong, ofs=48, size=8>
<code>depth</code>	Value: <Field type=c_int, ofs=40, size=4>
<code>h</code>	Value: <Field type=c_int, ofs=36, size=4>
<code>pixel</code>	Value: <Field type=c_ulong, ofs=56, size=8>
<code>pixmap</code>	Value: <Field type=c_ulong, ofs=0, size=8>
<code>visual</code>	Value: <Field type=LP_Visual, ofs=16, size=8>
<code>w</code>	Value: <Field type=c_int, ofs=32, size=4>

continued on next page

Name	Description
win	Value: <Field type=c_ulong, ofs=8, size=8>
x	Value: <Field type=c_int, ofs=24, size=4>
y	Value: <Field type=c_int, ofs=28, size=4>

2.13 Class *FD_Any*

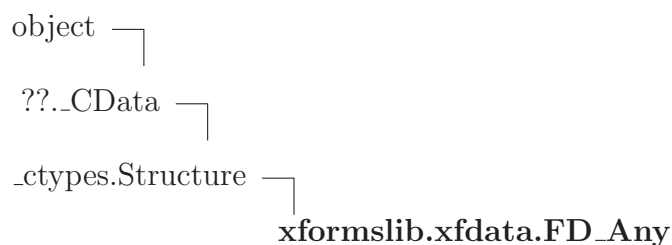

2.13.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.13.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.13.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('form', <class 'xformslib.xfdata.LP_FL_FORM_>'), ('vdat...
<code>cdata</code>	Value: <Field type=c_char_p, ofs=16, size=8>
<code>form</code>	Value: <Field type=LP_FL_FORM_, ofs=0, size=8>
<code>ldata</code>	Value: <Field type=c_long, ofs=24, size=8>
<code>vdata</code>	Value: <Field type=c_void_p, ofs=8, size=8>

2.14 Class XFontProp

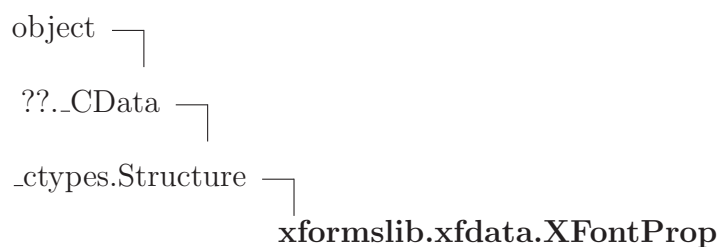

2.14.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.14.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	

continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.14.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('name', <class 'ctypes.c_ulong'>), ('card32', <class 'c...>)]
<code>card32</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>name</code>	Value: <Field type=c_ulong, ofs=0, size=8>

2.15 Class XCharStruct



2.15.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.15.2 Properties

Name	Description
<i>Inherited from</i> <code>??._CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	

2.15.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('lbearing', <class 'ctypes.c_short'>), ('rbearing', <cl...</code>
<code>ascent</code>	Value: <code><Field type=c_short, ofs=6, size=2></code>
<code>attributes</code>	Value: <code><Field type=c_ushort, ofs=10, size=2></code>
<code>descent</code>	Value: <code><Field type=c_short, ofs=8, size=2></code>
<code>lbearing</code>	Value: <code><Field type=c_short, ofs=0, size=2></code>
<code>rbearing</code>	Value: <code><Field type=c_short, ofs=2, size=2></code>
<code>width</code>	Value: <code><Field type=c_short, ofs=4, size=2></code>

2.16 Class XFontStruct



2.16.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.16.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.16.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('ext_data', <class 'xformslib.xfdata.LP__XExtData'>), (...</code>
<code>all_chars_exist</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>ascent</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>default_char</code>	Value: <code><Field type=c_uint, ofs=40, size=4></code>
<code>descent</code>	Value: <code><Field type=c_int, ofs=92, size=4></code>
<code>direction</code>	Value: <code><Field type=c_uint, ofs=16, size=4></code>
<code>ext_data</code>	Value: <code><Field type=LP__XExtData, ofs=0, size=8></code>
<code>fid</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>max_bounds</code>	Value: <code><Field type=XCharStruct, ofs=68, size=12></code>
<code>max_byte1</code>	Value: <code><Field type=c_uint, ofs=32, size=4></code>
<code>max_char_or_byte2</code>	Value: <code><Field type=c_uint, ofs=24, size=4></code>
<code>min_bounds</code>	Value: <code><Field type=XCharStruct, ofs=56, size=12></code>

continued on next page

Name	Description
min_bytel	Value: <Field type=c_uint, ofs=28, size=4>
min_char_or_byte2	Value: <Field type=c_uint, ofs=20, size=4>
n_properties	Value: <Field type=c_int, ofs=44, size=4>
per_char	Value: <Field type=LP_XCharStruct, ofs=80, size=8>
properties	Value: <Field type=LP_XFontProp, ofs=48, size=8>

2.17 Class GC

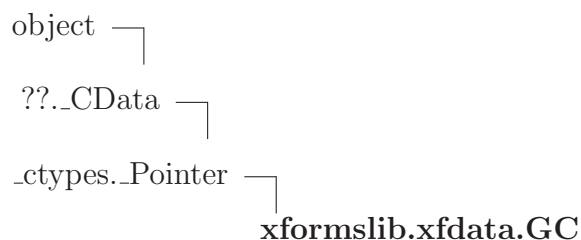

2.17.1 Methods

Inherited from _ctypes._Pointer

`--delitem--()`, `--getitem--()`, `--getslice--()`, `--init--()`, `--new--()`, `--nonzero--()`, `--setitem--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`


2.17.2 Properties

Name	Description
<i>Inherited from _ctypes._Pointer</i> contents	

continued on next page

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.18 Class *FL_State*

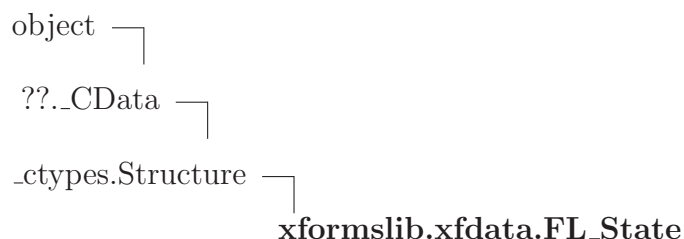

2.18.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`_ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.18.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.18.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('xvinfo', <class 'xformslib.xfdata.LP_XVisualInfo'>), (...</code>
<code>bbits</code>	Value: <code><Field type=c_uint, ofs=8544, size=4></code>
<code>bmask</code>	Value: <code><Field type=c_uint, ofs=8540, size=4></code>
<code>bshift</code>	Value: <code><Field type=c_uint, ofs=8536, size=4></code>
<code>colormap</code>	Value: <code><Field type=c_ulong, ofs=16, size=8></code>
<code>cur_fnt</code>	Value: <code><Field type=LP_XFontStruct, ofs=8, size=8></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>dimmedGC</code>	Value: <code><Field type=LP_XGC, ofs=312, size=8></code>
<code>dithered</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>gbits</code>	Value: <code><Field type=c_uint, ofs=8532, size=4></code>
<code>gc</code>	Value: <code><Field type=LP_XGC_Array_16, ofs=56, size=128></code>
<code>gmask</code>	Value: <code><Field type=c_uint, ofs=8528, size=4></code>
<code>gshift</code>	Value: <code><Field type=c_uint, ofs=8524, size=4></code>
<code>lut</code>	Value: <code><Field type=c_ulong_Array_1024, ofs=320, size=8192></code>
<code>pcm</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>rbits</code>	Value: <code><Field type=c_uint, ofs=8520, size=4></code>
<code>rgb_bits</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>rmask</code>	Value: <code><Field type=c_uint, ofs=8516, size=4></code>
<code>rshift</code>	Value: <code><Field type=c_uint, ofs=8512, size=4></code>
<code>textgc</code>	Value: <code><Field type=LP_XGC_Array_16, ofs=184, size=128></code>

continued on next page

Name	Description
trailblazer	Value: <Field type=c_ulong, ofs=24, size=8>
vclass	Value: <Field type=c_int, ofs=32, size=4>
xvinfo	Value: <Field type=LP_XVisualInfo, ofs=0, size=8>

2.19 Class *FL_State*



2.19.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.19.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.19.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('xvinfo', <class 'xformslib.xfdata.LP_XVisualInfo'>), (...</code>
<code>bbits</code>	Value: <code><Field type=c_uint, ofs=8544, size=4></code>
<code>bmask</code>	Value: <code><Field type=c_uint, ofs=8540, size=4></code>
<code>bshift</code>	Value: <code><Field type=c_uint, ofs=8536, size=4></code>
<code>colormap</code>	Value: <code><Field type=c_ulong, ofs=16, size=8></code>
<code>cur_fnt</code>	Value: <code><Field type=LP_XFontStruct, ofs=8, size=8></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>dimmedGC</code>	Value: <code><Field type=LP_XGC, ofs=312, size=8></code>
<code>dithered</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>gbits</code>	Value: <code><Field type=c_uint, ofs=8532, size=4></code>
<code>gc</code>	Value: <code><Field type=LP_XGC_Array_16, ofs=56, size=128></code>
<code>gmask</code>	Value: <code><Field type=c_uint, ofs=8528, size=4></code>
<code>gshift</code>	Value: <code><Field type=c_uint, ofs=8524, size=4></code>
<code>lut</code>	Value: <code><Field type=c_ulong_Array_1024, ofs=320, size=8192></code>
<code>pcm</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>rbits</code>	Value: <code><Field type=c_uint, ofs=8520, size=4></code>
<code>rgb_bits</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>rmask</code>	Value: <code><Field type=c_uint, ofs=8516, size=4></code>
<code>rshift</code>	Value: <code><Field type=c_uint, ofs=8512, size=4></code>
<code>textgc</code>	Value: <code><Field type=LP_XGC_Array_16, ofs=184, size=128></code>

continued on next page

Name	Description
trailblazer	Value: <Field type=c_ulong, ofs=24, size=8>
vclass	Value: <Field type=c_int, ofs=32, size=4>
xvinfo	Value: <Field type=LP_XVisualInfo, ofs=0, size=8>

2.20 Class FL_FONT



2.20.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.20.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.20.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('fs', <class 'xformslib.xfdata.LP_XFontStruct_Array_10'...
<code>fname</code>	Value: <Field type=c_char_Array_80, ofs=102, size=80>
<code>fs</code>	Value: <Field type=LP_XFontStruct_Array_10, ofs=0, size=80>
<code>nsiz</code>	Value: <Field type=c_short, ofs=100, size=2>
<code>size</code>	Value: <Field type=c_short_Array_10, ofs=80, size=20>

2.21 Class XPoint

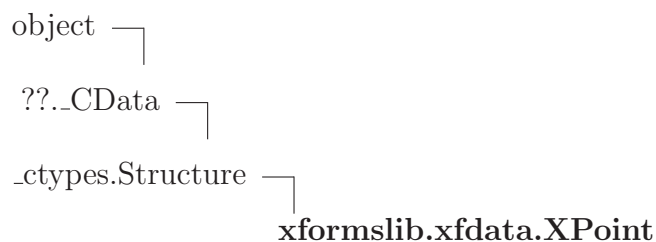

2.21.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.21.2 Properties

Name	Description
<i>Inherited from</i> <code>??._CData</code>	


continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.21.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('x', <class 'ctypes.c_short'>), ('y', <class 'ctypes.c_...
<code>x</code>	Value: <Field type=c_short, ofs=0, size=2>
<code>y</code>	Value: <Field type=c_short, ofs=2, size=2>

2.22 Class XPoint

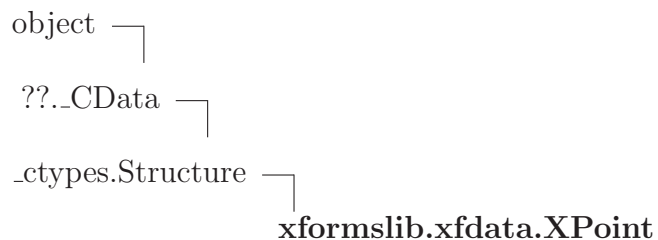

2.22.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.22.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.22.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('x', <class 'ctypes.c_short'>), ('y', <class 'ctypes.c_...</code>
<code>x</code>	Value: <code><Field type=c_short, ofs=0, size=2></code>
<code>y</code>	Value: <code><Field type=c_short, ofs=2, size=2></code>

2.23 Class XRectangle

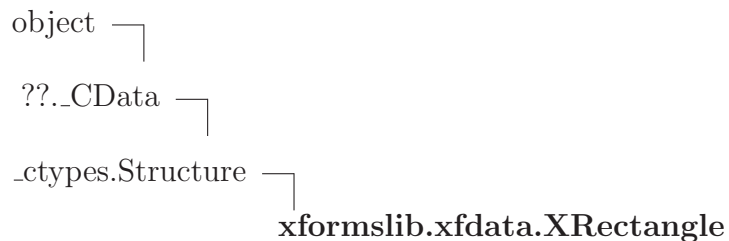

2.23.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctype_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.23.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.23.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('x', <class 'ctypes.c_short'>), ('y', <class 'ctypes.c_...]</code>
<code>height</code>	Value: <code><Field type=c_ushort, ofs=6, size=2></code>
<code>width</code>	Value: <code><Field type=c_ushort, ofs=4, size=2></code>
<code>x</code>	Value: <code><Field type=c_short, ofs=0, size=2></code>
<code>y</code>	Value: <code><Field type=c_short, ofs=2, size=2></code>

2.24 Class XRectangle

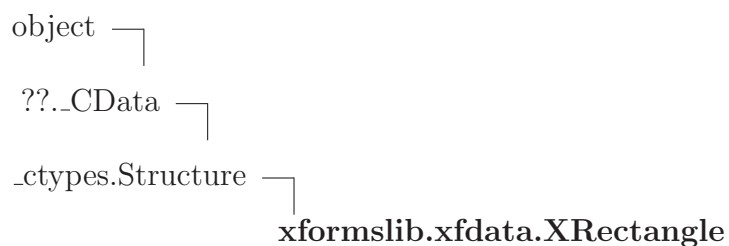

2.24.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.24.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.24.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('x', <class 'ctypes.c_short'>), ('y', <class 'ctypes.c_...</code>
<code>height</code>	Value: <code><Field type=c_ushort, ofs=6, size=2></code>
<code>width</code>	Value: <code><Field type=c_ushort, ofs=4, size=2></code>
<code>x</code>	Value: <code><Field type=c_short, ofs=0, size=2></code>
<code>y</code>	Value: <code><Field type=c_short, ofs=2, size=2></code>

2.25 Class `FL_RESOURCE`**2.25.1 Methods*****Inherited from `_ctypes.Structure`***

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.25.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.25.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('res_name', <class 'ctypes.c_char_p'>), ('res_class', <...</code>
<code>defval</code>	Value: <code><Field type=c_char_p, ofs=32, size=8></code>
<code>nbytes</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>res_class</code>	Value: <code><Field type=c_char_p, ofs=8, size=8></code>
<code>res_name</code>	Value: <code><Field type=c_char_p, ofs=0, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>var</code>	Value: <code><Field type=c_void_p, ofs=24, size=8></code>

2.26 Class XrmOptionDescRec



2.26.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.26.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.26.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('option', <class 'ctypes.c_char_p'>), ('specifier', <cl...
<code>argKind</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>option</code>	Value: <Field type=c_char_p, ofs=0, size=8>

continued on next page

Name	Description
specifier	Value: <Field type=c_char_p, ofs=8, size=8>
value	Value: <Field type=c_char_p, ofs=24, size=8>

2.27 Class XrmOptionDescList

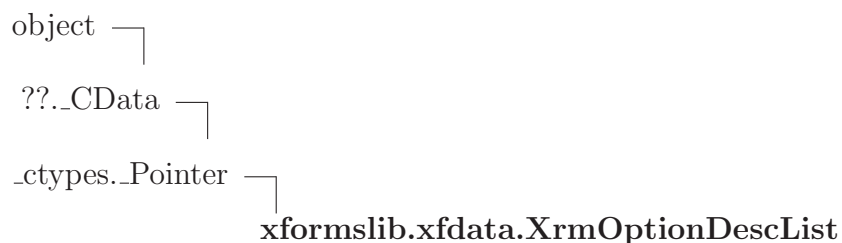

2.27.1 Methods

Inherited from _ctypes._Pointer

`--delitem--()`, `--getitem--()`, `--getslice--()`, `--init--()`, `--new--()`, `--nonzero--()`, `--setitem--()`

Inherited from ??.CData

`_ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`


Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.27.2 Properties

Name	Description
<i>Inherited from _ctypes._Pointer</i> contents	
<i>Inherited from ??.CData</i> _b_base_, _b_needsfree_	
<i>Inherited from object</i> _class__	

2.28 Class XrmOptionDescRec

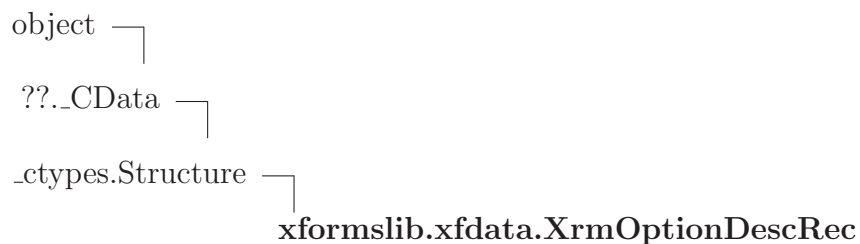

2.28.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.28.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.28.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('option', <class 'ctypes.c_char_p'>), ('specifier', <cl...
<code>argKind</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>option</code>	Value: <Field type=c_char_p, ofs=0, size=8>

continued on next page

Name	Description
specifier	Value: <Field type=c_char_p, ofs=8, size=8>
value	Value: <Field type=c_char_p, ofs=24, size=8>

2.29 Class *FL_RESOURCE*



2.29.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.29.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.29.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('res_name', <class 'ctypes.c_char_p'>), ('res_class', <...</code>
<code>defval</code>	Value: <code><Field type=c_char_p, ofs=32, size=8></code>
<code>nbytes</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>res_class</code>	Value: <code><Field type=c_char_p, ofs=8, size=8></code>
<code>res_name</code>	Value: <code><Field type=c_char_p, ofs=0, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>var</code>	Value: <code><Field type=c_void_p, ofs=24, size=8></code>

2.30 Class `FL_IOPT`

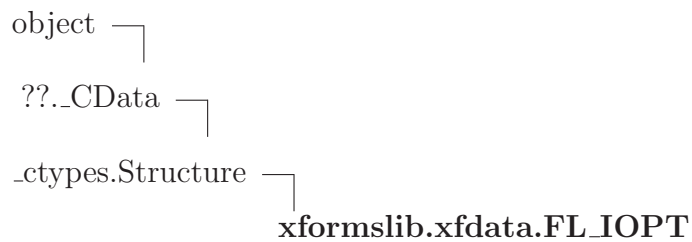

2.30.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.30.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.30.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('rgamma', <class 'ctypes.c_float'>), ('ggamma', <class ...</code>
<code>backingStore</code>	Value: <code><Field type=c_int, ofs=92, size=4></code>
<code>bgamma</code>	Value: <code><Field type=c_float, ofs=8, size=4></code>
<code>borderWidth</code>	Value: <code><Field type=c_int, ofs=100, size=4></code>
<code>browserFontSize</code>	Value: <code><Field type=c_int, ofs=52, size=4></code>
<code>buttonFontSize</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>choiceFontSize</code>	Value: <code><Field type=c_int, ofs=60, size=4></code>
<code>coordUnit</code>	Value: <code><Field type=c_int, ofs=96, size=4></code>
<code>debug</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=20, size=4></code>
<code>doubleBuffer</code>	Value: <code><Field type=c_int, ofs=28, size=4></code>
<code>ggamma</code>	Value: <code><Field type=c_float, ofs=4, size=4></code>
<code>inputFontSize</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>labelFontSize</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>
<code>menuFontSize</code>	Value: <code><Field type=c_int, ofs=56, size=4></code>
<code>privateColormap</code>	Value: <code><Field type=c_int, ofs=76, size=4></code>

continued on next page

Name	Description
pupFontSize	Value: <Field type=c_int, ofs=68, size=4>
pupFontStyle	Value: <Field type=c_int, ofs=72, size=4>
rgamma	Value: <Field type=c_float, ofs=0, size=4>
rgbfile	Value: <Field type=c_char_p, ofs=112, size=8>
safe	Value: <Field type=c_int, ofs=104, size=4>
scrollbarType	Value: <Field type=c_int, ofs=88, size=4>
sharedColormap	Value: <Field type=c_int, ofs=80, size=4>
sliderFontSize	Value: <Field type=c_int, ofs=44, size=4>
standardColormap	Value: <Field type=c_int, ofs=84, size=4>
sync	Value: <Field type=c_int, ofs=16, size=4>
ulPropWidth	Value: <Field type=c_int, ofs=32, size=4>
ulThickness	Value: <Field type=c_int, ofs=36, size=4>
vclass	Value: <Field type=c_int, ofs=24, size=4>
vname	Value: <Field type=c_char Array 24, ofs=120, size=24>

2.31 Class *FL_RGB2PIXEL_*

```

object └─
  ??._CData └─
    _ctypes.Structure └─
      xformslib.xfdata.FL_RGB2PIXEL_

```

2.31.1 Methods***Inherited from ctypes.Structure***`__init__()`, `__new__()`***Inherited from ??._CData***`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`***Inherited from object***`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`**2.31.2 Properties**

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.31.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('rshift', <class 'ctypes.c_uint'>), ('rmask', <class 'c...
<code>bbits</code>	Value: <Field type=c_uint, ofs=32, size=4>
<code>bits_per_rgb</code>	Value: <Field type=c_int, ofs=36, size=4>
<code>bmask</code>	Value: <Field type=c_uint, ofs=28, size=4>
<code>bshift</code>	Value: <Field type=c_uint, ofs=24, size=4>
<code>colormap_size</code>	Value: <Field type=c_int, ofs=40, size=4>
<code>gbits</code>	Value: <Field type=c_uint, ofs=20, size=4>
<code>gmask</code>	Value: <Field type=c_uint, ofs=16, size=4>

continued on next page

Name	Description
<code>gshift</code>	Value: <Field type=c_uint, ofs=12, size=4>
<code>rbits</code>	Value: <Field type=c_uint, ofs=8, size=4>
<code>rmask</code>	Value: <Field type=c_uint, ofs=4, size=4>
<code>rshift</code>	Value: <Field type=c_uint, ofs=0, size=4>

2.32 Class `FL_RGB2PIXEL_`



2.32.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.32.2 Properties

Name	Description
<i>Inherited from <code>??.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.32.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('rshift', <class 'ctypes.c_uint'>), ('rmask', <class 'c...</code>
<code>bbits</code>	Value: <code><Field type=c_uint, ofs=32, size=4></code>
<code>bits_per_rgb</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>bmask</code>	Value: <code><Field type=c_uint, ofs=28, size=4></code>
<code>bshift</code>	Value: <code><Field type=c_uint, ofs=24, size=4></code>
<code>colormap_size</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>gbits</code>	Value: <code><Field type=c_uint, ofs=20, size=4></code>
<code>gmask</code>	Value: <code><Field type=c_uint, ofs=16, size=4></code>
<code>gshift</code>	Value: <code><Field type=c_uint, ofs=12, size=4></code>
<code>rbits</code>	Value: <code><Field type=c_uint, ofs=8, size=4></code>
<code>rmask</code>	Value: <code><Field type=c_uint, ofs=4, size=4></code>
<code>rshift</code>	Value: <code><Field type=c_uint, ofs=0, size=4></code>

2.33 Class `FL_POPUP_`



2.33.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??_CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.33.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.33.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('next', <class 'xformslib.xfdata.LP_FL_POPUP_>), ('pre...</code>
<code>bg_color</code>	Value: <code><Field type=c_ulong, ofs=176, size=8></code>
<code>bw</code>	Value: <code><Field type=c_int, ofs=168, size=4></code>
<code>callback</code>	Value: <code><Field type=CFunctionType, ofs=72, size=8></code>
<code>counter</code>	Value: <code><Field type=c_int, ofs=136, size=4></code>
<code>cursor</code>	Value: <code><Field type=c_ulong, ofs=64, size=8></code>
<code>entries</code>	Value: <code><Field type=LP_FL_POPUP_ENTRY_, ofs=32, size=8></code>
<code>entry_font_size</code>	Value: <code><Field type=c_int, ofs=152, size=4></code>
<code>entry_font_style</code>	Value: <code><Field type=c_int, ofs=148, size=4></code>
<code>event_mask</code>	Value: <code><Field type=c_ulong, ofs=160, size=8></code>


continued on next page

Name	Description
<code>h</code>	Value: <Field type=c_uint, ofs=104, size=4>
<code>has_boxes</code>	Value: <Field type=c_int, ofs=132, size=4>
<code>has_subs</code>	Value: <Field type=c_int, ofs=128, size=4>
<code>min_width</code>	Value: <Field type=c_int, ofs=108, size=4>
<code>need_recalc</code>	Value: <Field type=c_int, ofs=236, size=4>
<code>next</code>	Value: <Field type=LP_FL_POPUP_, ofs=0, size=8>
<code>on_color</code>	Value: <Field type=c_ulong, ofs=184, size=8>
<code>parent</code>	Value: <Field type=LP_FL_POPUP_, ofs=16, size=8>
<code>parent_win</code>	Value: <Field type=c_ulong, ofs=56, size=8>
<code>policy</code>	Value: <Field type=c_int, ofs=232, size=4>
<code>prev</code>	Value: <Field type=LP_FL_POPUP_, ofs=8, size=8>
<code>radio_color</code>	Value: <Field type=c_ulong, ofs=224, size=8>
<code>req_x</code>	Value: <Field type=c_int, ofs=84, size=4>
<code>req_y</code>	Value: <Field type=c_int, ofs=88, size=4>
<code>ret</code>	Value: <Field type=FL_POPUP_RETURN_, ofs=240, size=56>
<code>text_color</code>	Value: <Field type=c_ulong, ofs=200, size=8>
<code>text_off_color</code>	Value: <Field type=c_ulong, ofs=216, size=8>
<code>text_on_color</code>	Value: <Field type=c_ulong, ofs=208, size=8>
<code>title</code>	Value: <Field type=c_char_p, ofs=40, size=8>
<code>title_box_h</code>	Value: <Field type=c_uint, ofs=124, size=4>
<code>title_box_w</code>	Value: <Field type=c_uint, ofs=120, size=4>

continued on next page

Name	Description
<code>title_box_x</code>	Value: <Field type=c_int, ofs=112, size=4>
<code>title_box_y</code>	Value: <Field type=c_int, ofs=116, size=4>
<code>title_color</code>	Value: <Field type=c_ulong, ofs=192, size=8>
<code>title_font_size</code>	Value: <Field type=c_int, ofs=144, size=4>
<code>title_font_style</code>	Value: <Field type=c_int, ofs=140, size=4>
<code>top_parent</code>	Value: <Field type=LP_FL_POPUP_, ofs=24, size=8>
<code>use_req_pos</code>	Value: <Field type=c_int, ofs=80, size=4>
<code>w</code>	Value: <Field type=c_uint, ofs=100, size=4>
<code>win</code>	Value: <Field type=c_ulong, ofs=48, size=8>
<code>x</code>	Value: <Field type=c_int, ofs=92, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=96, size=4>

2.34 Class `FL_POPUP_`

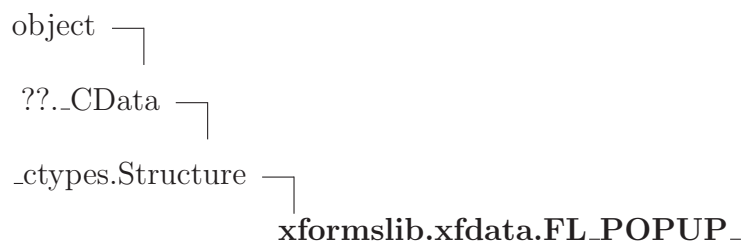

2.34.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.34.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.34.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('next', <class 'xformslib.xfdata.LP_FL_POPUP_'>), ('pre...</code>
<code>bg_color</code>	Value: <code><Field type=c_ulong, ofs=176, size=8></code>
<code>bw</code>	Value: <code><Field type=c_int, ofs=168, size=4></code>
<code>callback</code>	Value: <code><Field type=CFunctionType, ofs=72, size=8></code>
<code>counter</code>	Value: <code><Field type=c_int, ofs=136, size=4></code>
<code>cursor</code>	Value: <code><Field type=c_ulong, ofs=64, size=8></code>
<code>entries</code>	Value: <code><Field type=LP_FL_POPUP_ENTRY_, ofs=32, size=8></code>
<code>entry_font_size</code>	Value: <code><Field type=c_int, ofs=152, size=4></code>
<code>entry_font_style</code>	Value: <code><Field type=c_int, ofs=148, size=4></code>
<code>event_mask</code>	Value: <code><Field type=c_ulong, ofs=160, size=8></code>
<code>h</code>	Value: <code><Field type=c_uint, ofs=104, size=4></code>
<code>has_boxes</code>	Value: <code><Field type=c_int, ofs=132, size=4></code>
<code>has_subs</code>	Value: <code><Field type=c_int, ofs=128, size=4></code>

continued on next page

Name	Description
min_width	Value: <Field type=c_int, ofs=108, size=4>
need_recalc	Value: <Field type=c_int, ofs=236, size=4>
next	Value: <Field type=LP_FL_POPUP_, ofs=0, size=8>
on_color	Value: <Field type=c_ulong, ofs=184, size=8>
parent	Value: <Field type=LP_FL_POPUP_, ofs=16, size=8>
parent_win	Value: <Field type=c_ulong, ofs=56, size=8>
policy	Value: <Field type=c_int, ofs=232, size=4>
prev	Value: <Field type=LP_FL_POPUP_, ofs=8, size=8>
radio_color	Value: <Field type=c_ulong, ofs=224, size=8>
req_x	Value: <Field type=c_int, ofs=84, size=4>
req_y	Value: <Field type=c_int, ofs=88, size=4>
ret	Value: <Field type=FL_POPUP_RETURN_, ofs=240, size=56>
text_color	Value: <Field type=c_ulong, ofs=200, size=8>
text_off_color	Value: <Field type=c_ulong, ofs=216, size=8>
text_on_color	Value: <Field type=c_ulong, ofs=208, size=8>
title	Value: <Field type=c_char_p, ofs=40, size=8>
title_box_h	Value: <Field type=c_uint, ofs=124, size=4>
title_box_w	Value: <Field type=c_uint, ofs=120, size=4>
title_box_x	Value: <Field type=c_int, ofs=112, size=4>
title_box_y	Value: <Field type=c_int, ofs=116, size=4>
title_color	Value: <Field type=c_ulong, ofs=192, size=8>

continued on next page

Name	Description
<code>title_font_size</code>	Value: <Field type=c_int, ofs=144, size=4>
<code>title_font_style</code>	Value: <Field type=c_int, ofs=140, size=4>
<code>top_parent</code>	Value: <Field type=LP_FL_POPUP_, ofs=24, size=8>
<code>use_req_pos</code>	Value: <Field type=c_int, ofs=80, size=4>
<code>w</code>	Value: <Field type=c_uint, ofs=100, size=4>
<code>win</code>	Value: <Field type=c_ulong, ofs=48, size=8>
<code>x</code>	Value: <Field type=c_int, ofs=92, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=96, size=4>

2.35 Class `FL_POPUP_ENTRY_`



2.35.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.35.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.35.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('prev', <class 'xformslib.xfdata.LP_FL_POPUP_ENTRY_')>], ...</code>
<code>accel</code>	Value: <code><Field type=c_char_p, ofs=48, size=8></code>
<code>box_h</code>	Value: <code><Field type=c_uint, ofs=164, size=4></code>
<code>box_w</code>	Value: <code><Field type=c_uint, ofs=160, size=4></code>
<code>box_x</code>	Value: <code><Field type=c_int, ofs=152, size=4></code>
<code>box_y</code>	Value: <code><Field type=c_int, ofs=156, size=4></code>
<code>callback</code>	Value: <code><Field type=CFunctionType, ofs=112, size=8></code>
<code>enter_callback</code>	Value: <code><Field type=CFunctionType, ofs=120, size=8></code>
<code>group</code>	Value: <code><Field type=c_int, ofs=80, size=4></code>
<code>h</code>	Value: <code><Field type=c_uint, ofs=148, size=4></code>
<code>is_act</code>	Value: <code><Field type=c_int, ofs=24, size=4></code>
<code>label</code>	Value: <code><Field type=c_char_p, ofs=40, size=8></code>
<code>leave_callback</code>	Value: <code><Field type=CFunctionType, ofs=128, size=8></code>
<code>next</code>	Value: <code><Field type=LP_FL_POPUP_ENTRY_, ofs=8, size=8></code>
<code>popup</code>	Value: <code><Field type=LP_FL_POPUP_, ofs=16, size=8></code>
<code>prev</code>	Value: <code><Field type=LP_FL_POPUP_ENTRY_, ofs=0, size=8></code>

continued on next page

Name	Description
<code>shortcut</code>	Value: <Field type=LP_c_long, ofs=96, size=8>
<code>sl_h</code>	Value: <Field type=c_uint, ofs=168, size=4>
<code>state</code>	Value: <Field type=c_uint, ofs=76, size=4>
<code>sub</code>	Value: <Field type=LP_FL_POPUP_, ofs=88, size=8>
<code>text</code>	Value: <Field type=c_char_p, ofs=32, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=72, size=4>
<code>ul_h</code>	Value: <Field type=c_uint, ofs=184, size=4>
<code>ul_w</code>	Value: <Field type=c_uint, ofs=180, size=4>
<code>ul_x</code>	Value: <Field type=c_int, ofs=172, size=4>
<code>ul_y</code>	Value: <Field type=c_int, ofs=176, size=4>
<code>ulpos</code>	Value: <Field type=c_int, ofs=104, size=4>
<code>user_data</code>	Value: <Field type=c_void_p, ofs=64, size=8>
<code>val</code>	Value: <Field type=c_long, ofs=56, size=8>
<code>w</code>	Value: <Field type=c_uint, ofs=144, size=4>
<code>x</code>	Value: <Field type=c_int, ofs=136, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=140, size=4>

2.36 Class `FL_POPUP_ENTRY_`

```

object └─
  ??._CData └─
    _ctypes.Structure └─
      xformslib.xfdata.FL_POPUP_ENTRY_

```

2.36.1 Methods***Inherited from ctypes.Structure***`__init__()`, `__new__()`***Inherited from ??._CData***`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`***Inherited from object***`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`**2.36.2 Properties**

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.36.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('prev', <class 'xformslib.xfdata.LP_FL_POPUP_ENTRY_>'), ...]
<code>accel</code>	Value: <Field type=c_char_p, ofs=48, size=8>
<code>box_h</code>	Value: <Field type=c_uint, ofs=164, size=4>
<code>box_w</code>	Value: <Field type=c_uint, ofs=160, size=4>
<code>box_x</code>	Value: <Field type=c_int, ofs=152, size=4>
<code>box_y</code>	Value: <Field type=c_int, ofs=156, size=4>
<code>callback</code>	Value: <Field type=CFunctionType, ofs=112, size=8>
<code>enter_callback</code>	Value: <Field type=CFunctionType, ofs=120, size=8>
<code>group</code>	Value: <Field type=c_int, ofs=80, size=4>

continued on next page

Name	Description
<code>h</code>	Value: <Field type=c_uint, ofs=148, size=4>
<code>is_act</code>	Value: <Field type=c_int, ofs=24, size=4>
<code>label</code>	Value: <Field type=c_char_p, ofs=40, size=8>
<code>leave_callback</code>	Value: <Field type=CFunctionType, ofs=128, size=8>
<code>next</code>	Value: <Field type=LP_FL_POPUP_ENTRY_, ofs=8, size=8>
<code>popup</code>	Value: <Field type=LP_FL_POPUP_, ofs=16, size=8>
<code>prev</code>	Value: <Field type=LP_FL_POPUP_ENTRY_, ofs=0, size=8>
<code>shortcut</code>	Value: <Field type=LP_c_long, ofs=96, size=8>
<code>sl_h</code>	Value: <Field type=c_uint, ofs=168, size=4>
<code>state</code>	Value: <Field type=c_uint, ofs=76, size=4>
<code>sub</code>	Value: <Field type=LP_FL_POPUP_, ofs=88, size=8>
<code>text</code>	Value: <Field type=c_char_p, ofs=32, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=72, size=4>
<code>ul_h</code>	Value: <Field type=c_uint, ofs=184, size=4>
<code>ul_w</code>	Value: <Field type=c_uint, ofs=180, size=4>
<code>ul_x</code>	Value: <Field type=c_int, ofs=172, size=4>
<code>ul_y</code>	Value: <Field type=c_int, ofs=176, size=4>
<code>ulpos</code>	Value: <Field type=c_int, ofs=104, size=4>
<code>user_data</code>	Value: <Field type=c_void_p, ofs=64, size=8>
<code>val</code>	Value: <Field type=c_long, ofs=56, size=8>
<code>w</code>	Value: <Field type=c_uint, ofs=144, size=4>

continued on next page

Name	Description
x	Value: <Field type=c_int, ofs=136, size=4>
y	Value: <Field type=c_int, ofs=140, size=4>

2.37 Class `FL_POPUP_RETURN_`



2.37.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.37.2 Properties

Name	Description
<i>Inherited from <code>??.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.37.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('val', <class 'ctypes.c_long'>), ('user_data', <class '...>)]
<code>accel</code>	Value: <Field type=c_char_p, ofs=32, size=8>
<code>entry</code>	Value: <Field type=LP_FL_POPUP_ENTRY_, ofs=40, size=8>
<code>label</code>	Value: <Field type=c_char_p, ofs=24, size=8>
<code>popup</code>	Value: <Field type=LP_FL_POPUP_, ofs=48, size=8>
<code>text</code>	Value: <Field type=c_char_p, ofs=16, size=8>
<code>user_data</code>	Value: <Field type=c_void_p, ofs=8, size=8>
<code>val</code>	Value: <Field type=c_long, ofs=0, size=8>

2.38 Class `FL_POPUP_RETURN_`

```

object └─
  ??._CData └─
    _ctypes.Structure └─
      xformslib.xfdata.FL_POPUP_RETURN_

```

2.38.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.38.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.38.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('val', <class 'ctypes.c_long'>), ('user_data', <class '...'</code>
<code>accel</code>	Value: <code><Field type=c_char_p, ofs=32, size=8></code>
<code>entry</code>	Value: <code><Field type=LP_FL_POPUP_ENTRY_, ofs=40, size=8></code>
<code>label</code>	Value: <code><Field type=c_char_p, ofs=24, size=8></code>
<code>popup</code>	Value: <code><Field type=LP_FL_POPUP_, ofs=48, size=8></code>
<code>text</code>	Value: <code><Field type=c_char_p, ofs=16, size=8></code>
<code>user_data</code>	Value: <code><Field type=c_void_p, ofs=8, size=8></code>
<code>val</code>	Value: <code><Field type=c_long, ofs=0, size=8></code>

2.39 Class `FL_POPUP_ITEM`



2.39.1 Methods

Inherited from ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.39.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.39.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('text', <class 'ctypes.c_char_p'>), ('callback', <class...
<code>callback</code>	Value: <Field type=CFunctionType, ofs=8, size=8>
<code>shortcut</code>	Value: <Field type=c_char_p, ofs=16, size=8>
<code>state</code>	Value: <Field type=c_int, ofs=28, size=4>
<code>text</code>	Value: <Field type=c_char_p, ofs=0, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=24, size=4>

2.40 Class `FL_BUTTON_SPEC`



2.40.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `?.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.40.2 Properties

Name	Description
<i>Inherited from <code>?.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.40.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('pixmap', <class 'ctypes.c_ulong'>), ('mask', <class 'c...</code>
<code>bits_h</code>	Value: <code><Field type=c_uint, ofs=20, size=4></code>
<code>bits_w</code>	Value: <code><Field type=c_uint, ofs=16, size=4></code>

continued on next page

Name	Description
cspecl	Value: <Field type=c_long, ofs=64, size=8>
cspecv	Value: <Field type=c_void_p, ofs=72, size=8>
event	Value: <Field type=c_int, ofs=36, size=4>
filename	Value: <Field type=c_char_p, ofs=80, size=8>
focus_filename	Value: <Field type=c_char_p, ofs=104, size=8>
focus_mask	Value: <Field type=c_ulong, ofs=96, size=8>
focus_pixmap	Value: <Field type=c_ulong, ofs=88, size=8>
is_pushed	Value: <Field type=c_int, ofs=40, size=4>
mask	Value: <Field type=c_ulong, ofs=8, size=8>
mousebut	Value: <Field type=c_int, ofs=28, size=4>
pixmap	Value: <Field type=c_ulong, ofs=0, size=8>
react_to	Value: <Field type=c_int_Array_5, ofs=44, size=20>
timdel	Value: <Field type=c_int, ofs=32, size=4>
val	Value: <Field type=c_int, ofs=24, size=4>

2.41 Class *FL_BUTTON_SPEC*

```

object └─
  ??._CData └─
    _ctypes.Structure └─
      xformslib.xfdata.FL_BUTTON_SPEC

```

2.41.1 Methods***Inherited from ctypes.Structure***`__init__()`, `__new__()`***Inherited from ??._CData***`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`***Inherited from object***`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`**2.41.2 Properties**

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.41.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('pixmap', <class 'ctypes.c_ulong'>), ('mask', <class 'c...
<code>bits_h</code>	Value: <Field type=c_uint, ofs=20, size=4>
<code>bits_w</code>	Value: <Field type=c_uint, ofs=16, size=4>
<code>cspecl</code>	Value: <Field type=c_long, ofs=64, size=8>
<code>cspecv</code>	Value: <Field type=c_void_p, ofs=72, size=8>
<code>event</code>	Value: <Field type=c_int, ofs=36, size=4>
<code>filename</code>	Value: <Field type=c_char_p, ofs=80, size=8>
<code>focus_filename</code>	Value: <Field type=c_char_p, ofs=104, size=8>

continued on next page

Name	Description
focus_mask	Value: <Field type=c_ulong, ofs=96, size=8>
focus_pixmap	Value: <Field type=c_ulong, ofs=88, size=8>
is_pushed	Value: <Field type=c_int, ofs=40, size=4>
mask	Value: <Field type=c_ulong, ofs=8, size=8>
mousebut	Value: <Field type=c_int, ofs=28, size=4>
pixmap	Value: <Field type=c_ulong, ofs=0, size=8>
react_to	Value: <Field type=c_int_Array_5, ofs=44, size=20>
timdel	Value: <Field type=c_int, ofs=32, size=4>
val	Value: <Field type=c_int, ofs=24, size=4>

2.42 Class XSetWindowAttributes



2.42.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce.ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.42.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.42.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [(<code>'background_pixmap'</code> , <code><class 'ctypes.c_ulong'></code>), (<code>'backg...</code>
<code>background_pixel</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>background_pixmap</code>	Value: <code><Field type=c_ulong, ofs=0, size=8></code>
<code>backing_pixel</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>
<code>backing_planes</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>backing_store</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>bit_gravity</code>	Value: <code><Field type=c_int, ofs=32, size=4></code>
<code>border_pixel</code>	Value: <code><Field type=c_ulong, ofs=24, size=8></code>
<code>border_pixmap</code>	Value: <code><Field type=c_ulong, ofs=16, size=8></code>
<code>colormap</code>	Value: <code><Field type=c_ulong, ofs=96, size=8></code>
<code>cursor</code>	Value: <code><Field type=c_ulong, ofs=104, size=8></code>
<code>do_not_propagate_mask</code>	Value: <code><Field type=c_long, ofs=80, size=8></code>
<code>event_mask</code>	Value: <code><Field type=c_long, ofs=72, size=8></code>
<code>override_redirect</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>save_under</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>
<code>win_gravity</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>

2.43 Class GLXContext



2.43.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.43.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.43.3 Class Variables

Name	Description
<code>_fields_</code>	Value: []

2.44 Class *FL_Dirlist*



2.44.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.44.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.44.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('name', <class 'ctypes.c_char_p'>), ('type', <class 'ct...</code>
<code>dl_mtime</code>	Value: <code><Field type=c_long, ofs=16, size=8></code>
<code>dl_size</code>	Value: <code><Field type=c_ulong, ofs=24, size=8></code>

continued on next page

Name	Description
name	Value: <Field type=c_char_p, ofs=0, size=8>
type	Value: <Field type=c_int, ofs=8, size=4>

2.45 Class FLPS_CONTROL



2.45.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.45.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.45.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('ps_color', <class 'ctypes.c_int'>), ('orientation', <c...
<code>auto_fit</code>	Value: <Field type=c_int, ofs=8, size=4>
<code>clip</code>	Value: <Field type=c_int, ofs=76, size=4>
<code>drawbox</code>	Value: <Field type=c_int, ofs=12, size=4>
<code>eps</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>first_page_only</code>	Value: <Field type=c_int, ofs=72, size=4>
<code>gamma</code>	Value: <Field type=c_float, ofs=36, size=4>
<code>hm</code>	Value: <Field type=c_float, ofs=52, size=4>
<code>orientation</code>	Value: <Field type=c_int, ofs=4, size=4>
<code>paper_h</code>	Value: <Field type=c_float, ofs=32, size=4>
<code>paper_w</code>	Value: <Field type=c_float, ofs=28, size=4>
<code>printer_dpi</code>	Value: <Field type=c_int, ofs=48, size=4>
<code>ps_color</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>scale.text</code>	Value: <Field type=c_int, ofs=68, size=4>
<code>tmpdir</code>	Value: <Field type=c_char_p, ofs=40, size=8>
<code>vm</code>	Value: <Field type=c_float, ofs=56, size=4>
<code>xdpi</code>	Value: <Field type=c_float, ofs=20, size=4>
<code>xscale</code>	Value: <Field type=c_float, ofs=60, size=4>
<code>ydpi</code>	Value: <Field type=c_float, ofs=24, size=4>
<code>yscale</code>	Value: <Field type=c_float, ofs=64, size=4>

2.46 Class *FD_CMDLOG*

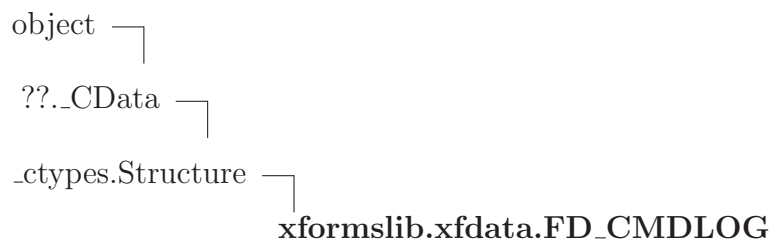

2.46.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.46.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.46.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('form', <class 'xformslib.xfdata.LP_FL_FORM_>), ('vdat...</code>
<code>browser</code>	Value: <code><Field type=LP_FL_OBJECT_, ofs=32, size=8></code>
<code>cdata</code>	Value: <code><Field type=c_char_p, ofs=16, size=8></code>

continued on next page

Name	Description
<code>clear_browser</code>	Value: <Field type= <code>LP_FL_OBJECT_</code> , ofs=48, size=8>
<code>close_browser</code>	Value: <Field type= <code>LP_FL_OBJECT_</code> , ofs=40, size=8>
<code>form</code>	Value: <Field type= <code>LP_FL_FORM_</code> , ofs=0, size=8>
<code>ldata</code>	Value: <Field type= <code>c_long</code> , ofs=24, size=8>
<code>vdata</code>	Value: <Field type= <code>c_void_p</code> , ofs=8, size=8>

2.47 Class `FD_FSELECTOR`



2.47.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.47.2 Properties

Name	Description
<i>Inherited from <code>??.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	


continued on next page

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

2.47.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('fselect', <class 'xformslib.xfdata.LP_FL_FORM_'>), ('v...
<code>appbutt</code>	Value: <Field type=LP_FL_OBJECT_, ofs=112, size=24>
<code>browser</code>	Value: <Field type=LP_FL_OBJECT_, ofs=32, size=8>
<code>cancel</code>	Value: <Field type=LP_FL_OBJECT_, ofs=80, size=8>
<code>cdata</code>	Value: <Field type=c_void_p, ofs=16, size=8>
<code>dirbutt</code>	Value: <Field type=LP_FL_OBJECT_, ofs=72, size=8>
<code>dirlabel</code>	Value: <Field type=LP_FL_OBJECT_, ofs=96, size=8>
<code>fselect</code>	Value: <Field type=LP_FL_FORM_, ofs=0, size=8>
<code>input</code>	Value: <Field type=LP_FL_OBJECT_, ofs=40, size=8>
<code>ldata</code>	Value: <Field type=c_long, ofs=24, size=8>
<code>patbutt</code>	Value: <Field type=LP_FL_OBJECT_, ofs=64, size=8>
<code>patlabel</code>	Value: <Field type=LP_FL_OBJECT_, ofs=104, size=8>
<code>prompt</code>	Value: <Field type=LP_FL_OBJECT_, ofs=48, size=8>
<code>ready</code>	Value: <Field type=LP_FL_OBJECT_, ofs=88, size=8>
<code>resbutt</code>	Value: <Field type=LP_FL_OBJECT_, ofs=56, size=8>
<code>vdata</code>	Value: <Field type=c_void_p, ofs=8, size=8>

2.48 Class *FL_EditKeymap*

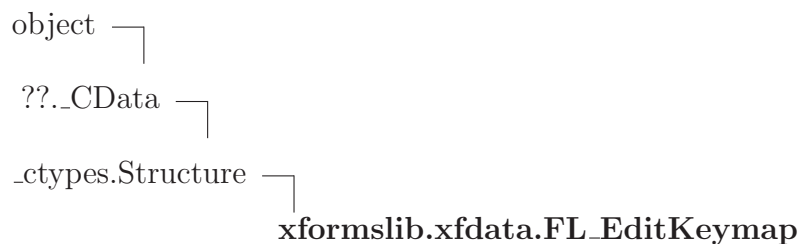

2.48.1 Methods

Inherited from *_ctypes.Structure*

`__init__()`, `__new__()`

Inherited from *??._CData*

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from *object*

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.48.2 Properties

Name	Description
<i>Inherited from</i> <i>??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <i>object</i>	
<code>__class__</code>	


2.48.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('del_prev_char', <class 'ctypes.c_long'>), ('del_next_c...</code>
<code>backspace</code>	Value: <code><Field type=c_long, ofs=144, size=8></code>
<code>clear_field</code>	Value: <code><Field type=c_long, ofs=168, size=8></code>

continued on next page

Name	Description
del_next_char	Value: <Field type=c_long, ofs=8, size=8>
del_next_word	Value: <Field type=c_long, ofs=24, size=8>
del_prev_char	Value: <Field type=c_long, ofs=0, size=8>
del_prev_word	Value: <Field type=c_long, ofs=16, size=8>
del_to_bol	Value: <Field type=c_long, ofs=152, size=8>
del_to_eol	Value: <Field type=c_long, ofs=160, size=8>
del_to_eos	Value: <Field type=c_long, ofs=176, size=8>
moveto_bof	Value: <Field type=c_long, ofs=112, size=8>
moveto_bol	Value: <Field type=c_long, ofs=96, size=8>
moveto_eof	Value: <Field type=c_long, ofs=120, size=8>
moveto_eol	Value: <Field type=c_long, ofs=104, size=8>
moveto_next_char	Value: <Field type=c_long, ofs=56, size=8>
moveto_next_line	Value: <Field type=c_long, ofs=40, size=8>
moveto_next_page	Value: <Field type=c_long, ofs=88, size=8>
moveto_next_word	Value: <Field type=c_long, ofs=72, size=8>
moveto_prev_char	Value: <Field type=c_long, ofs=48, size=8>
moveto_prev_line	Value: <Field type=c_long, ofs=32, size=8>
moveto_prev_page	Value: <Field type=c_long, ofs=80, size=8>
moveto_prev_word	Value: <Field type=c_long, ofs=64, size=8>
paste	Value: <Field type=c_long, ofs=136, size=8>
transpose	Value: <Field type=c_long, ofs=128, size=8>

2.49 Class `flimage_text_`

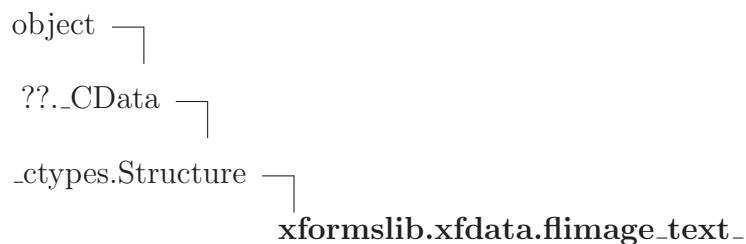

2.49.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.49.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.49.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('str', <class 'ctypes.c_char_p'>), ('len', <class 'ctyp...</code>
<code>align</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>angle</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>

continued on next page

Name	Description
<code>bcolor</code>	Value: <Field type=c_uint, ofs=24, size=4>
<code>color</code>	Value: <Field type=c_uint, ofs=20, size=4>
<code>len</code>	Value: <Field type=c_int, ofs=8, size=4>
<code>nobk</code>	Value: <Field type=c_int, ofs=28, size=4>
<code>size</code>	Value: <Field type=c_int, ofs=32, size=4>
<code>str</code>	Value: <Field type=c_char_p, ofs=0, size=8>
<code>style</code>	Value: <Field type=c_int, ofs=36, size=4>
<code>x</code>	Value: <Field type=c_int, ofs=12, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=16, size=4>

2.50 Class `flimage_text_`



2.50.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.50.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.50.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('str', <class 'ctypes.c_char_p'>), ('len', <class 'ctyp...</code>
<code>align</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>angle</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>bcolor</code>	Value: <code><Field type=c_uint, ofs=24, size=4></code>
<code>color</code>	Value: <code><Field type=c_uint, ofs=20, size=4></code>
<code>len</code>	Value: <code><Field type=c_int, ofs=8, size=4></code>
<code>nobk</code>	Value: <code><Field type=c_int, ofs=28, size=4></code>
<code>size</code>	Value: <code><Field type=c_int, ofs=32, size=4></code>
<code>str</code>	Value: <code><Field type=c_char_p, ofs=0, size=8></code>
<code>style</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>y</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>

2.51 Class `flimage_marker_`



2.51.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.51.2 Properties

Name	Description
<i>Inherited from <code>??.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.51.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('name', <class 'ctypes.c_char_p'>), ('w', <class 'ctype...</code>
<code>angle</code>	Value: <code><Field type=c_int, ofs=32, size=4></code>
<code>bcolor</code>	Value: <code><Field type=c_uint, ofs=28, size=4></code>

continued on next page

Name	Description
color	Value: <Field type=c_uint, ofs=24, size=4>
display	Value: <Field type=c_void_p, ofs=48, size=8>
fill	Value: <Field type=c_int, ofs=36, size=4>
gc	Value: <Field type=c_void_p, ofs=56, size=8>
h	Value: <Field type=c_int, ofs=12, size=4>
name	Value: <Field type=c_char_p, ofs=0, size=8>
psdraw	Value: <Field type=c_char_p, ofs=72, size=8>
style	Value: <Field type=c_int, ofs=44, size=4>
thickness	Value: <Field type=c_int, ofs=40, size=4>
w	Value: <Field type=c_int, ofs=8, size=4>
win	Value: <Field type=c_ulong, ofs=64, size=8>
x	Value: <Field type=c_int, ofs=16, size=4>
y	Value: <Field type=c_int, ofs=20, size=4>

2.52 Class *flimage_marker_*



2.52.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.52.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.52.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('name', <class 'ctypes.c_char_p'>), ('w', <class 'ctype...</code>
<code>angle</code>	Value: <code><Field type=c_int, ofs=32, size=4></code>
<code>bcolor</code>	Value: <code><Field type=c_uint, ofs=28, size=4></code>
<code>color</code>	Value: <code><Field type=c_uint, ofs=24, size=4></code>
<code>display</code>	Value: <code><Field type=c_void_p, ofs=48, size=8></code>
<code>fill</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>gc</code>	Value: <code><Field type=c_void_p, ofs=56, size=8></code>
<code>h</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>name</code>	Value: <code><Field type=c_char_p, ofs=0, size=8></code>
<code>psdraw</code>	Value: <code><Field type=c_char_p, ofs=72, size=8></code>

continued on next page

Name	Description
style	Value: <Field type=c_int, ofs=44, size=4>
thickness	Value: <Field type=c_int, ofs=40, size=4>
w	Value: <Field type=c_int, ofs=8, size=4>
win	Value: <Field type=c_ulong, ofs=64, size=8>
x	Value: <Field type=c_int, ofs=16, size=4>
y	Value: <Field type=c_int, ofs=20, size=4>

2.53 Class *flimage_setup_*

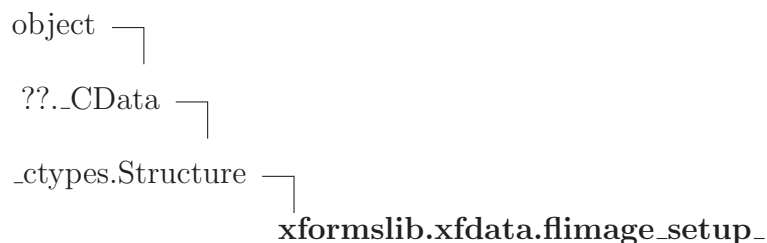

2.53.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattrattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.53.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	

continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.53.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('app_data', <class 'ctypes.c_void_p'>), ('visual_cue', ...
<code>app_data</code>	Value: <Field type=c_void_p, ofs=0, size=8>
<code>delay</code>	Value: <Field type=c_int, ofs=60, size=4>
<code>display</code>	Value: <Field type=CFunctionType, ofs=24, size=8>
<code>do_not_clear</code>	Value: <Field type=c_int, ofs=40, size=4>
<code>double_buffer</code>	Value: <Field type=c_int, ofs=72, size=4>
<code>error_message</code>	Value: <Field type=CFunctionType, ofs=16, size=8>
<code>header_info</code>	Value: <Field type=c_int, ofs=88, size=4>
<code>max_frames</code>	Value: <Field type=c_int, ofs=56, size=4>
<code>no_auto_extension</code>	Value: <Field type=c_int, ofs=64, size=4>
<code>report_frequency</code>	Value: <Field type=c_int, ofs=68, size=4>
<code>rgbfile</code>	Value: <Field type=c_char_p, ofs=32, size=8>
<code>trailblazer</code>	Value: <Field type=c_ulong, ofs=80, size=8>
<code>visual_cue</code>	Value: <Field type=CFunctionType, ofs=8, size=8>
<code>xdisplay</code>	Value: <Field type=c_void_p, ofs=48, size=8>

2.54 Class FLIMAGESETUP



2.54.1 Methods

Inherited from _ctypes.Pointer

`--delitem--()`, `--getitem--()`, `--getslice--()`, `--init--()`, `--new--()`, `--nonzero--()`, `--setitem--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.54.2 Properties

Name	Description
<i>Inherited from _ctypes.Pointer</i> <code>contents</code>	
<i>Inherited from ??.CData</i> <code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i> <code>--class--</code>	

2.55 Class `_IO_FILE`



2.55.1 Methods

Inherited from `_ctypes.Structure`

`--init--()`, `--new--()`

Inherited from `??._CData`

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`


Inherited from `object`

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.55.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>--class--</code>	

2.56 Class `flimage_`

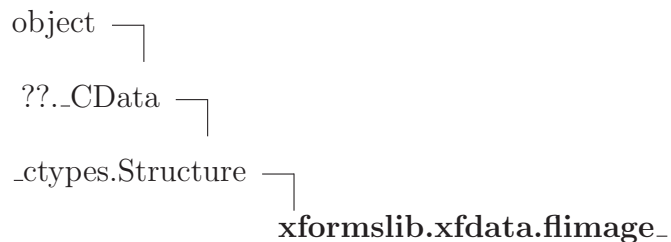

2.56.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.56.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.56.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('w', <class 'ctypes.c...</code>
<code>alpha</code>	Value: <code><Field type=LP_LP_c_ubyte, ofs=64, size=8></code>
<code>alpha16</code>	Value: <code><Field type=LP_LP_c_ushort, ofs=152, size=8></code>
<code>alpha_lut</code>	Value: <code><Field type=LP_c_int, ofs=192, size=8></code>
<code>app_background</code>	Value: <code><Field type=c_int, ofs=276, size=4></code>
<code>app_data</code>	Value: <code><Field type=c_void_p, ofs=16, size=8></code>
<code>available_type</code>	Value: <code><Field type=c_int, ofs=292, size=4></code>
<code>blue</code>	Value: <code><Field type=LP_LP_c_ubyte, ofs=56, size=8></code>

continued on next page

Name	Description
blue16	Value: <Field type=LP_LP_c_ushort, ofs=144, size=8>
blue_lut	Value: <Field type=LP_c_int, ofs=184, size=8>
ci	Value: <Field type=LP_LP_c_ushort, ofs=104, size=8>
ci8	Value: <Field type=LP_LP_c_ubyte, ofs=160, size=8>
ci_maxval	Value: <Field type=c_int, ofs=244, size=4>
cleanup	Value: <Field type=CFunctionType, ofs=792, size=8>
colors	Value: <Field type=c_int, ofs=236, size=4>
comments	Value: <Field type=c_char_p, ofs=280, size=8>
comments_len	Value: <Field type=c_int, ofs=288, size=4>
completed	Value: <Field type=c_int, ofs=676, size=4>
current_frame	Value: <Field type=c_int, ofs=748, size=4>
depth	Value: <Field type=c_int, ofs=844, size=4>
display	Value: <Field type=CFunctionType, ofs=336, size=8>
display_markers	Value: <Field type=CFunctionType, ofs=448, size=8>
display_text	Value: <Field type=CFunctionType, ofs=408, size=8>
display_type	Value: <Field type=c_int, ofs=700, size=4>
dont_display_marker	Value: <Field type=c_int, ofs=440, size=4>
dont_display_text	Value: <Field type=c_int, ofs=400, size=4>
double_buffer	Value: <Field type=c_int, ofs=344, size=4>
error_code	Value: <Field type=c_int, ofs=696, size=4>
error_message	Value: <Field type=CFunctionType, ofs=688, size=8>

continued on next page

Name	Description
extra_io_info	Value: <Field type=c_void_p, ofs=968, size=8>
fill_color	Value: <Field type=c_uint, ofs=596, size=4>
fmt_name	Value: <Field type=c_char_p, ofs=376, size=8>
foffset	Value: <Field type=c_long, ofs=544, size=8>
force_convert	Value: <Field type=c_int, ofs=600, size=4>
fpin	Value: <Field type=LP__IO_FILE, ofs=808, size=8>
fpout	Value: <Field type=LP__IO_FILE, ofs=816, size=8>
free_markers	Value: <Field type=CFunctionType, ofs=456, size=8>
free_text	Value: <Field type=CFunctionType, ofs=416, size=8>
gc	Value: <Field type=c_void_p, ofs=936, size=8>
gray	Value: <Field type=LP_LP_c_ushort, ofs=112, size=8>
gray_maxval	Value: <Field type=c_int, ofs=240, size=4>
green	Value: <Field type=LP_LP_c_ubyte, ofs=48, size=8>
green16	Value: <Field type=LP_LP_c_ushort, ofs=136, size=8>
green_lut	Value: <Field type=LP_c_int, ofs=176, size=8>
h	Value: <Field type=c_int, ofs=8, size=4>
hist	Value: <Field type=LP_c_uint_Array_4, ofs=640, size=32>
image_io	Value: <Field type=c_void_p, ofs=824, size=8>
image_spec	Value: <Field type=c_void_p, ofs=712, size=8>
infile	Value: <Field type=c_char_p, ofs=528, size=8>
info	Value: <Field type=c_char_p, ofs=1008, size=8>

continued on next page

Name	Description
io_spec	Value: <Field type=c_void_p, ofs=832, size=8>
isPixmap	Value: <Field type=c_int, ofs=996, size=4>
level	Value: <Field type=c_int, ofs=252, size=4>
llut	Value: <Field type=LP_c_int_Array_3, ofs=608, size=24>
llut_len	Value: <Field type=c_int, ofs=632, size=4>
lut	Value: <Field type=LP_c_int_Array_4, ofs=200, size=32>
map_len	Value: <Field type=c_int, ofs=232, size=4>
marker	Value: <Field type=LP_flimage_marker_, ofs=424, size=8>
markergc	Value: <Field type=c_void_p, ofs=960, size=8>
matc	Value: <Field type=c_int, ofs=740, size=4>
matr	Value: <Field type=c_int, ofs=736, size=4>
max_markers	Value: <Field type=c_int, ofs=436, size=4>
max_text	Value: <Field type=c_int, ofs=396, size=4>
modified	Value: <Field type=c_int, ofs=328, size=4>
more	Value: <Field type=c_int, ofs=744, size=4>
next	Value: <Field type=LP_flimage_, ofs=296, size=8>
next_frame	Value: <Field type=CFunctionType, ofs=760, size=8>
nmarkers	Value: <Field type=c_int, ofs=432, size=4>
ntext	Value: <Field type=c_int, ofs=392, size=4>
original_type	Value: <Field type=c_int, ofs=552, size=4>
outfile	Value: <Field type=c_char_p, ofs=536, size=8>

continued on next page

Name	Description
packed	Value: <Field type=LP_LP_c_uint, ofs=120, size=8>
pixels	Value: <Field type=LP_LP_c_ushort, ofs=704, size=8>
pixmap	Value: <Field type=c_ulong, ofs=976, size=8>
pixmap_depth	Value: <Field type=c_int, ofs=992, size=4>
pixmap_h	Value: <Field type=c_int, ofs=988, size=4>
pixmap_w	Value: <Field type=c_int, ofs=984, size=4>
pmax	Value: <Field type=c_double, ofs=472, size=8>
pmin	Value: <Field type=c_double, ofs=464, size=8>
poffset	Value: <Field type=c_double, ofs=480, size=8>
post_write	Value: <Field type=CFunctionType, ofs=568, size=8>
pre_write	Value: <Field type=CFunctionType, ofs=560, size=8>
prev_frame	Value: <Field type=CFunctionType, ofs=768, size=8>
pscale	Value: <Field type=c_double, ofs=488, size=8>
random_frame	Value: <Field type=CFunctionType, ofs=776, size=8>
red	Value: <Field type=LP_LP_c_ubyte, ofs=40, size=8>
red16	Value: <Field type=LP_LP_c_ushort, ofs=128, size=8>
red_lut	Value: <Field type=LP_c_int, ofs=168, size=8>
rewind_frame	Value: <Field type=CFunctionType, ofs=784, size=8>
rgb2p	Value: <Field type=FL_RGB2PIXEL_, ofs=872, size=44>
rgb_maxval	Value: <Field type=c_int, ofs=248, size=4>
rgba	Value: <Field type=LP_LP_c_ubyte_Array_4, ofs=72, size=32>

continued on next page

Name	Description
sdepth	Value: <Field type=c_int, ofs=944, size=4>
setup	Value: <Field type=LP_flimage_setup_, ofs=1000, size=8>
sh	Value: <Field type=c_int, ofs=316, size=4>
shd	Value: <Field type=c_int, ofs=360, size=4>
spec_size	Value: <Field type=c_int, ofs=840, size=4>
stop_looping	Value: <Field type=c_int, ofs=800, size=4>
sub_shape	Value: <Field type=c_int, ofs=592, size=4>
subh	Value: <Field type=c_int, ofs=588, size=4>
subw	Value: <Field type=c_int, ofs=584, size=4>
subx	Value: <Field type=c_int, ofs=576, size=4>
suby	Value: <Field type=c_int, ofs=580, size=4>
sw	Value: <Field type=c_int, ofs=312, size=4>
swd	Value: <Field type=c_int, ofs=356, size=4>
sx	Value: <Field type=c_int, ofs=304, size=4>
sxd	Value: <Field type=c_int, ofs=348, size=4>
sy	Value: <Field type=c_int, ofs=308, size=4>
syd	Value: <Field type=c_int, ofs=352, size=4>
text	Value: <Field type=LP_flimage_text_, ofs=384, size=8>
textgc	Value: <Field type=c_void_p, ofs=952, size=8>
total	Value: <Field type=c_int, ofs=672, size=4>
total_frames	Value: <Field type=c_int, ofs=752, size=4>


continued on next page

Name	Description
tran_index	Value: <Field type=c_int, ofs=732, size=4>
tran_rgb	Value: <Field type=c_int, ofs=728, size=4>
type	Value: <Field type=c_int, ofs=0, size=4>
u_ldata	Value: <Field type=c_long, ofs=32, size=8>
u_vdata	Value: <Field type=c_void_p, ofs=24, size=8>
vclass	Value: <Field type=c_int, ofs=848, size=4>
visual	Value: <Field type=c_void_p, ofs=856, size=8>
visual_cue	Value: <Field type=CFunctionType, ofs=680, size=8>
w	Value: <Field type=c_int, ofs=4, size=4>
win	Value: <Field type=c_ulong, ofs=928, size=8>
wlut	Value: <Field type=LP_c_ushort, ofs=264, size=8>
wlut_len	Value: <Field type=c_int, ofs=272, size=4>
wwidth	Value: <Field type=c_int, ofs=256, size=4>
wx	Value: <Field type=c_int, ofs=320, size=4>
wxd	Value: <Field type=c_int, ofs=364, size=4>
wy	Value: <Field type=c_int, ofs=324, size=4>
wyd	Value: <Field type=c_int, ofs=368, size=4>
xcolormap	Value: <Field type=c_ulong, ofs=864, size=8>
xdisplay	Value: <Field type=c_void_p, ofs=720, size=8>
xdist_offset	Value: <Field type=c_double, ofs=496, size=8>
xdist_scale	Value: <Field type=c_double, ofs=504, size=8>

continued on next page

Name	Description
ximage	Value: <Field type=c_void_p, ofs=920, size=8>
ydist_offset	Value: <Field type=c_double, ofs=512, size=8>
ydist_scale	Value: <Field type=c_double, ofs=520, size=8>

2.57 Class *flimage_*

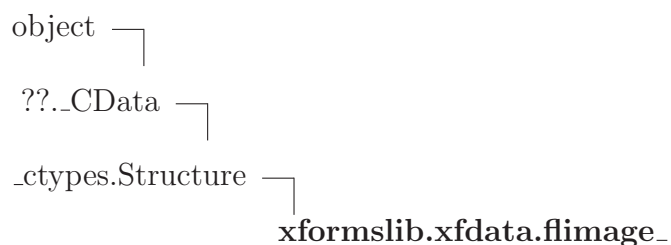

2.57.1 Methods

Inherited from *_ctypes.Structure*

`__init__()`, `__new__()`

Inherited from *??.CData*

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from *object*

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.57.2 Properties

Name	Description
<i>Inherited from</i> <i>??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <i>object</i>	
<code>__class__</code>	

2.57.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('w', <class 'ctypes.c...
<code>alpha</code>	Value: <Field type=LP_LP_c_ubyte, ofs=64, size=8>
<code>alpha16</code>	Value: <Field type=LP_LP_c_ushort, ofs=152, size=8>
<code>alpha_lut</code>	Value: <Field type=LP_c_int, ofs=192, size=8>
<code>app_background</code>	Value: <Field type=c_int, ofs=276, size=4>
<code>app_data</code>	Value: <Field type=c_void_p, ofs=16, size=8>
<code>available_type</code>	Value: <Field type=c_int, ofs=292, size=4>
<code>blue</code>	Value: <Field type=LP_LP_c_ubyte, ofs=56, size=8>
<code>blue16</code>	Value: <Field type=LP_LP_c_ushort, ofs=144, size=8>
<code>blue_lut</code>	Value: <Field type=LP_c_int, ofs=184, size=8>
<code>ci</code>	Value: <Field type=LP_LP_c_ushort, ofs=104, size=8>
<code>ci8</code>	Value: <Field type=LP_LP_c_ubyte, ofs=160, size=8>
<code>ci_maxval</code>	Value: <Field type=c_int, ofs=244, size=4>
<code>cleanup</code>	Value: <Field type=CFunctionType, ofs=792, size=8>
<code>colors</code>	Value: <Field type=c_int, ofs=236, size=4>
<code>comments</code>	Value: <Field type=c_char_p, ofs=280, size=8>
<code>comments_len</code>	Value: <Field type=c_int, ofs=288, size=4>
<code>completed</code>	Value: <Field type=c_int, ofs=676, size=4>
<code>current_frame</code>	Value: <Field type=c_int, ofs=748, size=4>
<code>depth</code>	Value: <Field type=c_int, ofs=844, size=4>

continued on next page

Name	Description
display	Value: <Field type=CFunctionType, ofs=336, size=8>
display_markers	Value: <Field type=CFunctionType, ofs=448, size=8>
display_text	Value: <Field type=CFunctionType, ofs=408, size=8>
display_type	Value: <Field type=c_int, ofs=700, size=4>
dont_display_marker	Value: <Field type=c_int, ofs=440, size=4>
dont_display_text	Value: <Field type=c_int, ofs=400, size=4>
double_buffer	Value: <Field type=c_int, ofs=344, size=4>
error_code	Value: <Field type=c_int, ofs=696, size=4>
error_message	Value: <Field type=CFunctionType, ofs=688, size=8>
extra_io_info	Value: <Field type=c_void_p, ofs=968, size=8>
fill_color	Value: <Field type=c_uint, ofs=596, size=4>
fmt_name	Value: <Field type=c_char_p, ofs=376, size=8>
foffset	Value: <Field type=c_long, ofs=544, size=8>
force_convert	Value: <Field type=c_int, ofs=600, size=4>
fpin	Value: <Field type=LP__IO_FILE, ofs=808, size=8>
fpout	Value: <Field type=LP__IO_FILE, ofs=816, size=8>
free_markers	Value: <Field type=CFunctionType, ofs=456, size=8>
free_text	Value: <Field type=CFunctionType, ofs=416, size=8>
gc	Value: <Field type=c_void_p, ofs=936, size=8>
gray	Value: <Field type=LP_LP_c_ushort, ofs=112, size=8>
gray_maxval	Value: <Field type=c_int, ofs=240, size=4>

continued on next page

Name	Description
green	Value: <Field type=LP_LP_c_ubyte, ofs=48, size=8>
green16	Value: <Field type=LP_LP_c_ushort, ofs=136, size=8>
green_lut	Value: <Field type=LP_c_int, ofs=176, size=8>
h	Value: <Field type=c_int, ofs=8, size=4>
hist	Value: <Field type=LP_c_uint_Array_4, ofs=640, size=32>
image_io	Value: <Field type=c_void_p, ofs=824, size=8>
image_spec	Value: <Field type=c_void_p, ofs=712, size=8>
infile	Value: <Field type=c_char_p, ofs=528, size=8>
info	Value: <Field type=c_char_p, ofs=1008, size=8>
io_spec	Value: <Field type=c_void_p, ofs=832, size=8>
isPixmap	Value: <Field type=c_int, ofs=996, size=4>
level	Value: <Field type=c_int, ofs=252, size=4>
llut	Value: <Field type=LP_c_int_Array_3, ofs=608, size=24>
llut_len	Value: <Field type=c_int, ofs=632, size=4>
lut	Value: <Field type=LP_c_int_Array_4, ofs=200, size=32>
map_len	Value: <Field type=c_int, ofs=232, size=4>
marker	Value: <Field type=LP_flimage_marker_, ofs=424, size=8>
markergc	Value: <Field type=c_void_p, ofs=960, size=8>
matc	Value: <Field type=c_int, ofs=740, size=4>
matr	Value: <Field type=c_int, ofs=736, size=4>
max_markers	Value: <Field type=c_int, ofs=436, size=4>

continued on next page

Name	Description
max_text	Value: <Field type=c_int, ofs=396, size=4>
modified	Value: <Field type=c_int, ofs=328, size=4>
more	Value: <Field type=c_int, ofs=744, size=4>
next	Value: <Field type=LP_flimage_, ofs=296, size=8>
next_frame	Value: <Field type=CFunctionType, ofs=760, size=8>
nmarkers	Value: <Field type=c_int, ofs=432, size=4>
ntext	Value: <Field type=c_int, ofs=392, size=4>
original_type	Value: <Field type=c_int, ofs=552, size=4>
outfile	Value: <Field type=c_char_p, ofs=536, size=8>
packed	Value: <Field type=LP_LP_c_uint, ofs=120, size=8>
pixels	Value: <Field type=LP_LP_c_ushort, ofs=704, size=8>
pixmap	Value: <Field type=c_ulong, ofs=976, size=8>
pixmap_depth	Value: <Field type=c_int, ofs=992, size=4>
pixmap_h	Value: <Field type=c_int, ofs=988, size=4>
pixmap_w	Value: <Field type=c_int, ofs=984, size=4>
pmax	Value: <Field type=c_double, ofs=472, size=8>
pmin	Value: <Field type=c_double, ofs=464, size=8>
poffset	Value: <Field type=c_double, ofs=480, size=8>
post_write	Value: <Field type=CFunctionType, ofs=568, size=8>
pre_write	Value: <Field type=CFunctionType, ofs=560, size=8>
prev_frame	Value: <Field type=CFunctionType, ofs=768, size=8>

continued on next page

Name	Description
pscale	Value: <Field type=c_double, ofs=488, size=8>
random_frame	Value: <Field type=CFunctionType, ofs=776, size=8>
red	Value: <Field type=LP_LP_c_ubyte, ofs=40, size=8>
red16	Value: <Field type=LP_LP_c_ushort, ofs=128, size=8>
red_lut	Value: <Field type=LP_c_int, ofs=168, size=8>
rewind_frame	Value: <Field type=CFunctionType, ofs=784, size=8>
rgb2p	Value: <Field type=FL_RGB2PIXEL_, ofs=872, size=44>
rgb_maxval	Value: <Field type=c_int, ofs=248, size=4>
rgba	Value: <Field type=LP_LP_c_ubyte_Array_4, ofs=72, size=32>
sdepth	Value: <Field type=c_int, ofs=944, size=4>
setup	Value: <Field type=LP_flimage_setup_, ofs=1000, size=8>
sh	Value: <Field type=c_int, ofs=316, size=4>
shd	Value: <Field type=c_int, ofs=360, size=4>
spec_size	Value: <Field type=c_int, ofs=840, size=4>
stop_looping	Value: <Field type=c_int, ofs=800, size=4>
sub_shape	Value: <Field type=c_int, ofs=592, size=4>
subh	Value: <Field type=c_int, ofs=588, size=4>
subw	Value: <Field type=c_int, ofs=584, size=4>
subx	Value: <Field type=c_int, ofs=576, size=4>
suby	Value: <Field type=c_int, ofs=580, size=4>
sw	Value: <Field type=c_int, ofs=312, size=4>


continued on next page

Name	Description
swd	Value: <Field type=c_int, ofs=356, size=4>
sx	Value: <Field type=c_int, ofs=304, size=4>
sxd	Value: <Field type=c_int, ofs=348, size=4>
sy	Value: <Field type=c_int, ofs=308, size=4>
syd	Value: <Field type=c_int, ofs=352, size=4>
text	Value: <Field type=LP_flimage_text_, ofs=384, size=8>
textgc	Value: <Field type=c_void_p, ofs=952, size=8>
total	Value: <Field type=c_int, ofs=672, size=4>
total_frames	Value: <Field type=c_int, ofs=752, size=4>
tran_index	Value: <Field type=c_int, ofs=732, size=4>
tran_rgb	Value: <Field type=c_int, ofs=728, size=4>
type	Value: <Field type=c_int, ofs=0, size=4>
u_ldata	Value: <Field type=c_long, ofs=32, size=8>
u_vdata	Value: <Field type=c_void_p, ofs=24, size=8>
vclass	Value: <Field type=c_int, ofs=848, size=4>
visual	Value: <Field type=c_void_p, ofs=856, size=8>
visual_cue	Value: <Field type=CFunctionType, ofs=680, size=8>
w	Value: <Field type=c_int, ofs=4, size=4>
win	Value: <Field type=c_ulong, ofs=928, size=8>
wlut	Value: <Field type=LP_c_ushort, ofs=264, size=8>
wlut_len	Value: <Field type=c_int, ofs=272, size=4>

continued on next page

Name	Description
wwidth	Value: <Field type=c_int, ofs=256, size=4>
wx	Value: <Field type=c_int, ofs=320, size=4>
wxd	Value: <Field type=c_int, ofs=364, size=4>
wy	Value: <Field type=c_int, ofs=324, size=4>
wyd	Value: <Field type=c_int, ofs=368, size=4>
xcolormap	Value: <Field type=c_ulong, ofs=864, size=8>
xdisplay	Value: <Field type=c_void_p, ofs=720, size=8>
xdist_offset	Value: <Field type=c_double, ofs=496, size=8>
xdist_scale	Value: <Field type=c_double, ofs=504, size=8>
ximage	Value: <Field type=c_void_p, ofs=920, size=8>
ydist_offset	Value: <Field type=c_double, ofs=512, size=8>
ydist_scale	Value: <Field type=c_double, ofs=520, size=8>

2.58 Class *flimage_setup_*

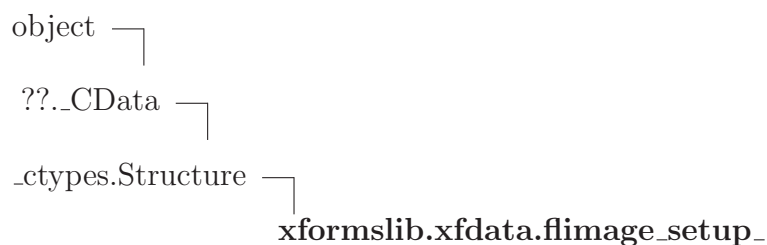

2.58.1 Methods

Inherited from *_ctypes.Structure*

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.58.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.58.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('app_data', <class 'ctypes.c_void_p'>), ('visual_cue', ...</code>
<code>app_data</code>	Value: <code><Field type=c_void_p, ofs=0, size=8></code>
<code>delay</code>	Value: <code><Field type=c_int, ofs=60, size=4></code>
<code>display</code>	Value: <code><Field type=CFunctionType, ofs=24, size=8></code>
<code>do_not_clear</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>double_buffer</code>	Value: <code><Field type=c_int, ofs=72, size=4></code>
<code>error_message</code>	Value: <code><Field type=CFunctionType, ofs=16, size=8></code>
<code>header_info</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>max_frames</code>	Value: <code><Field type=c_int, ofs=56, size=4></code>
<code>no_auto_extension</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>
<code>report_frequency</code>	Value: <code><Field type=c_int, ofs=68, size=4></code>
<code>rgbfile</code>	Value: <code><Field type=c_char_p, ofs=32, size=8></code>

continued on next page

Name	Description
trailblazer	Value: <Field type=c_ulong, ofs=80, size=8>
visual_cue	Value: <Field type=CFunctionType, ofs=8, size=8>
xdisplay	Value: <Field type=c_void_p, ofs=48, size=8>

2.59 Class FLIMAGE_JPEG_OPTION



2.59.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.59.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.59.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('quality', <class 'ctypes.c_int'>), ('smoothing', <clas...
<code>quality</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>smoothing</code>	Value: <Field type=c_int, ofs=4, size=4>

2.60 Class FLIMAGE_FORMAT_INFO



2.60.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.60.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.60.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('formal_name', <class 'ctypes.c_char_p'>), ('short_name...
<code>annotation</code>	Value: <Field type=c_int, ofs=32, size=4>
<code>extension</code>	Value: <Field type=c_char_p, ofs=16, size=8>
<code>formal_name</code>	Value: <Field type=c_char_p, ofs=0, size=8>
<code>read_write</code>	Value: <Field type=c_int, ofs=28, size=4>
<code>short_name</code>	Value: <Field type=c_char_p, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=24, size=4>

2.61 Class XWindowAttributes



2.61.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.61.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.61.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('x', <class 'ctypes.c_int'>), ('y', <class 'ctypes.c_in...</code>
<code>all_event_masks</code>	Value: <code><Field type=c_long, ofs=96, size=8></code>
<code>backing_pixel</code>	Value: <code><Field type=c_ulong, ofs=64, size=8></code>
<code>backing_planes</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>
<code>backing_store</code>	Value: <code><Field type=c_int, ofs=52, size=4></code>
<code>bit_gravity</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>border_width</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>c_class</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>colormap</code>	Value: <code><Field type=c_ulong, ofs=80, size=8></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=20, size=4></code>
<code>do_not_propagate_mask</code>	Value: <code><Field type=c_long, ofs=112, size=8></code>
<code>height</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>map_installed</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>map_state</code>	Value: <code><Field type=c_int, ofs=92, size=4></code>
<code>override_redirect</code>	Value: <code><Field type=c_int, ofs=120, size=4></code>
<code>root</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>

continued on next page

Name	Description
save_under	Value: <Field type=c_int, ofs=72, size=4>
screen	Value: <Field type=LP_Screen, ofs=128, size=8>
visual	Value: <Field type=LP_Visual, ofs=24, size=8>
width	Value: <Field type=c_int, ofs=8, size=4>
win_gravity	Value: <Field type=c_int, ofs=48, size=4>
x	Value: <Field type=c_int, ofs=0, size=4>
y	Value: <Field type=c_int, ofs=4, size=4>
your_event_mask	Value: <Field type=c_long, ofs=104, size=8>

2.62 Class XExtCodes



2.62.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.62.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.62.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('extension', <class 'ctypes.c_int'>), ('major_opcode', ...</code>
<code>extension</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>first_error</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>first_event</code>	Value: <code><Field type=c_int, ofs=8, size=4></code>
<code>major_opcode</code>	Value: <code><Field type=c_int, ofs=4, size=4></code>

2.63 Class XPixmapFormatValues

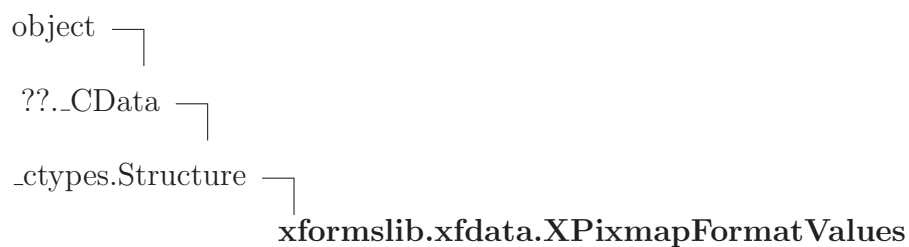

2.63.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.63.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.63.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('depth', <class 'ctypes.c_int'>), ('bits_per_pixel', <c...</code>
<code>bits_per_pixel</code>	Value: <code><Field type=c_int, ofs=4, size=4></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>scanline_pad</code>	Value: <code><Field type=c_int, ofs=8, size=4></code>

2.64 Class *XGCValues*



2.64.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.64.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.64.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('function', <class 'ctypes.c_int'>), ('plane_mask', <cl...</code>
<code>arc_mode</code>	Value: <code><Field type=c_int, ofs=56, size=4></code>
<code>background</code>	Value: <code><Field type=c_ulong, ofs=24, size=8></code>
<code>cap_style</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>clip_mask</code>	Value: <code><Field type=c_ulong, ofs=112, size=8></code>
<code>clip_x_origin</code>	Value: <code><Field type=c_int, ofs=104, size=4></code>
<code>clip_y_origin</code>	Value: <code><Field type=c_int, ofs=108, size=4></code>
<code>dash_offset</code>	Value: <code><Field type=c_int, ofs=120, size=4></code>
<code>dashes</code>	Value: <code><Field type=c_char, ofs=124, size=1></code>
<code>fill_rule</code>	Value: <code><Field type=c_int, ofs=52, size=4></code>
<code>fill_style</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>font</code>	Value: <code><Field type=c_ulong, ofs=88, size=8></code>

continued on next page

Name	Description
foreground	Value: <Field type=c_ulong, ofs=16, size=8>
function	Value: <Field type=c_int, ofs=0, size=4>
graphics_exposures	Value: <Field type=c_int, ofs=100, size=4>
join_style	Value: <Field type=c_int, ofs=44, size=4>
line_style	Value: <Field type=c_int, ofs=36, size=4>
line_width	Value: <Field type=c_int, ofs=32, size=4>
plane_mask	Value: <Field type=c_ulong, ofs=8, size=8>
stipple	Value: <Field type=c_ulong, ofs=72, size=8>
subwindow_mode	Value: <Field type=c_int, ofs=96, size=4>
tile	Value: <Field type=c_ulong, ofs=64, size=8>
ts_x_origin	Value: <Field type=c_int, ofs=80, size=4>
ts_y_origin	Value: <Field type=c_int, ofs=84, size=4>

2.65 Class Depth

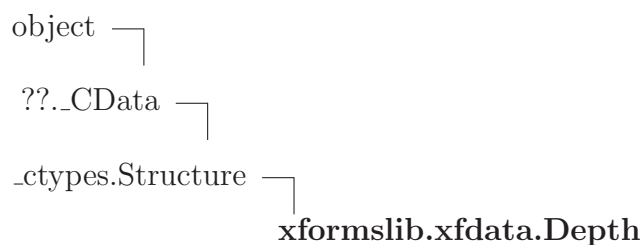

2.65.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object


`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.65.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.65.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('depth', <class 'ctypes.c_int'>), ('nvisuals', <class '...'>)]</code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>nvisuals</code>	Value: <code><Field type=c_int, ofs=4, size=4></code>
<code>visuals</code>	Value: <code><Field type=LP_Visual, ofs=8, size=8></code>

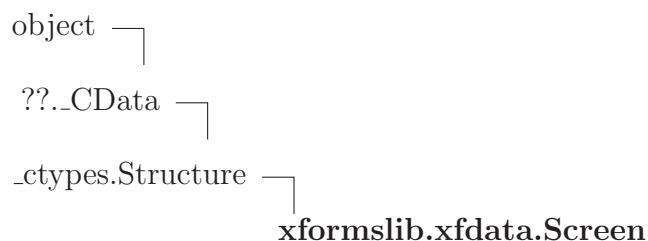2.66 Class Screen

2.66.1 Methods

Inherited from ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.66.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.66.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('ext_data', <class 'xformslib.xfdata.LP__XExtData'>), (...</code>
<code>backing_store</code>	Value: <code><Field type=c_int, ofs=112, size=4></code>
<code>black_pixel</code>	Value: <code><Field type=c_ulong, ofs=96, size=8></code>
<code>cmap</code>	Value: <code><Field type=c_ulong, ofs=80, size=8></code>
<code>default_gc</code>	Value: <code><Field type=LP__XGC, ofs=72, size=8></code>
<code>depths</code>	Value: <code><Field type=LP_Depth, ofs=48, size=8></code>
<code>display</code>	Value: <code><Field type=LP__XDisplay, ofs=8, size=8></code>
<code>ext_data</code>	Value: <code><Field type=LP__XExtData, ofs=0, size=8></code>
<code>height</code>	Value: <code><Field type=c_int, ofs=28, size=4></code>

continued on next page

Name	Description
max_maps	Value: <Field type=c_int, ofs=104, size=4>
mheight	Value: <Field type=c_int, ofs=36, size=4>
min_maps	Value: <Field type=c_int, ofs=108, size=4>
mwidth	Value: <Field type=c_int, ofs=32, size=4>
ndepths	Value: <Field type=c_int, ofs=40, size=4>
root	Value: <Field type=c_ulong, ofs=16, size=8>
root_depth	Value: <Field type=c_int, ofs=56, size=4>
root_input_mask	Value: <Field type=c_long, ofs=120, size=8>
root_visual	Value: <Field type=LP_Visual, ofs=64, size=8>
save_unders	Value: <Field type=c_int, ofs=116, size=4>
white_pixel	Value: <Field type=c_ulong, ofs=88, size=8>
width	Value: <Field type=c_int, ofs=24, size=4>

2.67 Class ScreenFormat

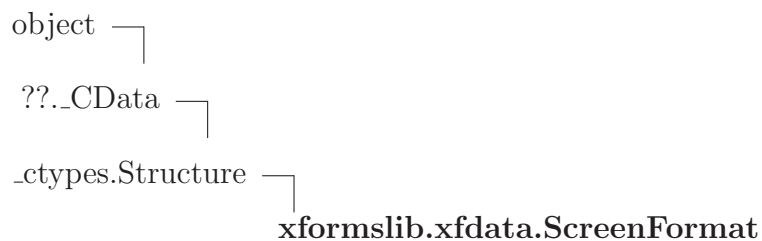

2.67.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.67.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.67.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('ext_data', <class 'xformslib.xfdata.LP__XExtData'>), (...</code>
<code>bits_per_pixel</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=8, size=4></code>
<code>ext_data</code>	Value: <code><Field type=LP__XExtData, ofs=0, size=8></code>
<code>scanline_pad</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>

2.68 Class XHostAddress

```

object └─
  ??_CData └─
    _ctypes.Structure └─
      xformslib.xfdata.XHostAddress

```

2.68.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.68.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.68.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('family', <class 'ctypes.c_int'>), ('length', <class 'c...</code>
<code>address</code>	Value: <code><Field type=c_char_p, ofs=8, size=8></code>
<code>family</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>length</code>	Value: <code><Field type=c_int, ofs=4, size=4></code>

2.69 Class XServerInterpretedAddress

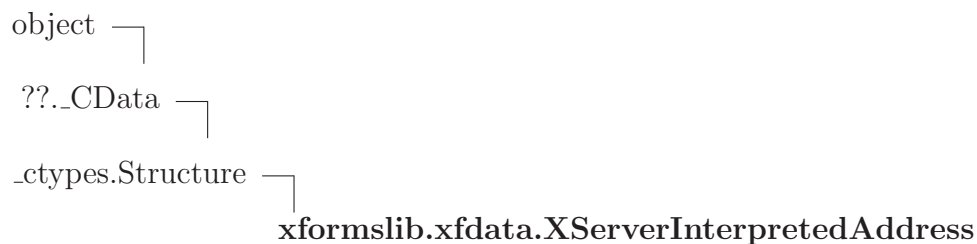

2.69.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.69.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.69.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('typelength', <class 'ctypes.c_int'>), ('valuelength', ...</code>
<code>type</code>	Value: <code><Field type=c_char_p, ofs=8, size=8></code>
<code>typelength</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>

continued on next page

Name	Description
value	Value: <Field type=c_char_p, ofs=16, size=8>
valuelength	Value: <Field type=c_int, ofs=4, size=4>

2.70 Class funcs

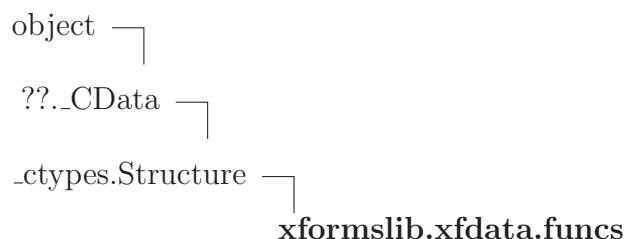

2.70.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.70.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.70.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('create_image', <class 'ctypes.CFunctionType'>), ('dest...
<code>add_pixel</code>	Value: <Field type=CFunctionType, ofs=40, size=8>
<code>create_image</code>	Value: <Field type=CFunctionType, ofs=0, size=8>
<code>destroy_image</code>	Value: <Field type=CFunctionType, ofs=8, size=8>
<code>get_pixel</code>	Value: <Field type=CFunctionType, ofs=16, size=8>
<code>put_pixel</code>	Value: <Field type=CFunctionType, ofs=24, size=8>
<code>sub_image</code>	Value: <Field type=CFunctionType, ofs=32, size=8>

2.71 Class `_XImage`

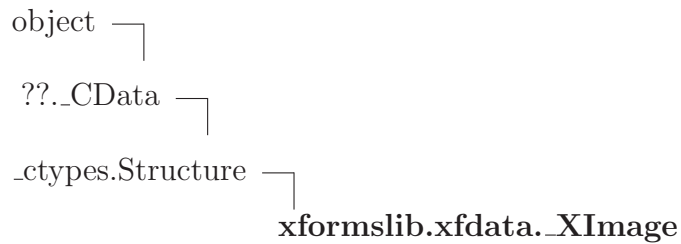

2.71.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.71.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.71.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('width', <class 'ctypes.c_int'>), ('height', <class 'ct...</code>
<code>bitmap_bit_order</code>	Value: <code><Field type=c_int, ofs=32, size=4></code>
<code>bitmap_pad</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>
<code>bitmap_unit</code>	Value: <code><Field type=c_int, ofs=28, size=4></code>
<code>bits_per_pixel</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>blue_mask</code>	Value: <code><Field type=c_ulong, ofs=72, size=8></code>
<code>byte_order</code>	Value: <code><Field type=c_int, ofs=24, size=4></code>
<code>bytes_per_line</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>data</code>	Value: <code><Field type=c_char_p, ofs=16, size=8></code>
<code>depth</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>f</code>	Value: <code><Field type=funcs, ofs=88, size=48></code>
<code>format</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>
<code>green_mask</code>	Value: <code><Field type=c_ulong, ofs=64, size=8></code>
<code>height</code>	Value: <code><Field type=c_int, ofs=4, size=4></code>
<code>obdata</code>	Value: <code><Field type=c_char_p, ofs=80, size=8></code>
<code>red_mask</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>

continued on next page

Name	Description
width	Value: <Field type=c_int, ofs=0, size=4>
xoffset	Value: <Field type=c_int, ofs=8, size=4>

2.72 Class XWindowChanges



2.72.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.72.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	

2.72.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('x', <class 'ctypes.c_int'>), ('y', <class 'ctypes.c_in...
<code>border_width</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>height</code>	Value: <Field type=c_int, ofs=12, size=4>
<code>sibling</code>	Value: <Field type=c_ulong, ofs=24, size=8>
<code>stack_mode</code>	Value: <Field type=c_int, ofs=32, size=4>
<code>width</code>	Value: <Field type=c_int, ofs=8, size=4>
<code>x</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=4, size=4>

2.73 Class XColor

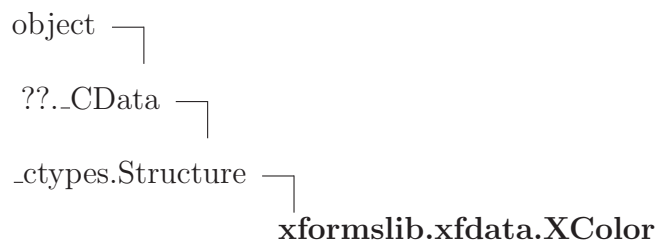

2.73.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.73.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.73.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('pixel', <class 'ctypes.c_ulong'>), ('red', <class 'cty...</code>
<code>blue</code>	Value: <code><Field type=c_ushort, ofs=12, size=2></code>
<code>flags</code>	Value: <code><Field type=c_char, ofs=14, size=1></code>
<code>green</code>	Value: <code><Field type=c_ushort, ofs=10, size=2></code>
<code>pad</code>	Value: <code><Field type=c_char, ofs=15, size=1></code>
<code>pixel</code>	Value: <code><Field type=c_ulong, ofs=0, size=8></code>
<code>red</code>	Value: <code><Field type=c_ushort, ofs=8, size=2></code>

2.74 Class XSegment



2.74.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.74.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.74.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('x1', <class 'ctypes.c_short'>), ('y1', <class 'ctypes....</code>
<code>x1</code>	Value: <code><Field type=c_short, ofs=0, size=2></code>
<code>x2</code>	Value: <code><Field type=c_short, ofs=4, size=2></code>
<code>y1</code>	Value: <code><Field type=c_short, ofs=2, size=2></code>
<code>y2</code>	Value: <code><Field type=c_short, ofs=6, size=2></code>

2.75 Class XArc

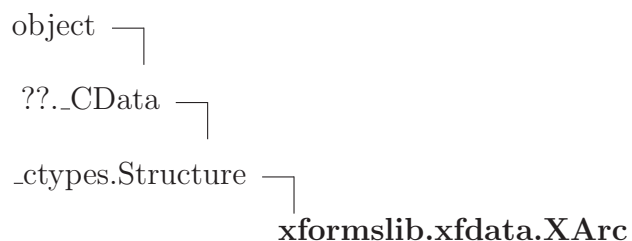

2.75.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.75.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.75.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('x', <class 'ctypes.c_short'>), ('y', <class 'ctypes.c_...]</code>
<code>angle1</code>	Value: <code><Field type=c_short, ofs=8, size=2></code>
<code>angle2</code>	Value: <code><Field type=c_short, ofs=10, size=2></code>
<code>height</code>	Value: <code><Field type=c_ushort, ofs=6, size=2></code>
<code>width</code>	Value: <code><Field type=c_ushort, ofs=4, size=2></code>
<code>x</code>	Value: <code><Field type=c_short, ofs=0, size=2></code>
<code>y</code>	Value: <code><Field type=c_short, ofs=2, size=2></code>

2.76 Class XKeyboardControl



2.76.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.76.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	

2.76.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('key_click_percent', <class 'ctypes.c_int'>), ('bell_pe...</code>
<code>auto_repeat_mode</code>	Value: <code><Field type=c_int, ofs=28, size=4></code>
<code>bell_duration</code>	Value: <code><Field type=c_int, ofs=12, size=4></code>

continued on next page

Name	Description
bell_percent	Value: <Field type=c_int, ofs=4, size=4>
bell_pitch	Value: <Field type=c_int, ofs=8, size=4>
key	Value: <Field type=c_int, ofs=24, size=4>
key_click_percent	Value: <Field type=c_int, ofs=0, size=4>
led	Value: <Field type=c_int, ofs=16, size=4>
led_mode	Value: <Field type=c_int, ofs=20, size=4>

2.77 Class XKeyboardState



2.77.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.77.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	

continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.77.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('key_click_percent', <class 'ctypes.c_int'>), ('bell_pe...
<code>auto_repeats</code>	Value: <Field type=c_char Array_32, ofs=28, size=32>
<code>bell_duration</code>	Value: <Field type=c_uint, ofs=12, size=4>
<code>bell_percent</code>	Value: <Field type=c_int, ofs=4, size=4>
<code>bell_pitch</code>	Value: <Field type=c_uint, ofs=8, size=4>
<code>global_auto_repeat</code>	Value: <Field type=c_int, ofs=24, size=4>
<code>key_click_percent</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>led_mask</code>	Value: <Field type=c_ulong, ofs=16, size=8>

2.78 Class XTimeCoord



2.78.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.78.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.78.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('time', <class 'ctypes.c_ulong'>), ('x', <class 'ctypes...</code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=0, size=8></code>
<code>x</code>	Value: <code><Field type=c_short, ofs=8, size=2></code>
<code>y</code>	Value: <code><Field type=c_short, ofs=10, size=2></code>

2.79 Class XModifierKeymap

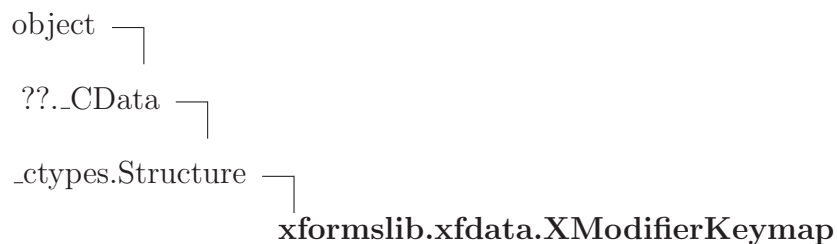

2.79.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.79.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.79.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('max_keypermod', <class 'ctypes.c_int'>), ('modifiermap...</code>
<code>max_keypermod</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>modifiermap</code>	Value: <code><Field type=LP_c_ubyte, ofs=8, size=8></code>

2.80 Class `_XDisplay`

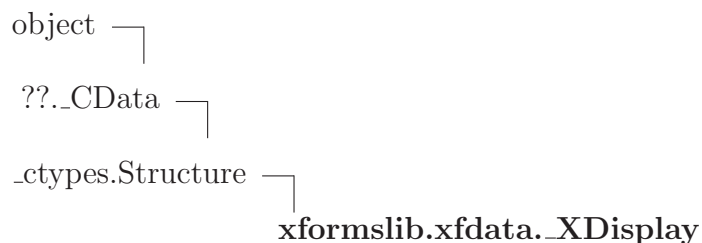

2.80.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.80.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.80.3 Class Variables

Name	Description
<code>_fields_</code>	Value: []

2.81 Class XKeyEvent



2.81.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.81.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.81.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>keycode</code>	Value: <code><Field type=c_uint, ofs=84, size=4></code>
<code>root</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>same_screen</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>state</code>	Value: <code><Field type=c_uint, ofs=80, size=4></code>
<code>subwindow</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>

continued on next page

Name	Description
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.82 Class XKeyEvent



2.82.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


2.82.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.82.3 Class Variables

Name	Description
fields	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
display	Value: <Field type=LP_XDisplay, ofs=24, size=8>
keycode	Value: <Field type=c_uint, ofs=84, size=4>
root	Value: <Field type=c_ulong, ofs=40, size=8>
same_screen	Value: <Field type=c_int, ofs=88, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
state	Value: <Field type=c_uint, ofs=80, size=4>
subwindow	Value: <Field type=c_ulong, ofs=48, size=8>
time	Value: <Field type=c_ulong, ofs=56, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.83 Class XKeyEvent

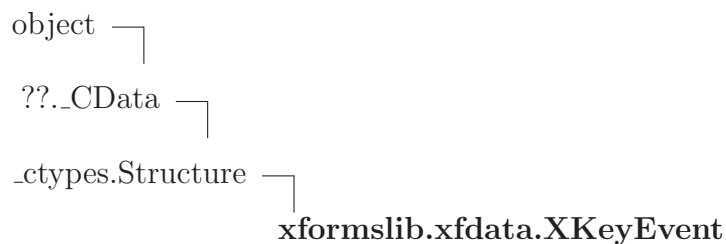

2.83.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`_ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.83.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	

2.83.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>keycode</code>	Value: <code><Field type=c_uint, ofs=84, size=4></code>

continued on next page

Name	Description
root	Value: <Field type=c_ulong, ofs=40, size=8>
same_screen	Value: <Field type=c_int, ofs=88, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
state	Value: <Field type=c_uint, ofs=80, size=4>
subwindow	Value: <Field type=c_ulong, ofs=48, size=8>
time	Value: <Field type=c_ulong, ofs=56, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.84 Class XButtonEvent



2.84.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.84.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.84.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>button</code>	Value: <code><Field type=c_uint, ofs=84, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>root</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>same_screen</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>state</code>	Value: <code><Field type=c_uint, ofs=80, size=4></code>
<code>subwindow</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>

continued on next page

Name	Description
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.85 Class XButtonEvent

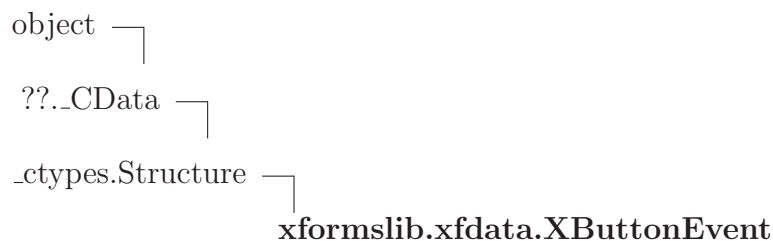

2.85.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.85.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	

continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.85.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>button</code>	Value: <code><Field type=c_uint, ofs=84, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>root</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>same_screen</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>state</code>	Value: <code><Field type=c_uint, ofs=80, size=4></code>
<code>subwindow</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>
<code>x_root</code>	Value: <code><Field type=c_int, ofs=72, size=4></code>
<code>y</code>	Value: <code><Field type=c_int, ofs=68, size=4></code>
<code>y_root</code>	Value: <code><Field type=c_int, ofs=76, size=4></code>

2.86 Class XButtonEvent



2.86.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.86.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.86.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>button</code>	Value: <Field type=c_uint, ofs=84, size=4>
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>

continued on next page

Name	Description
root	Value: <Field type=c_ulong, ofs=40, size=8>
same_screen	Value: <Field type=c_int, ofs=88, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
state	Value: <Field type=c_uint, ofs=80, size=4>
subwindow	Value: <Field type=c_ulong, ofs=48, size=8>
time	Value: <Field type=c_ulong, ofs=56, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.87 Class *XMotionEvent*



2.87.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.87.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.87.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>is_hint</code>	Value: <Field type=c_char, ofs=84, size=1>
<code>root</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>same_screen</code>	Value: <Field type=c_int, ofs=88, size=4>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>state</code>	Value: <Field type=c_uint, ofs=80, size=4>
<code>subwindow</code>	Value: <Field type=c_ulong, ofs=48, size=8>
<code>time</code>	Value: <Field type=c_ulong, ofs=56, size=8>

continued on next page

Name	Description
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.88 Class *XMotionEvent*



2.88.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.88.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	

continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.88.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>is_hint</code>	Value: <code><Field type=c_char, ofs=84, size=1></code>
<code>root</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>same_screen</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>state</code>	Value: <code><Field type=c_uint, ofs=80, size=4></code>
<code>subwindow</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>
<code>x_root</code>	Value: <code><Field type=c_int, ofs=72, size=4></code>
<code>y</code>	Value: <code><Field type=c_int, ofs=68, size=4></code>
<code>y_root</code>	Value: <code><Field type=c_int, ofs=76, size=4></code>

2.89 Class `XCrossingEvent`



2.89.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.89.2 Properties

Name	Description
<i>Inherited from <code>??.CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

2.89.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>detail</code>	Value: <code><Field type=c_int, ofs=84, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>

continued on next page

Name	Description
focus	Value: <Field type=c_int, ofs=92, size=4>
mode	Value: <Field type=c_int, ofs=80, size=4>
root	Value: <Field type=c_ulong, ofs=40, size=8>
same_screen	Value: <Field type=c_int, ofs=88, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
state	Value: <Field type=c_uint, ofs=96, size=4>
subwindow	Value: <Field type=c_ulong, ofs=48, size=8>
time	Value: <Field type=c_ulong, ofs=56, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.90 Class *XCrossingEvent*



2.90.1 Methods***Inherited from ctypes.Structure***`__init__()`, `__new__()`***Inherited from ??._CData***`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`***Inherited from object***`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`**2.90.2 Properties**

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.90.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>detail</code>	Value: <Field type=c_int, ofs=84, size=4>
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>focus</code>	Value: <Field type=c_int, ofs=92, size=4>
<code>mode</code>	Value: <Field type=c_int, ofs=80, size=4>
<code>root</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>same_screen</code>	Value: <Field type=c_int, ofs=88, size=4>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>

continued on next page

Name	Description
serial	Value: <Field type=c_ulong, ofs=8, size=8>
state	Value: <Field type=c_uint, ofs=96, size=4>
subwindow	Value: <Field type=c_ulong, ofs=48, size=8>
time	Value: <Field type=c_ulong, ofs=56, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.91 Class `XCrossingEvent`

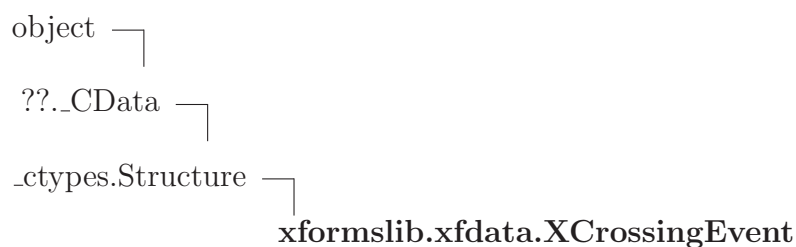

2.91.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctype_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.91.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	


2.91.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>detail</code>	Value: <code><Field type=c_int, ofs=84, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>focus</code>	Value: <code><Field type=c_int, ofs=92, size=4></code>
<code>mode</code>	Value: <code><Field type=c_int, ofs=80, size=4></code>
<code>root</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>same_screen</code>	Value: <code><Field type=c_int, ofs=88, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>state</code>	Value: <code><Field type=c_uint, ofs=96, size=4></code>
<code>subwindow</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=56, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>

continued on next page

Name	Description
window	Value: <Field type=c_ulong, ofs=32, size=8>
x	Value: <Field type=c_int, ofs=64, size=4>
x_root	Value: <Field type=c_int, ofs=72, size=4>
y	Value: <Field type=c_int, ofs=68, size=4>
y_root	Value: <Field type=c_int, ofs=76, size=4>

2.92 Class XFocusChangeEvent

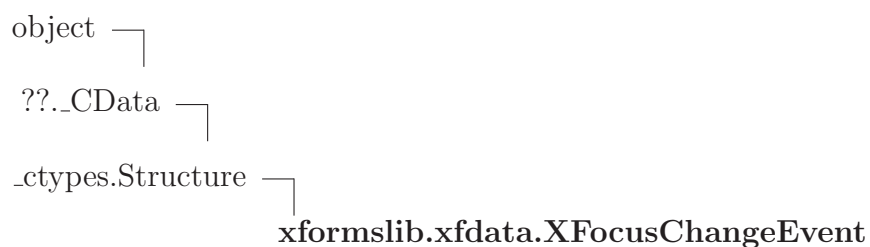

2.92.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.92.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	


continued on next page

Name	Description
<i>Inherited from object</i>	
__class__	

2.92.3 Class Variables

Name	Description
fields	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
detail	Value: <Field type=c_int, ofs=44, size=4>
display	Value: <Field type=LP_XDisplay, ofs=24, size=8>
mode	Value: <Field type=c_int, ofs=40, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>

2.93 Class XFocusChangeEvent

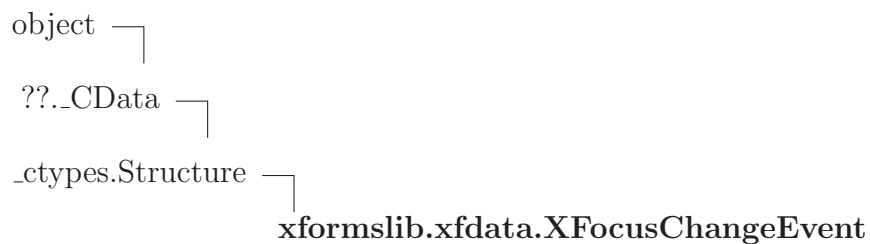

2.93.1 Methods

Inherited from _ctypes.Structure

__init__(), __new__()

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.93.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.93.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>detail</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>mode</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>

2.94 Class XFocusChangeEvent

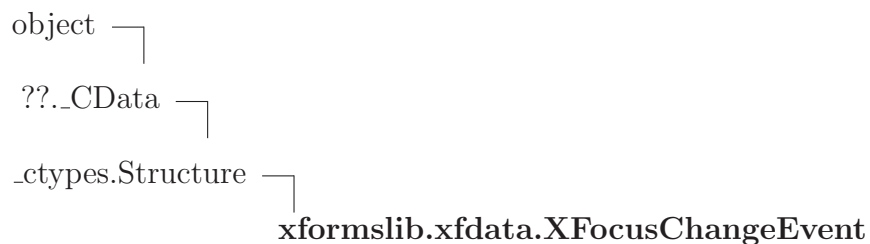

2.94.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.94.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.94.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'ctypes.c_int'>)]</code>
<code>detail</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>

continued on next page

Name	Description
mode	Value: <Field type=c_int, ofs=40, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>

2.95 Class XKeymapEvent



2.95.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.95.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	

continued on next page

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

2.95.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>key_vector</code>	Value: <Field type=c_char_Array_32, ofs=40, size=32>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>window</code>	Value: <Field type=c_ulong, ofs=32, size=8>

2.96 Class XExposeEvent



2.96.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.96.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.96.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>count</code>	Value: <code><Field type=c_int, ofs=56, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>height</code>	Value: <code><Field type=c_int, ofs=52, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>width</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>y</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>

2.97 Class XGraphicsExposeEvent



2.97.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.97.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.97.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>count</code>	Value: <Field type=c_int, ofs=56, size=4>
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>

continued on next page

Name	Description
drawable	Value: <Field type=c_ulong, ofs=32, size=8>
height	Value: <Field type=c_int, ofs=52, size=4>
major_code	Value: <Field type=c_int, ofs=60, size=4>
minor_code	Value: <Field type=c_int, ofs=64, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
width	Value: <Field type=c_int, ofs=48, size=4>
x	Value: <Field type=c_int, ofs=40, size=4>
y	Value: <Field type=c_int, ofs=44, size=4>

2.98 Class XNoExposeEvent



2.98.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctype_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.98.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.98.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>drawable</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>major_code</code>	Value: <code><Field type=c_int, ofs=40, size=4></code>
<code>minor_code</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>

2.99 Class XVisibilityEvent

```

object └─
  ??._CData └─
    _ctypes.Structure └─
      xformslib.xfdata.XVisibilityEvent

```


2.99.1 Methods

Inherited from ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.99.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.99.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>state</code>	Value: <Field type=c_int, ofs=40, size=4>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>window</code>	Value: <Field type=c_ulong, ofs=32, size=8>

2.100 Class XCreateWindowEvent



2.100.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.100.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.100.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>border_width</code>	Value: <Field type=c_int, ofs=64, size=4>
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>

continued on next page

Name	Description
height	Value: <Field type=c_int, ofs=60, size=4>
override_redirect	Value: <Field type=c_int, ofs=68, size=4>
parent	Value: <Field type=c_ulong, ofs=32, size=8>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
width	Value: <Field type=c_int, ofs=56, size=4>
window	Value: <Field type=c_ulong, ofs=40, size=8>
x	Value: <Field type=c_int, ofs=48, size=4>
y	Value: <Field type=c_int, ofs=52, size=4>

2.101 Class XDestroyWindowEvent



2.101.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.101.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.101.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>event</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>

2.102 Class XUnmapEvent

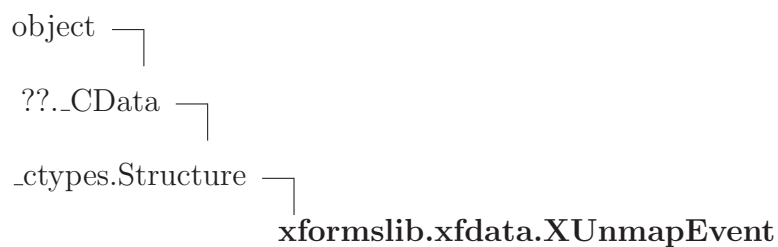

2.102.1 Methods*Inherited from ctypes.Structure*`__init__()`, `__new__()`*Inherited from ??._CData*`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`*Inherited from object*`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`**2.102.2 Properties**

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.102.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>event</code>	Value: <Field type=c_ulong, ofs=32, size=8>
<code>from_configure</code>	Value: <Field type=c_int, ofs=48, size=4>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>window</code>	Value: <Field type=c_ulong, ofs=40, size=8>

2.103 Class XMapEvent



2.103.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`_ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.103.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	


2.103.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>event</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>

continued on next page

Name	Description
override_redirect	Value: <Field type=c_int, ofs=48, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=40, size=8>

2.104 Class XMapRequestEvent

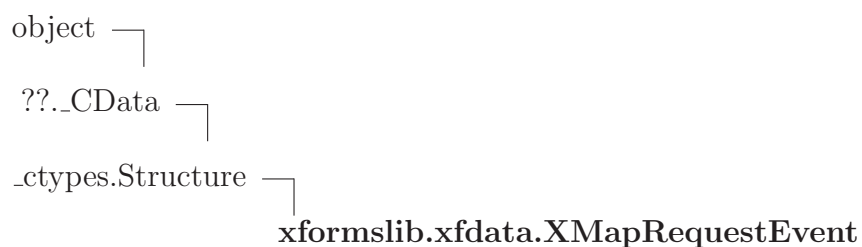

2.104.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.104.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	

continued on next page

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

2.104.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>parent</code>	Value: <Field type=c_ulong, ofs=32, size=8>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>window</code>	Value: <Field type=c_ulong, ofs=40, size=8>

2.105 Class XReparentEvent



2.105.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.105.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.105.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>event</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>override_redirect</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>
<code>parent</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=56, size=4></code>
<code>y</code>	Value: <code><Field type=c_int, ofs=60, size=4></code>

2.106 Class XConfigureEvent



2.106.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.106.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.106.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>above</code>	Value: <code><Field type=c_ulong, ofs=72, size=8></code>
<code>border_width</code>	Value: <code><Field type=c_int, ofs=64, size=4></code>

continued on next page

Name	Description
display	Value: <Field type=LP_XDisplay, ofs=24, size=8>
event	Value: <Field type=c_ulong, ofs=32, size=8>
height	Value: <Field type=c_int, ofs=60, size=4>
override_redirect	Value: <Field type=c_int, ofs=80, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
width	Value: <Field type=c_int, ofs=56, size=4>
window	Value: <Field type=c_ulong, ofs=40, size=8>
x	Value: <Field type=c_int, ofs=48, size=4>
y	Value: <Field type=c_int, ofs=52, size=4>

2.107 Class XGravityEvent



2.107.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??..CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.107.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.107.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>event</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>x</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>y</code>	Value: <code><Field type=c_int, ofs=52, size=4></code>

2.108 Class XResizeRequestEvent

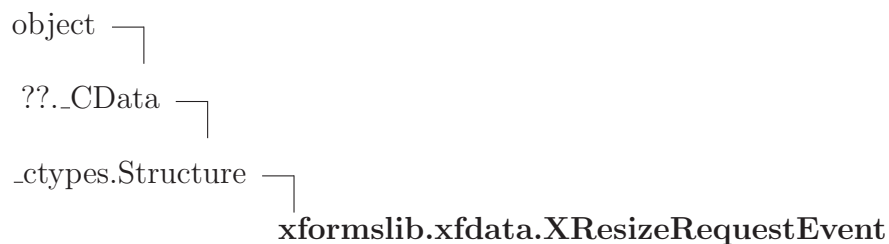

2.108.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattribute__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.108.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	


2.108.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>height</code>	Value: <code><Field type=c_int, ofs=44, size=4></code>

continued on next page

Name	Description
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
width	Value: <Field type=c_int, ofs=40, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>

2.109 Class XConfigureRequestEvent

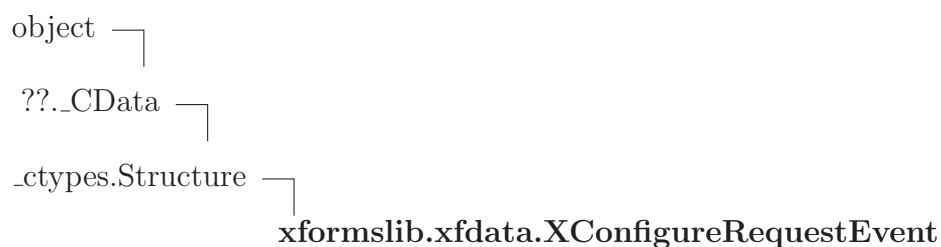

2.109.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.109.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	

continued on next page

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

2.109.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>above</code>	Value: <Field type=c_ulong, ofs=72, size=8>
<code>border_width</code>	Value: <Field type=c_int, ofs=64, size=4>
<code>detail</code>	Value: <Field type=c_int, ofs=80, size=4>
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>height</code>	Value: <Field type=c_int, ofs=60, size=4>
<code>parent</code>	Value: <Field type=c_ulong, ofs=32, size=8>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>value_mask</code>	Value: <Field type=c_ulong, ofs=88, size=8>
<code>width</code>	Value: <Field type=c_int, ofs=56, size=4>
<code>window</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>x</code>	Value: <Field type=c_int, ofs=48, size=4>
<code>y</code>	Value: <Field type=c_int, ofs=52, size=4>

2.110 Class XCirculateEvent



2.110.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.110.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.110.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>event</code>	Value: <Field type=c_ulong, ofs=32, size=8>

continued on next page

Name	Description
place	Value: <Field type=c_int, ofs=48, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=40, size=8>

2.111 Class XCirculateRequestEvent



2.111.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.111.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	

continued on next page

Name	Description
<i>Inherited from object</i>	
__class__	

2.111.3 Class Variables

Name	Description
fields	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
display	Value: <Field type=LP_XDisplay, ofs=24, size=8>
parent	Value: <Field type=c_ulong, ofs=32, size=8>
place	Value: <Field type=c_int, ofs=48, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=40, size=8>

2.112 Class XPropertyEvent



2.112.1 Methods

Inherited from _ctypes.Structure

__init__(), __new__()

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.112.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.112.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>atom</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>state</code>	Value: <code><Field type=c_int, ofs=56, size=4></code>
<code>time</code>	Value: <code><Field type=c_ulong, ofs=48, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>

2.113 Class XSelectionClearEvent



2.113.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.113.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.113.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>selection</code>	Value: <Field type=c_ulong, ofs=40, size=8>

continued on next page

Name	Description
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
time	Value: <Field type=c_ulong, ofs=48, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>

2.114 Class XSelectionRequestEvent



2.114.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.114.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	

continued on next page

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

2.114.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>owner</code>	Value: <Field type=c_ulong, ofs=32, size=8>
<code>property</code>	Value: <Field type=c_ulong, ofs=64, size=8>
<code>requestor</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>selection</code>	Value: <Field type=c_ulong, ofs=48, size=8>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>target</code>	Value: <Field type=c_ulong, ofs=56, size=8>
<code>time</code>	Value: <Field type=c_ulong, ofs=72, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>

2.115 Class XSelectionEvent



2.115.1 Methods

Inherited from ctypes.Structure`__init__()`, `__new__()`*Inherited from ??._CData*`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`*Inherited from object*`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.115.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.115.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>property</code>	Value: <Field type=c_ulong, ofs=56, size=8>
<code>requestor</code>	Value: <Field type=c_ulong, ofs=32, size=8>
<code>selection</code>	Value: <Field type=c_ulong, ofs=40, size=8>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>target</code>	Value: <Field type=c_ulong, ofs=48, size=8>

continued on next page

Name	Description
time	Value: <Field type=c_ulong, ofs=64, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>

2.116 Class XColormapEvent



2.116.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??.CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.116.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.116.3 Class Variables

Name	Description
fields	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
c_new	Value: <Field type=c_int, ofs=48, size=4>
colormap	Value: <Field type=c_ulong, ofs=40, size=8>
display	Value: <Field type=LP_XDisplay, ofs=24, size=8>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
state	Value: <Field type=c_int, ofs=52, size=4>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>

2.117 Class N19XClientMessageEvent4DOT_71E

```

object └─
  ??._CData └─
    _ctypes.Union └─
      xformslib.xfdata.N19XClientMessageEvent4DOT_71E

```

2.117.1 Methods

Inherited from _ctypes.Union

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`


2.117.2 Properties

Name	Description
<i>Inherited from <code>??._CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.117.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('b', <class 'xformslib.xfdata.c_char_Array_20'>), ('s', ...</code>
<code>b</code>	Value: <code><Field type=c_char_Array_20, ofs=0, size=20></code>
<code>l</code>	Value: <code><Field type=c_long_Array_5, ofs=0, size=40></code>
<code>s</code>	Value: <code><Field type=c_short_Array_10, ofs=0, size=20></code>

2.118 Class XClientMessageEvent

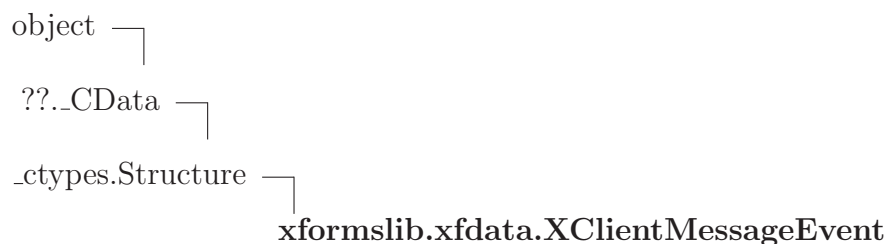

2.118.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??._CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.118.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.118.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>data</code>	Value: <code><Field type=N19XClientMessageEvent4DOT_71E, ofs=56, size=40></code>
<code>display</code>	Value: <code><Field type=LP__XDisplay, ofs=24, size=8></code>
<code>format</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>message_type</code>	Value: <code><Field type=c_ulong, ofs=40, size=8></code>
<code>send_event</code>	Value: <code><Field type=c_int, ofs=16, size=4></code>
<code>serial</code>	Value: <code><Field type=c_ulong, ofs=8, size=8></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>window</code>	Value: <code><Field type=c_ulong, ofs=32, size=8></code>

2.119 Class XMappingEvent



2.119.1 Methods

Inherited from `_ctypes.Structure`

`__init__()`, `__new__()`

Inherited from `??.CData`

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.119.2 Properties

Name	Description
<i>Inherited from</i> <code>??.CData</code>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from</i> <code>object</code>	
<code>__class__</code>	

2.119.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>count</code>	Value: <code><Field type=c_int, ofs=48, size=4></code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>

continued on next page

Name	Description
first_keycode	Value: <Field type=c_int, ofs=44, size=4>
request	Value: <Field type=c_int, ofs=40, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>
window	Value: <Field type=c_ulong, ofs=32, size=8>

2.120 Class XErrorEvent



2.120.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattr--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.120.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	


continued on next page

Name	Description
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.120.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('display', <class 'xf...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=8, size=8>
<code>error_code</code>	Value: <Field type=c_ubyte, ofs=32, size=1>
<code>minor_code</code>	Value: <Field type=c_ubyte, ofs=34, size=1>
<code>request_code</code>	Value: <Field type=c_ubyte, ofs=33, size=1>
<code>resourceid</code>	Value: <Field type=c_ulong, ofs=16, size=8>
<code>serial</code>	Value: <Field type=c_ulong, ofs=24, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>

2.121 Class XAnyEvent

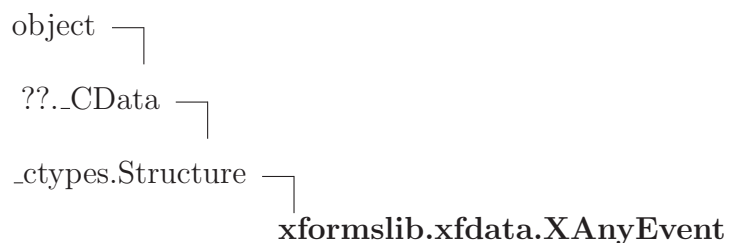

2.121.1 Methods

Inherited from _ctypes.Structure

`__init__()`, `__new__()`

Inherited from ??._CData

`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

2.121.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.121.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>
<code>window</code>	Value: <Field type=c_ulong, ofs=32, size=8>

2.122 Class XGenericEvent



2.122.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??._CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.122.2 Properties

Name	Description
<i>Inherited from ??._CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.122.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...</code>
<code>display</code>	Value: <code><Field type=LP_XDisplay, ofs=24, size=8></code>
<code>evtype</code>	Value: <code><Field type=c_int, ofs=36, size=4></code>

continued on next page

Name	Description
extension	Value: <Field type=c_int, ofs=32, size=4>
send_event	Value: <Field type=c_int, ofs=16, size=4>
serial	Value: <Field type=c_ulong, ofs=8, size=8>
type	Value: <Field type=c_int, ofs=0, size=4>

2.123 Class XGenericEventCookie



2.123.1 Methods

Inherited from _ctypes.Structure

`--init--()`, `--new--()`

Inherited from ??.CData

`--ctypes_from_outparam--()`, `--hash--()`, `--reduce--()`, `--setstate--()`

Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--reduce_ex--()`, `--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

2.123.2 Properties

Name	Description
<i>Inherited from ??.CData</i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>--class--</code>	

2.123.3 Class Variables

Name	Description
<code>_fields_</code>	Value: [('type', <class 'ctypes.c_int'>), ('serial', <class 'cty...
<code>cookie</code>	Value: <Field type=c_uint, ofs=40, size=4>
<code>data</code>	Value: <Field type=c_void_p, ofs=48, size=8>
<code>display</code>	Value: <Field type=LP_XDisplay, ofs=24, size=8>
<code>evtype</code>	Value: <Field type=c_int, ofs=36, size=4>
<code>extension</code>	Value: <Field type=c_int, ofs=32, size=4>
<code>send_event</code>	Value: <Field type=c_int, ofs=16, size=4>
<code>serial</code>	Value: <Field type=c_ulong, ofs=8, size=8>
<code>type</code>	Value: <Field type=c_int, ofs=0, size=4>

2.124 Class `_XEvent`**2.124.1 Methods***Inherited from `_ctypes.Union`*`__init__()`, `__new__()`*Inherited from `??._CData`*`__ctypes_from_outparam__()`, `__hash__()`, `__reduce__()`, `__setstate__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

2.124.2 Properties

Name	Description
<i>Inherited from <code>??_CData</code></i>	
<code>_b_base_</code> , <code>_b_needsfree_</code>	
<i>Inherited from object</i>	
<code>__class__</code>	

2.124.3 Class Variables

Name	Description
<code>_fields_</code>	Value: <code>[('type', <class 'ctypes.c_int'>), ('xany', <class 'xform...</code>
<code>pad</code>	Value: <code><Field type=c_long Array 24, ofs=0, size=192></code>
<code>type</code>	Value: <code><Field type=c_int, ofs=0, size=4></code>
<code>xany</code>	Value: <code><Field type=XAnyEvent, ofs=0, size=40></code>
<code>xbutton</code>	Value: <code><Field type=XButtonEvent, ofs=0, size=96></code>
<code>xcirculate</code>	Value: <code><Field type=XCirculateEvent, ofs=0, size=56></code>
<code>xcirculaterequest</code>	Value: <code><Field type=XCirculateRequestEvent, ofs=0, size=56></code>
<code>xclient</code>	Value: <code><Field type=XClientMessageEvent, ofs=0, size=96></code>
<code>xcolormap</code>	Value: <code><Field type=XColormapEvent, ofs=0, size=56></code>
<code>xconfigure</code>	Value: <code><Field type=XConfigureEvent, ofs=0, size=88></code>
<code>xconfigurerequest</code>	Value: <code><Field type=XConfigureRequestEvent, ofs=0, size=96></code>
<code>xcookie</code>	Value: <code><Field type=XGenericEventCookie, ofs=0, size=56></code>

continued on next page

Name	Description
xcreatewindow	Value: <Field type=XCreateWindowEvent, ofs=0, size=72>
xcrossing	Value: <Field type=XCrossingEvent, ofs=0, size=104>
xdestroywindow	Value: <Field type=XDestroyWindowEvent, ofs=0, size=48>
xerror	Value: <Field type=XErrorEvent, ofs=0, size=40>
xexpose	Value: <Field type=XExposeEvent, ofs=0, size=64>
xfocus	Value: <Field type=XFocusChangeEvent, ofs=0, size=48>
xgeneric	Value: <Field type=XGenericEvent, ofs=0, size=40>
xgraphicsexpose	Value: <Field type=XGraphicsExposeEvent, ofs=0, size=72>
xgravity	Value: <Field type=XGravityEvent, ofs=0, size=56>
xkey	Value: <Field type=XKeyEvent, ofs=0, size=96>
xkeymap	Value: <Field type=XKeymapEvent, ofs=0, size=72>
xmap	Value: <Field type=XMapEvent, ofs=0, size=56>
xmapping	Value: <Field type=XMappingEvent, ofs=0, size=56>
xmaprequest	Value: <Field type=XMapRequestEvent, ofs=0, size=48>
xmotion	Value: <Field type=XMotionEvent, ofs=0, size=96>
xnoexpose	Value: <Field type=XNoExposeEvent, ofs=0, size=48>
xproperty	Value: <Field type=XPropertyEvent, ofs=0, size=64>
xreparent	Value: <Field type=XReparentEvent, ofs=0, size=72>
xresizerequest	Value: <Field type=XResizeRequestEvent, ofs=0, size=48>
xselection	Value: <Field type=XSelectionEvent, ofs=0, size=72>

continued on next page

Name	Description
xselectionclear	Value: <Field type=XSelectionClearEvent, ofs=0, size=56>
xselectionrequest	Value: <Field type=XSelectionRequestEvent, ofs=0, size=80>
xunmap	Value: <Field type=XUnmapEvent, ofs=0, size=56>
xvisibility	Value: <Field type=XVisibilityEvent, ofs=0, size=48>

Index

- xformslib (*package*)
 - xformslib.library (*module*), 12–102
 - xformslib.library.button_down (*function*), 39
 - xformslib.library.cfuncproto (*function*), 13
 - xformslib.library.check_admitted_listvalues (*function*), 14
 - xformslib.library.controlkey_down (*function*), 39
 - xformslib.library.convert_to_double (*function*), 13
 - xformslib.library.convert_to_float (*function*), 13
 - xformslib.library.convert_to_int (*function*), 13
 - xformslib.library.convert_to_long (*function*), 13
 - xformslib.library.convert_to_string (*function*), 13
 - xformslib.library.convert_to_ubyte (*function*), 14
 - xformslib.library.convert_to_uint (*function*), 13
 - xformslib.library.convert_to_ulong (*function*), 13
 - xformslib.library.FL_abs (*function*), 29
 - xformslib.library.fl_activate_all_forms (*function*), 19
 - xformslib.library.fl_activate_event_callbacks (*function*), 39
 - xformslib.library.fl_activate_form (*function*), 19
 - xformslib.library.fl_activate_glccanvas (*function*), 54
 - xformslib.library.fl_activate_object (*function*), 27
 - xformslib.library.fl_add_bitmap (*function*), 45
 - xformslib.library.fl_add_bitmapbutton (*function*), 51
 - xformslib.library.fl_add_box (*function*), 47
 - xformslib.library.fl_add_browser (*function*), 47
 - xformslib.library.fl_add_browser_line (*function*), 47
 - xformslib.library.fl_add_button (*function*), 51
 - xformslib.library.fl_add_button_class (*function*), 52
 - xformslib.library.fl_add_canvas (*function*), 53
 - xformslib.library.fl_add_canvas_handler (*function*), 53
 - xformslib.library.fl_add_chart (*function*), 55
 - xformslib.library.fl_add_chart_value (*function*), 55
 - xformslib.library.fl_add_checkbox (*function*), 51
 - xformslib.library.fl_add_child (*function*), 30
 - xformslib.library.fl_add_choice (*function*), 55
 - xformslib.library.fl_add_clock (*function*), 57
 - xformslib.library.fl_add_counter (*function*), 57
 - xformslib.library.fl_add_dial (*function*), 59
 - xformslib.library.fl_add_event_callback (*function*), 39
 - xformslib.library.fl_add_formbrowser (*function*), 62
 - xformslib.library.fl_add_frame (*function*), 62
 - xformslib.library.fl_add_free (*function*), 63
 - xformslib.library.fl_add_fselector_appbutton (*function*), 67
 - xformslib.library.fl_add_glccanvas (*function*), 54
 - xformslib.library.fl_add_input (*function*), 47

- 67
- xformslib.library.fl_add_io_callback (*function*), 15
- xformslib.library.fl_add_labelbutton (*function*), 51
- xformslib.library.fl_add_labelframe (*function*), 63
- xformslib.library.fl_add_lightbutton (*function*), 51
- xformslib.library.fl_add_menu (*function*), 70
- xformslib.library.fl_add_nmenu (*function*), 71
- xformslib.library.fl_add_nmenu_items (*function*), 71
- xformslib.library.fl_add_object (*function*), 29
- xformslib.library.fl_add_pixmap (*function*), 46
- xformslib.library.fl_add_pixmapbutton (*function*), 51
- xformslib.library.fl_add_positioner (*function*), 73
- xformslib.library.fl_add_round3dbutton (*function*), 50
- xformslib.library.fl_add_roundbutton (*function*), 50
- xformslib.library.fl_add_scrollbar (*function*), 74
- xformslib.library.fl_add_scrollbutton (*function*), 51
- xformslib.library.fl_add_select (*function*), 74
- xformslib.library.fl_add_select_items (*function*), 74
- xformslib.library.fl_add_signal_callback (*function*), 15
- xformslib.library.fl_add_slider (*function*), 76
- xformslib.library.fl_add_spinner (*function*), 77
- xformslib.library.fl_add_symbol (*function*), 28
- xformslib.library.fl_add_tabfolder (*function*), 78
- xformslib.library.fl_add_text (*function*), 80
- xformslib.library.fl_add_thumbwheel (*function*), 81
- xformslib.library.fl_add_timeout (*function*), 16
- xformslib.library.fl_add_timer (*function*), 81
- xformslib.library.fl_add_valslider (*function*), 76
- xformslib.library.fl_add_xyplot (*function*), 85
- xformslib.library.fl_add_xyplot_overlay (*function*), 85
- xformslib.library.fl_add_xyplot_overlay_file (*function*), 85
- xformslib.library.fl_add_xyplot_text (*function*), 85
- xformslib.library.fl_addto_browser (*function*), 47
- xformslib.library.fl_addto_browser_chars (*function*), 47
- xformslib.library.fl_addto_choice (*function*), 56
- xformslib.library.fl_addto_command_log (*function*), 65
- xformslib.library.fl_addto_form (*function*), 30
- xformslib.library.fl_addto_formbrowser (*function*), 61
- xformslib.library.fl_addto_group (*function*), 22
- xformslib.library.fl_addto_menu (*function*), 70
- xformslib.library.fl_addto_selected_xevent (*function*), 39
- xformslib.library.fl_addto_tabfolder (*function*), 78
- xformslib.library.fl_addtopup (*function*), 82
- xformslib.library.fl_adjust_form_size (*function*), 21
- xformslib.library.fl_app_signal_direct (*function*), 78

- tion*), 15
- xformslib.library.fl_arc (*function*), 33
- xformslib.library.fl_arcf (*function*), 33
- xformslib.library.fl_bgn_form (*function*), 16
- xformslib.library.fl_bgn_group (*function*), 22
- xformslib.library.fl_bk_color (*function*), 29
- xformslib.library.fl_bk_textcolor (*function*), 29
- xformslib.library.fl_call_object_callback (*function*), 25
- xformslib.library.fl_canvas_yield_to_shortcut (*function*), 54
- xformslib.library.fl_check_command (*function*), 65
- xformslib.library.fl_check_forms (*function*), 16
- xformslib.library.fl_check_only_forms (*function*), 17
- xformslib.library.fl_circ (*function*), 33
- xformslib.library.fl_circf (*function*), 33
- xformslib.library.FL_clamp (*function*), 29
- xformslib.library.fl_clear_browser (*function*), 47
- xformslib.library.fl_clear_canvas (*function*), 54
- xformslib.library.fl_clear_chart (*function*), 55
- xformslib.library.fl_clear_choice (*function*), 56
- xformslib.library.fl_clear_command_log (*function*), 65
- xformslib.library.fl_clear_menu (*function*), 70
- xformslib.library.fl_clear_nmenu (*function*), 71
- xformslib.library.fl_clear_select (*function*), 74
- xformslib.library.fl_clear_xyplot (*function*), 87
- xformslib.library.fl_color (*function*), 29
- xformslib.library.fl_create_animated_cursor (*function*), 59
- xformslib.library.fl_create_bitmap (*function*), 45
- xformslib.library.fl_create_bitmap_cursor (*function*), 59
- xformslib.library.fl_create_bitmapbutton (*function*), 50
- xformslib.library.fl_create_box (*function*), 47
- xformslib.library.fl_create_browser (*function*), 47
- xformslib.library.fl_create_button (*function*), 50
- xformslib.library.fl_create_canvas (*function*), 53
- xformslib.library.fl_create_chart (*function*), 55
- xformslib.library.fl_create_checkbutton (*function*), 50
- xformslib.library.fl_create_choice (*function*), 55
- xformslib.library.fl_create_clock (*function*), 57
- xformslib.library.fl_create_colormap (*function*), 37
- xformslib.library.fl_create_counter (*function*), 57
- xformslib.library.fl_create_dial (*function*), 59
- xformslib.library.fl_create_formbrowser (*function*), 62
- xformslib.library.fl_create_frame (*function*), 62
- xformslib.library.fl_create_free (*function*), 63
- xformslib.library.fl_create_from_bitmapdata (*function*), 46
- xformslib.library.fl_create_from_pixmapdata (*function*), 46
- xformslib.library.fl_create_generic_button (*function*), 52
- xformslib.library.fl_create_generic_canvas (*function*), 52
- xformslib.library.fl_create_glcanvas (*function*), 59

- tion*), 54
- xformslib.library.fl_create_input (*function*), 67
- xformslib.library.fl_create_labelbutton (*function*), 50
- xformslib.library.fl_create_labelframe (*function*), 63
- xformslib.library.fl_create_lightbutton (*function*), 50
- xformslib.library.fl_create_menu (*function*), 70
- xformslib.library.fl_create_nmenu (*function*), 71
- xformslib.library.fl_create_pixmap (*function*), 46
- xformslib.library.fl_create_pixmapbutton (*function*), 50
- xformslib.library.fl_create_positioner (*function*), 73
- xformslib.library.fl_create_round3dbutton (*function*), 50
- xformslib.library.fl_create_roundbutton (*function*), 50
- xformslib.library.fl_create_scrollbar (*function*), 73
- xformslib.library.fl_create_scrollbutton (*function*), 50
- xformslib.library.fl_create_select (*function*), 74
- xformslib.library.fl_create_slider (*function*), 76
- xformslib.library.fl_create_spinner (*function*), 77
- xformslib.library.fl_create_tabfolder (*function*), 78
- xformslib.library.fl_create_text (*function*), 80
- xformslib.library.fl_create_thumbwheel (*function*), 81
- xformslib.library.fl_create_timer (*function*), 81
- xformslib.library.fl_create_valslider (*function*), 76
- xformslib.library.fl_create_xyplot (*function*), 85
- xformslib.library.FL_crnd (*function*), 29
- xformslib.library.fl_cur_fs_ (*function*), 89
- xformslib.library.fl_cur_win_ (*function*), 88, 89
- xformslib.library.fl_current_pup (*function*), 84
- xformslib.library.fl_dashedlinestyle (*function*), 32
- xformslib.library.fl_deactivate_all_forms (*function*), 19
- xformslib.library.fl_deactivate_form (*function*), 18
- xformslib.library.fl_deactivate_object (*function*), 27
- xformslib.library.fl_default_win (*function*), 31
- xformslib.library.fl_default_window (*function*), 31
- xformslib.library.fl_defpup (*function*), 82
- xformslib.library.fl_delete_browser_line (*function*), 47
- xformslib.library.fl_delete_choice (*function*), 56
- xformslib.library.fl_delete_folder (*function*), 79
- xformslib.library.fl_delete_folder_byname (*function*), 79
- xformslib.library.fl_delete_folder_bynumber (*function*), 79
- xformslib.library.fl_delete_formbrowser (*function*), 61
- xformslib.library.fl_delete_formbrowser_bynumber (*function*), 61
- xformslib.library.fl_delete_menu_item (*function*), 70
- xformslib.library.fl_delete_nmenu_item (*function*), 72
- xformslib.library.fl_delete_object (*function*), 26
- xformslib.library.fl_delete_select_item (*function*), 75
- xformslib.library.fl_delete_xyplot_overlay (*function*), 86

- xformslib.library.fl_delete_xyplot_text (*function*), 85
- xformslib.library.fl_deselect_browser (*function*), 48
- xformslib.library.fl_deselect_browser_line (*function*), 47
- xformslib.library.fl_diagline (*function*), 32
- xformslib.library.fl_disable_fselector_cache (*function*), 67
- xformslib.library.fl_display_ (*function*), 89
- xformslib.library.fl_do_forms (*function*), 16
- xformslib.library.fl_do_only_forms (*function*), 17
- xformslib.library.fl_dopup (*function*), 82
- xformslib.library.fl_draw_object_label (*function*), 24
- xformslib.library.fl_draw_object_label_outside (*function*), 24, 25
- xformslib.library.fl_draw_symbol (*function*), 28
- xformslib.library.fl_drawmode (*function*), 33
- xformslib.library.fl_drw_box (*function*), 28
- xformslib.library.fl_drw_checkbox (*function*), 34
- xformslib.library.fl_drw_frame (*function*), 34
- xformslib.library.fl_drw_text (*function*), 28
- xformslib.library.fl_drw_text_beside (*function*), 28
- xformslib.library.fl_drw_text_cursor (*function*), 28
- xformslib.library.fl_end_all_command (*function*), 65
- xformslib.library.fl_end_command (*function*), 65, 66
- xformslib.library.fl_end_form (*function*), 16
- xformslib.library.fl_end_group (*function*), 22
- xformslib.library.fl_enumerate_fonts (*function*), 27
- xformslib.library.fl_exe_command (*function*), 65
- xformslib.library.fl_fdesc_ (*function*), 88, 89
- xformslib.library.fl_fheight_ (*function*), 88, 89
- xformslib.library.fl_find_formbrowser_form_number (*function*), 62
- xformslib.library.fl_finish (*function*), 40
- xformslib.library.fl_fit_object_label (*function*), 25
- xformslib.library.fl_fix_dirname (*function*), 60
- xformslib.library.fl_flip_yorigin (*function*), 30
- xformslib.library.fl_fmtime (*function*), 60
- xformslib.library.fl_for_all_objects (*function*), 25
- xformslib.library.fl_form_is_iconified (*function*), 22
- xformslib.library.fl_form_is_visible (*function*), 22
- xformslib.library.FL_FormDisplay (*function*), 38
- xformslib.library.fl_free (*function*), 31
- xformslib.library.fl_free_all_dirlist (*function*), 60
- xformslib.library.fl_free_colors (*function*), 28
- xformslib.library.fl_free_dirlist (*function*), 60
- xformslib.library.fl_free_form (*function*), 21
- xformslib.library.fl_free_matrix (*function*), 92
- xformslib.library.fl_free_object (*function*), 26
- xformslib.library.fl_free_pixels (*function*), 28
- xformslib.library.fl_free_pixmap (*function*), 46
- xformslib.library.fl_free_pixmap_pixmap (*function*), 46, 52

- xformslib.library.fl_freepup (*function*), 82
- xformslib.library.fl_freeze_all_forms (*function*), 19
- xformslib.library.fl_freeze_form (*function*), 17
- xformslib.library.fl_gc_ (*function*), 88, 89
- xformslib.library.fl_get_active_folder (*function*), 79
- xformslib.library.fl_get_active_folder_name (*function*), 80
- xformslib.library.fl_get_active_folder_number (*function*), 79
- xformslib.library.fl_get_align_xy (*function*), 28
- xformslib.library.fl_get_app_mainform (*function*), 20
- xformslib.library.fl_get_app_resources (*function*), 40
- xformslib.library.fl_get_border_width (*function*), 30
- xformslib.library.fl_get_browser (*function*), 48
- xformslib.library.fl_get_browser_dimension (*function*), 48
- xformslib.library.fl_get_browser_hscroll_callbackxformslib.library.fl_get_browser_line (*function*), 47
- xformslib.library.fl_get_browser_line_yoffset (*function*), 49
- xformslib.library.fl_get_browser_maxline (*function*), 48
- xformslib.library.fl_get_browser_rel_xoffset (*function*), 49
- xformslib.library.fl_get_browser_rel_yoffset (*function*), 49
- xformslib.library.fl_get_browser_screenlines (*function*), 48
- xformslib.library.fl_get_browser_topline (*function*), 48
- xformslib.library.fl_get_browser_vscroll_callbackxformslib.library.fl_get_browser_xoffset (*function*), 48
- xformslib.library.fl_get_browser_yoffset (*function*), 49
- xformslib.library.fl_get_button (*function*), 52
- xformslib.library.fl_get_button_mouse_buttons (*function*), 52
- xformslib.library.fl_get_button_numb (*function*), 52
- xformslib.library.fl_get_canvas_colormap (*function*), 53
- xformslib.library.fl_get_canvas_depth (*function*), 53
- xformslib.library.fl_get_canvas_id (*function*), 53
- xformslib.library.fl_get_char_height (*function*), 27
- xformslib.library.fl_get_char_width (*function*), 27
- xformslib.library.fl_get_chart_bounds (*function*), 55
- xformslib.library.fl_get_choice (*function*), 56
- xformslib.library.fl_get_choice_item_mode (*function*), 56
- xformslib.library.fl_get_choice_item_text (*function*), 56
- xformslib.library.fl_get_choice_maxitems (*function*), 56
- xformslib.library.fl_get_choice_text (*function*), 56
- xformslib.library.fl_get_clock (*function*), 57
- xformslib.library.fl_get_cmdline_args (*function*), 31
- xformslib.library.fl_get_command_log_fdstruct (*function*), 65
- xformslib.library.fl_get_coordunit (*function*), 30
- xformslib.library.fl_get_counter_bounds (*function*), 58
- xformslib.library.fl_get_counter_min_repeat (*function*), 58
- xformslib.library.fl_get_counter_precision (*function*), 58

- xformslib.library.fl_get_counter_repeat (*function*), 58
- xformslib.library.fl_get_counter_speedjump (*function*), 58
- xformslib.library.fl_get_counter_step (*function*), 58
- xformslib.library.fl_get_counter_value (*function*), 58
- xformslib.library.fl_get_cursor_byname (*function*), 59
- xformslib.library.fl_get_decoration_sizes (*function*), 34
- xformslib.library.fl_get_defaults (*function*), 40
- xformslib.library.fl_get_dial_bounds (*function*), 59
- xformslib.library.fl_get_dial_value (*function*), 59
- xformslib.library.fl_get_directory (*function*), 66
- xformslib.library.fl_get_dirlist (*function*), 60
- xformslib.library.fl_get_display (*function*), 38
- xformslib.library.fl_get_drawmode (*function*), 33
- xformslib.library.fl_get_filename (*function*), 66
- xformslib.library.fl_get_focus_object (*function*), 17
- xformslib.library.fl_get_folder (*function*), 79
- xformslib.library.fl_get_folder_area (*function*), 80
- xformslib.library.fl_get_folder_name (*function*), 79
- xformslib.library.fl_get_folder_number (*function*), 79
- xformslib.library.fl_get_fontstruct (*function*), 34
- xformslib.library.fl_get_form_event_cmask (*function*), 21
- xformslib.library.fl_get_form_mouse (*function*), 34
- xformslib.library.fl_get_form_vclass (*function*), 31
- xformslib.library.fl_get_formbrowser_area (*function*), 61
- xformslib.library.fl_get_formbrowser_form (*function*), 62
- xformslib.library.fl_get_formbrowser_numforms (*function*), 62
- xformslib.library.fl_get_formbrowser_topform (*function*), 61
- xformslib.library.fl_get_formbrowser_xoffset (*function*), 62
- xformslib.library.fl_get_formbrowser_yoffset (*function*), 62
- xformslib.library.fl_get_fselector_fdstruct (*function*), 67
- xformslib.library.fl_get_fselector_form (*function*), 67
- xformslib.library.fl_get_gc (*function*), 31
- xformslib.library.fl_get_glccanvas_attributes (*function*), 54
- xformslib.library.fl_get_glccanvas_context (*function*), 54
- xformslib.library.fl_get_glccanvas_defaults (*function*), 54
- xformslib.library.fl_get_glccanvas_xvisualinfo (*function*), 54
- xformslib.library.fl_get_icm_color (*function*), 29
- xformslib.library.fl_get_input (*function*), 69
- xformslib.library.fl_get_input_color (*function*), 68
- xformslib.library.fl_get_input_cursorpos (*function*), 69
- xformslib.library.fl_get_input_format (*function*), 69
- xformslib.library.fl_get_input_numberofflines (*function*), 69
- xformslib.library.fl_get_input_screenlines (*function*), 69
- xformslib.library.fl_get_input_scrollbarsize (*function*), 68
- xformslib.library.fl_get_input_selected_range

- (function), 68
- xformslib.library.fl_get_input_topline (function), 69
- xformslib.library.fl_get_input_xoffset (function), 68
- xformslib.library.fl_get_linestyle (function), 33
- xformslib.library.fl_get_linewidth (function), 33
- xformslib.library.fl_get_matrix (function), 92
- xformslib.library.fl_get_menu (function), 70
- xformslib.library.fl_get_menu_item_mode (function), 71
- xformslib.library.fl_get_menu_item_text (function), 70
- xformslib.library.fl_get_menu_maxitems (function), 71
- xformslib.library.fl_get_menu_popup (function), 70
- xformslib.library.fl_get_menu_text (function), 71
- xformslib.library.fl_get_mouse (function), 34
- xformslib.library.fl_get_nmenu_item (function), 72
- xformslib.library.fl_get_nmenu_item_by_label (function), 72
- xformslib.library.fl_get_nmenu_item_by_text (function), 72
- xformslib.library.fl_get_nmenu_item_by_value (function), 72
- xformslib.library.fl_get_nmenu_popup (function), 72
- xformslib.library.fl_get_object_bbox (function), 25
- xformslib.library.fl_get_object_bw (function), 23
- xformslib.library.fl_get_object_component (function), 24
- xformslib.library.fl_get_object_geometry (function), 25
- xformslib.library.fl_get_object_gravity (function), 23
- xformslib.library.fl_get_object_label (function), 25
- xformslib.library.fl_get_object_position (function), 25
- xformslib.library.fl_get_object_resize (function), 23
- xformslib.library.fl_get_object_return_state (function), 26
- xformslib.library.fl_get_object_size (function), 24
- xformslib.library.fl_get_pattern (function), 66
- xformslib.library.fl_get_pixel (function), 29
- xformslib.library.fl_get_pixmap_pixmap (function), 46, 52
- xformslib.library.fl_get_positioner_xbounds (function), 73
- xformslib.library.fl_get_positioner_xvalue (function), 73
- xformslib.library.fl_get_positioner_ybounds (function), 73
- xformslib.library.fl_get_positioner_yvalue (function), 73
- xformslib.library.fl_get_real_object_window (function), 38
- xformslib.library.fl_get_resource (function), 40
- xformslib.library.fl_get_scrollbar_bounds (function), 74
- xformslib.library.fl_get_scrollbar_increment (function), 74
- xformslib.library.fl_get_scrollbar_value (function), 74
- xformslib.library.fl_get_select_item (function), 75
- xformslib.library.fl_get_select_item_by_label (function), 75
- xformslib.library.fl_get_select_item_by_text (function), 75
- xformslib.library.fl_get_select_item_by_value (function), 75
- xformslib.library.fl_get_select_popup (function), 75

- tion*), 75
- xformslib.library.fl_get_select_text_align
(*function*), 76
- xformslib.library.fl_get_select_text_color
(*function*), 76
- xformslib.library.fl_get_select_text_font (*func-*
tion), 76
- xformslib.library.fl_get_slider_bounds (*func-*
tion), 77
- xformslib.library.fl_get_slider_increment
(*function*), 77
- xformslib.library.fl_get_slider_value (*func-*
tion), 77
- xformslib.library.fl_get_spinner_bounds (*func-*
tion), 78
- xformslib.library.fl_get_spinner_down_button
(*function*), 78
- xformslib.library.fl_get_spinner_input (*func-*
tion), 78
- xformslib.library.fl_get_spinner_precision
(*function*), 78
- xformslib.library.fl_get_spinner_step (*func-*
tion), 78
- xformslib.library.fl_get_spinner_up_button
(*function*), 78
- xformslib.library.fl_get_spinner_value (*func-*
tion), 77
- xformslib.library.fl_get_string_dimension
(*function*), 27
- xformslib.library.fl_get_string_height (*func-*
tion), 27
- xformslib.library.fl_get_string_width (*func-*
tion), 27
- xformslib.library.fl_get_string_widthTAB
(*function*), 27
- xformslib.library.fl_get_submatrix (*func-*
tion), 94
- xformslib.library.fl_get_tabfolder_folder_byname
(*function*), 79
- xformslib.library.fl_get_tabfolder_folder_bynumb
(*function*), 79
- xformslib.library.fl_get_tabfolder_numfolders
(*function*), 79
- xformslib.library.fl_get_thumbwheel_bounds
(*function*), 81
- xformslib.library.fl_get_thumbwheel_step
(*function*), 80
- xformslib.library.fl_get_thumbwheel_value
(*function*), 80
- xformslib.library.fl_get_timer (*function*),
81
- xformslib.library.fl_get_vclass (*function*),
31
- xformslib.library.fl_get_visual_depth (*func-*
tion), 40
- xformslib.library.fl_get_win_mouse (*func-*
tion), 34
- xformslib.library.fl_get_wingecometry (*func-*
tion), 37, 38
- xformslib.library.fl_get_winorigin (*func-*
tion), 37, 38
- xformslib.library.fl_get_winsize (*function*),
37
- xformslib.library.fl_get_xyplot (*function*),
86
- xformslib.library.fl_get_xyplot_data (*func-*
tion), 86
- xformslib.library.fl_get_xyplot_data_pointer
(*function*), 86
- xformslib.library.fl_get_xyplot_numdata
(*function*), 87
- xformslib.library.fl_get_xyplot_overlay_data
(*function*), 86
- xformslib.library.fl_get_xyplot_xbounds (*func-*
tion), 86
- xformslib.library.fl_get_xyplot_xmapping
(*function*), 87
- xformslib.library.fl_get_xyplot_ybounds (*func-*
tion), 86
- xformslib.library.fl_get_xyplot_ymapping
(*function*), 87
- xformslib.library.fl_getmcolor (*function*),
28
- xformslib.library.fl_getpup_items (*func-*
tion), 84
- xformslib.library.fl_getpup_mode (*func-*
tion), 84
- xformslib.library.fl_getpup_text (*function*),

- 84
- xformslib.library.FL_GETR (*function*), 89
- xformslib.library.fl_gettime (*function*), 30
- xformslib.library.fl_glwincreate (*function*), 54
- xformslib.library.fl_glwinopen (*function*), 54
- xformslib.library.fl_goodies_atclose (*function*), 67
- xformslib.library.fl_hide_alert (*function*), 63
- xformslib.library.fl_hide_canvas (*function*), 53
- xformslib.library.fl_hide_choice (*function*), 64
- xformslib.library.fl_hide_command_log (*function*), 65
- xformslib.library.fl_hide_form (*function*), 21
- xformslib.library.fl_hide_fselector (*function*), 67
- xformslib.library.fl_hide_input (*function*), 64
- xformslib.library.fl_hide_message (*function*), 63
- xformslib.library.fl_hide_object (*function*), 26
- xformslib.library.fl_hide_oneliner (*function*), 64
- xformslib.library.fl_hide_question (*function*), 63
- xformslib.library.fl_hidepup (*function*), 84
- xformslib.library.fl_iconify (*function*), 36
- xformslib.library.fl_init_RGBdatabase (*function*), 92
- xformslib.library.fl_initial_wingometry (*function*), 37
- xformslib.library.fl_initial_winsize (*function*), 37
- xformslib.library.fl_initial_winstage (*function*), 37
- xformslib.library.fl_initialize (*function*), 40
- xformslib.library.fl_insert_browser_line (*function*), 47
- xformslib.library.fl_insert_chart_value (*function*), 55
- xformslib.library.fl_insert_formbrowser (*function*), 61
- xformslib.library.fl_insert_nmenu_items (*function*), 71
- xformslib.library.fl_insert_select_items (*function*), 75
- xformslib.library.fl_insert_xyplot_data (*function*), 85
- xformslib.library.fl_interpolate (*function*), 88
- xformslib.library.fl_invalidate_fselector_cache (*function*), 67
- xformslib.library.FL_IS_CANVAS (*function*), 38
- xformslib.library.FL_IS_DOWNBOX (*function*), 14
- xformslib.library.FL_is_gray (*function*), 31
- xformslib.library.FL_is_rgb (*function*), 31
- xformslib.library.FL_IS_UPBOX (*function*), 14
- xformslib.library.fl_is_valid_dir (*function*), 60
- xformslib.library.FL_IsPacked (*function*), 89
- xformslib.library.FL_IsRGB (*function*), 89
- xformslib.library.fl_isselected_browser_line (*function*), 48
- xformslib.library.fl_j2pass_quantize_packed (*function*), 95
- xformslib.library.fl_j2pass_quantize_rgb (*function*), 95
- xformslib.library.fl_keysym_pressed (*function*), 40
- xformslib.library.fl_last_event (*function*), 38
- xformslib.library.fl_library_version (*function*), 16

- xformslib.library.fl_line (*function*), 32
- xformslib.library.fl_lines (*function*), 32
- xformslib.library.fl_linestyle (*function*), 32, 33
- xformslib.library.fl_linewidth (*function*), 32, 33
- xformslib.library.fl_load_browser (*function*), 47
- xformslib.library.fl_lookup_RGBcolor (*function*), 93
- xformslib.library.fl_lower_form (*function*), 35
- xformslib.library.fl_make_matrix (*function*), 92
- xformslib.library.fl_make_object (*function*), 30
- xformslib.library.fl_make_submatrix (*function*), 95
- xformslib.library.fl_mapcolor (*function*), 28
- xformslib.library.fl_mapcolorname (*function*), 28
- xformslib.library.FL_max (*function*), 29
- xformslib.library.FL_min (*function*), 29
- xformslib.library.fl_mode_capable (*function*), 31
- xformslib.library.fl_modify_canvas_prop (*function*), 54
- xformslib.library.fl_mouse_button (*function*), 30, 31
- xformslib.library.fl_move_object (*function*), 25
- xformslib.library.fl_msleep (*function*), 31
- xformslib.library.fl_newpup (*function*), 82
- xformslib.library.FL_nint (*function*), 29
- xformslib.library.fl_noborder (*function*), 37
- xformslib.library.fl_notify_object (*function*), 24
- xformslib.library.fl_now (*function*), 30
- xformslib.library.fl_object_ps_dump (*function*), 61
- xformslib.library.fl_object_returned (*function*), 14
- xformslib.library.FL_ObjectDisplay (*function*), 38
- xformslib.library.FL_ObjWin (*function*), 38
- xformslib.library.fl_oval (*function*), 33
- xformslib.library.fl_ovalarc (*function*), 33
- xformslib.library.fl_ovalbound (*function*), 33
- xformslib.library.fl_ovalf (*function*), 33
- xformslib.library.fl_ovall (*function*), 33
- xformslib.library.fl_pack_bits (*function*), 95
- xformslib.library.FL_PCCLAMP (*function*), 41
- xformslib.library.fl_pclose (*function*), 65
- xformslib.library.fl_pieslice (*function*), 33
- xformslib.library.fl_point (*function*), 32
- xformslib.library.fl_points (*function*), 32
- xformslib.library.fl_polybound (*function*), 32
- xformslib.library.fl_polyf (*function*), 32
- xformslib.library.fl_polygon (*function*), 32
- xformslib.library.fl_polyl (*function*), 32
- xformslib.library.fl_popen (*function*), 65
- xformslib.library.fl_popup_add (*function*), 41
- xformslib.library.fl_popup_add_entries (*function*), 41
- xformslib.library.fl_popup_create (*function*), 41
- xformslib.library.fl_popup_delete (*function*), 41
- xformslib.library.fl_popup_do (*function*), 42
- xformslib.library.fl_popup_entry_clear_state (*function*), 43
- xformslib.library.fl_popup_entry_delete (*function*), 41
- xformslib.library.fl_popup_entry_get_by_label (*function*), 44
- xformslib.library.fl_popup_entry_get_by_position (*function*), 44
- xformslib.library.fl_popup_entry_get_by_text

- (function), 44
- xformslib.library.fl_popup_entry_get_by_user_data (function), 44
- xformslib.library.fl_popup_entry_get_by_value (function), 44
- xformslib.library.fl_popup_entry_get_font (function), 42
- xformslib.library.fl_popup_entry_get_group (function), 44
- xformslib.library.fl_popup_entry_get_state (function), 43
- xformslib.library.fl_popup_entry_get_subpopup (function), 45
- xformslib.library.fl_popup_entry_raise_state (function), 43
- xformslib.library.fl_popup_entry_set_callback (function), 43
- xformslib.library.fl_popup_entry_set_enter_callback (function), 43
- xformslib.library.fl_popup_entry_set_font (function), 42
- xformslib.library.fl_popup_entry_set_group (function), 45
- xformslib.library.fl_popup_entry_set_leave_callback (function), 43
- xformslib.library.fl_popup_entry_set_shortcut (function), 44
- xformslib.library.fl_popup_entry_set_state (function), 43
- xformslib.library.fl_popup_entry_set_subpopup (function), 45
- xformslib.library.fl_popup_entry_set_text (function), 44
- xformslib.library.fl_popup_entry_set_user_data (function), 44
- xformslib.library.fl_popup_entry_set_value (function), 44
- xformslib.library.fl_popup_entry_toggle_state (function), 44
- xformslib.library.fl_popup_get_bw (function), 42
- xformslib.library.fl_popup_get_color (function), 42
- xformslib.library.fl_popup_get_min_width (function), 45
- xformslib.library.fl_popup_get_policy (function), 42
- xformslib.library.fl_popup_get_size (function), 45
- xformslib.library.fl_popup_get_title (function), 43
- xformslib.library.fl_popup_get_title_font (function), 42
- xformslib.library.fl_popup_insert_entries (function), 41
- xformslib.library.fl_popup_set_bw (function), 42
- xformslib.library.fl_popup_set_callback (function), 42
- xformslib.library.fl_popup_set_color (function), 43
- xformslib.library.fl_popup_set_cursor (function), 43
- xformslib.library.fl_popup_set_min_width (function), 45
- xformslib.library.fl_popup_set_policy (function), 42
- xformslib.library.fl_popup_set_position (function), 42
- xformslib.library.fl_popup_set_title (function), 43
- xformslib.library.fl_popup_set_title_font (function), 42
- xformslib.library.fl_prepare_form_window (function), 21
- xformslib.library.fl_print_xevent_name (function), 39
- xformslib.library.fl_raise_form (function), 35
- xformslib.library.fl_read_bitmapfile (function), 45
- xformslib.library.fl_read_pixmapfile (function), 46
- xformslib.library.fl_rect (function), 32
- xformslib.library.fl_rectangle (function), 32
- xformslib.library.fl_rectbound (function), 32

- xformslib.library.fl_rectf (*function*), 32
- xformslib.library.fl_redraw_form (*function*), 21
- xformslib.library.fl_redraw_object (*function*), 26
- xformslib.library.fl_refresh_fselector (*function*), 67
- xformslib.library.fl_register_raw_callback (*function*), 22
- xformslib.library.fl_remove_canvas_handler (*function*), 53
- xformslib.library.fl_remove_event_callback (*function*), 39
- xformslib.library.fl_remove_fselector_appbutton (*function*), 67
- xformslib.library.fl_remove_io_callback (*function*), 15
- xformslib.library.fl_remove_selected_xevent (*function*), 39
- xformslib.library.fl_remove_signal_callback (*function*), 15
- xformslib.library.fl_remove_timeout (*function*), 16
- xformslib.library.fl_replace_browser_line (*function*), 47
- xformslib.library.fl_replace_chart_value (*function*), 55
- xformslib.library.fl_replace_choice (*function*), 56
- xformslib.library.fl_replace_folder_bynumber (*function*), 80
- xformslib.library.fl_replace_formbrowser (*function*), 61
- xformslib.library.fl_replace_menu_item (*function*), 70
- xformslib.library.fl_replace_nmenu_item (*function*), 72
- xformslib.library.fl_replace_select_item (*function*), 75
- xformslib.library.fl_replace_xyplot_point (*function*), 86
- xformslib.library.fl_replace_xyplot_point_in_overlay (*function*), 86
- xformslib.library.fl_request_clipboard (*function*), 57
- xformslib.library.fl_reset_focus_object (*function*), 17
- xformslib.library.fl_reset_winconstraints (*function*), 37
- xformslib.library.fl_resume_timer (*function*), 82
- xformslib.library.FL_RGB2GRAY (*function*), 89
- xformslib.library.fl_ringbell (*function*), 30
- xformslib.library.fl_roundrect (*function*), 32
- xformslib.library.fl_roundrectangle (*function*), 32
- xformslib.library.fl_roundrectf (*function*), 32
- xformslib.library.fl_scale_form (*function*), 19
- xformslib.library.fl_scale_object (*function*), 26
- xformslib.library.fl_select_browser_line (*function*), 47
- xformslib.library.fl_select_mediantcut_quantizer (*function*), 93
- xformslib.library.fl_set_app_mainform (*function*), 20
- xformslib.library.fl_set_app_nomainform (*function*), 20
- xformslib.library.fl_set_atclose (*function*), 18
- xformslib.library.fl_set_background (*function*), 35
- xformslib.library.fl_set_bitmap_data (*function*), 45
- xformslib.library.fl_set_bitmap_file (*function*), 45, 46, 51
- xformslib.library.fl_set_bitmapbutton_data (*function*), 51
- xformslib.library.fl_set_border_width (*function*), 30
- xformslib.library.fl_set_browser_dbclick_callback (*function*), 48
- xformslib.library.fl_set_browser_fontsize (*function*), 48

- xformslib.library.fl_set_browser_fontstyle
(function), 48
- xformslib.library.fl_set_browser_hscroll_callback
(function), 49
- xformslib.library.fl_set_browser_hscrollbar
(function), 48
- xformslib.library.fl_set_browser_line_selectable
(function), 48
- xformslib.library.fl_set_browser_rel_xoffset
(function), 49
- xformslib.library.fl_set_browser_rel_yoffset
(function), 49
- xformslib.library.fl_set_browser_scrollbar_size
(function), 49
- xformslib.library.fl_set_browser_specialkey
(function), 48
- xformslib.library.fl_set_browser_topline (func-
tion), 48
- xformslib.library.fl_set_browser_vscroll_callback
(function), 49
- xformslib.library.fl_set_browser_vscrollbar
(function), 48
- xformslib.library.fl_set_browser_xoffset (func-
tion), 49
- xformslib.library.fl_set_browser_yoffset (func-
tion), 49
- xformslib.library.fl_set_button (function),
52
- xformslib.library.fl_set_button_mouse_buttons
(function), 52
- xformslib.library.fl_set_canvas_attributes
(function), 53
- xformslib.library.fl_set_canvas_colormap
(function), 53
- xformslib.library.fl_set_canvas_depth (func-
tion), 53
- xformslib.library.fl_set_canvas_visual (func-
tion), 53
- xformslib.library.fl_set_chart_autosize (func-
tion), 55
- xformslib.library.fl_set_chart_baseline (func-
tion), 55
- xformslib.library.fl_set_chart_bounds (func-
tion), 55
- xformslib.library.fl_set_chart_lcolor (func-
tion), 55
- xformslib.library.fl_set_chart_lsize (func-
tion), 55
- xformslib.library.fl_set_chart_lstyle (func-
tion), 55
- xformslib.library.fl_set_chart_maxnumb (func-
tion), 55
- xformslib.library.fl_set_choice (function),
56
- xformslib.library.fl_set_choice_align (func-
tion), 56
- xformslib.library.fl_set_choice_entries (func-
tion), 57
- xformslib.library.fl_set_choice_fontsize (func-
tion), 56
- xformslib.library.fl_set_choice_fontstyle (func-
tion), 56
- xformslib.library.fl_set_choice_item_mode
(function), 56
- xformslib.library.fl_set_choice_item_shortcut
(function), 57
- xformslib.library.fl_set_choice_notitle (func-
tion), 57
- xformslib.library.fl_set_choice_text (func-
tion), 56
- xformslib.library.fl_set_choices_shortcut (func-
tion), 64
- xformslib.library.fl_set_clipping (function),
41
- xformslib.library.fl_set_clippings (function),
41
- xformslib.library.fl_set_clock_adjustment
(function), 57
- xformslib.library.fl_set_clock_ampm (func-
tion), 57
- xformslib.library.fl_set_color_leak (func-
tion), 28
- xformslib.library.fl_set_command_log_position
(function), 65
- xformslib.library.fl_set_coordunit (func-
tion), 30
- xformslib.library.fl_set_counter_bounds (func-
tion), 58

- xformslib.library.fl_set_counter_filter (*function*), 58
- xformslib.library.fl_set_counter_min_repeat (*function*), 58
- xformslib.library.fl_set_counter_precision (*function*), 58
- xformslib.library.fl_set_counter_repeat (*function*), 58
- xformslib.library.fl_set_counter_return (*function*), 58
- xformslib.library.fl_set_counter_speedjump (*function*), 59
- xformslib.library.fl_set_counter_step (*function*), 58
- xformslib.library.fl_set_counter_value (*function*), 58
- xformslib.library.fl_set_cursor (*function*), 59
- xformslib.library.fl_set_cursor_color (*function*), 59
- xformslib.library.fl_set_default_browser_maxlinelength (*function*), 49
- xformslib.library.fl_set_default_tabfolder_corner (*function*), 80
- xformslib.library.fl_set_defaults (*function*), 40
- xformslib.library.fl_set_dial_angles (*function*), 60
- xformslib.library.fl_set_dial_bounds (*function*), 59
- xformslib.library.fl_set_dial_cross (*function*), 60
- xformslib.library.fl_set_dial_direction (*function*), 60
- xformslib.library.fl_set_dial_return (*function*), 59
- xformslib.library.fl_set_dial_step (*function*), 59
- xformslib.library.fl_set_dial_value (*function*), 59
- xformslib.library.fl_set_directory (*function*), 66
- xformslib.library.fl_set_dirlist_filter (*function*), 60
- xformslib.library.fl_set_dirlist_filterdir (*function*), 60
- xformslib.library.fl_set_dirlist_sort (*function*), 60
- xformslib.library.fl_set_err_logfp (*function*), 31
- xformslib.library.fl_set_error_handler (*function*), 31
- xformslib.library.fl_set_event_callback (*function*), 39
- xformslib.library.fl_set_focus_object (*function*), 17
- xformslib.library.fl_set_folder (*function*), 79
- xformslib.library.fl_set_folder_byname (*function*), 79
- xformslib.library.fl_set_folder_bynumber (*function*), 79
- xformslib.library.fl_set_font (*function*), 27
- xformslib.library.fl_set_font_name (*function*), 27
- xformslib.library.fl_set_foreground (*function*), 35
- xformslib.library.fl_set_form_atactivate (*function*), 18
- xformslib.library.fl_set_form_atclose (*function*), 18
- xformslib.library.fl_set_form_atdeactivate (*function*), 18
- xformslib.library.fl_set_form_callback (*function*), 20
- xformslib.library.fl_set_form_dblbuffer (*function*), 21
- xformslib.library.fl_set_form_event_cmask (*function*), 20
- xformslib.library.fl_set_form_geometry (*function*), 21
- xformslib.library.fl_set_form_hotobject (*function*), 20
- xformslib.library.fl_set_form_hotspot (*function*), 20
- xformslib.library.fl_set_form_icon (*function*), 34
- xformslib.library.fl_set_form_maxsize (*function*), 34

- tion*), 20
- xformslib.library.fl_set_form_minsize (*function*), 20
- xformslib.library.fl_set_form_position (*function*), 19
- xformslib.library.fl_set_form_size (*function*), 20
- xformslib.library.fl_set_form_title (*function*), 20
- xformslib.library.fl_set_formbrowser_hscrollbar (*function*), 61
- xformslib.library.fl_set_formbrowser_scroll (*function*), 61
- xformslib.library.fl_set_formbrowser_topform (*function*), 61
- xformslib.library.fl_set_formbrowser_topform_by_xformslib (*function*), 61
- xformslib.library.fl_set_formbrowser_vscrollbar (*function*), 61
- xformslib.library.fl_set_formbrowser_xoffset (*function*), 62
- xformslib.library.fl_set_formbrowser_yoffset (*function*), 62
- xformslib.library.fl_set_fselector_border (*function*), 66
- xformslib.library.fl_set_fselector_callback (*function*), 66, 67
- xformslib.library.fl_set_fselector_filetype_marker (*function*), 67
- xformslib.library.fl_set_fselector_fontsize (*function*), 66
- xformslib.library.fl_set_fselector_fontstyle (*function*), 66
- xformslib.library.fl_set_fselector_placement (*function*), 66
- xformslib.library.fl_set_fselector_title (*function*), 67
- xformslib.library.fl_set_fselector_transient (*function*), 66
- xformslib.library.fl_set_gamma (*function*), 29
- xformslib.library.fl_set_gc_clipping (*function*), 41
- xformslib.library.fl_set_glccanvas_attributes (*function*), 54
- xformslib.library.fl_set_glccanvas_defaults (*function*), 54
- xformslib.library.fl_set_glccanvas_direct (*function*), 54
- xformslib.library.fl_set_goodies_font (*function*), 63
- xformslib.library.fl_set_graphics_mode (*function*), 40
- xformslib.library.fl_set_icm_color (*function*), 29
- xformslib.library.fl_set_idle_callback (*function*), 39
- xformslib.library.fl_set_idle_delta (*function*), 39
- xformslib.library.fl_set_input (*function*), 67
- xformslib.library.fl_set_input_color (*function*), 68
- xformslib.library.fl_set_input_cursor_visible (*function*), 69
- xformslib.library.fl_set_input_cursorpos (*function*), 68
- xformslib.library.fl_set_input_editkeymap (*function*), 69
- xformslib.library.fl_set_input_fieldchar (*function*), 69
- xformslib.library.fl_set_input_filter (*function*), 69
- xformslib.library.fl_set_input_format (*function*), 68
- xformslib.library.fl_set_input_hscrollbar (*function*), 68
- xformslib.library.fl_set_input_maxchars (*function*), 68
- xformslib.library.fl_set_input_return (*function*), 68
- xformslib.library.fl_set_input_scroll (*function*), 68
- xformslib.library.fl_set_input_scrollbarsize (*function*), 68
- xformslib.library.fl_set_input_selected (*function*), 68
- xformslib.library.fl_set_input_selected_range

- (function)*, 68
- xformslib.library.fl_set_input_topline (*function*), 68
- xformslib.library.fl_set_input_vscrollbar (*function*), 68
- xformslib.library.fl_set_input_xoffset (*function*), 68
- xformslib.library.fl_set_menu (*function*), 70
- xformslib.library.fl_set_menu_entries (*function*), 71
- xformslib.library.fl_set_menu_item_callback (*function*), 70
- xformslib.library.fl_set_menu_item_id (*function*), 71
- xformslib.library.fl_set_menu_item_mode (*function*), 70
- xformslib.library.fl_set_menu_item_shortcut (*function*), 70
- xformslib.library.fl_set_menu_notitle (*function*), 71
- xformslib.library.fl_set_menu_popup (*function*), 70
- xformslib.library.fl_set_mouse (*function*), 34
- xformslib.library.fl_set_nmenu_hl_text_color (*function*), 72
- xformslib.library.fl_set_nmenu_items (*function*), 72
- xformslib.library.fl_set_nmenu_policy (*function*), 72
- xformslib.library.fl_set_nmenu_popup (*function*), 72
- xformslib.library.fl_set_object_automatic (*function*), 24
- xformslib.library.fl_set_object_boxtype (*function*), 23, 53
- xformslib.library.fl_set_object_bw (*function*), 23
- xformslib.library.fl_set_object_callback (*function*), 26
- xformslib.library.fl_set_object_color (*function*), 24
- xformslib.library.fl_set_object_dblbuffer (*function*), 24
- xformslib.library.fl_set_object_dblclick (*function*), 25
- xformslib.library.fl_set_object_geometry (*function*), 25
- xformslib.library.fl_set_object_gravity (*function*), 23
- xformslib.library.fl_set_object_helper (*function*), 24
- xformslib.library.fl_set_object_label (*function*), 24
- xformslib.library.fl_set_object_lalign (*function*), 24, 26
- xformslib.library.fl_set_object_lcol (*function*), 23, 25
- xformslib.library.fl_set_object_lsize (*function*), 23
- xformslib.library.fl_set_object_lstyle (*function*), 23
- xformslib.library.fl_set_object_position (*function*), 24
- xformslib.library.fl_set_object_posthandler (*function*), 26
- xformslib.library.fl_set_object_prehandler (*function*), 25
- xformslib.library.fl_set_object_resize (*function*), 23
- xformslib.library.fl_set_object_return (*function*), 24
- xformslib.library.fl_set_object_shortcut (*function*), 24, 52, 69
- xformslib.library.fl_set_object_shortcutkey (*function*), 24
- xformslib.library.fl_set_object_size (*function*), 24
- xformslib.library.fl_set_oneliner_color (*function*), 64
- xformslib.library.fl_set_oneliner_font (*function*), 64
- xformslib.library.fl_set_pattern (*function*), 66
- xformslib.library.fl_set_pixmap_align (*function*), 46, 52
- xformslib.library.fl_set_pixmap_colorcloseness

- (function), 46
- xformslib.library.fl_set_pixmap_data (function), 46, 51
- xformslib.library.fl_set_pixmap_file (function), 46, 51, 52
- xformslib.library.fl_set_pixmap_pixmap (function), 46, 51
- xformslib.library.fl_set_pixmapbutton_focus_data (function), 52
- xformslib.library.fl_set_pixmapbutton_focus_file (function), 52
- xformslib.library.fl_set_pixmapbutton_focus_outfile (function), 51, 52
- xformslib.library.fl_set_pixmapbutton_focus_pixmap (function), 52
- xformslib.library.fl_set_positioner_return (function), 73
- xformslib.library.fl_set_positioner_xbounds (function), 73
- xformslib.library.fl_set_positioner_xstep (function), 73
- xformslib.library.fl_set_positioner_xvalue (function), 73
- xformslib.library.fl_set_positioner_ybounds (function), 73
- xformslib.library.fl_set_positioner_ystep (function), 73
- xformslib.library.fl_set_positioner_yvalue (function), 73
- xformslib.library.fl_set_resource (function), 40
- xformslib.library.fl_set_scrollbar_bounds (function), 74
- xformslib.library.fl_set_scrollbar_increment (function), 74
- xformslib.library.fl_set_scrollbar_return (function), 74
- xformslib.library.fl_set_scrollbar_size (function), 74
- xformslib.library.fl_set_scrollbar_step (function), 74
- xformslib.library.fl_set_scrollbar_type (function), 30
- xformslib.library.fl_set_scrollbar_value (function), 74
- xformslib.library.fl_set_select_item (function), 75
- xformslib.library.fl_set_select_items (function), 75
- xformslib.library.fl_set_select_policy (function), 76
- xformslib.library.fl_set_select_popup (function), 75
- xformslib.library.fl_set_select_text_align (function), 76
- xformslib.library.fl_set_select_text_color (function), 76
- xformslib.library.fl_set_select_text_font (function), 76
- xformslib.library.fl_set_slider_bounds (function), 77
- xformslib.library.fl_set_slider_filter (function), 77
- xformslib.library.fl_set_slider_increment (function), 77
- xformslib.library.fl_set_slider_precision (function), 77
- xformslib.library.fl_set_slider_return (function), 77
- xformslib.library.fl_set_slider_size (function), 77
- xformslib.library.fl_set_slider_step (function), 77
- xformslib.library.fl_set_slider_value (function), 77
- xformslib.library.fl_set_spinner_bounds (function), 78
- xformslib.library.fl_set_spinner_precision (function), 78
- xformslib.library.fl_set_spinner_step (function), 78
- xformslib.library.fl_set_spinner_value (function), 77
- xformslib.library.fl_set_tabfolder_autofit (function), 80
- xformslib.library.fl_set_tabfolder_offset (function), 80
- xformslib.library.fl_set_tabstop (function),

- 40
- xformslib.library.fl_set_text_clipping (*function*), 41
- xformslib.library.fl_set_thin scrollbar (*function*), 30
- xformslib.library.fl_set_thumbwheel_bounds (*function*), 81
- xformslib.library.fl_set_thumbwheel_crossover (*function*), 81
- xformslib.library.fl_set_thumbwheel_return (*function*), 81
- xformslib.library.fl_set_thumbwheel_step (*function*), 80
- xformslib.library.fl_set_thumbwheel_value (*function*), 80
- xformslib.library.fl_set_timer (*function*), 81
- xformslib.library.fl_set_timer_countup (*function*), 81
- xformslib.library.fl_set_timer_filter (*function*), 81
- xformslib.library.fl_set_tooltip_boxttype (*function*), 64
- xformslib.library.fl_set_tooltip_color (*function*), 64
- xformslib.library.fl_set_tooltip_font (*function*), 64
- xformslib.library.fl_set_tooltip_lalign (*function*), 65
- xformslib.library.fl_set_ul_property (*function*), 41
- xformslib.library.fl_set_visualID (*function*), 40
- xformslib.library.fl_set_xyplot_alphaxtics (*function*), 88
- xformslib.library.fl_set_xyplot_alphaytics (*function*), 88
- xformslib.library.fl_set_xyplot_data (*function*), 85
- xformslib.library.fl_set_xyplot_data_double (*function*), 85
- xformslib.library.fl_set_xyplot_file (*function*), 85
- xformslib.library.fl_set_xyplot_fixed_xaxis (*function*), 88
- xformslib.library.fl_set_xyplot_fixed_yaxis (*function*), 88
- xformslib.library.fl_set_xyplot_fontsize (*function*), 87
- xformslib.library.fl_set_xyplot_fontstyle (*function*), 87
- xformslib.library.fl_set_xyplot_grid_linestyle (*function*), 87
- xformslib.library.fl_set_xyplot_inspect (*function*), 86
- xformslib.library.fl_set_xyplot_interpolate (*function*), 86
- xformslib.library.fl_set_xyplot_key (*function*), 87
- xformslib.library.fl_set_xyplot_key_font (*function*), 87
- xformslib.library.fl_set_xyplot_key_position (*function*), 87
- xformslib.library.fl_set_xyplot_keys (*function*), 87
- xformslib.library.fl_set_xyplot_linewidth (*function*), 87
- xformslib.library.fl_set_xyplot_mark_active (*function*), 88
- xformslib.library.fl_set_xyplot_maxoverlays (*function*), 85
- xformslib.library.fl_set_xyplot_overlay_type (*function*), 86
- xformslib.library.fl_set_xyplot_return (*function*), 85
- xformslib.library.fl_set_xyplot_symbol (*function*), 88
- xformslib.library.fl_set_xyplot_symbolsizesize (*function*), 86
- xformslib.library.fl_set_xyplot_xbounds (*function*), 86
- xformslib.library.fl_set_xyplot_xgrid (*function*), 87
- xformslib.library.fl_set_xyplot_xscale (*function*), 87
- xformslib.library.fl_set_xyplot_xtics (*function*), 85
- xformslib.library.fl_set_xyplot_ybounds (*function*), 86

- tion*), 86
- xformslib.library.fl_set_xyplot_ygrid (*function*), 87
- xformslib.library.fl_set_xyplot_yscale (*function*), 87
- xformslib.library.fl_set_xyplot_ytics (*function*), 86
- xformslib.library.fl_setup_bw (*function*), 83
- xformslib.library.fl_setup_cursor (*function*), 84
- xformslib.library.fl_setup_default_bw (*function*), 83
- xformslib.library.fl_setup_default_color (*function*), 82, 83
- xformslib.library.fl_setup_default_cursor (*function*), 82
- xformslib.library.fl_setup_default_fontsize (*function*), 82, 83
- xformslib.library.fl_setup_default_fontstyle (*function*), 83
- xformslib.library.fl_setup_default_pup_checked_color (*function*), 82, 83
- xformslib.library.fl_setup_entercb (*function*), 83
- xformslib.library.fl_setup_entries (*function*), 82
- xformslib.library.fl_setup_itemcb (*function*), 84
- xformslib.library.fl_setup_leavecb (*function*), 84
- xformslib.library.fl_setup_maxpup (*function*), 84
- xformslib.library.fl_setup_menucb (*function*), 84
- xformslib.library.fl_setup_mode (*function*), 82, 85
- xformslib.library.fl_setup_pad (*function*), 84
- xformslib.library.fl_setup_position (*function*), 83
- xformslib.library.fl_setup_selection (*function*), 83
- xformslib.library.fl_setup_shadow (*function*), 83
- xformslib.library.fl_setup_shortcut (*function*), 83
- xformslib.library.fl_setup_softedge (*function*), 83
- xformslib.library.fl_setup_submenu (*function*), 85
- xformslib.library.fl_setup_title (*function*), 83
- xformslib.library.fl_share_canvas_colormap (*function*), 53
- xformslib.library.fl_show_alert (*function*), 63
- xformslib.library.fl_show_alert2 (*function*), 63
- xformslib.library.fl_show_browser_line (*function*), 49
- xformslib.library.fl_show_choice (*function*), 64
- xformslib.library.fl_show_choices (*function*), 64
- xformslib.library.fl_show_colormap (*function*), 64
- xformslib.library.fl_show_command_log (*function*), 65
- xformslib.library.fl_show_errors (*function*), 29
- xformslib.library.fl_show_form (*function*), 21
- xformslib.library.fl_show_form_window (*function*), 21
- xformslib.library.fl_show_fselector (*function*), 66, 67
- xformslib.library.fl_show_input (*function*), 64
- xformslib.library.fl_show_menu_symbol (*function*), 70
- xformslib.library.fl_show_message (*function*), 63
- xformslib.library.fl_show_messages (*function*), 63
- xformslib.library.fl_show_msg (*function*), 63
- xformslib.library.fl_show_object (*function*),

- 26
- xformslib.library.fl_show_oneliner (*function*), 64
- xformslib.library.fl_show_question (*function*), 63
- xformslib.library.fl_show_simple_input (*function*), 64
- xformslib.library.fl_showpup (*function*), 84
- xformslib.library.fl_signal_caught (*function*), 15
- xformslib.library.fl_spline_interpolate (*function*), 88
- xformslib.library.fl_strdup (*function*), 31
- xformslib.library.fl_stuff_clipboard (*function*), 57
- xformslib.library.fl_suspend_timer (*function*), 82
- xformslib.library.fl_textcolor (*function*), 29
- xformslib.library.fl_textgc_ (*function*), 88, 89
- xformslib.library.FL_TO_DOWNBOX (*function*), 14
- xformslib.library.fl_transient (*function*), 37
- xformslib.library.fl_trigger_object (*function*), 27
- xformslib.library.fl_unfreeze_all_forms (*function*), 19
- xformslib.library.fl_unfreeze_form (*function*), 18
- xformslib.library.fl_unpack_bits (*function*), 95
- xformslib.library.fl_unset_clipping (*function*), 41
- xformslib.library.fl_unset_gc_clipping (*function*), 41
- xformslib.library.fl_unset_text_clipping (*function*), 41
- xformslib.library.fl_update_display (*function*), 32
- xformslib.library.fl_use_fselector (*function*), 66
- xformslib.library.fl_validate_input (*function*), 69
- xformslib.library.fl_value_to_bits (*function*), 95
- xformslib.library.fl_vclass_name (*function*), 40
- xformslib.library.fl_vclass_val (*function*), 40
- xformslib.library.fl_whoami (*function*), 30
- xformslib.library.fl_win_to_form (*function*), 34
- xformslib.library.fl_winaspect (*function*), 37
- xformslib.library.fl_winbackground (*function*), 36
- xformslib.library.fl_winclose (*function*), 35
- xformslib.library.fl_wincreate (*function*), 35
- xformslib.library.fl_winfocus (*function*), 36
- xformslib.library.fl_wingeometry (*function*), 37
- xformslib.library.fl_winget (*function*), 36
- xformslib.library.fl_winhide (*function*), 35
- xformslib.library.fl_winicon (*function*), 36
- xformslib.library.fl_winicontitle (*function*), 36
- xformslib.library.fl_winisvalid (*function*), 36
- xformslib.library.fl_winmaxsize (*function*), 36
- xformslib.library.fl_winminsize (*function*), 36
- xformslib.library.fl_winmove (*function*), 36
- xformslib.library.fl_winopen (*function*), 35
- xformslib.library.fl_winposition (*function*), 36, 38
- xformslib.library.fl_winreparent (*function*), 35
- xformslib.library.fl_winreshape (*function*), 36

- xformslib.library.fl_winresize (*function*), 36
- xformslib.library.fl_winset (*function*), 35
- xformslib.library.fl_winshow (*function*), 35
- xformslib.library.fl_winsize (*function*), 37
- xformslib.library.fl_winstepunit (*function*), 36
- xformslib.library.fl_wintitle (*function*), 36
- xformslib.library.fl_XEventsQueued (*function*), 38
- xformslib.library.fl_XNextEvent (*function*), 38
- xformslib.library.fl_XPeekEvent (*function*), 38
- xformslib.library.fl_XPutBackEvent (*function*), 38
- xformslib.library.fl_xyplot_s2w (*function*), 87
- xformslib.library.fl_xyplot_w2s (*function*), 87
- xformslib.library.flimage_add_comments (*function*), 95
- xformslib.library.flimage_add_format (*function*), 93
- xformslib.library.flimage_add_marker (*function*), 91
- xformslib.library.flimage_add_marker_struct (*function*), 91
- xformslib.library.flimage_add_text (*function*), 91
- xformslib.library.flimage_add_text_struct (*function*), 91
- xformslib.library.flimage_alloc (*function*), 90
- xformslib.library.flimage_autocrop (*function*), 94
- xformslib.library.flimage_close (*function*), 90
- xformslib.library.flimage_color_to_pixel (*function*), 95
- xformslib.library.flimage_combine (*function*), 95
- xformslib.library.flimage_convert (*function*), 91
- xformslib.library.flimage_convolve (*function*), 93
- xformslib.library.flimage_convolvea (*function*), 93
- xformslib.library.flimage_crop (*function*), 94
- xformslib.library.flimage_define_marker (*function*), 91
- xformslib.library.flimage_delete_all_markers (*function*), 91
- xformslib.library.flimage_delete_all_text (*function*), 91
- xformslib.library.flimage_description_via_filter (*function*), 90
- xformslib.library.flimage_display (*function*), 90
- xformslib.library.flimage_display_markers (*function*), 95
- xformslib.library.flimage_dump (*function*), 90
- xformslib.library.flimage_dup (*function*), 94
- xformslib.library.flimage_dup_ (*function*), 95
- xformslib.library.flimage_enable_bmp (*function*), 95
- xformslib.library.flimage_enable_fits (*function*), 95
- xformslib.library.flimage_enable_genesis (*function*), 95
- xformslib.library.flimage_enable_gif (*function*), 96
- xformslib.library.flimage_enable_gzip (*function*), 96
- xformslib.library.flimage_enable_jpeg (*function*), 96
- xformslib.library.flimage_enable_png (*function*), 96
- xformslib.library.flimage_enable_pnm (*function*), 92
- xformslib.library.flimage_enable_ps (*function*), 96
- xformslib.library.flimage_enable_sgi (*function*), 96

- tion*), 96
- xformslib.library.flimage_enable_tiff (*function*), 96
- xformslib.library.flimage_enable_xbm (*function*), 96
- xformslib.library.flimage_enable_xpm (*function*), 96
- xformslib.library.flimage_enable_xwd (*function*), 96
- xformslib.library.flimage_enhance (*function*), 94
- xformslib.library.flimage_error (*function*), 91
- xformslib.library.flimage_flip (*function*), 93
- xformslib.library.flimage_free (*function*), 90
- xformslib.library.flimage_free_ci (*function*), 96
- xformslib.library.flimage_free_gray (*function*), 96
- xformslib.library.flimage_free_linearlut (*function*), 96
- xformslib.library.flimage_free_rgb (*function*), 96
- xformslib.library.flimage_freemem (*function*), 96
- xformslib.library.flimage_from_pixmap (*function*), 94
- xformslib.library.flimage_get_autocrop (*function*), 94
- xformslib.library.flimage_get_closest_color_from_palette (*function*), 96
- xformslib.library.flimage_get_format_info (*function*), 92
- xformslib.library.flimage_get_linearlut (*function*), 96
- xformslib.library.flimage_get_number_of_formats (*function*), 92
- xformslib.library.flimage_get_colormap (*function*), 93
- xformslib.library.flimage_getmem (*function*), 90
- xformslib.library.flimage_gif_output_options (*function*), 92
- xformslib.library.flimage_invalidate_pixels (*function*), 96
- xformslib.library.flimage_is_supported (*function*), 90
- xformslib.library.flimage_jpeg_output_options (*function*), 92
- xformslib.library.flimage_load (*function*), 90
- xformslib.library.flimage_open (*function*), 96
- xformslib.library.flimage_pnm_output_options (*function*), 92
- xformslib.library.flimage_ps_options (*function*), 92
- xformslib.library.flimage_read (*function*), 90
- xformslib.library.flimage_read_annotation (*function*), 97
- xformslib.library.flimage_render_annotation (*function*), 91
- xformslib.library.flimage_replace_image (*function*), 97
- xformslib.library.flimage_replace_pixel (*function*), 94
- xformslib.library.flimage_rotate (*function*), 93
- xformslib.library.flimage_scale (*function*), 93
- xformslib.library.flimage_sdisplay (*function*), 91
- xformslib.library.flimage_set_annotation_support (*function*), 93
- xformslib.library.flimage_set_fits_bits (*function*), 92
- xformslib.library.flimage_setup (*function*), 89
- xformslib.library.flimage_swapbuffer (*function*), 97
- xformslib.library.flimage_tint (*function*), 93
- xformslib.library.flimage_to_pixmap (*function*), 94
- xformslib.library.flimage_to_ximage (*function*), 94

- tion*), 97
- xformslib.library.flimage_transform_pixels (*function*), 94
- xformslib.library.flimage_type_name (*function*), 91
- xformslib.library.flimage_warp (*function*), 93
- xformslib.library.flimage_windowlevel (*function*), 94
- xformslib.library.flimage_write_annotation (*function*), 97
- xformslib.library.flimage_write_via_filter (*function*), 90
- xformslib.library.flps_apply_gamma (*function*), 97
- xformslib.library.flps_arc (*function*), 97
- xformslib.library.flps_circ (*function*), 97
- xformslib.library.flps_color (*function*), 97
- xformslib.library.flps_draw_box (*function*), 97
- xformslib.library.flps_draw_checkbox (*function*), 97
- xformslib.library.flps_draw_frame (*function*), 97
- xformslib.library.flps_draw_symbol (*function*), 97
- xformslib.library.flps_draw_tbox (*function*), 97
- xformslib.library.flps_draw_text (*function*), 97
- xformslib.library.flps_draw_text_beside (*function*), 97
- xformslib.library.flps_emit_header (*function*), 98
- xformslib.library.flps_emit_prolog (*function*), 98
- xformslib.library.flps_get_gray255 (*function*), 98
- xformslib.library.flps_get_linestyle (*function*), 98
- xformslib.library.flps_get_linewidth (*function*), 98
- xformslib.library.flps_get_namedcolor (*function*), 98
- xformslib.library.flps_init (*function*), 60
- xformslib.library.flps_invalidate_color_cache (*function*), 98
- xformslib.library.flps_invalidate_font_cache (*function*), 98
- xformslib.library.flps_invalidate_linewidth_cache (*function*), 98
- xformslib.library.flps_invalidate_symbol_cache (*function*), 98
- xformslib.library.flps_line (*function*), 98
- xformslib.library.flps_lines (*function*), 98
- xformslib.library.flps_linestyle (*function*), 98
- xformslib.library.flps_linewidth (*function*), 98
- xformslib.library.flps_log (*function*), 98
- xformslib.library.flps_output (*function*), 98
- xformslib.library.flps_oval (*function*), 98
- xformslib.library.flps_pieslice (*function*), 98
- xformslib.library.flps_poly (*function*), 99
- xformslib.library.flps_rectangle (*function*), 99
- xformslib.library.flps_reset_cache (*function*), 99
- xformslib.library.flps_reset_linewidth (*function*), 99
- xformslib.library.flps_restore_flps (*function*), 99
- xformslib.library.flps_rgbcolor (*function*), 99
- xformslib.library.flps_roundrectangle (*function*), 99
- xformslib.library.flps_set_clipping (*function*), 99
- xformslib.library.flps_set_font (*function*), 99
- xformslib.library.flps_unset_clipping (*function*), 99
- xformslib.library.func_do_nothing_placeholder (*function*), 12
- xformslib.library.get_xforms_version (*function*), 12

- xformslib.library.keep_cfunc_refs (*function*), 12
- xformslib.library.keep_elem_refs (*function*), 12
- xformslib.library.load_so_libflimage (*function*), 12
- xformslib.library.load_so_libforms (*function*), 12
- xformslib.library.load_so_libformsgl (*function*), 12
- xformslib.library.load_so_libx11 (*function*), 13
- xformslib.library.make_double_and_pointer (*function*), 14
- xformslib.library.make_float_and_pointer (*function*), 14
- xformslib.library.make_int_and_pointer (*function*), 14
- xformslib.library.make_long_and_pointer (*function*), 14
- xformslib.library.make_uint_and_pointer (*function*), 14
- xformslib.library.make_ulong_and_pointer (*function*), 14
- xformslib.library.metakey_down (*function*), 39
- xformslib.library.shiftkey_down (*function*), 39
- xformslib.library.special_style (*function*), 14
- xformslib.library.verify_version_compatibility (*function*), 12
- xformslib.library.warn_deprecated_function (*function*), 12
- xformslib.library.XClearWindow (*function*), 99
- xformslib.library.XCreateBitmapFromData (*function*), 45
- xformslib.library.XFormsLoadError (*class*), 100–101
- xformslib.library.XFormsTypeError (*class*), 101–102
- xformslib.library.XFreePixmap (*function*), 46
- xformslib.library.XLowerWindow (*function*), 35
- xformslib.library.XRaiseWindow (*function*), 34
- xformslib.library.XSetBackground (*function*), 35
- xformslib.library.XSetForeground (*function*), 35
- xformslib.xfddata (*module*), 103–333
 - xformslib.xfddata.IO_FILE (*class*), 222–223
 - xformslib.xfddata.XDisplay (*class*), 267–268
 - xformslib.xfddata.XEvent (*class*), 330–333
 - xformslib.xfddata.XExtData (*class*), 136–137
 - xformslib.xfddata.XImage (*class*), 256–258
 - xformslib.xfddata.Depth (*class*), 248–249
 - xformslib.xfddata.FD_Any (*class*), 159–160
 - xformslib.xfddata.FD_CMDLOG (*class*), 208–210
 - xformslib.xfddata.FD_FSELECTOR (*class*), 210–211
 - xformslib.xfddata.FL_BUTTON_SPEC (*class*), 199–203
 - xformslib.xfddata.FL_Dirlist (*class*), 205–207
 - xformslib.xfddata.FL_EditKeymap (*class*), 211–213
 - xformslib.xfddata.FL_FONT (*class*), 169–170
 - xformslib.xfddata.FL_FORM_ (*class*), 140–147
 - xformslib.xfddata.FL_IOPT (*class*), 180–182
 - xformslib.xfddata.FL_OBJECT_ (*class*), 147–156
 - xformslib.xfddata.FL_pixmap_ (*class*), 156–159
 - xformslib.xfddata.FL_POPUP_ (*class*), 185–191

- xformslib.xfdata.FL_POPUP_ENTRY_ (*class*), 273–278
 - 191–196
- xformslib.xfdata.FL_POPUP_ITEM (*class*), 198–199
- xformslib.xfdata.FL_POPUP_RETURN_ (*class*), 196–198
- xformslib.xfdata.FL_PUP_ENTRY (*class*), 133–136
- xformslib.xfdata.FL_RESOURCE (*class*), 174–175, 179–180
- xformslib.xfdata.FL_RGB2PIXEL_ (*class*), 182–185
- xformslib.xfdata.FL_State (*class*), 165–169
- xformslib.xfdata.flimage_ (*class*), 223–238
- xformslib.xfdata.FLIMAGE_FORMAT_INFO (*class*), 241–242
- xformslib.xfdata.FLIMAGE_JPEG_OPTION (*class*), 240–241
- xformslib.xfdata.flimage_marker_ (*class*), 216–220
- xformslib.xfdata.flimage_setup_ (*class*), 220–221, 238–240
- xformslib.xfdata.flimage_text_ (*class*), 213–216
- xformslib.xfdata.FLIMAGESETUP (*class*), 221–222
- xformslib.xfdata.FLPS_CONTROL (*class*), 207–208
- xformslib.xfdata.funcs (*class*), 255–256
- xformslib.xfdata.GC (*class*), 164–165
- xformslib.xfdata.GLXContext (*class*), 204–205
- xformslib.xfdata.N19XClientMessageEvent4DO (*class*), 321–322
- xformslib.xfdata.Screen (*class*), 249–251
- xformslib.xfdata.ScreenFormat (*class*), 251–252
- xformslib.xfdata.Visual (*class*), 137–138
- xformslib.xfdata.XAnyEvent (*class*), 326–327
- xformslib.xfdata.XArc (*class*), 261–262
- xformslib.xfdata.XButtonEvent (*class*), 273–278
 - 161–162
- xformslib.xfdata.XCharStruct (*class*), 161–162
- xformslib.xfdata.XCirculateEvent (*class*), 311–313
- xformslib.xfdata.XCirculateRequestEvent (*class*), 313–314
- xformslib.xfdata.XClientMessageEvent (*class*), 322–323
- xformslib.xfdata.XColor (*class*), 259–260
- xformslib.xfdata.XColormapEvent (*class*), 320–321
- xformslib.xfdata.XConfigureEvent (*class*), 305–307
- xformslib.xfdata.XConfigureRequestEvent (*class*), 310–311
- xformslib.xfdata.XCreateWindowEvent (*class*), 297–299
- xformslib.xfdata.XCrossingEvent (*class*), 281–287
- xformslib.xfdata.XDestroyWindowEvent (*class*), 299–300
- xformslib.xfdata.XErrorEvent (*class*), 325–326
- xformslib.xfdata.XExposeEvent (*class*), 292–293
- xformslib.xfdata.XExtCodes (*class*), 244–245
- xformslib.xfdata.XFocusChangeEvent (*class*), 287–291
- xformslib.xfdata.XFontProp (*class*), 160–161
- xformslib.xfdata.XFontStruct (*class*), 162–164
- xformslib.xfdata.XGCValues (*class*), 246–248
- xformslib.xfdata.XGenericEvent (*class*), 327–329
- xformslib.xfdata.XGenericEventCookie (*class*), 329–330
- xformslib.xfdata.XGraphicsExposeEvent (*class*), 293–295
- xformslib.xfdata.XGravityEvent (*class*), 307–308

- xformslib.xfdata.XHostAddress (*class*),
252–253
- xformslib.xfdata.XKeyboardControl (*class*),
262–264
- xformslib.xfdata.XKeyboardState (*class*),
264–265
- xformslib.xfdata.XKeyEvent (*class*), 268–
273
- xformslib.xfdata.XKeymapEvent (*class*),
291–292
- xformslib.xfdata.XMapEvent (*class*), 301–
303
- xformslib.xfdata.XMappingEvent (*class*),
323–325
- xformslib.xfdata.XMapRequestEvent (*class*),
303–304
- xformslib.xfdata.XModifierKeymap (*class*),
266–267
- xformslib.xfdata.XMotionEvent (*class*),
278–281
- xformslib.xfdata.XNoExposeEvent (*class*),
295–296
- xformslib.xfdata.XPixmapFormatValues
(*class*), 245–246
- xformslib.xfdata.XPoint (*class*), 170–172
- xformslib.xfdata.XPropertyEvent (*class*),
314–315
- xformslib.xfdata.XRectangle (*class*), 172–
174
- xformslib.xfdata.XReparentEvent (*class*),
304–305
- xformslib.xfdata.XResizeRequestEvent (*class*),
308–310
- xformslib.xfdata.XrmOptionDescList (*class*),
177
- xformslib.xfdata.XrmOptionDescRec (*class*),
175–179
- xformslib.xfdata.XSegment (*class*), 260–
261
- xformslib.xfdata.XSelectionClearEvent (*class*),
315–317
- xformslib.xfdata.XSelectionEvent (*class*),
318–320
- xformslib.xfdata.XSelectionRequestEvent
(*class*), 317–318
- xformslib.xfdata.XServerInterpretedAddress
(*class*), 253–255
- xformslib.xfdata.XSetWindowAttributes
(*class*), 203–204
- xformslib.xfdata.XTimeCoord (*class*), 265–
266
- xformslib.xfdata.XUnmapEvent (*class*),
300–301
- xformslib.xfdata.XVisibilityEvent (*class*),
296–297
- xformslib.xfdata.XVisualInfo (*class*), 138–
140
- xformslib.xfdata.XWindowAttributes (*class*),
242–244
- xformslib.xfdata.XWindowChanges (*class*),
258–259