HW4

1) two(int n){

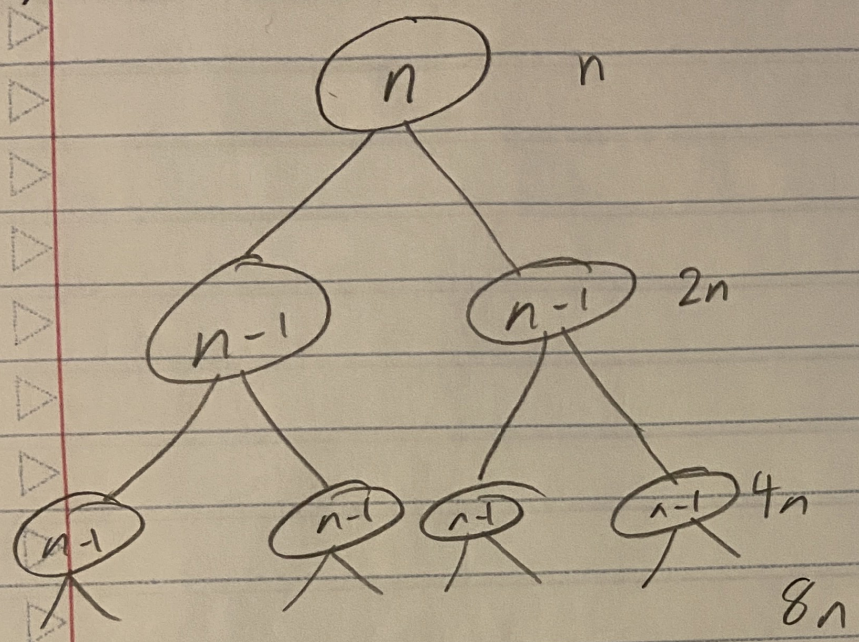

Each recursive call doubles each time, thus $\underline{O(2^n)}$

2) three(int n){

The first for loop is $i = i/2$ which is $\log_2 n$, and the for loop within that one is just n, thus $n \cdot \log n$

$\underline{O(n \cdot \log n)}$

3) four(int n)

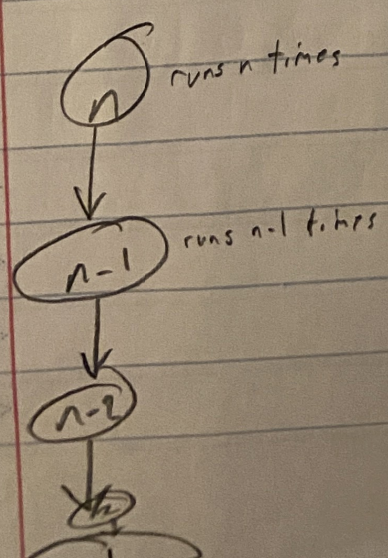

The recursive call runs n times, and the for loop runs $1+2+3+\ldots+n-1+n$ times, thus a loop n within a loop n, $n \cdot n =$

$\underline{O(n^2)}$