

# DevOps - Group 14 Assignments

Document Version: d9e58f8

by

Andre Santiago-Neyra  
Badri Narayanan Rajendran

Stevens.edu

October 2, 2025

© Badri Narayanan Rajendran, Andre Santiago-Neyra  
Stevens.edu  
ALL RIGHTS RESERVED

# DevOps - Group 14 Assignments

Andre Santiago-Neyra, Badri Narayanan Rajendran  
Stevens.edu

This document provides the group assignments completed by Group 14 for the DevOps course. The following table (Table 1) should be updated by authors whenever major changes are made to the document or new assignments are added. Add updates to the top of the table. Most recent changes to the document should be seen first and the oldest last.

Table 1: Document Update History

Date	Updates
10/27/2025	Andre, Badri: <ul style="list-style-type: none"><li>• Assignment 8: Setting up Prometheus And Grafana Dashboards and Node Exporter in DigitalOcean (Chapter 7).</li></ul>
10/20/2025	Andre, Badri: <ul style="list-style-type: none"><li>• Assignment 6: Overleaf CI with GitHub Actions (Chapter 6).</li></ul>
10/20/2025	Andre, Badri: <ul style="list-style-type: none"><li>• Assignment 5: Overleaf deployment and verification (Chapter 5).</li></ul>
10/05/2025	Andre: <ul style="list-style-type: none"><li>• Assignment 4: Bugzilla and Overleaf Dockers on Digital Ocean (Chapter 4).</li></ul>
10/03/2025	Andre, Badri: <ul style="list-style-type: none"><li>• Assignment 3: Docker on AWS created (Chapter 3).</li></ul>
09/24/2025	Andre: <ul style="list-style-type: none"><li>• Assignment 2: Project Proposal created (Chapter 2).</li></ul>
09/17/2025	Badri: <ul style="list-style-type: none"><li>• Assignment 1: Linux Commands created (Chapter 1).</li></ul>
09/12/2025	Andre, Badri, Nozanin: <ul style="list-style-type: none"><li>• Initial document creation with template structure.</li></ul>

## Passwords and Service Hints

This page contains password hints for various services used throughout the assignments. These hints are for reference only and should be updated as credentials change.

Service	Password Hint
Bugzilla Admin	Default password set during deployment (check deployment notes)
MariaDB Root	Password specified in docker-compose environment variables
MariaDB Bugzilla User	Password specified in docker-compose environment variables
Overleaf Admin	Created via command line during setup
DigitalOcean Droplet	SSH key authentication (root user)
AWS Account	SSO credentials via Stevens portal
GitHub	Personal access token for repository access
Docker Hub	Optional - for private image repositories

Table 2: Service Password Hints

# Contents

<b>Revision History</b>	<b>ii</b>
<b>Passwords and Service Hints</b>	<b>iii</b>
<b>1 Linux Commands</b>	<b>1</b>
1.1 Navigation & File Ops . . . . .	1
1.2 Viewing & Searching . . . . .	2
1.3 Text Processing . . . . .	3
1.4 Permissions & Ownership . . . . .	3
1.5 Links & Find . . . . .	4
1.6 Processes & Job Control . . . . .	4
1.7 Archiving & Compression . . . . .	5
1.8 Networking & System Info . . . . .	5
1.9 Package & Services (Debian/Ubuntu) . . . . .	6
1.10 Bash & Scripting . . . . .	6
<b>2 Project Proposal – Group 14</b>	<b>8</b>
2.1 Project Title . . . . .	8
2.2 Project Description . . . . .	8
2.3 Simple Tasks . . . . .	8
2.4 DevSecOps Tools . . . . .	8
<b>3 AWS Deployment</b>	<b>10</b>
3.1 Overview . . . . .	10
3.2 Set Environment Variables . . . . .	10
3.3 Create (or Reuse) an ECR Repository . . . . .	10
3.4 Authenticate Docker to ECR . . . . .	10
3.5 Build, Tag, and Push Your Local Image . . . . .	11
3.6 Verify the Image in ECR . . . . .	11
3.7 Quick Deploy with App Runner . . . . .	11
3.8 Deployment Results . . . . .	12
3.9 Class-Based JavaScript Implementation . . . . .	12
3.9.1 Updated HTML . . . . .	13
3.9.2 ColorChanger Class . . . . .	13
3.9.3 UML Class Diagram . . . . .	14
3.10 Latex Docker . . . . .	14
3.11 Project Structure . . . . .	14
3.12 Sample LaTeX Document . . . . .	15
3.13 Dockerfile . . . . .	15

3.14	Compilation Script . . . . .	15
3.15	Build the Docker Image . . . . .	16
3.16	Compile a LaTeX Document . . . . .	16
3.17	Alternative: Interactive Mode . . . . .	16
3.18	Results . . . . .	16
<b>4</b>	<b>DigitalOcean Setup</b>	<b>17</b>
4.1	Bugzilla Details . . . . .	17
4.1.1	Docker Images Used . . . . .	17
4.1.2	Setup Process . . . . .	17
4.1.3	Configuration Parameters . . . . .	18
4.1.4	Troubleshooting . . . . .	18
4.1.5	Access URL . . . . .	18
4.1.6	Verification . . . . .	19
4.2	Overleaf Details . . . . .	19
4.2.1	Docker Images Used . . . . .	19
4.2.2	Setup Process . . . . .	19
4.2.3	Configuration Parameters . . . . .	21
4.2.4	Troubleshooting . . . . .	22
4.2.5	Initialization . . . . .	22
4.2.6	Verification . . . . .	22
4.2.7	Access URL . . . . .	23
<b>5</b>	<b>Overleaf Deployment</b>	<b>24</b>
5.1	Introduction . . . . .	24
5.2	Domain Registration and DNS Configuration . . . . .	24
5.2.1	Domain Acquisition . . . . .	24
5.2.2	DigitalOcean Droplet Creation . . . . .	24
5.2.3	DNS Configuration in DigitalOcean . . . . .	24
5.2.4	DNS Propagation Verification . . . . .	25
5.3	SSL Certificate Configuration with Let's Encrypt . . . . .	25
5.3.1	SSL Certificate Overview . . . . .	25
5.3.2	Prerequisites for SSL Setup . . . . .	25
5.3.3	SSL Certificate Installation Process . . . . .	26
5.3.4	SSL Certificate Automatic Renewal . . . . .	28
5.3.5	Update Docker Compose for SSL . . . . .	28
5.4	Overleaf Instance Deployment . . . . .	28
5.4.1	Repository Setup . . . . .	28
5.4.2	Docker Compose Configuration . . . . .	28
5.4.3	Build and Deploy Containers . . . . .	30
5.4.4	LaTeX Package Installation . . . . .	31
5.4.5	Administrator Account Creation . . . . .	31
5.4.6	Access Overleaf Instance . . . . .	32
5.5	GitHub Repository Integration with DigitalOcean App Platform . . . . .	32
5.5.1	DigitalOcean App Platform Overview . . . . .	32
5.5.2	Create DigitalOcean App from GitHub Repository . . . . .	32
5.5.3	Verify Automatic Deployment . . . . .	33
5.6	Command-Line Compilation . . . . .	34

5.6.1	Compilation Overview . . . . .	34
5.6.2	Access DigitalOcean Droplet . . . . .	34
5.6.3	Direct Container Compilation . . . . .	34
5.6.4	Extract Compiled PDF . . . . .	35
5.6.5	Compilation from GitHub Repository . . . . .	35
5.6.6	Troubleshooting Compilation Issues . . . . .	35
5.7	Version Control Integration with Document Title . . . . .	36
5.7.1	Purpose and Implementation . . . . .	36
5.7.2	Automated Version Insertion Strategy . . . . .	36
5.7.3	Manual Version Addition . . . . .	38
5.7.4	Verification . . . . .	38
<b>6</b>	<b>Overleaf Compilation and Sync with GitHub</b>	<b>39</b>
6.1	System Overview . . . . .	39
6.2	Step 1: SSH into DigitalOcean Droplet . . . . .	39
6.3	Step 2: Create Backup Directory and Initialize Git . . . . .	39
6.4	Step 3: Create Backup Script . . . . .	40
6.5	Step 4: Setup Cron Job (Every 5 Seconds) . . . . .	45
6.6	Step 5: Create GitHub Actions Workflow . . . . .	45
6.7	Step 6: Initial Commit and Push . . . . .	47
6.8	Step 7: Test the Setup . . . . .	48
6.9	Step 8: Monitoring Commands . . . . .	48
6.10	Workflow Process . . . . .	48
6.11	Verification Checklist . . . . .	49
6.12	Troubleshooting Commands . . . . .	49
6.13	Project Structure . . . . .	49
<b>7</b>	<b>Prometheus And Grafana</b>	<b>51</b>
7.1	Technologies Used . . . . .	51
7.2	Executed Outputs . . . . .	51
<b>8</b>	<b>Load Balancer and Virtual Host Setup</b>	<b>54</b>
	<b>Glossary</b>	<b>59</b>

# List of Tables

1	Document Update History . . . . .	ii
2	Service Password Hints . . . . .	iii



# List of Figures

3.1	AWS Image 1 . . . . .	12
3.2	AWS Image 2 . . . . .	12
3.3	AWS Image 3 . . . . .	12
3.4	AWS Image 4 . . . . .	12
3.5	AWS Image 5 . . . . .	13
3.6	AWS Image 6 . . . . .	13
7.1	Prometheus Dashboard Image - 1 . . . . .	51
7.2	Prometheus Dashboard Image - 2 . . . . .	52
7.3	Prometheus Status Page . . . . .	52
7.4	Grafana 1860 Dashboard . . . . .	52
7.5	Node Exporter Home . . . . .	53

# Chapter 1

## Linux Commands

This chapter is about understanding and executing Linux commands and some exercises.

### 1.1 Navigation & File Ops

1. Show your present working directory path only.
  - Input: `pwd`
  - Output: `/Users/badrinarayanan/lx-test`
2. List all entries in the current directory, one per line, including dotfiles.
  - Input: `ls -A1`
  - Output:

```
archive
blob.bin
cs.txt
link-to-file1
old.txt
people.csv
src
sys.log
tmp
words.txt
```
3. Copy `src/file1.txt` to `tmp/` only if `tmp` exists; do it verbosely.
  - Input: `[ -d tmp ] && cp -v src/file1.txt tmp/`
  - Output: `src/file1.txt -> tmp/file1.txt`
4. Move `old.txt` into `archive/` and keep its original timestamp.
  - Input: `mv -v old.txt archive/`
  - Output: `old.txt -> archive/old.txt`
5. Create a new empty file `notes.md` only if it doesn't already exist.

- Input: `[ ! -e notes.md ] && touch notes.md`
  - Output: `notes.md` file created in `lx-test` folder.
6. Show disk usage (human-readable) for the `src` directory only (not total FS).
- Input: `du -sh src`
  - Output: `8.0K src`

## 1.2 Viewing & Searching

1. Print line numbers while displaying `sys.log`.
  - Input: `nl sys.log`
  - Output:

```
1 INFO boot ok
2 WARN disk low
3 ERROR fan fail
4 INFO shutdown
```
2. Show only the lines in `sys.log` that contain `ERROR` (case-sensitive).
  - Input: `grep 'ERROR' sys.log`
  - Output: `ERROR fan fail`
3. Count how many distinct words appear in `words.txt` (case-insensitive).
  - Input: `tr '[:upper:]' '[:lower:]' < words.txt | uniq | wc -w`
  - Output: `4`
4. From `words.txt`, show lines that start with `g` or `G`.
  - Input: `grep -E '^(g|G)' words.txt`
  - Output:

```
Gamma
gamma
```
5. Display the first 2 lines of `people.csv` without using an editor.
  - Input: `head -n 2 people.csv`
  - Output:

```
id,name,dept
1,Ada,EE
```
6. Show the last 3 lines of `sys.log` and keep following if the file grows.
  - Input: `tail -n 3 -f sys.log`
  - Output:

```
WARN disk low
ERROR fan fail
INFO shutdown
```

## 1.3 Text Processing

1. From `people.csv`, print only the name column (2nd), excluding the header.
  - Input: `awk -F',' 'NR>1 {print $2}' people.csv`
  - Output:  
Ada  
Linus  
Grace  
Dennis
2. Sort `words.txt` case-insensitively and remove duplicates.
  - Input: `sort -f words.txt | uniq`
  - Output:  
alpha  
beta  
gamma  
Gamma
3. Replace every three with 3 in all files under `src/` in-place, creating `.bak` backups.
  - Input: `find src -type f -exec sed -i.bak 's/three/3/g' {} +`
  - Output: one two 3 four in file1.txt  
two 3 four five in file2.txt  
file1.txt.bak and file2.txt.bak created with original data.
4. Print the number of lines, words, and bytes for every `*.txt` file in `src/`.
  - Input: `wc src/*.txt`
  - Output:  
1 4 15 src/file1.txt  
1 4 16 src/file2.txt  
2 8 31 total

## 1.4 Permissions & Ownership

1. Make `tmp/` readable, writable, and searchable only by the owner.
  - Input: `chmod 700 tmp`
  - Output: directory permission changed.
2. Give group execute permission to `src/lib` recursively without touching others/owner bits.
  - Input: `find src/lib -type d -exec chmod g+x {} +`
  - Output: folder permissions changed.

3. Show the numeric (octal) permissions of `src/file2.txt`.
  - Input: `stat -f '%Lp' src/file2.txt`
  - Output: 644
4. Make `notes.md` append-only for the owner via file attributes (if supported).
  - Input: `sudo chflags uchg notes.md`
  - Output: file permissions changed

## 1.5 Links & Find

1. Verify whether `link-to-file1` is a symlink and show its target path.
  - Input: `readlink -f link-to-file1`
  - Output: `/Users/badrinarayanan/lx-test/src/file1.txt`
2. Find all regular files under the current tree larger than 40 KiB.
  - Input: `find . -type f -size +40k`
  - Output: `./blob.bin`
3. Find files modified in the last 10 minutes under `tmp/` and print their sizes.
  - Input: `find tmp -type f -mmin -10 -exec ls -lh {} + | awk '{print $5, $9}'`
  - Output: `24B tmp/file1.txt`

## 1.6 Processes & Job Control

1. Show your processes in a tree view.
  - Input: `ps -ejh`
  - Output: printed all the processes in a tree manner.
2. Start `sleep 120` in the background and show its PID.
  - Input: `sleep 120 & echo $!`
  - Output:  
`12425`  
`12425`
3. Send a TERM signal to all sleep processes owned by you (don't use `kill -9`).
  - Input: `pkill -u $(whoami) -x sleep`
  - Output: `[1] + terminated sleep 120`
4. Show the top 5 processes by memory usage (one-shot, not interactive).
  - Input: `ps aux | sort -nrk 4 | head -n 6`
  - Output: top 5 processes shown.

## 1.7 Archiving & Compression

1. Create a gzipped tar archive `src.tgz` from `src/` with relative paths.

- Input: `tar czf src.tgz -C src .`
- Output: tar file created.

2. List the contents of `src.tgz` without extracting.

- Input: `tar tzf src.tgz`
- Output:

```
./
./file2.txt
./file1.txt
./file2.txt.bak
./lib/
./file1.txt.bak
```

3. Extract only `file2.txt` from `src.tgz` into `tmp/`.

- Input: `tar xzf src.tgz -C tmp file2.txt`
- Output: Extracted only `file2.txt` into `tmp`.

## 1.8 Networking & System Info

1. Show all listening TCP sockets with associated PIDs (no root assumptions).

- Input: `netstat -anp tcp | grep LISTEN`
- Output:

```
tcp6 0 0 *.51050 *.* LISTEN
tcp4 0 0 *.51050 *.* LISTEN
tcp6 0 0 *.5000 *.* LISTEN
tcp4 0 0 *.5000 *.* LISTEN
tcp6 0 0 *.7000 *.* LISTEN
tcp4 0 0 *.7000 *.* LISTEN
```

2. Print your default route (gateway) in a concise form.

- Input: `netstat -rn | grep '^default' | awk '{print $2}'`
- Output:

```
10.0.0.1
fe80::12e1:77ff:fe1c:3e48fe80::fe80::fe80::fe80::
```

3. Display kernel name, release, and machine architecture.

- Input: `uname -srm`
- Output: Darwin 24.6.0 arm64

4. Show the last 5 successful logins (or last sessions) on the system.

- Input: `last -f head -n 5`
- Output:

```
badrinarayanan ttys000 Tue Sep 16 20:56 still logged in
badrinarayanan console Tue Sep 16 11:55 still logged in
```

## 1.9 Package & Services (Debian/Ubuntu)

1. Show the installed version of package coreutils.

- Input: `brew list --versions coreutils`
- Output: lists the versions of coreutils installed.

2. Search available packages whose names contain ripgrep.

- Input: `brew search ripgrep`
- Output:

```
==> Formulae
ripgrep
ripgrep-all
==> Casks
ripme
```

3. Check whether service cron is active and print its status line only.

- Input: `ps aux | grep [c]ron`
- Output: no matches found: `[c]ron`

## 1.10 Bash & Scripting

1. Write a one-liner that loops over \*.txt in src/ and prints: <filename>:<number of lines>:<number of words>.

- Input: `for f in src/*.txt; do echo "$f:${wc -l < "$f"}:${wc -w < "$f}"; done`
- Output:

```
src/file1.txt: 1: 4
src/file2.txt: 1: 4
```

2. Write a command that exports CSV rows where dept == "CS" to cs.txt (exclude header).

- Input: `awk -F',' 'NR>1 && $3=="CS"' people.csv > cs.txt`
- Output:

2, Linus, CS

4, Dennis, CS

3. Create a variable X with value 42, print it, then remove it from the environment.

- Input: `export X=42; echo $X; unset X`
- Output: 42



# Chapter 2

## Project Proposal – Group 14

### 2.1 Project Title

Automated Blog Deployment Pipeline

### 2.2 Project Description

This project will develop a simple, containerized blog application and automate its build, test, and deployment processes using two [CI/CD](#) tools: Jenkins and Github Actions. The application will be hosted on AWS EC2 using Docker. An operational dashboard, built with monitoring tools, like Grafana, Datadog or Dynatrace, for effectively monitoring of application health and logs.

### 2.3 Simple Tasks

- Develop the blog app using Node.js or Python
- Containerize the app using Docker
- Integrate source control with GitHub
- Setup CI/CD with Jenkins and Github Actions for code build, test, and deploy
- Host on AWS using Docker and ECS
- Design a dashboard for build and deployment status

### 2.4 DevSecOps Tools

- Programming Language: Python or Node.js
- Back-End Framework: Flask or Express
- Database: PostgreSQL or MongoDB
- Source Control: GitHub

- CI/CD: Jenkins, Github Actions
- Deployment: Docker, AWS EC2, ECS
- Monitoring: Grafana or Datadog or Dynatrace or similar monitoring tool

# Chapter 3

## AWS Deployment

### 3.1 Overview

This chapter documents the deployment of the two-button color website to AWS using Docker and Amazon Elastic Container Registry (ECR). The deployment follows the steps outlined in Chapter 3 of the AWS guide.

### 3.2 Set Environment Variables

Edit these to match your setup (region, repo name, etc.):

```
# >>> EDIT THESE <
export AWS_REGION=us-east-1
export ECR_REPO=myapp
export IMAGE_TAG=v1
export CONTAINER_PORT=3000 # Port your app listens on

# Discover your AWS Account ID from your SSO session:
export AWS_ACCOUNT_ID="$(aws sts get-caller-identity --query Account --output text --)"
```

### 3.3 Create (or Reuse) an ECR Repository

Idempotently create the repo in your chosen region:

```
aws ecr describe-repositories \
  --repository-names "$ECR_REPO" \
  --region "$AWS_REGION" --profile default >/dev/null 2>&1 || \
aws ecr create-repository \
  --repository-name "$ECR_REPO" \
  --image-scanning-configuration scanOnPush=true \
  --region "$AWS_REGION" --profile default
```

### 3.4 Authenticate Docker to ECR

Use the AWS CLI to obtain a short-lived registry token and log in Docker:

```
aws ecr get-login-password --region "$AWS_REGION" --profile default \
| docker login --username AWS --password-stdin \
"$AWS_ACCOUNT_ID.dkr.ecr.$AWS_REGION.amazonaws.com"
```

## 3.5 Build, Tag, and Push Your Local Image

Run these from the directory containing your Dockerfile:

```
# Build your local image
docker build --platform linux/amd64 -t "$ECR_REPO:$IMAGE_TAG" .

# Tag it for ECR
docker tag "$ECR_REPO:$IMAGE_TAG" \
"$AWS_ACCOUNT_ID.dkr.ecr.$AWS_REGION.amazonaws.com/$ECR_REPO:$IMAGE_TAG"

# Push to ECR
docker push "$AWS_ACCOUNT_ID.dkr.ecr.$AWS_REGION.amazonaws.com/$ECR_REPO:$IMAGE_TAG"
```

## 3.6 Verify the Image in ECR

```
aws ecr describe-images \
--repository-name "$ECR_REPO" \
--region "$AWS_REGION" --profile default \
--query 'imageDetails[].imageTags'
```

## 3.7 Quick Deploy with App Runner

Spin up a managed HTTPS service directly from your ECR image:

```
export APP_NAME=my-apprunner-app
```

```
aws apprunner create-service \
--service-name "$APP_NAME" \
--region "$AWS_REGION" --profile default \
--source-configuration "{
  \"ImageRepository\": {
    \"ImageIdentifier\": \"$AWS_ACCOUNT_ID.dkr.ecr.$AWS_REGION.amazonaws.com/$ECR_R
    \"ImageRepositoryType\": \"ECR\",
    \"ImageConfiguration\": {\"Port\": \"$CONTAINER_PORT\"}
  },
  \"AutoDeploymentsEnabled\": true
}" \
--instance-configuration "{\"Cpu\": \"1 vCPU\", \"Memory\": \"2 GB\"}"
```

Set the following variables for your own configuration:

```
AWS_REGION=us-east-2
```

```
PROFILE=AdministratorAccess-539272219501
```

```
SERVICE_ARN=arn:aws:apprunner:us-east-2:539272219501:service/my-apprunner-app/04c50b9
```

Test that the service status changes to running:

```
while true; do
  STATUS=$(aws apprunner describe-service \
    --service-arn "$SERVICE_ARN" \
    --region "$AWS_REGION" --profile "$PROFILE" \
    --query 'Service.Status' --output text)
  echo "Service status: $STATUS"
  case "$STATUS" in RUNNING|CREATE_FAILED|OPERATION_FAILED) break ;; esac
  sleep 4
done
```

When status changes to running, get the service URL:

```
aws apprunner list-services \
  --region "$AWS_REGION" --profile default \
  --query "ServiceSummaryList[?ServiceName=='$APP_NAME'].ServiceUrl" --output text
```

## 3.8 Deployment Results

The application was successfully deployed to AWS App Runner. Screenshots of the deployed website are shown below.

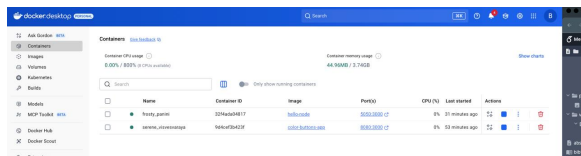


Figure 3.1: AWS Image 1




Figure 3.2: AWS Image 2



Figure 3.3: AWS Image 3



Figure 3.4: AWS Image 4

## 3.9 Class-Based JavaScript Implementation

The website was updated to use a class-based approach for better code organization.

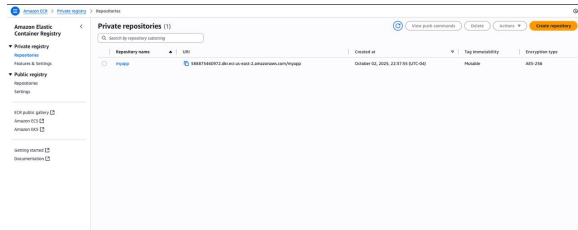


Figure 3.5: AWS Image 5

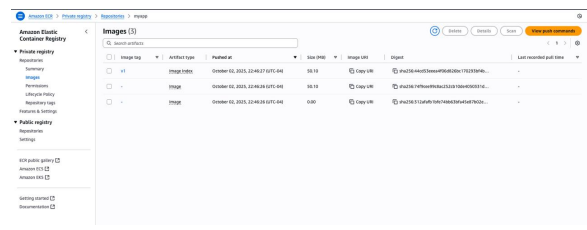


Figure 3.6: AWS Image 6

### 3.9.1 Updated HTML

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Color Buttons App</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      text-align: center;
      margin-top: 50px;
      transition: background-color 0.3s ease;
    }
    button {
      padding: 12px 24px;
      font-size: 18px;
      margin: 10px;
      cursor: pointer;
    }
  </style>
</head>
<body>
  <h1>Click a Button to Change Background</h1>
  <button id="blueBtn">Blue</button>
  <button id="redBtn">Red</button>
  <script src="ColorChanger.js"></script>
  <script>
    const colorChanger = new ColorChanger();
    colorChanger.initialize();
  </script>
</body>
</html>
```

### 3.9.2 ColorChanger Class

```
class ColorChanger {
  constructor() {
    this.body = document.body;
```

```

}

changeColor(color) {
  this.body.style.backgroundColor = color;
}

attachEventListeners() {
  document.getElementById("blueBtn").addEventListener("click", () => {
    this.changeColor("blue");
  });

  document.getElementById("redBtn").addEventListener("click", () => {
    this.changeColor("red");
  });
}

initialize() {
  this.attachEventListeners();
}
}

```

### 3.9.3 UML Class Diagram

```

+-----+
|   ColorChanger   |
+-----+
| - body: Element  |
+-----+
| + constructor()  |
| + changeColor(   |
|     color: string)|
| + attachEvent    |
|     Listeners()  |
| + initialize()   |
+-----+

```

## 3.10 Latex Docker

This chapter demonstrates creating a Docker container to compile  $\text{\LaTeX}$  documents using TeX Live, replicating the functionality of Overleaf locally.

## 3.11 Project Structure

```

latex-docker/
  Dockerfile
  sample.tex
  compile.sh

```

## 3.12 Sample LaTeX Document

Create a simple  $\text{\LaTeX}$  document to test compilation:

```
% sample.tex
\documentclass{article}
\usepackage[utf8]{inputenc}

\title{Docker LaTeX Test}
\author{Group 14}
\date{\today}

\begin{document}
\maketitle

\section{Introduction}
This document was compiled using Docker and TeX Live.

\section{Conclusion}
LaTeX compilation in Docker works successfully.

\end{document}
```

## 3.13 Dockerfile

Create the Dockerfile for the TeX Live environment:

```
FROM texlive/texlive:latest

WORKDIR /workspace

# Copy compilation script
COPY compile.sh /usr/local/bin/compile.sh
RUN chmod +x /usr/local/bin/compile.sh

# Set default command
CMD ["/bin/bash"]
```

## 3.14 Compilation Script

Create a helper script to compile  $\text{\LaTeX}$  files:

```
#!/bin/bash
# compile.sh

if [ -z "$1" ]; then
    echo "Usage: compile.sh <filename.tex>"
    exit 1
```



```
fi
```

```
pdflatex -interaction=nonstopmode "$1"
echo "Compilation complete: ${1%.tex}.pdf"
```

## 3.15 Build the Docker Image

Build the Docker image with TeX Live:

```
docker build -t latex-compiler .
```

## 3.16 Compile a LaTeX Document

Run the container to compile a  $\text{\LaTeX}$  file:

```
docker run --rm -v $(pwd):/workspace latex-compiler \
  compile.sh sample.tex
```

## 3.17 Alternative: Interactive Mode

For interactive compilation and debugging:

```
docker run -it --rm -v $(pwd):/workspace latex-compiler
# Inside container:
pdflatex sample.tex
```

## 3.18 Results

The Docker container successfully compiles  $\text{\LaTeX}$  documents, producing PDF output files. This provides a portable, consistent  $\text{\LaTeX}$  environment without requiring local TeX Live installation.

# Chapter 4

## DigitalOcean Setup

### 4.1 Bugzilla Details

For this assignment, I deployed Bugzilla on a DigitalOcean Droplet using Docker containers. The setup required two separate containers: one for the MariaDB database and one for the Bugzilla application itself.

#### 4.1.1 Docker Images Used

- **Bugzilla:** nasqueron/bugzilla
- **Database:** mariadb:10.6

#### 4.1.2 Setup Process

##### Step 1: Create DigitalOcean Droplet

I created a new Droplet on DigitalOcean with the following specifications:

- Operating System: Ubuntu 22.04 LTS
- Plan: Basic (\$4-\$6/month)
- SSH access enabled

##### Step 2: Install Docker

After connecting to the Droplet via SSH, I installed Docker and Docker Compose:

```
apt update && apt install -y docker.io docker-compose
systemctl enable docker && systemctl start docker
```

##### Step 3: Create Docker Network

I created a dedicated Docker network to allow the containers to communicate:

```
docker network create bugzilla-net
```

### Step 4: Deploy MariaDB Container

I started the MariaDB database container with the following configuration:

```
docker run -d \
  --name mariadb-bugzilla \
  --network bugzilla-net \
  -e MYSQL_ROOT_PASSWORD=rootpass \
  -e MYSQL_USER=bugzilla \
  -e MYSQL_PASSWORD=bugpass \
  -e MYSQL_DATABASE=bugs \
  mariadb:10.6
```

### Step 5: Deploy Bugzilla Container

After the database was running, I deployed the Bugzilla container:

```
docker run -d \
  --name bugzilla \
  --network bugzilla-net \
  -p 80:80 \
  -e DB_HOST=mariadb-bugzilla \
  -e DB_DATABASE=bugs \
  -e DB_USER=bugzilla \
  -e DB_PASSWORD=bugpass \
  -e BUGZILLA_URL=http://159.89.43.12 \
  nasqueron/bugzilla
```

#### 4.1.3 Configuration Parameters

- **Port Mapping:** 80:80 (host:container)
- **Network:** Custom bridge network (bugzilla-net)
- **Database Connection:** MariaDB via Docker network
- **Environment Variables:** Database credentials and Bugzilla URL configured via `-e` flags

#### 4.1.4 Troubleshooting

During setup, I encountered an issue where the Bugzilla container kept exiting. The logs revealed missing environment variables (`DB_PASSWORD` and `DB_DATABASE`). This was resolved by ensuring all required environment variables were properly specified in the `docker run` command.

#### 4.1.5 Access URL

The Bugzilla application is accessible at:

<http://159.89.43.12>

### 4.1.6 Verification

To verify both containers were running correctly, I used:

```
docker ps
```

Both `mariadb-bugzilla` and `bugzilla` containers showed status “Up” after successful deployment.

## 4.2 Overleaf Details

I deployed an Overleaf (ShareLaTeX) instance on a dedicated DigitalOcean Droplet using Docker Compose. Overleaf is a collaborative online LaTeX editor that allows real-time document editing and requires MongoDB and Redis as dependencies.

### 4.2.1 Docker Images Used

- **Overleaf:** `sharelatex/sharelatex:latest`
- **Database:** `mongo:6.0`
- **Cache:** `redis:6.2`

### 4.2.2 Setup Process

#### Step 1: Create Dedicated DigitalOcean Droplet

I created a new dedicated Droplet on DigitalOcean with the following specifications:

- Operating System: Ubuntu 22.04 LTS
- RAM: At least 2GB (recommended for Overleaf)
- Plan: Basic (\$12/month)
- SSH access enabled

#### Step 2: Install Docker and Docker Compose

After connecting to the Droplet via SSH, I installed Docker and Docker Compose:

```
apt update && apt install -y docker.io docker-compose
systemctl enable docker && systemctl start docker
```

#### Step 3: Create Docker Compose Configuration

I created a directory for Overleaf and set up a Docker Compose file:

```
mkdir ~/overleaf
cd ~/overleaf
nano docker-compose.yml
```

**Step 4: Docker Compose Configuration**

The `docker-compose.yml` file contains three services: MongoDB (with replica set), Redis, and Overleaf (ShareLaTeX):

```
version: '3.8'
services:
  mongo:
    image: mongo:6.0
    container_name: mongo
    command: ["--replSet", "overleaf"]
    restart: always
    volumes:
      - /root/mongo_data:/data/db
    expose:
      - 27017
    healthcheck:
      test: ["CMD", "mongosh", "--eval",
             "db.adminCommand('ping')"]
      interval: 10s
      timeout: 5s
      retries: 10
    networks:
      - overleaf-net

  redis:
    image: redis:6.2
    container_name: redis
    restart: always
    volumes:
      - /root/redis_data:/data
    expose:
      - 6379
    networks:
      - overleaf-net

  sharelatex:
    image: sharelatex/sharelatex
    container_name: sharelatex
    restart: always
    depends_on:
      mongo:
        condition: service_healthy
      redis:
        condition: service_started
    ports:
      - "80:80"
    volumes:
      - /root/sharelatex_data:/var/lib/overleaf
```

```
environment:
  OVERLEAF_APP_NAME: Overleaf Community Edition
  OVERLEAF_MONGO_URL: mongodb://mongo:27017/sharelatex?replicaSet=overleaf
  OVERLEAF_REDIS_HOST: redis
  ENABLED_LINKED_FILE_TYPES: project_file,project_output_file
  ENABLE_CONVERSIONS: 'true'
  EMAIL_CONFIRMATION_DISABLED: 'true'
  OVERLEAF_SITE_URL: http://<droplet_ip>
  OVERLEAF_NAV_TITLE: Overleaf CE
networks:
  - overleaf-net
```

```
networks:
  overleaf-net:
```

### Step 5: Initialize MongoDB Replica Set

After starting the containers, I initialized the MongoDB replica set manually:

```
docker exec -it mongo mongosh --eval "rs.initiate({
  _id: 'overleaf',
  members: [{ _id: 0, host: 'mongo:27017' }]
})"
```

### Step 6: Deploy Overleaf

I started all three containers using Docker Compose:

```
docker-compose up -d
```

### Step 7: Configure Firewall

I ensured that port 80 was open in the firewall to allow external access:

```
ufw allow 80/tcp
ufw allow OpenSSH
ufw enable
```

## 4.2.3 Configuration Parameters

- **Port Mapping:** 80:80 (host:container)
- **Container Names:** sharelatex, mongo, redis
- **Persistent Storage:** Three bind mounts for Overleaf data (/root/sharelatex\_data), MongoDB data (/root/mongo\_data), and Redis data (/root/redis\_data)
- **Network:** Custom bridge network (overleaf-net) for inter-container communication
- **Dependencies:** MongoDB 6.0 configured as a replica set for transaction support, and Redis 6.2 for session management

- **MongoDB Replica Set:** Required by Overleaf version 5.0+ for database transaction support

## 4.2.4 Troubleshooting

During setup, I encountered several critical issues that were resolved:

### MongoDB Version Requirement

The initial deployment attempted to use MongoDB 5.0, but Overleaf required MongoDB 6.0. This was resolved by updating the Docker image to `mongo:6.0`.

### MongoDB Replica Set Requirement

Overleaf version 5.0+ requires MongoDB to run in replica set mode to support database transactions. The error message “Transaction numbers are only allowed on a replica set member or mongos” indicated this requirement. This was resolved by:

1. Configuring MongoDB with the `--replSet overleaf` command
2. Updating the connection string to include `?replicaSet=overleaf`
3. Manually initializing the replica set using `mongosh`

### Environment Variable Rebranding

Overleaf 5.0+ deprecated `SHARELATEX_` prefixed environment variables in favor of `OVERLEAF_` prefixed variables. All environment variables were updated to use the new naming convention.

### Volume Path Updates

The path `/var/lib/sharelatex` was deprecated in favor of `/var/lib/overleaf` for the main application data directory.

## 4.2.5 Initialization

The Overleaf container takes approximately 2–3 minutes to fully initialize on first startup. The `depends_on` configuration with health checks ensures that MongoDB is ready before Overleaf attempts to connect. During this time, the internal services connect to MongoDB and Redis, and the web application becomes available.

## 4.2.6 Verification

To verify all containers were running correctly, I used:

```
docker-compose ps
```

All three containers (`sharelatex`, `mongo`, and `redis`) showed status “Up” after successful deployment. MongoDB also showed “healthy” status after passing its health check.

### 4.2.7 Access URL

The Overleaf application is accessible at:

<http://142.93.207.133>

Note: Overleaf is deployed on a dedicated droplet on port 80, eliminating the need to specify a port number in the URL. This provides a cleaner access experience compared to port-based deployments.



# Chapter 5

## Overleaf Deployment

### 5.1 Introduction

This chapter documents the deployment and configuration of Overleaf Community Edition (CE) on DigitalOcean. The deployment includes custom domain integration, SSL certificate setup with Let's Encrypt, GitHub synchronization, and command-line compilation capabilities for LaTeX projects.

### 5.2 Domain Registration and DNS Configuration

#### 5.2.1 Domain Acquisition

A domain name was acquired through Name.com for the Overleaf deployment:

**Domain:** devops-group14.app

This domain was obtained with a one-year free registration through the GitHub Student Developer Pack.

#### 5.2.2 DigitalOcean Droplet Creation

A DigitalOcean Droplet was created with the following specifications:

**Droplet Details:**

- **IPv4 Address:** 142.93.207.133
- **Operating System:** Ubuntu 22.04 LTS
- **Region:** Configured based on proximity requirements

#### 5.2.3 DNS Configuration in DigitalOcean

After creating the Droplet, configure DNS records in the DigitalOcean control panel:

**Step 1: Add Domain to DigitalOcean**

1. Navigate to Networking → Domains in the DigitalOcean dashboard
2. Enter devops-group14.app and click “Add Domain”
3. Select your Droplet from the list

### Step 2: Configure DNS Records

The following DNS records are automatically created:

- **A Record:**

- **Hostname:** @
- **Will Direct To:** 142.93.207.133
- **TTL:** 3600

### Step 3: Update Name.com Nameservers

In Name.com DNS settings, update nameservers to point to DigitalOcean:

- ns1.digitalocean.com
- ns2.digitalocean.com
- ns3.digitalocean.com

## 5.2.4 DNS Propagation Verification

Verify DNS propagation using the following commands from your local machine:

```
# Check A record
```

```
dig devops-group14.app
```

```
# Verify IP address resolution
```

```
ping devops-group14.app
```

```
# Check nameservers
```

```
dig NS devops-group14.app
```

Expected output should show the IP address 142.93.207.133. DNS propagation typically takes 15 minutes to 48 hours.

## 5.3 SSL Certificate Configuration with Let's Encrypt

### 5.3.1 SSL Certificate Overview

SSL certificates encrypt data transmitted between the client and server, ensuring secure communication. Let's Encrypt provides free SSL certificates that automatically renew every 90 days.

### 5.3.2 Prerequisites for SSL Setup

Ensure the following requirements are met on your DigitalOcean Droplet (IP: 142.93.207.133):

1. Domain name properly configured and pointing to 142.93.207.133
2. Ports 80 (HTTP) and 443 (HTTPS) are open in the firewall
3. SSH access to the Droplet

### 5.3.3 SSL Certificate Installation Process

#### Install Certbot and Nginx

SSH into your DigitalOcean Droplet and install the required packages:

```
# Update package list
sudo apt update

# Install Nginx
sudo apt install nginx -y

# Install Certbot and Nginx plugin
sudo apt install certbot python3-certbot-nginx -y
```

#### Configure Nginx as Reverse Proxy

Create an Nginx configuration file for Overleaf:

```
sudo nano /etc/nginx/sites-available/overleaf
```

Add the following configuration:

```
server {
    listen 80;
    server_name devops-group14.app;

    location / {
        proxy_pass http://localhost:80;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;

        # WebSocket support
        proxy_http_version 1.1;
        proxy_set_header Upgrade $http_upgrade;
        proxy_set_header Connection "upgrade";

        # Timeout settings
        proxy_read_timeout 300s;
        proxy_connect_timeout 75s;
    }
}
```

Enable the configuration:

```
# Create symbolic link
sudo ln -s /etc/nginx/sites-available/overleaf /etc/nginx/sites-enabled/

# Remove default configuration
sudo rm /etc/nginx/sites-enabled/default
```

```
# Test Nginx configuration
```

```
sudo nginx -t
```

```
# Restart Nginx
```

```
sudo systemctl restart nginx
```

## Obtain SSL Certificate

Request an SSL certificate from Let's Encrypt:

```
sudo certbot --nginx -d devops-group14.app
```

During the certificate request:

1. Enter an email address for urgent renewal notices
2. Agree to the Terms of Service
3. Choose whether to redirect HTTP to HTTPS (Select option 2: Redirect)

Certbot automatically modifies the Nginx configuration to include SSL settings.

## Verify SSL Configuration

After installation, the Nginx configuration is automatically updated to:

```
server {
    listen 443 ssl;
    server_name devops-group14.app;

    ssl_certificate /etc/letsencrypt/live/devops-group14.app/fullchain.pem;
    ssl_certificate_key /etc/letsencrypt/live/devops-group14.app/privkey.pem;
    include /etc/letsencrypt/options-ssl-nginx.conf;
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;

    location / {
        proxy_pass http://localhost:80;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;

        # WebSocket support
        proxy_http_version 1.1;
        proxy_set_header Upgrade $http_upgrade;
        proxy_set_header Connection "upgrade";

        # Timeout settings
        proxy_read_timeout 300s;
        proxy_connect_timeout 75s;
    }
}
```

```
server {
    listen 80;
    server_name devops-group14.app;
    return 301 https://$server_name$request_uri;
}
```

### 5.3.4 SSL Certificate Automatic Renewal

#### Test Renewal Process

Verify that automatic renewal is configured correctly:

```
sudo certbot renew --dry-run
```

Let's Encrypt certificates are valid for 90 days. Certbot automatically creates a systemd timer that checks and renews certificates when they are within 30 days of expiration.

### 5.3.5 Update Docker Compose for SSL

Since Nginx now handles SSL termination, the docker-compose.yml uses standard HTTP internally. The Overleaf container listens on port 80, and Nginx proxies HTTPS traffic to it.

## 5.4 Overleaf Instance Deployment

### 5.4.1 Repository Setup

#### Fork and Clone Repository

SSH into your DigitalOcean Droplet and clone the forked Overleaf repository:

```
git clone https://github.com/Badri-Narayanan/overleaf-group14.git
cd overleaf-group14
```

#### Navigate to Configuration Directory

```
cd overleaf
```

### 5.4.2 Docker Compose Configuration

#### Create docker-compose.yml

Create the docker-compose.yml file with the following configuration:

```
nano docker-compose.yml
```

Add the following content:

```

version: '3.8'
services:
  mongo:
    image: mongo:6.0
    container_name: mongo
    command: ["--replSet", "overleaf"]
    restart: always
    volumes:
      - /root/mongo_data:/data/db
    expose:
      - 27017
    healthcheck:
      test: ["CMD", "mongosh", "--eval", "db.adminCommand('ping')"]
      interval: 10s
      timeout: 5s
      retries: 10
    networks:
      - overleaf-net
  redis:
    image: redis:6.2
    container_name: redis
    restart: always
    volumes:
      - /root/redis_data:/data
    expose:
      - 6379
    networks:
      - overleaf-net
  sharelatex:
    image: sharelatex/sharelatex
    container_name: sharelatex
    restart: always
    depends_on:
      mongo:
        condition: service_healthy
      redis:
        condition: service_started
    ports:
      - "80:80"
    volumes:
      - /root/sharelatex_data:/var/lib/overleaf
    environment:
      OVERLEAF_APP_NAME: Overleaf Community Edition
      OVERLEAF_MONGO_URL: mongodb://mongo:27017/sharelatex?replicaSet=overleaf
      OVERLEAF_REDIS_HOST: redis
      ENABLED_LINKED_FILE_TYPES: project_file,project_output_file
      ENABLE_CONVERSIONS: 'true'
      EMAIL_CONFIRMATION_DISABLED: 'true'
      OVERLEAF_SITE_URL: http://devops-group14.app
      OVERLEAF_NAV_TITLE: Overleaf CE
    networks:

```

```

- overleaf-net
networks:
  overleaf-net:

```

### Key Configuration Points:

- MongoDB runs with replica set support
- Data volumes are stored in `/root/` directory
- Containers communicate through a dedicated network
- Overleaf is accessible on port 80

## 5.4.3 Build and Deploy Containers

### Initialize MongoDB Replica Set

Before starting the containers, ensure MongoDB replica set is properly initialized:

```

# Start containers
docker compose up -d

# Wait for MongoDB to be healthy (check with docker ps)
# Then initialize the replica set
docker exec mongo mongosh --eval "rs.initiate({_id: 'overleaf', members:
↪  [{_id: 0, host: 'mongo:27017'}]})"

```

### Build Docker Images

Execute the following command from the repository root:

```
docker compose up -d --build
```

This command:

- Builds Docker images for ShareLaTeX, MongoDB, and Redis
- Creates and starts containers in detached mode
- Establishes networking between containers

### Verify Container Status

Check that all containers are running:

```
docker ps
```

Expected output shows three running containers:

- `sharelatex`
- `mongo`
- `redis`

## 5.4.4 LaTeX Package Installation

### Install Essential LaTeX Packages

Install comprehensive LaTeX packages inside the ShareLaTeX container:

```
docker exec -it sharelatex bash -lc "apt-get update && apt-get install -y
↪ --no-install-recommends latexmk texlive-latex-recommended
↪ texlive-latex-extra texlive-fonts-recommended texlive-science
↪ texlive-bibtex-extra texlive-publishers && apt-get clean"
```

This installation includes:

- `latexmk`: Build automation tool
- `texlive-latex-recommended`: Core LaTeX packages
- `texlive-latex-extra`: Extended LaTeX packages
- `texlive-fonts-recommended`: Standard font packages
- `texlive-science`: Scientific and mathematical packages
- `texlive-bibtex-extra`: Bibliography management
- `texlive-publishers`: Journal and publisher templates

## 5.4.5 Administrator Account Creation

### Create Admin Account

Create an administrator account for Overleaf:

```
docker exec sharelatex /bin/bash -c "cd /var/www/sharelatex; grunt
↪ user:create-admin --email=group14@stevens.com"
```

### Set Administrator Password

The command outputs a password reset link. Example:

Generated password reset token for group14@stevens.com:  
<http://localhost/user/password/set?passwordResetToken=abc123def456...>

Access the link by replacing `localhost` with your domain:

<http://devops-group14.app/user/password/set?passwordResetToken=abc123def456...>

Set the administrator password as: `somePassword123#`

### Administrator Credentials:

- **Email:** `group14@stevens.com`
- **Password:** `somePassword123#`



### 5.4.6 Access Overleaf Instance

Navigate to <https://devops-group14.app> in a web browser and log in using the administrator credentials created above.

## 5.5 GitHub Repository Integration with DigitalOcean App Platform

### 5.5.1 DigitalOcean App Platform Overview

DigitalOcean App Platform enables automated deployment directly from GitHub repositories. When integrated, any push to the main branch automatically triggers a new deployment, ensuring the application stays synchronized with the latest code changes.

### 5.5.2 Create DigitalOcean App from GitHub Repository

#### Connect GitHub Repository

1. Navigate to the DigitalOcean dashboard
2. Click on “Apps” in the left sidebar
3. Click “Create App”
4. Select “GitHub” as the source
5. Authorize DigitalOcean to access your GitHub account
6. Select the repository: `Badri-Narayanan/overleaf-group14`
7. Choose the branch: `main`

#### Configure Auto-Deploy Settings

Enable automatic deployment on code changes:

1. In the app configuration, locate “Source” settings
2. Check the option “Autodeploy: code changes”
3. This ensures that any push to the `main` branch triggers automatic redeployment

#### Configuration Details:

- **Repository:** <https://github.com/Badri-Narayanan/overleaf-group14>
- **Branch:** `main`
- **Autodeploy:** Enabled
- **Deploy on Push:** Yes

## Configure App Resources

Set up the application resources:

1. **Resource Type:** Docker Compose
2. **Source Directory:** /overleaf (where docker-compose.yml is located)
3. **Environment Variables:** Already defined in docker-compose.yml
4. **HTTP Port:** 80

## Deploy the App

1. Review the app configuration
2. Click “Create Resources”
3. Wait for the initial deployment to complete
4. DigitalOcean will build and deploy the containers

### 5.5.3 Verify Automatic Deployment

#### Test Auto-Deploy Functionality

To verify automatic deployment works:

```
# Clone the repository locally
git clone https://github.com/Badri-Narayanan/overleaf-group14.git
cd overleaf-group14

# Make a test change
echo "# Test deployment" >> README.md

# Commit and push to main branch
git add README.md
git commit -m "Test automatic deployment"
git push origin main
```

#### Monitor Deployment

1. Navigate to the DigitalOcean App Platform dashboard
2. Select your app
3. View the “Activity” tab to see the automatic deployment triggered
4. Wait for deployment to complete (typically 5-10 minutes)

## 5.6 Command-Line Compilation

### 5.6.1 Compilation Overview

Command-line compilation enables automated builds and integration with CI/CD pipelines. All compilation commands are executed via SSH on the DigitalOcean Droplet (142.93.207.133).

### 5.6.2 Access DigitalOcean Droplet

Connect to the Droplet via SSH:

```
ssh root@142.93.207.133
```

### 5.6.3 Direct Container Compilation

Access the ShareLaTeX Container

```
docker exec -it sharelatex bash
```

Navigate to Project Directory

Projects are stored in the compiles directory:

```
cd /var/lib/overleaf/data/compiles
ls -la
```

Navigate to your specific project:

```
cd /var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc
ls -la
```

Locate Main LaTeX File

Identify the main .tex file (commonly main.tex):

```
ls -la *.tex
```

Compile Using latexmk

Use latexmk for automated compilation with dependency resolution:

```
latexmk -pdf -interaction=nonstopmode main.tex
```

Command Options:

- `-pdf`: Generate PDF output
- `-interaction=nonstopmode`: Continue compilation without stopping for errors

Alternative Compilation Methods

Using pdfLaTeX:

```
pdflatex -interaction=nonstopmode main.tex
```

## 5.6.4 Extract Compiled PDF

### Copy PDF from Container to Droplet

Exit the container and execute from the Droplet:

```
docker cp
↪ sharelatex:/var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc/main.pdf
↪ ./output.pdf
```

### Download PDF to Local Machine

From your local machine, download the PDF using SCP:

```
scp root@142.93.207.133:~/output.pdf ./local-output.pdf
```

## 5.6.5 Compilation from GitHub Repository

### Clone Repository on Droplet

SSH into the Droplet and clone the GitHub repository:

```
cd ~
git clone https://github.com/Badri-Narayanan/overleaf-group14.git
cd overleaf-group14
```

### Copy Files to Overleaf Container

```
docker cp ./
↪ sharelatex:/var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc/
```

### Compile Inside Container

```
docker exec sharelatex bash -c "cd
↪ /var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc && latexmk -pdf
↪ -interaction=nonstopmode main.tex"
```

### Extract Compiled Output

```
docker cp
↪ sharelatex:/var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc/main.pdf
↪ ./compiled-output.pdf
```

## 5.6.6 Troubleshooting Compilation Issues

### View Compilation Logs

If compilation fails, check the log file:

```
docker exec sharelatex bash -c "cd
↪ /var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc && cat main.log"
```

## Check LaTeX Package Installation

Verify required packages are installed:

```
docker exec sharelatex bash -c "latex --version"
docker exec sharelatex bash -c "pdflatex --version"
```

## Install Missing Packages

If specific packages are missing:

```
docker exec -it sharelatex bash
apt-get update
apt-get install -y texlive-PACKAGE-NAME
```

# 5.7 Version Control Integration with Document Title

## 5.7.1 Purpose and Implementation

To establish traceability between compiled documents and their source code versions in GitHub, the document title should include the Git commit hash. This creates an audit trail that maps each generated PDF to its exact source code state.

## 5.7.2 Automated Version Insertion Strategy

### Modify LaTeX Document for Dynamic Versioning

Update the main LaTeX file to include a version placeholder:

```
\documentclass{article}
\usepackage{fancyhdr}

% Define version command
\newcommand{\documentversion}{VERSION_PLACEHOLDER}

\title{Project Report - Version \documentversion}
\author{Group 14}
\date{\today}

\begin{document}
\maketitle

% Document content here

\end{document}
```

## Create Version Injection Script

Create a script on the DigitalOcean Droplet to automatically inject the Git commit hash:

```
#!/bin/bash
# inject-version.sh

REPO_PATH="$1"
TEX_FILE="$2"

if [ -z "$REPO_PATH" ] || [ -z "$TEX_FILE" ]; then
    echo "Usage: ./inject-version.sh REPO_PATH TEX_FILE"
    exit 1
fi

cd "$REPO_PATH"

# Get the latest commit hash
COMMIT_HASH=$(git rev-parse --short HEAD)
COMMIT_DATE=$(git log -1 --format=%cd --date=short)

echo "Injecting version: $COMMIT_HASH (Date: $COMMIT_DATE)"

# Replace version placeholder with actual commit hash
sed -i "s/VERSION_PLACEHOLDER/$COMMIT_HASH/g" "$TEX_FILE"

echo "Version injection completed."
```

Make the script executable:

```
chmod +x inject-version.sh
```

## Usage Example

SSH into the DigitalOcean Droplet (142.93.207.133) and execute:

```
# Clone the repository
git clone https://github.com/Badri-Narayanan/overleaf-group14.git
cd overleaf-group14

# Inject version into LaTeX document
./inject-version.sh . main.tex

# Copy to Overleaf container
docker cp ./
→ sharelatex:/var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc/

# Compile the document
docker exec sharelatex bash -c "cd
→ /var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc && latexmk -pdf
→ -interaction=nonstopmode main.tex"
```

```
# Extract the compiled PDF
```

```
docker cp
```

```
↪ sharelatex:/var/lib/overleaf/data/compiles/68f14824c7c1f423d5bbe7bc/main.pdf
```

```
↪ ./output-versioned.pdf
```

### 5.7.3 Manual Version Addition

If the LaTeX document doesn't contain a VERSION\_PLACEHOLDER, manually add the version to the title:

```
# Get the current commit hash
```

```
COMMIT_HASH=$(git rev-parse --short HEAD)
```

```
# Modify the title in the LaTeX file
```

```
sed -i "s/\\title{\\([^}]*\\)}/\\title{\\1 - Version $COMMIT_HASH}/g" main.tex
```

### 5.7.4 Verification

After compilation, verify that the PDF contains the version information:

1. Open the generated PDF
2. Check the title page for the commit hash
3. Verify the commit hash matches the latest Git commit:

```
git rev-parse --short HEAD
```

# Chapter 6

## Overleaf Compilation and Sync with GitHub

### 6.1 System Overview

- **Overleaf Instance:** DigitalOcean Droplet (IP: 142.93.207.133)
- **Project Path:** /root/sharelatex\_data/data/compiles/68f9818f6cbab3ad67b265f7-68f147
- **Backup Directory:** /root/overleaf\_backups
- **GitHub Repository:** Connected via SSH
- **Automation:** Cron job (every 5 seconds) + GitHub Actions

### 6.2 Step 1: SSH into DigitalOcean Droplet

```
ssh root@142.93.207.133
```

### 6.3 Step 2: Create Backup Directory and Initialize Git

```
# Create backup directory  
mkdir -p /root/overleaf_backups  
cd /root/overleaf_backups
```

```
# Initialize git repository  
git init  
git branch -M main
```

```
# Configure git credentials  
git config user.name "Badri-Narayanan"  
git config user.email "badhrirajen@gmail.com"
```

```
# Generate SSH key for GitHub  
ssh-keygen -t ed25519 -C "badhrirajen@gmail.com" -f /root/.ssh/id_ed25519 -N ""
```



```
# Display public key (add this to GitHub)
cat /root/.ssh/id_ed25519.pub
```

### Add SSH key to GitHub:

1. Copy the public key output
2. Go to GitHub → Settings → SSH and GPG keys → New SSH key
3. Paste and save

```
# Add GitHub remote (replace with your repo URL)
git remote add origin git@github.com:YOUR_USERNAME/YOUR_REPO.git
```

```
# Test connection
ssh -T git@github.com
```

## 6.4 Step 3: Create Backup Script

```
nano /root/backup-overleaf-projects.sh
```

### Script Content:

```
#!/bin/bash

# Configuration
SOURCE_DIR="/root/sharelatex_data/data/compiles/68f9818f6cbab3ad67b265f7-68f14753eda1"
BACKUP_DIR="/root/overleaf_backups"
LOG_FILE="/var/log/overleaf-backup.log"
GIT_BRANCH="main"
MAX_LOG_SIZE=10485760 # 10MB

# Function to rotate log if too large
rotate_log() {
    if [ -f "$LOG_FILE" ]; then
        LOG_SIZE=$(stat -f%z "$LOG_FILE" 2>/dev/null || stat -c%s "$LOG_FILE" 2>/dev/null)
        if [ "$LOG_SIZE" -gt "$MAX_LOG_SIZE" ]; then
            mv "$LOG_FILE" "$LOG_FILE.old"
            echo "Log rotated at $(date '+%Y-%m-%d %H:%M:%S')" > "$LOG_FILE"
        fi
    fi
}

# Function to log messages with timestamp
log_message() {
    local TIMESTAMP=$(date '+%Y-%m-%d %H:%M:%S')
    echo "[${TIMESTAMP}] $1" >> "$LOG_FILE"
}
```

```

# Function to log errors
log_error() {
    local TIMESTAMP=$(date '+%Y-%m-%d %H:%M:%S')
    echo "[${TIMESTAMP}] ERROR: $1" >> "$LOG_FILE"
}

# Function to log success
log_success() {
    local TIMESTAMP=$(date '+%Y-%m-%d %H:%M:%S')
    echo "[${TIMESTAMP}] SUCCESS: $1" >> "$LOG_FILE"
}

# Rotate log if needed
rotate_log

# Start backup process
log_message "===== Starting backup process ====="

# Check if source directory exists
if [ ! -d "$SOURCE_DIR" ]; then
    log_error "Source directory does not exist: $SOURCE_DIR"
    exit 1
fi

log_message "Source directory exists: $SOURCE_DIR"

# Check if backup directory exists
if [ ! -d "$BACKUP_DIR" ]; then
    log_error "Backup directory does not exist: $BACKUP_DIR"
    exit 1
fi

log_message "Backup directory exists: $BACKUP_DIR"

# Check if backup directory is a git repository
if [ ! -d "$BACKUP_DIR/.git" ]; then
    log_error "Backup directory is not a Git repository: $BACKUP_DIR"
    exit 1
fi

log_message "Git repository detected in backup directory"

# Change to backup directory
cd "$BACKUP_DIR" || {
    log_error "Cannot change to backup directory: $BACKUP_DIR"
    exit 1
}

```

```

log_message "Changed to backup directory"

# Check if we're on the correct branch
CURRENT_BRANCH=$(git rev-parse --abbrev-ref HEAD 2>/dev/null)
if [ "$CURRENT_BRANCH" != "$GIT_BRANCH" ]; then
    log_message "Current branch is $CURRENT_BRANCH, switching to $GIT_BRANCH"
    git checkout "$GIT_BRANCH" >> "$LOG_FILE" 2>&1
    if [ $? -ne 0 ]; then
        log_error "Failed to checkout branch $GIT_BRANCH"
        exit 1
    fi
fi

# Stash any local changes to protected files before pulling
log_message "Checking for local changes to protected files"
PROTECTED_FILES=".github .gitignore README.md builds"
HAS_PROTECTED_CHANGES=false

for file in $PROTECTED_FILES; do
    if [ -e "$file" ] && git diff --quiet "$file" 2>/dev/null; then
        :
    elif [ -e "$file" ]; then
        HAS_PROTECTED_CHANGES=true
        break
    fi
done

if [ "$HAS_PROTECTED_CHANGES" = true ]; then
    log_message "Stashing changes to protected files"
    git stash push -m "Auto-stash before pull $(date '+%Y-%m-%d %H:%M:%S')" $PROTECTED_FILES
fi

# Pull latest changes from remote
log_message "Pulling latest changes from remote"
git pull origin "$GIT_BRANCH" >> "$LOG_FILE" 2>&1
PULL_EXIT_CODE=$?

if [ $PULL_EXIT_CODE -eq 0 ]; then
    log_success "Successfully pulled from remote"
else
    log_error "Git pull failed with exit code $PULL_EXIT_CODE"
    log_message "Attempting to continue anyway..."
fi

# Pop stashed changes if any
if [ "$HAS_PROTECTED_CHANGES" = true ]; then
    log_message "Restoring stashed changes"

```

```

git stash pop >> "$LOG_FILE" 2>&1
fi

# Ensure .github directory exists
if [ ! -d "$BACKUP_DIR/.github" ]; then
    log_message ".github directory not found, creating it"
    mkdir -p "$BACKUP_DIR/.github/workflows"
fi

# Sync the compiles directory to backup location
log_message "Starting rsync from $SOURCE_DIR to $BACKUP_DIR"

rsync -av --delete \
    --exclude='.git' \
    --exclude='.git/' \
    --exclude='.github' \
    --exclude='.github/' \
    --exclude='.gitignore' \
    --exclude='README.md' \
    --exclude='LICENSE' \
    --exclude='builds' \
    --exclude='builds/' \
    "$SOURCE_DIR/" "$BACKUP_DIR/" >> "$LOG_FILE" 2>&1

RSYNC_EXIT_CODE=$?

if [ $RSYNC_EXIT_CODE -eq 0 ]; then
    log_success "Rsync completed successfully"
else
    log_error "Rsync failed with exit code $RSYNC_EXIT_CODE"
    exit 1
fi

# Check Git status before staging
log_message "Checking for changes in Git repository"
git status --porcelain >> "$LOG_FILE" 2>&1

# Stage all changes
log_message "Staging all changes"
git add -A >> "$LOG_FILE" 2>&1

if [ $? -ne 0 ]; then
    log_error "Failed to stage changes"
    exit 1
fi

# Check if there are any changes to commit
if git diff --cached --quiet; then

```

```

log_message "No changes detected - nothing to commit"
log_message "==== Backup process completed (no changes) ====="
exit 0
fi

# Count the changes
ADDED=$(git diff --cached --numstat | wc -l)
log_message "Changes detected: $ADDED file(s) modified/added/deleted"

# Show what changed for debugging
log_message "Files changed:"
git diff --cached --name-status >> "$LOG_FILE" 2>&1

# Create commit message with details
COMMIT_TIMESTAMP=$(date '+%Y-%m-%d %H:%M:%S')
COMMIT_MESSAGE="Auto-backup: $COMMIT_TIMESTAMP"

Changes: $ADDED file(s) modified/added/deleted
Source: $SOURCE_DIR"

# Commit the changes
log_message "Committing changes"
git commit -m "$COMMIT_MESSAGE" >> "$LOG_FILE" 2>&1
COMMIT_EXIT_CODE=$?

if [ $COMMIT_EXIT_CODE -ne 0 ]; then
    log_error "Git commit failed with exit code $COMMIT_EXIT_CODE"
    exit 1
fi

log_success "Changes committed successfully"

# Push to remote repository
log_message "Pushing to remote repository (branch: $GIT_BRANCH)"
git push origin "$GIT_BRANCH" >> "$LOG_FILE" 2>&1
PUSH_EXIT_CODE=$?

if [ $PUSH_EXIT_CODE -eq 0 ]; then
    log_success "Changes pushed to remote repository successfully"
    COMMIT_HASH=$(git rev-parse --short HEAD)
    log_message "Commit hash: $COMMIT_HASH"
else
    log_error "Git push failed with exit code $PUSH_EXIT_CODE"
    log_message "Checking if local is behind remote..."
    git fetch origin "$GIT_BRANCH" >> "$LOG_FILE" 2>&1
    LOCAL=$(git rev-parse @)
    REMOTE=$(git rev-parse @{u})
    if [ "$LOCAL" != "$REMOTE" ]; then

```

```

        log_message "Local is out of sync with remote, will retry on next run"
    fi
    exit 1
fi

log_message "==== Backup process completed successfully ====="
exit 0

# Make script executable
chmod +x /root/backup-overleaf-projects.sh

```

## 6.5 Step 4: Setup Cron Job (Every 5 Seconds)

```
crontab -e
```

Add these lines:

```

* * * * * /root/backup-overleaf-projects.sh
* * * * * sleep 5; /root/backup-overleaf-projects.sh
* * * * * sleep 10; /root/backup-overleaf-projects.sh
* * * * * sleep 15; /root/backup-overleaf-projects.sh
* * * * * sleep 20; /root/backup-overleaf-projects.sh
* * * * * sleep 25; /root/backup-overleaf-projects.sh
* * * * * sleep 30; /root/backup-overleaf-projects.sh
* * * * * sleep 35; /root/backup-overleaf-projects.sh
* * * * * sleep 40; /root/backup-overleaf-projects.sh
* * * * * sleep 45; /root/backup-overleaf-projects.sh
* * * * * sleep 50; /root/backup-overleaf-projects.sh
* * * * * sleep 55; /root/backup-overleaf-projects.sh

```

Verify cron is running:

```

sudo systemctl status cron
crontab -l

```

## 6.6 Step 5: Create GitHub Actions Workflow

```

# Create workflow directory
mkdir -p /root/overleaf_backups/.github/workflows

# Create workflow file
nano /root/overleaf_backups/.github/workflows/build.yml

```

Workflow Content (YAML):

```

name: Build LaTeX PDF
permissions:
  contents: write

```

```

on:
  push:
    branches:
      - main
  workflow_dispatch:
jobs:
  build:
    runs-on: ubuntu-latest
    steps:
      - name: Checkout repository
        uses: actions/checkout@v4
        with:
          persist-credentials: true
          fetch-depth: 0

      - name: Install TeX Live and Pygments
        run: |
          sudo apt-get update
          sudo apt-get install -y texlive-full python3-pygments

      - name: Get Git commit hash
        run: echo "GIT_HASH=$(git rev-parse --short HEAD)" >> $GITHUB_ENV

      - name: Update version in groupAssignments.tex
        run: |
          sed -i "s/\\\\\\newcommand{\\\\\\gitversion}{Unknown}/\\\\\\newcommand{\\\\\\gitver
          echo "Updated version to: ${GIT_HASH}"

      - name: Compile LaTeX document
        run: |
          pdflatex -shell-escape -interaction=nonstopmode groupAssignments.tex || tru
          bibtex groupAssignments || true
          makeindex groupAssignments.idx || true
          pdflatex -shell-escape -interaction=nonstopmode groupAssignments.tex || tru
          pdflatex -shell-escape -interaction=nonstopmode groupAssignments.tex || tru

      - name: Verify PDF was created
        run: |
          if [ -f "groupAssignments.pdf" ]; then
            echo "PDF successfully generated"
            ls -lh groupAssignments.pdf
          else
            echo "ERROR: PDF was not generated!"
            exit 1
          fi

      - name: Upload PDF artifact
        uses: actions/upload-artifact@v4

```

```

with:
  name: Compiled-PDF
  path: groupAssignments.pdf

- name: Commit PDF to repo
  if: success()
  env:
    GIT_HASH: ${ env.GIT_HASH }
  run: |
    git config user.name "Badri-Narayanan"
    git config user.email "badhrirajen@gmail.com"
    mkdir -p builds
    cp groupAssignments.pdf builds/document_${GIT_HASH}.pdf
    git add builds/document_${GIT_HASH}.pdf
    git commit -m "Auto-build PDF for commit ${GIT_HASH}" || echo "No changes"
    git push origin HEAD:main || echo "Push failed"

```

## 6.7 Step 6: Initial Commit and Push

```
cd /root/overleaf_backups
```

```

# Add .gitignore
cat > .gitignore << 'EOF'
*.log
*.aux
*.out
*.toc
*.synctex.gz
_minted-*
*.idx
*.ilg
*.ind
*.bbl
*.blg
*.fls
*.fdb_latexmk
EOF

# Add all files
git add -A

# Initial commit
git commit -m "Initial commit: Overleaf project setup"

# Push to remote
git push -u origin main

```



## 6.8 Step 7: Test the Setup

```
# Test backup script manually
/root/backup-overleaf-projects.sh

# Check log
tail -50 /var/log/overleaf-backup.log

# Verify files in backup directory
ls -la /root/overleaf_backups/
```

## 6.9 Step 8: Monitoring Commands

```
# Watch backup log in real-time
tail -f /var/log/overleaf-backup.log

# Monitor cron execution
grep CRON /var/log/syslog | tail -20

# Check git status
cd /root/overleaf_backups && git status

# View recent commits
cd /root/overleaf_backups && git log --oneline -10

# Check if .github folder is protected
ls -la /root/overleaf_backups/.github/workflows/
```

## 6.10 Workflow Process

1. Edit Overleaf document on DigitalOcean (<http://devops-group14.app>)
2. Cron job runs every 5 seconds:
  - Pulls latest from GitHub
  - Syncs Overleaf files (excluding .github)
  - Commits changes
  - Pushes to GitHub
3. GitHub Actions triggers:
  - Checks out repository
  - Installs TeX Live
  - Gets commit hash
  - Updates version in document
  - Compiles LaTeX (3 passes)

- Creates PDF with version number
- Saves to builds/ directory
- Commits and pushes PDF back

## 6.11 Verification Checklist

Cron job running every 5 seconds

Files syncing from Overleaf to GitHub

.github folder protected from deletion

GitHub Actions workflow executing on push

PDF being compiled with commit hash

PDF saved to builds/ directory

All changes committed and pushed

## 6.12 Troubleshooting Commands

*# Check cron service*

```
sudo systemctl status cron
```

*# View full backup log*

```
cat /var/log/overleaf-backup.log
```

*# Test rsync without delete*

```
rsync -avn --exclude='.git' --exclude='.github' \
  /root/sharelatex_data/data/compiles/68f9818f6cbab3ad67b265f7-68f14753eda193f7e7fa03
  /root/overleaf_backups/
```

*# Check SSH connection to GitHub*

```
ssh -T git@github.com
```

*# Force manual sync*

```
cd /root/overleaf_backups && git pull && git push
```

## 6.13 Project Structure

```
/root/overleaf_backups/
|-- .git/
|-- .github/
|   |-- workflows/
|       |-- build.yml
|-- .gitignore
|-- groupAssignments.tex
```

```
|-- [other .tex files]
|-- png/
|   |-- [images]
|-- builds/
    |-- document_[hash].pdf
```

# Chapter 7

## Prometheus And Grafana

### 7.1 Technologies Used

- **Prometheus** is a monitoring system that collects and stores time-series metrics from various sources by scraping HTTP endpoints at regular intervals.
- **Node Exporter** is an agent that runs on your servers and exposes system-level metrics in a format Prometheus can scrape.
- **Grafana** is a visualization platform that queries Prometheus data and displays it through customizable dashboards with graphs and alerts.
- **Dashboard 1860** It shows real-time and historical data about CPU usage, memory consumption, disk I/O and space, network traffic, and system load.

### 7.2 Executed Outputs

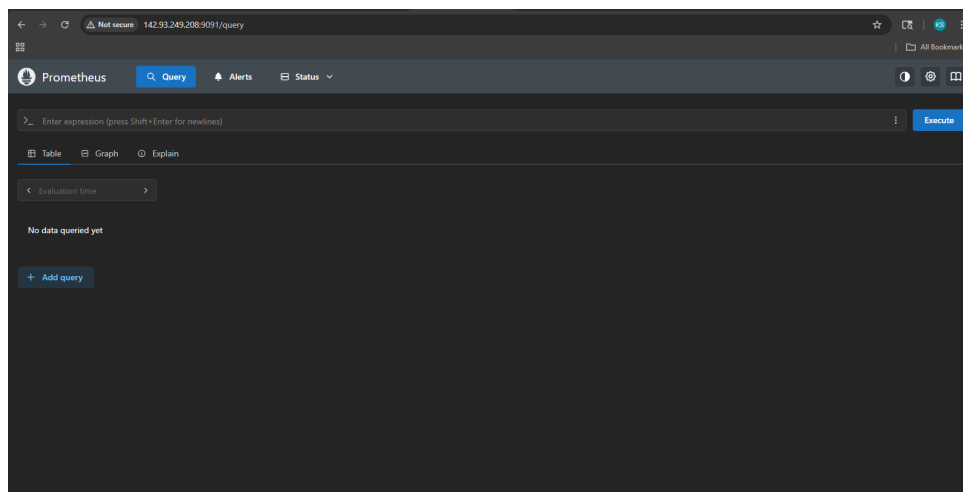


Figure 7.1: Prometheus Dashboard Image - 1

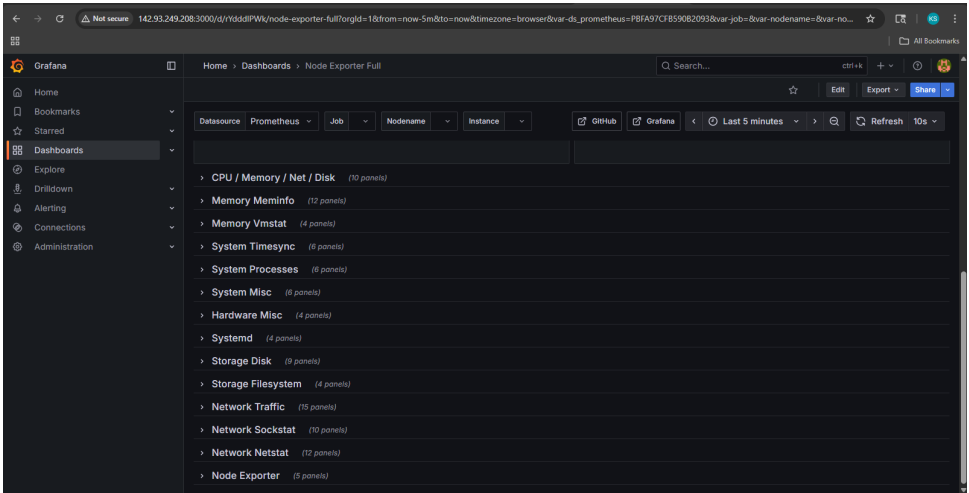


Figure 7.2: Prometheus Dashboard Image - 2

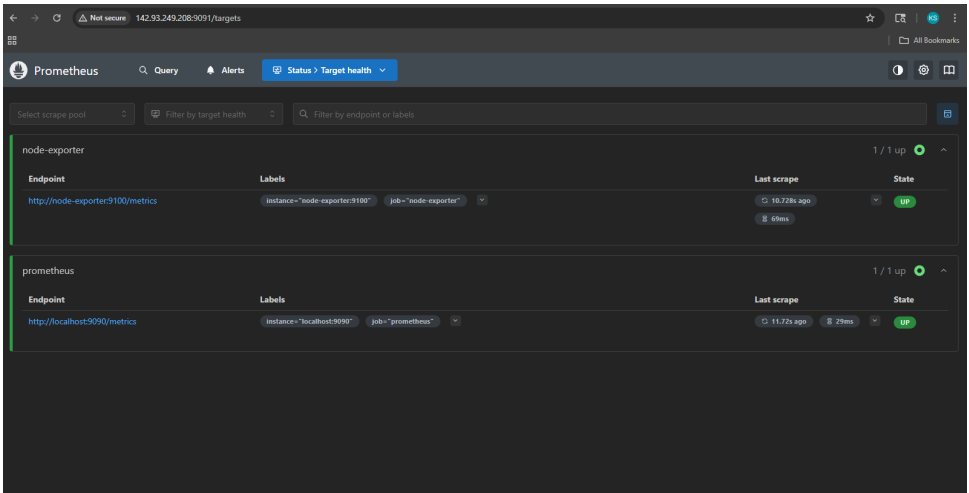


Figure 7.3: Prometheus Status Page

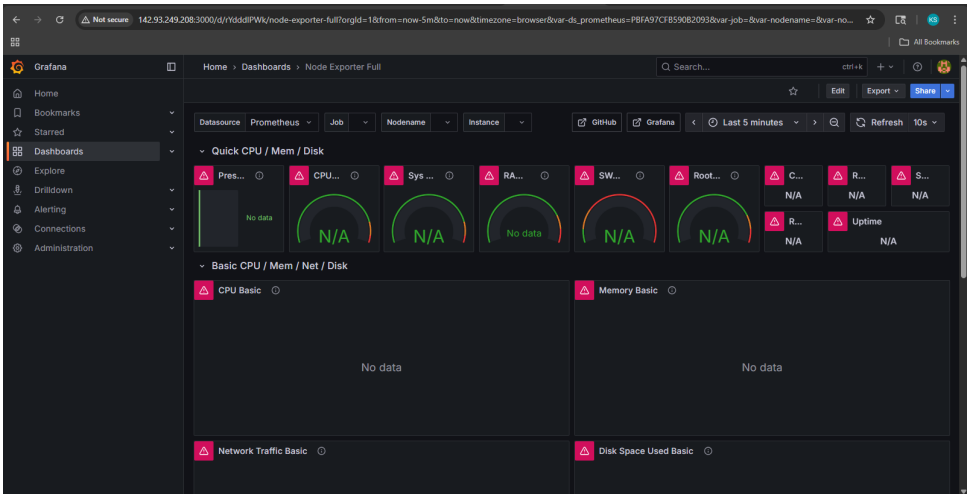


Figure 7.4: Grafana 1860 Dashboard

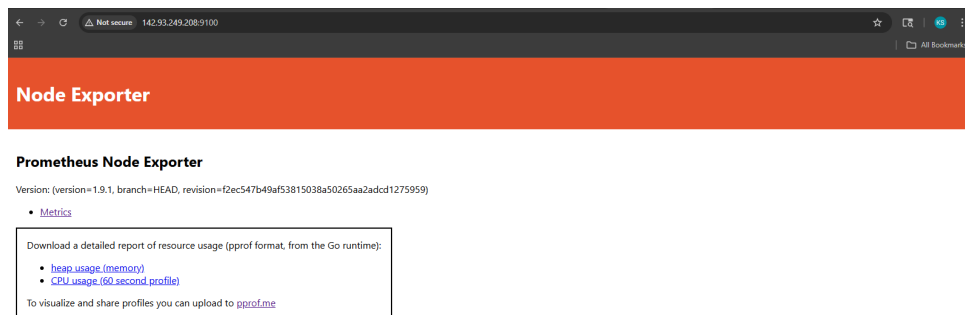


Figure 7.5: Node Exporter Home

# Chapter 8

## Load Balancer and Virtual Host Setup

### A — Project: Load Balancer

#### File Structure

```
load-balanced-app/  
  docker-compose.yml  
  nginx/  
    nginx.conf  
  web1/  
    index.html  
  web2/  
    index.html
```

#### File Contents

web1/index.html

```
<h1>Hello from Web 1</h1>
```

web2/index.html

```
<h1>Hello from Web 2</h1>
```

nginx/nginx.conf

```
events {}  
  
http {  
    upstream backend {  
        server web1:80;  
        server web2:80;  
    }  
  
    server {  
        listen 80;  
  
        location / {
```

```

        proxy_pass http://backend;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
    }
}
}

```

### **docker-compose.yml**

```

version: '3'

services:
  web1:
    image: nginx
    container_name: web1
    volumes:
      - ./web1:/usr/share/nginx/html:ro

  web2:
    image: nginx
    container_name: web2
    volumes:
      - ./web2:/usr/share/nginx/html:ro

  loadbalancer:
    image: nginx
    container_name: loadbalancer
    ports:
      - "8080:80"
    volumes:
      - ./nginx/nginx.conf:/etc/nginx/nginx.conf:ro
    depends_on:
      - web1
      - web2

```

## **Steps Executed**

```

cd /path/to/load-balanced-app
docker-compose up -d --build
docker ps
# verify containers: web1, web2, loadbalancer

# local browser test:
# open http://localhost:8080 and refresh to see alternating servers

docker-compose down

```



## B — Project: Virtual Host (Name-Based)

### File Structure

```
virtual-hosts/
  docker-compose.yml
  nginx/
    nginx.conf
  web1/
    index.html
  web2/
    index.html
```

### File Contents

#### web1/index.html

```
<h1>This is Web 1 Virtual Host</h1>
```

#### web2/index.html

```
<h1>This is Web 2 Virtual Host</h1>
```

#### nginx/nginx.conf

```
events {}

http {
    server {
        listen 80;
        server_name web1.domain.com;

        location / {
            proxy_pass http://web1:80;
            proxy_set_header Host $host;
            proxy_set_header X-Real-IP $remote_addr;
        }
    }

    server {
        listen 80;
        server_name web2.domain.com;

        location / {
            proxy_pass http://web2:80;
            proxy_set_header Host $host;
            proxy_set_header X-Real-IP $remote_addr;
        }
    }
}
```

#### docker-compose.yml

```

version: '3'

services:
  web1:
    image: nginx
    container_name: vh_web1
    volumes:
      - ./web1:/usr/share/nginx/html:ro

  web2:
    image: nginx
    container_name: vh_web2
    volumes:
      - ./web2:/usr/share/nginx/html:ro

  proxy:
    image: nginx
    container_name: vh_proxy
    ports:
      - "80:80"
    volumes:
      - ./nginx/nginx.conf:/etc/nginx/nginx.conf:ro
    depends_on:
      - web1
      - web2

```

## Steps Executed

```

cd /path/to/virtual-hosts
docker-compose up -d --build
docker ps
# verify containers: vh_web1, vh_web2, vh_proxy

curl -H "Host: web1.domain.com" http://localhost
curl -H "Host: web2.domain.com" http://localhost

docker-compose down

```

## C — Local DNS (Simulated Domains)

### Windows Hosts File Configuration

C:\Windows\System32\drivers\etc\hosts

```

203.0.113.42 web1.domain.com
203.0.113.42 web2.domain.com

```

ipconfig /flushdns

Open in browser:

- <http://web1.domain.com>
- <http://web2.domain.com>

## Linux / Unix Hosts File Configuration

```
sudo nano /etc/hosts
```

Add:

```
203.0.113.42 web1.domain.com
203.0.113.42 web2.domain.com
```

Save and apply:

```
sudo systemctl restart NetworkManager
# or
sudo dscacheutil -flushcache # macOS
```

Test:

```
ping web1.domain.com
ping web2.domain.com
```

Open in browser:

- <http://web1.domain.com>
- <http://web2.domain.com>

# Glossary

**CI/CD** Continuous Integration and Continuous Deployment - automated software development practices that enable frequent code integration and deployment. [8](#)

# Bibliography

# Index

awk command, [3](#)

AWS, [10](#)

AWS EC2, [8](#)

Bugzilla, [17](#)

chmod command, [3](#)

deployment pipeline, [8](#)

DigitalOcean, [17](#)

Docker, [8](#)

ECR, [10](#)

find command, [4](#)

Github Actions, [8](#)

grep command, [2](#)

Jenkins, [8](#)

LaTeX, [14](#)

Linux commands, [1](#)

ls command, [1](#)

MariaDB, [17](#)

netstat command, [5](#)

ps command, [4](#)

pwd command, [1](#)

tar command, [5](#)