AI 로컬 테스트

ke-brp-workflow-users 그룹생성

ke-brp-workflow-users 그룹에 Administrator 추가

backup_location 설치

===============================

리뷰어 그룹에서

/var/workflow/instances 경로에 jcr:all 부여

AEM - Translation Reviewer (en)

Access Control List

Access Control Entries (ACEs)

PATH	PERMISSION	PRIVILEGES	RESTRICTIONS
/var/workflow/instances	● allow	jcr:all	

==================

1. 워크플로우 설치

/var/workflow/models/ke-ai-translate-component

/var/workflow/models/ke-ai-translate-page

/var/workflow/models/ke-review-translated-page

2. 계정 생성(리뷰어 역할)

ID / PW / EMAIL

test / test / test@en.com

test1 / test1 / test1@ja.com

test2 / test2 / test2@cn.com

test3 / test3 / test3@hk.com

3. 그룹 생성(리뷰어 그룹)

AEM - Translation Reviewer (en)

AEM - Translation Reviewer (ja)

AEM - Translation Reviewer (zh_cn)

AEM - Translation Reviewer (zh_hk)

4. 그룹 생성(요청자 그룹)

AEM - Business Super User

AEM - Administrators

5. 리뷰어 그룹에 리뷰어 배속

AEM - Translation Reviewer (en) > test

AEM - Translation Reviewer (ja) > test1

AEM - Translation Reviewer (zh_cn) > test2

AEM - Translation Reviewer (zh_hk) > test3

6. 요청자 그룹에 요청자 배속

AEM - Business Super User > admin

AEM - Administrators > admin

로컬 메일테스트 설정

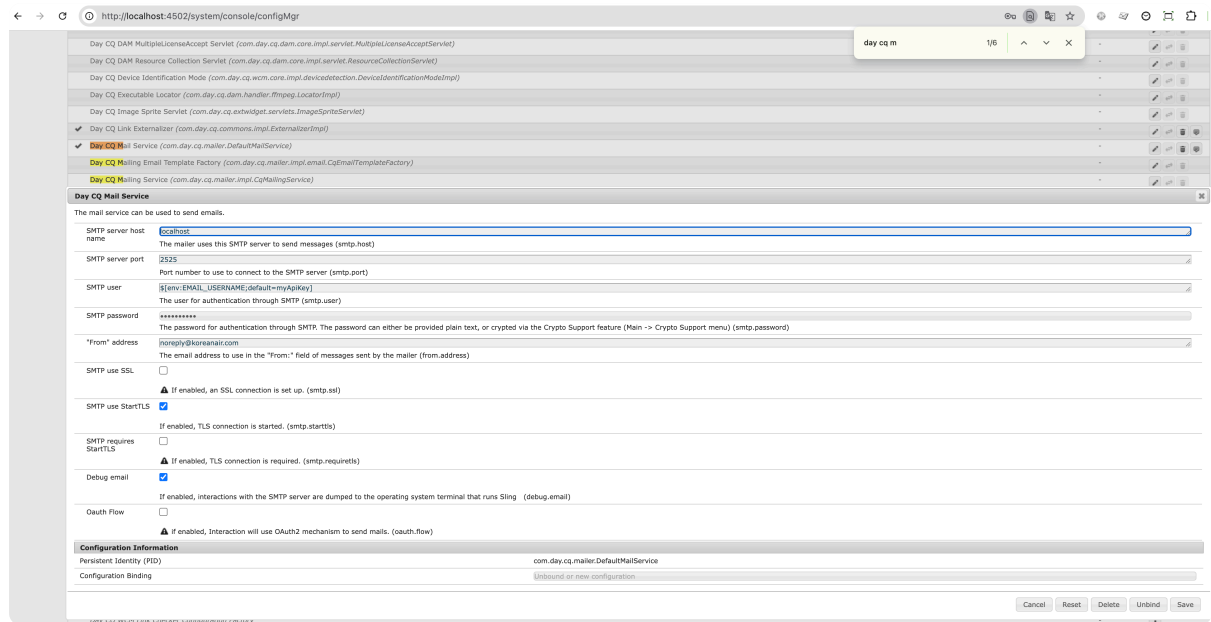1. 프로그램 설치 및 실행

https://glenn-dev.tistory.com/9

2. AEM 메일 발송 config host, port 변경

com.day.cq.mailer.DefaultMailService

SMTP server host name : localhost

SMTP server port : 2525

3. fakeSMTP 포트 2525로 실행

* gpt 접근 불가능할 때 fake translation 설정

com.composum.ai.backend.base.service.chat.impl.GPTTranslationServiceImpl

Fake translation 체크

Compare Version Configuration *(com.day.cq.wcm.core.impl.VersionPreviewLinkUsagesService)*	-	
Compat Group Mapping	-	✚
Compat Switches *(com.adobe.granite.compatrouter.impl.CompatSwitchingServiceImpl)*	-	
✔ Component com.adobe.cq.account.api.AccountManagementService *(com.adobe.cq.account.api.AccountManagementService)*	-	
Component com.adobe.cq.account.impl.AccountManagementServlet *(com.adobe.cq.account.impl.AccountManagementServlet)*	-	
Component com.adobe.cq.cdn.rewriter.impl.CDNConfigServiceImpl *(com.adobe.cq.cdn.rewriter.impl.CDNConfigServiceImpl)*	-	
Component com.adobe.granite.comments.core.internal.CommentReplicationContentFilterFactory *(com.adobe.granite.comments.core.internal.CommentReplicationContentFilterFactory)*	-	
Component com.adobe.granite.distribution.core.impl.replication.adapters.ReplicationAgentProvider *(com.adobe.granite.distribution.core.impl.replication.adapters.ReplicationAgentProvider)*	-	
Component com.day.cq.dam.commons.handler.StandardImageHandler *(com.day.cq.dam.commons.handler.StandardImageHandler)*	-	
Component com.day.cq.dam.core.impl.AssetMoveListener *(com.day.cq.dam.core.impl.AssetMoveListener)*	-	
Component com.day.cq.dam.core.impl.cache.CQBufferedImageCache *(com.day.cq.dam.core.impl.cache.CQBufferedImageCache)*	-	
Component com.day.cq.dam.core.impl.DamChangeEventListener *(com.day.cq.dam.core.impl.DamChangeEventListener)*	-	
Component com.day.cq.dam.core.impl.DamEventRecorderImpl *(com.day.cq.dam.core.impl.DamEventRecorderImpl)*	-	
Component com.day.cq.dam.core.impl.gfx.CommonsGfxRenderer *(com.day.cq.dam.core.impl.gfx.CommonsGfxRenderer)*	-	

Composum AI Translation Service Configuration ✖

Configuration for the basic Composum AI Translation Service

Disable the translation service ⚠	☐
Fake translation	☑
	⚠ For quick and inexpensive testing, when you just want to check that the translation does something for e.g. a bulk of texts, you can enable this. The "translation" then just turns the text iNtO tHiS cApItAlIsAtIoN. Easy to spot, but probably doesn't destroy the content completely. (fakeTranslation)
Disk cache	
	⚠ Path to a directory where to cache the translations. If empty, no caching is done. If the path is relative, it is relative to the current working directory. If the path is absolute, it is used as is. (diskCache)
temperature	
	⚠ The sampling temperature, between 0 and 1. Higher values like 0.8 will make the output more random, while lower values like 0.2 will make it more focused and deterministic. (temperature)
seed	
	⚠ If specified, OpenAI will make a best effort to sample deterministically, such that repeated requests with the same seed and parameters should return the same result. (seed)

Configuration Information

Persistent Identity (PID)	com.composum.ai.backend.base.service.chat.impl.GPTTranslationServiceImpl
Configuration Binding	Unbound or new configuration

Cancel Reset Delete Unbind Save