

#1

The screenshot shows a database IDE with the following components:


- Database Explorer:** Shows a tree view of the database structure. The 'task2' database is selected, showing a 'public' schema with tables: airline, airport, baggage, baggage_check, boarding_pass, booking, booking_flight, flights, and passengers.
- SQL Editor:** Contains the following SQL code:

```
--lab8
399 SELECT * FROM flights;
400 --1
401
402 CREATE VIEW flights_on_date AS
403 SELECT *
404 FROM flights
405 WHERE DATE(sch_departure_time) = '2024-01-10';
406
407 SELECT * FROM flights_on_date;
408
409
```
- Output Panel:** Displays the results of the SQL execution. It shows a table with 2 rows and 5 columns: flight_id, sch_departure_time, sch_arrival_time, departing_airport_id, and arriving_airport_id. The data is as follows:

flight_id	sch_departure_time	sch_arrival_time	departing_airport_id	arriving_airport_id
1	2024-01-10 08:00:00.000000	2024-01-10 12:00:00.000000	1	1
2	2024-01-10 08:01:00.000000	2024-01-10 12:01:00.000000	1	1
- Services Panel:** Shows a list of database consoles. The 'console' console is selected, showing a status of '455 ms'.

```
CREATE VIEW flights_on_date AS
SELECT *
FROM flights
WHERE DATE(sch_departure_time) = '2024-01-10';
```

#3

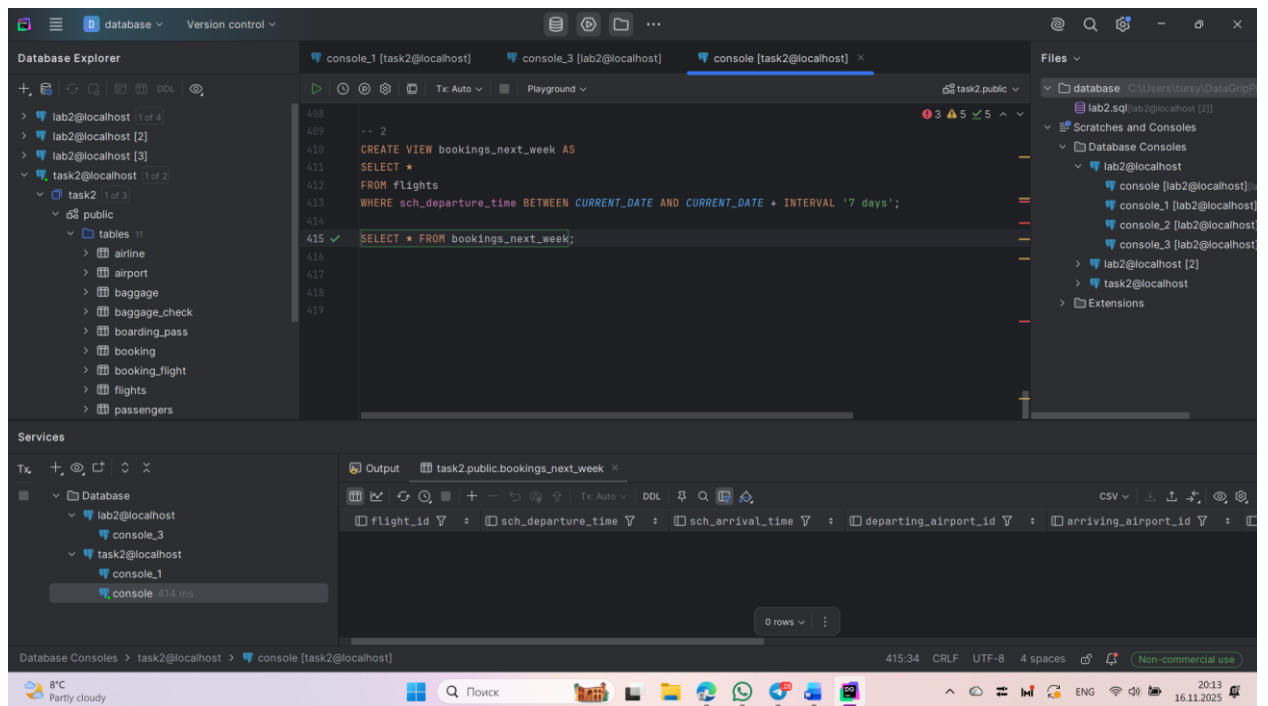


CREATE VIEW bookings_next_week AS


SELECT *

FROM flights

WHERE sch_departure_time BETWEEN CURRENT_DATE AND CURRENT_DATE +
INTERVAL '7 days';

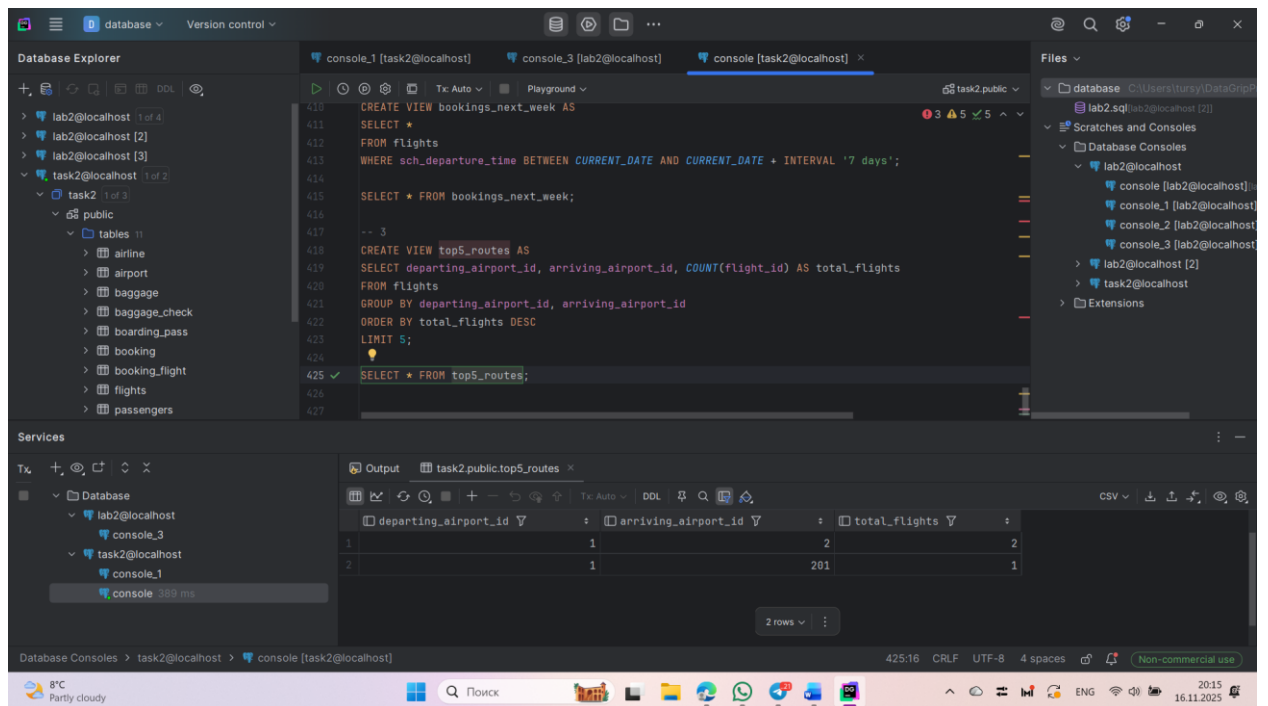


```
CREATE VIEW top5_routes AS
SELECT departing_airport_id, arriving_airport_id, COUNT(flight_id) AS total_flights
FROM flights
GROUP BY departing_airport_id, arriving_airport_id
ORDER BY total_flights DESC
LIMIT 5;
```

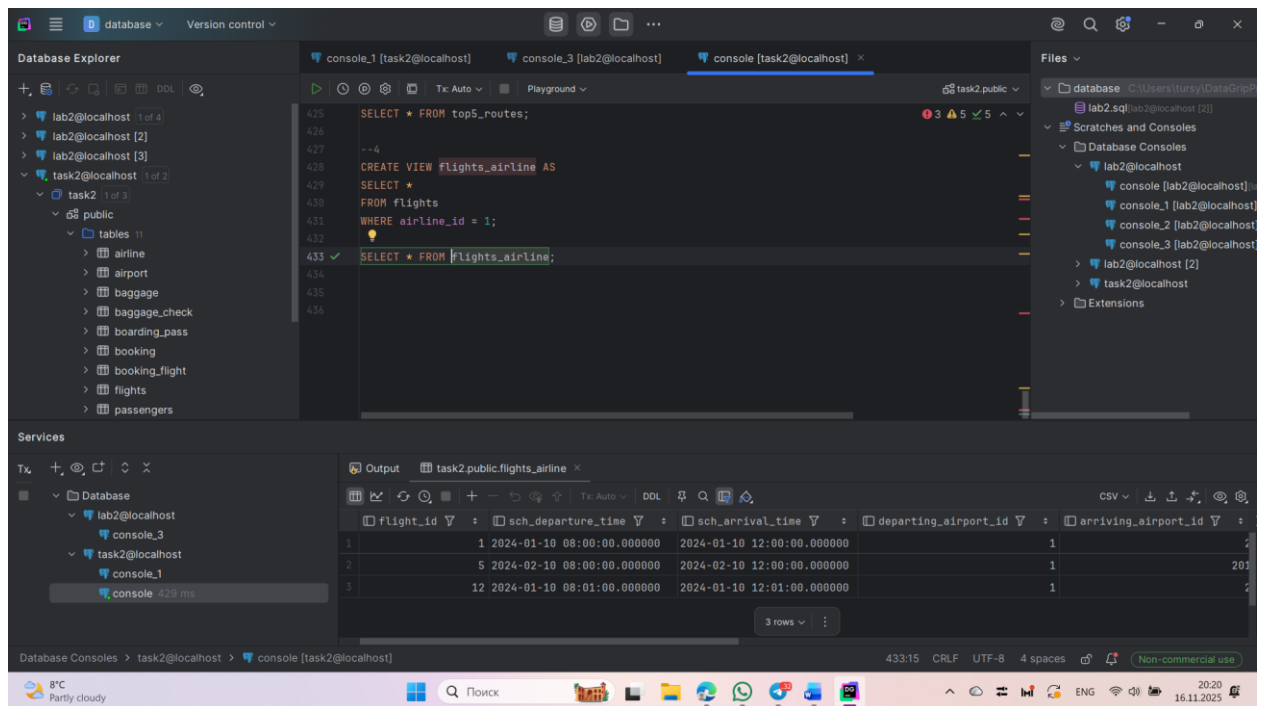


```
CREATE VIEW flights_airline AS
SELECT *
FROM flights
WHERE airline_id = 1;
```

#5

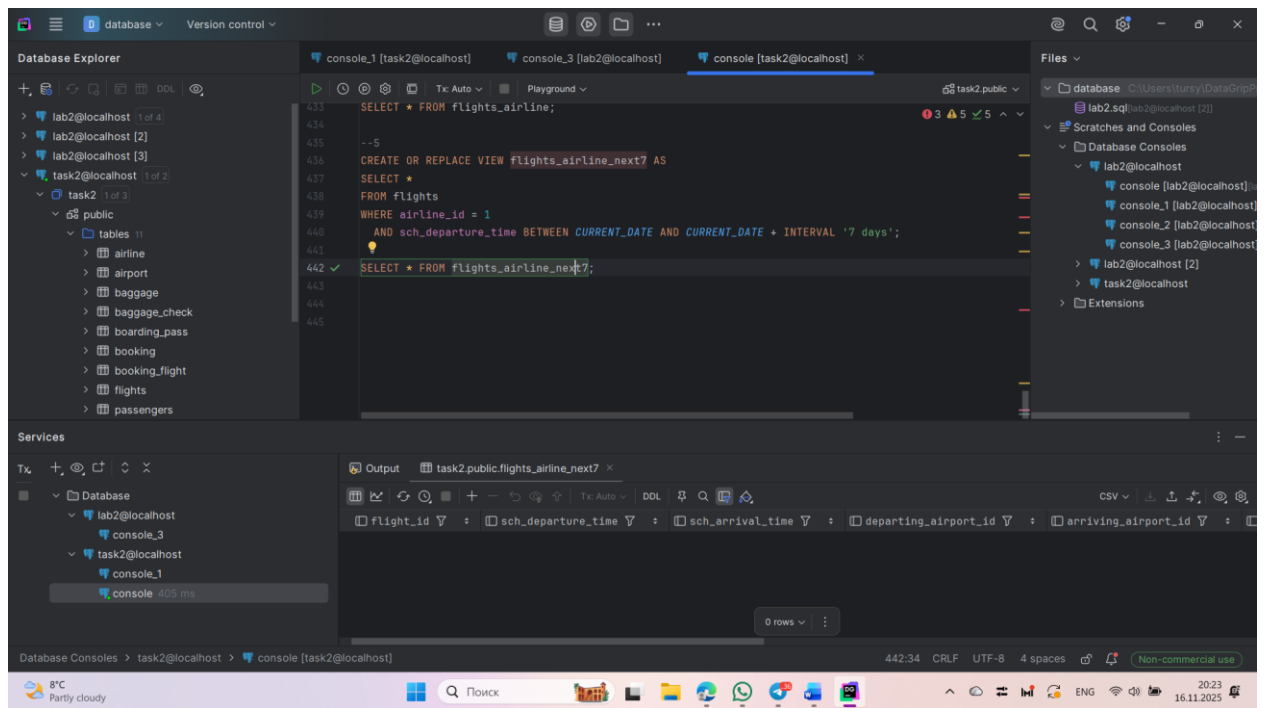


```
CREATE OR REPLACE VIEW flights_airline_next7 AS  
SELECT *  
FROM flights  
WHERE airline_id = 1  
AND sch_departure_time BETWEEN CURRENT_DATE AND CURRENT_DATE + INTERVAL  
'7 days';
```

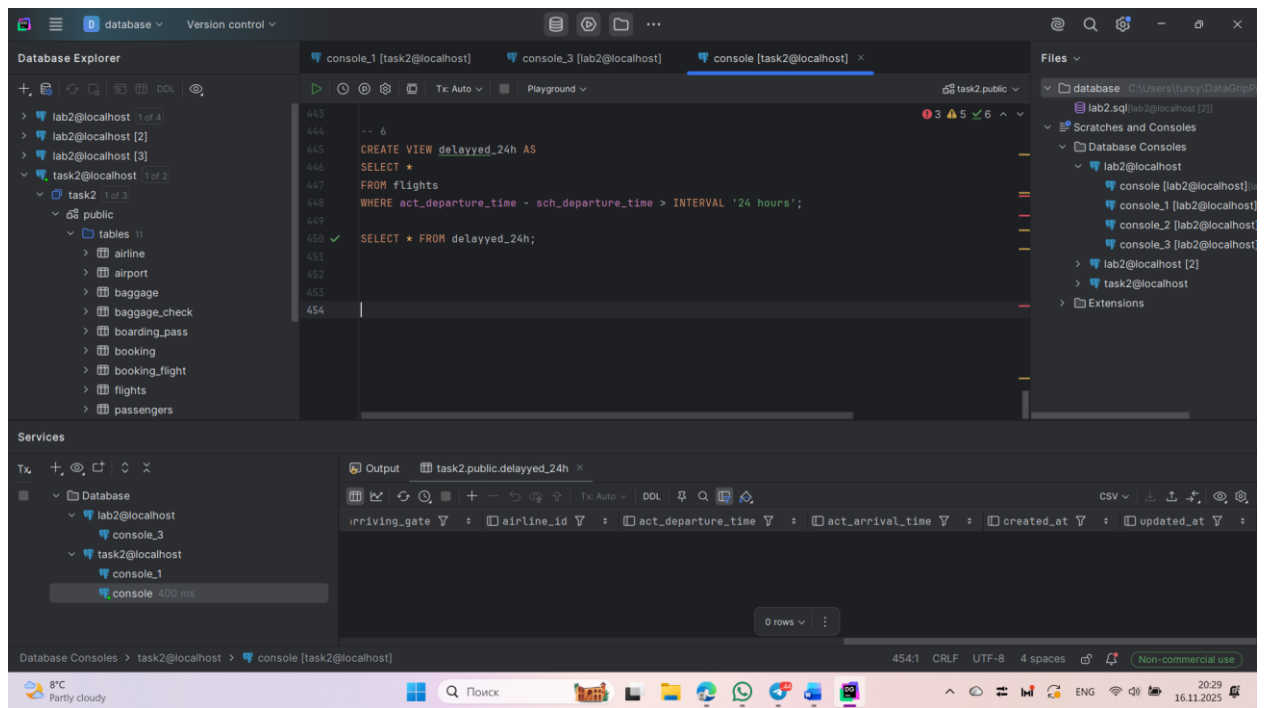


```
CREATE VIEW delayed_24h AS  
SELECT *  
FROM flights  
WHERE act_departure_time - sch_departure_time > INTERVAL '24 hours';
```


#7

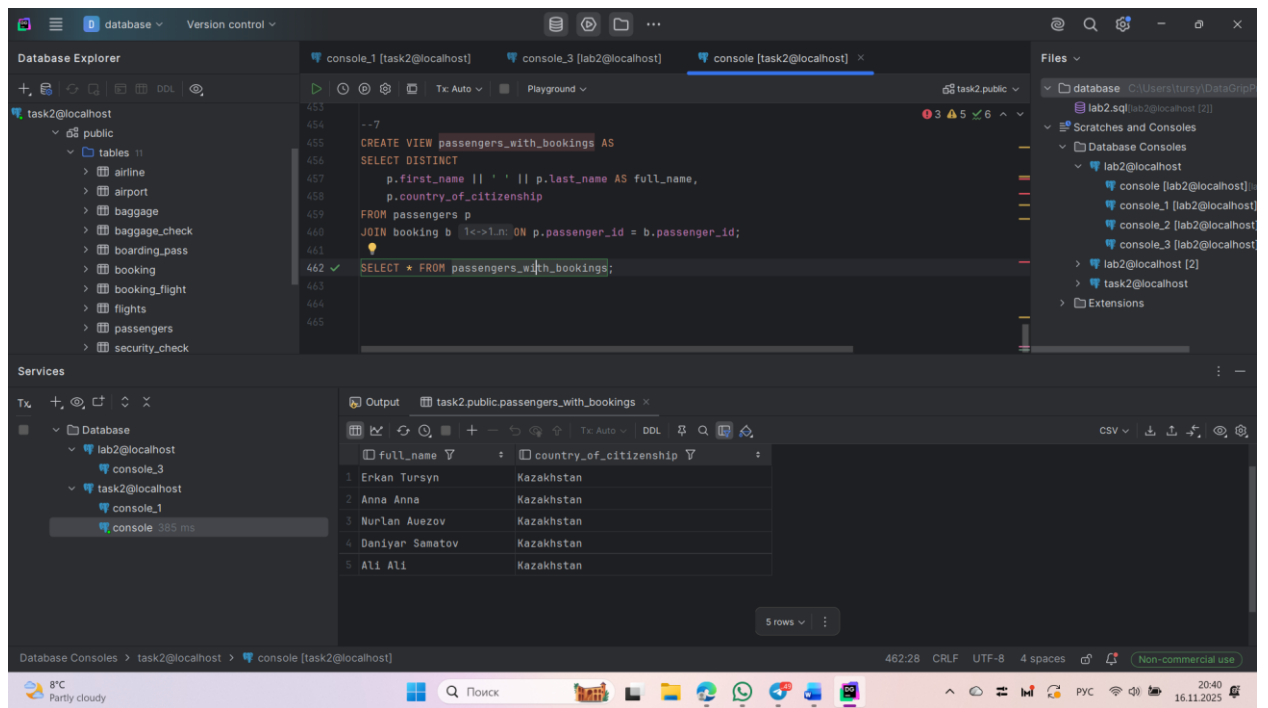

```
CREATE VIEW passengers_with_bookings AS
SELECT DISTINCT
    p.first_name || ' ' || p.last_name AS full_name,
    p.country_of_citizenship
FROM passengers p
JOIN booking b ON p.passenger_id = b.passenger_id;
```

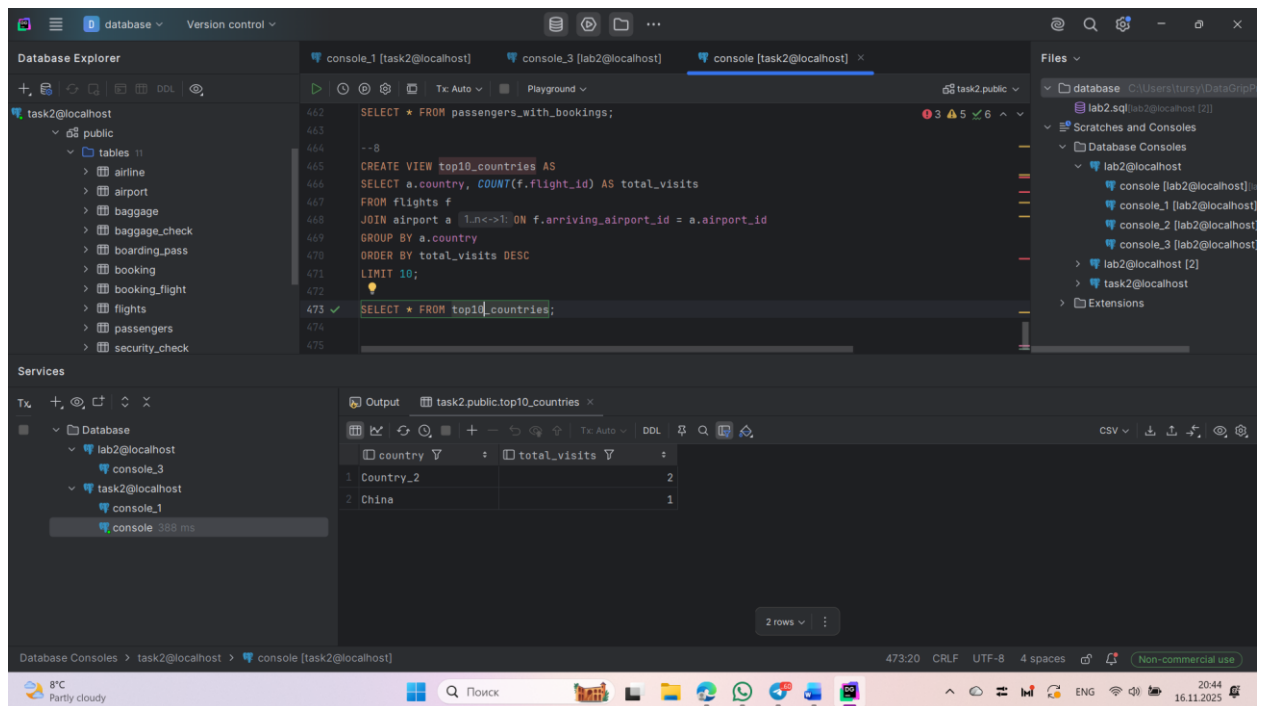

```
CREATE VIEW top10_countries AS
SELECT a.country, COUNT(f.flight_id) AS total_visits
FROM flights f
JOIN airports a ON f.arriving_airport_id = a.airport_id
GROUP BY a.country
ORDER BY total_visits DESC
LIMIT 10;
```
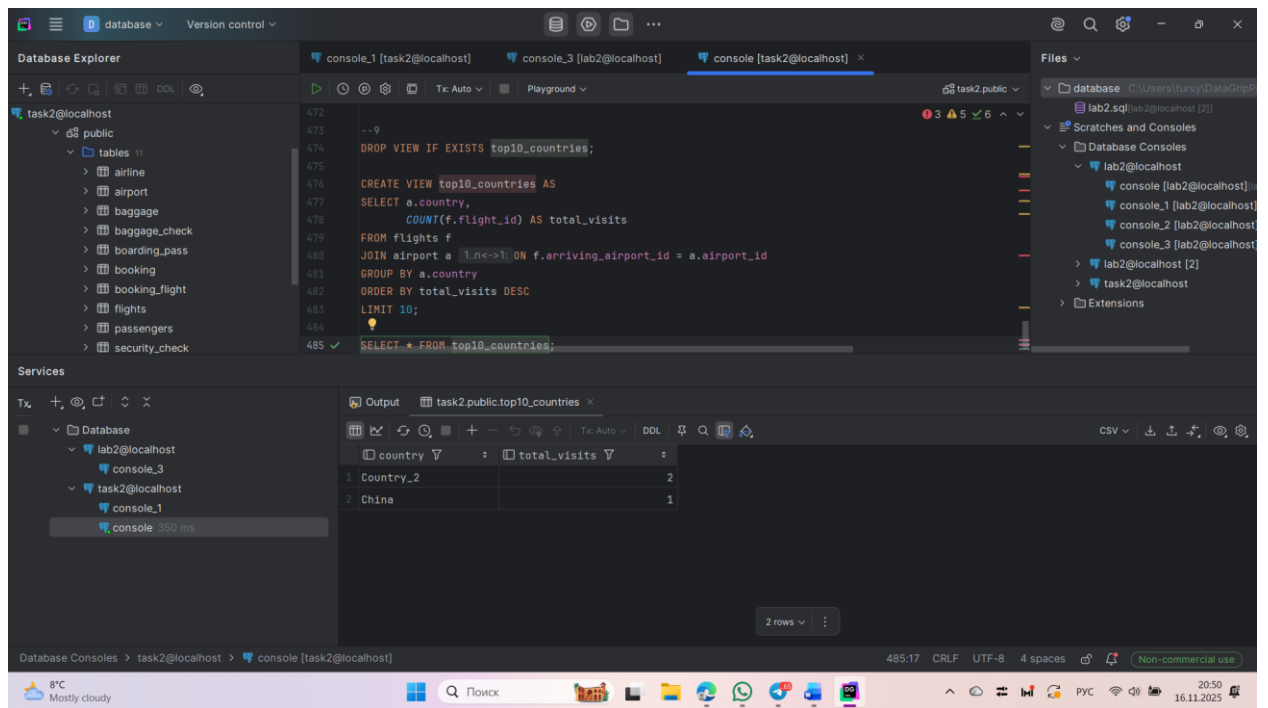
```
CREATE VIEW top10_countries AS
SELECT a.country,
       COUNT(f.flight_id) AS total_visits
FROM flights f
JOIN airport a ON f.arriving_airport_id = a.airport_id
GROUP BY a.country
ORDER BY total_visits DESC
LIMIT 10;
```

#10

The screenshot shows a database management tool interface with a dark theme. The top section contains a 'Database Explorer' on the left, a central SQL editor, and a 'Files' panel on the right. The SQL editor displays a command to drop several views: `DROP VIEW IF EXISTS flights_on_date, bookings_next_week, top5_routes, flights_airline, flights_airline_next7, delayed_24h, passengers_leffler_thompson, top10_countries CASCADE;`. Below the editor, the 'Output' panel shows the results of the command, which is a table with two columns: 'country' and 'total_visits'. The table contains two rows: 'Country_2' with a value of 2, and 'China' with a value of 1. The bottom of the interface shows a status bar with the text 'SUM: 1 2.2 493.1' and a 'Non-commercial use' notice.

Database Explorer

task2@localhost

- public
 - tables 11
 - airline
 - airport
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_flight
 - flights
 - passengers
 - security_check

console_1 [task2@localhost] console_3 [lab2@localhost] console [task2@localhost]

task2.public

task2.public.top10_countries

country total_visits

1 Country_2	2
2 China	1

2 rows

Database Consoles > task2@localhost > console [task2@localhost]

SUM: 1 2.2 493.1

Панель управления HUAWEI

Non-commercial use

DROP VIEW IF EXISTS flights_on_date, bookings_next_week, top5_routes,
flights_airline, flights_airline_next7, delayed_24h,
passengers_leffler_thompson, top10_countries CASCADE;