

#1

The screenshot shows a database management tool interface with a dark theme. The main window displays a SQL query in a console:

```
1 SELECT f.*
2 FROM flights f
3 JOIN airline a ON f.airline_id = a.airline_id
4 WHERE a.airline_name = 'KazAero';
5
```


The query is executed, and the results are shown in a table with 3 rows. The table has columns: airline_id, act_departure_time, act_arrival_time, created_at, and updated_at. The results are as follows:

airline_id	act_departure_time	act_arrival_time	created_at	updated_at
1	2024-01-10 08:05:00.000000	2024-01-10 12:10:00.000000	2025-09-27 20:30:46.978773	2025-09-27 20:30:46.978773
2	2024-02-10 08:05:00.000000	2024-02-10 12:10:00.000000	2025-09-27 20:41:06.973743	2025-09-27 20:41:06.973743
3	2024-01-10 08:06:00.000000	2024-01-10 12:11:00.000000	2025-10-13 12:18:02.745188	2025-10-13 12:18:02.745188

The interface also shows a Database Explorer on the left with a tree view of the database structure, including tables like airline, airport, baggage, and baggage_check. The bottom status bar indicates the current database is 'task2@localhost' and the console is 'console [task2@localhost]'. A small tooltip in the bottom right corner suggests switching input methods using the Windows+ПРОБЕЛ key.


```
SELECT f.*
FROM flights f
JOIN airline a ON f.airline_id = a.airline_id
WHERE a.airline_name = 'KazAero';
```

#2

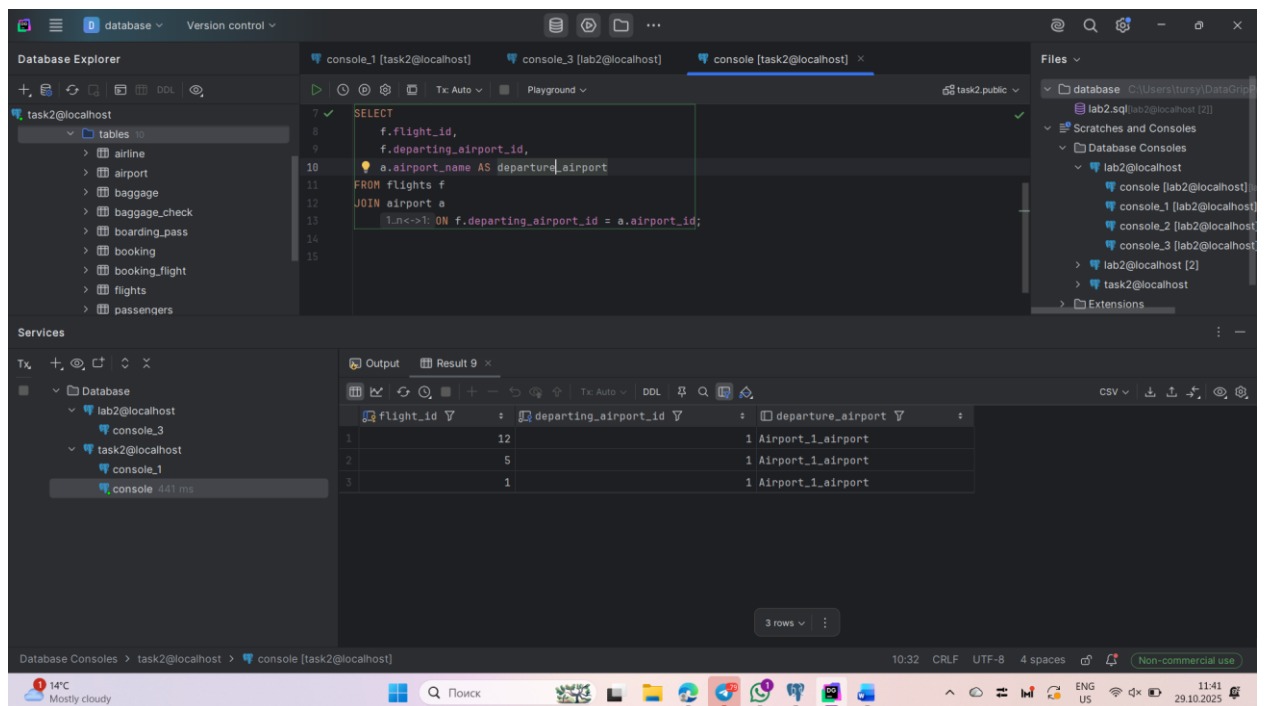


```
SELECT
  f.flight_id,
  f.departing_airport_id,
  a.airport_name AS departure_airport
FROM flights f
JOIN airport a
  ON f.departing_airport_id = a.airport_id;
```

#3

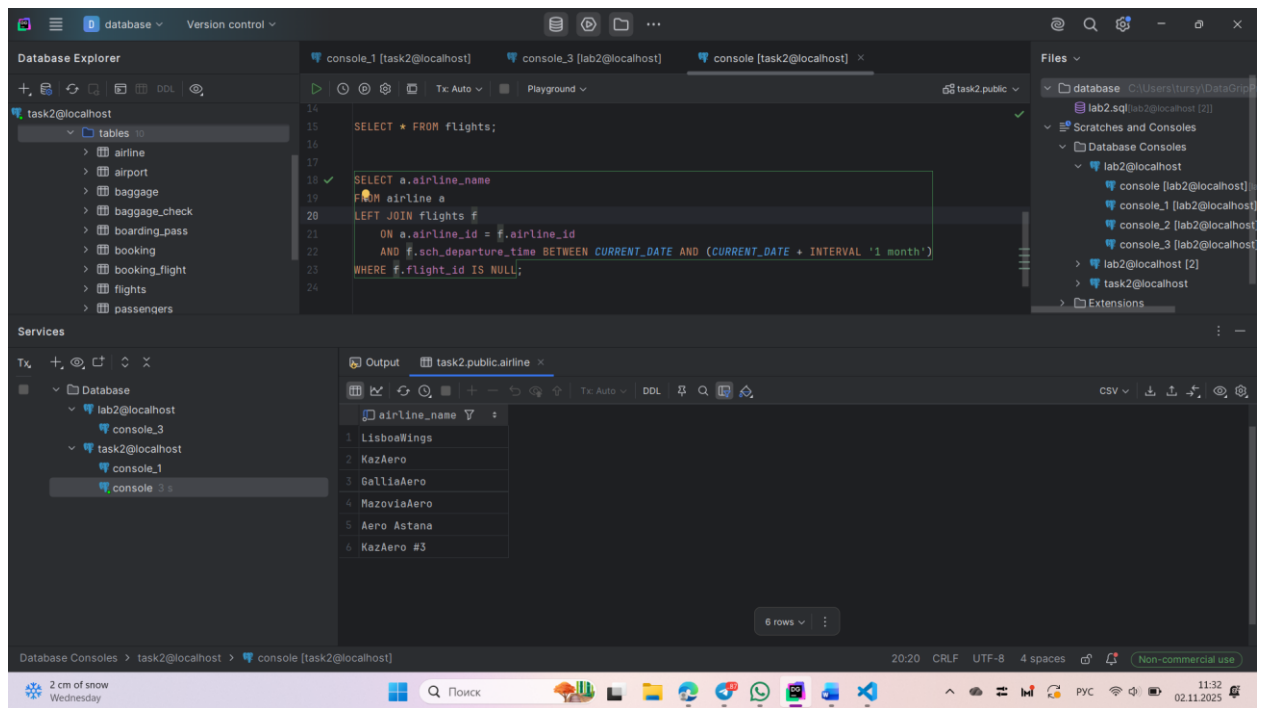

```
SELECT a.airline_name  
FROM airline a  
LEFT JOIN flights f  
ON a.airline_id = f.airline_id  
AND f.sch_departure_time BETWEEN CURRENT_DATE AND (CURRENT_DATE +  
INTERVAL '1 month')  
WHERE f.flight_id IS NULL;
```

#4

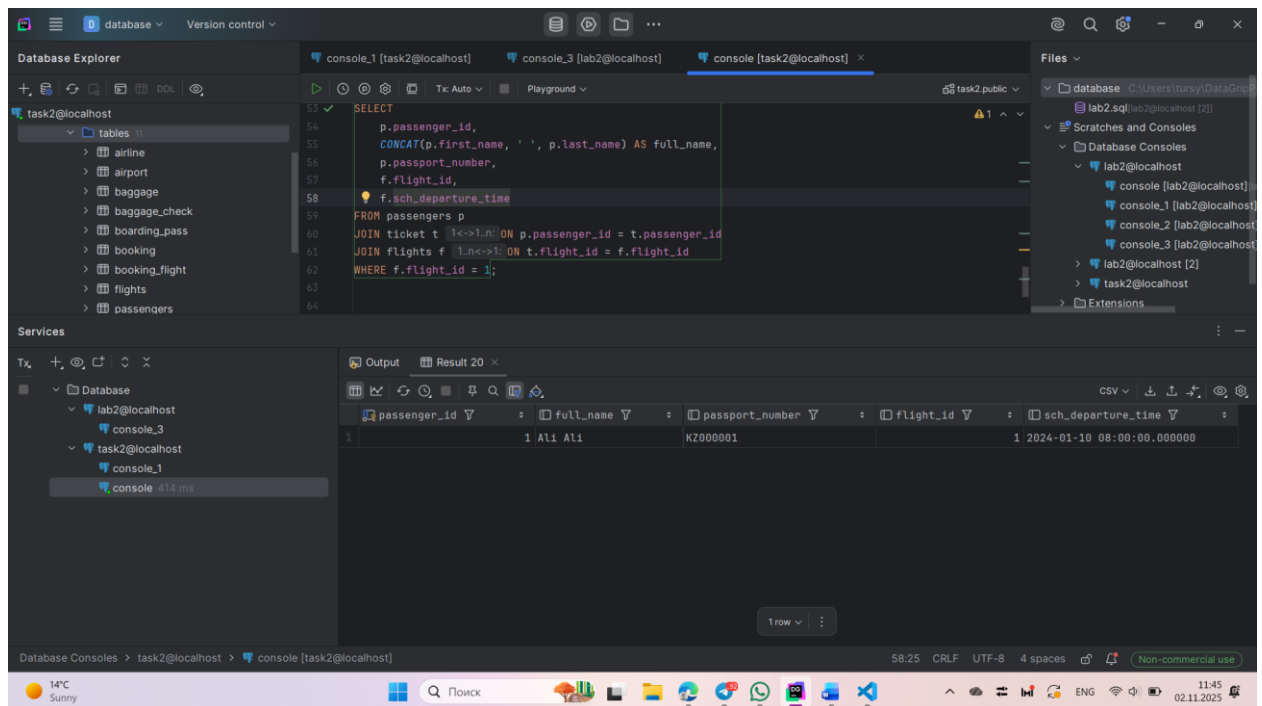

```
SELECT
  p.passenger_id,
  CONCAT(p.first_name, ' ', p.last_name) AS full_name,
  p.passport_number,
  f.flight_id,
  f.sch_departure_time
FROM passenger p
JOIN ticket t ON p.passenger_id = t.passenger_id
JOIN flights f ON t.flight_id = f.flight_id
WHERE f.flight_id = 1;
```

The screenshot shows a database IDE interface. On the left, the 'Database Explorer' pane shows a tree view of a database with tables like 'airline', 'airport', 'baggage', etc. The main editor displays a SQL query:

```
SELECT
  f.flight_id,
  AVG(t.price) AS avg_price,
  SUM(t.price) AS total_price,
  MAX(t.price) AS max_price,
  MIN(t.price) AS min_price
FROM ticket t
JOIN flights f ON t.flight_id = f.flight_id
GROUP BY f.flight_id;
```

The 'Output' pane at the bottom shows the results of the query, which is a single row with the following values:

flight_id	avg_price	total_price	max_price	min_price
1	65000	65000	65000	65000

The status bar at the bottom indicates the sum of the total_price is 65000.00.

SELECT

f.flight_id,

AVG(t.price) AS avg_price,

SUM(t.price) AS total_price,


MAX(t.price) AS max_price,

MIN(t.price) AS min_price

FROM ticket t

JOIN flights f ON t.flight_id = f.flight_id

GROUP BY f.flight_id;

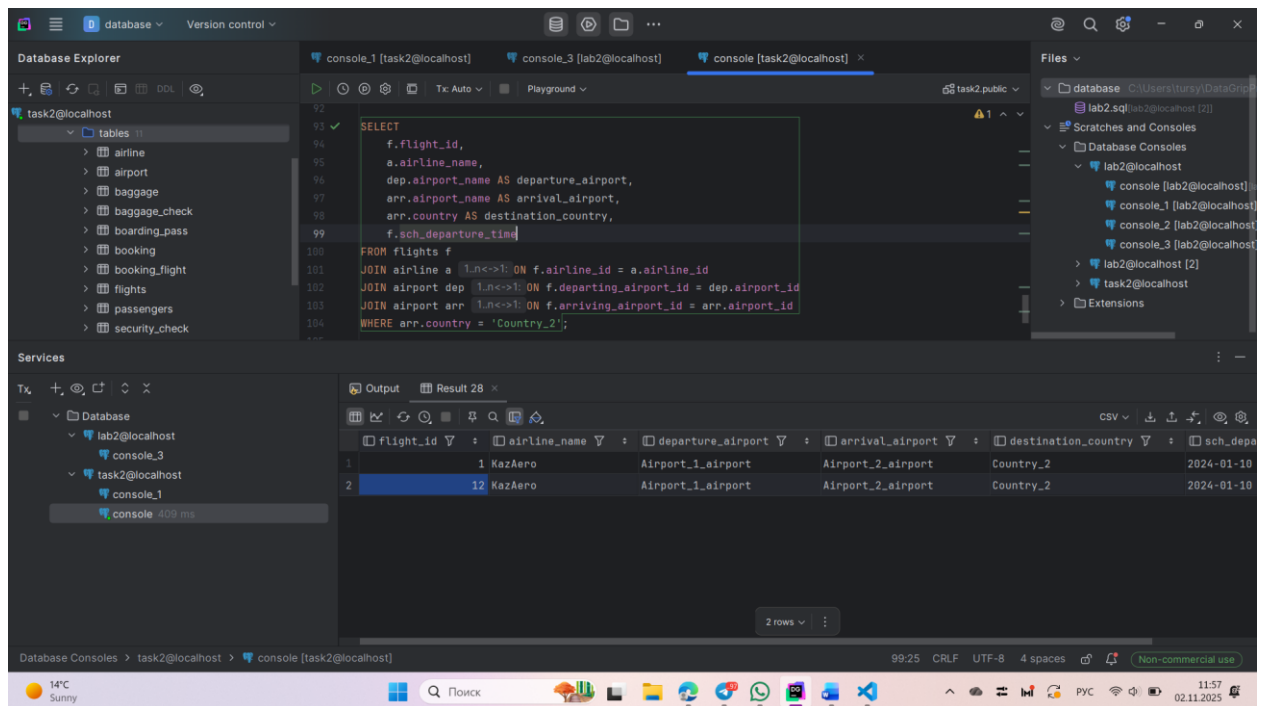

SELECT

f.flight_id,

a.airline_name,

dep.airport_name AS departure_airport,

arr.airport_name AS arrival_airport,

arr.country AS destination_country,

f.sch_departure_time

FROM flights f


JOIN airline a ON f.airline_id = a.airline_id

JOIN airport dep ON f.departing_airport_id = dep.airport_id

JOIN airport arr ON f.arriving_airport_id = arr.airport_id

WHERE arr.country = 'Country_2'; -- замени на существующую страну

#7

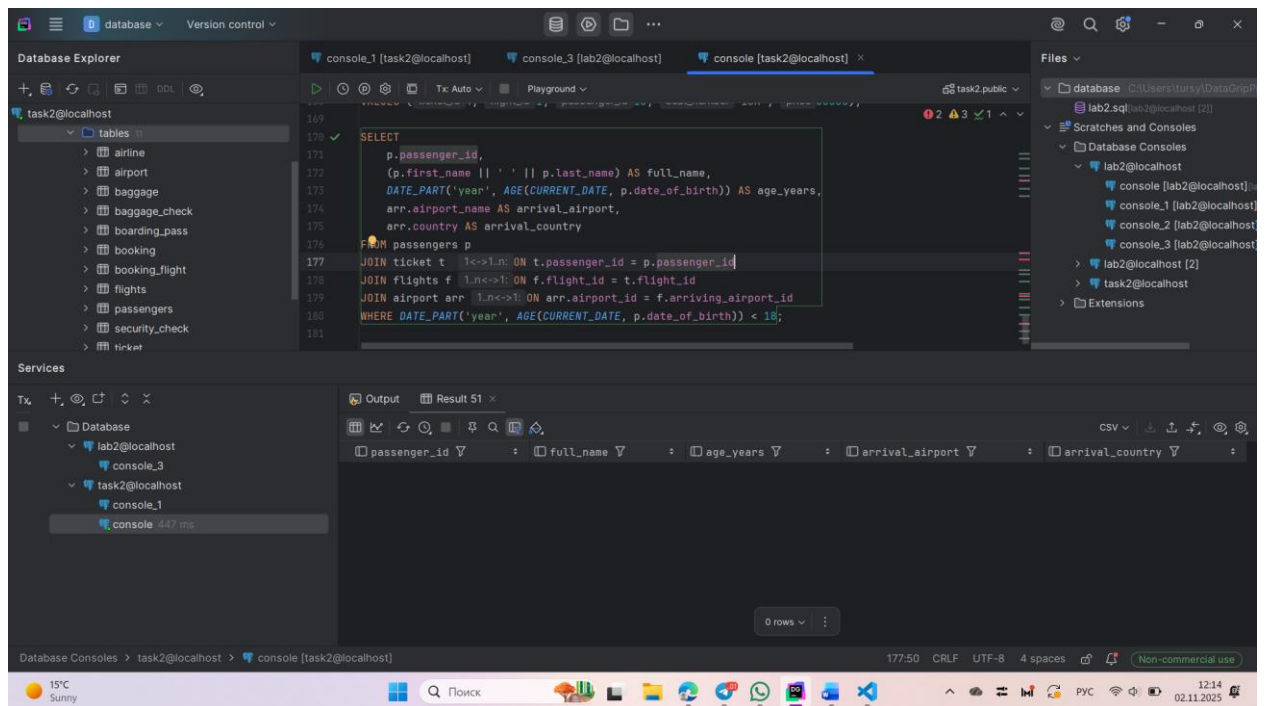

SELECT

p.passenger_id,

(p.first_name || ' ' || p.last_name) AS full_name,

DATE_PART('year', AGE(CURRENT_DATE, p.date_of_birth)) AS age_years,

arr.airport_name AS arrival_airport,

arr.country AS arrival_country


FROM passengers p

JOIN ticket t ON t.passenger_id = p.passenger_id

JOIN flights f ON f.flight_id = t.flight_id

JOIN airport arr ON arr.airport_id = f.arriving_airport_id

WHERE DATE_PART('year', AGE(CURRENT_DATE, p.date_of_birth)) < 18;

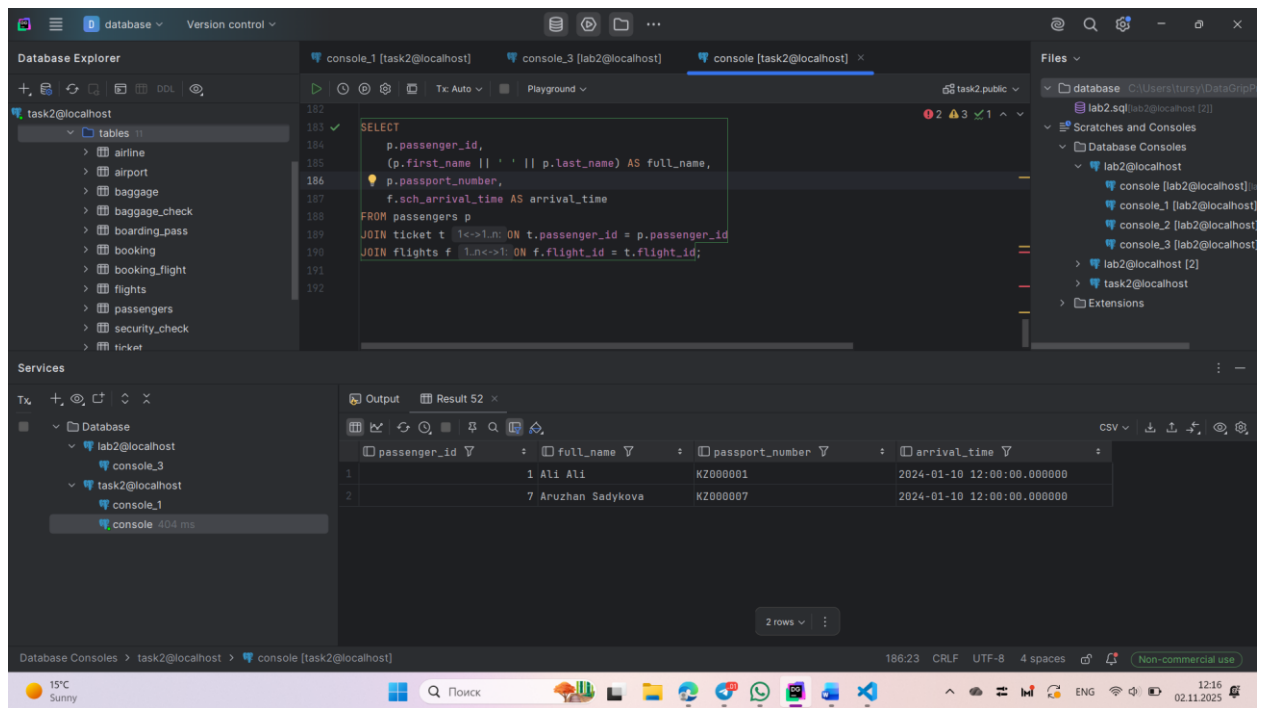


SELECT

```
p.passenger_id,
(p.first_name || ' ' || p.last_name) AS full_name,
p.passport_number,
f.sch_arrival_time AS arrival_time
```

FROM passengers p

JOIN ticket t ON t.passenger_id = p.passenger_id

JOIN flights f ON f.flight_id = t.flight_id;

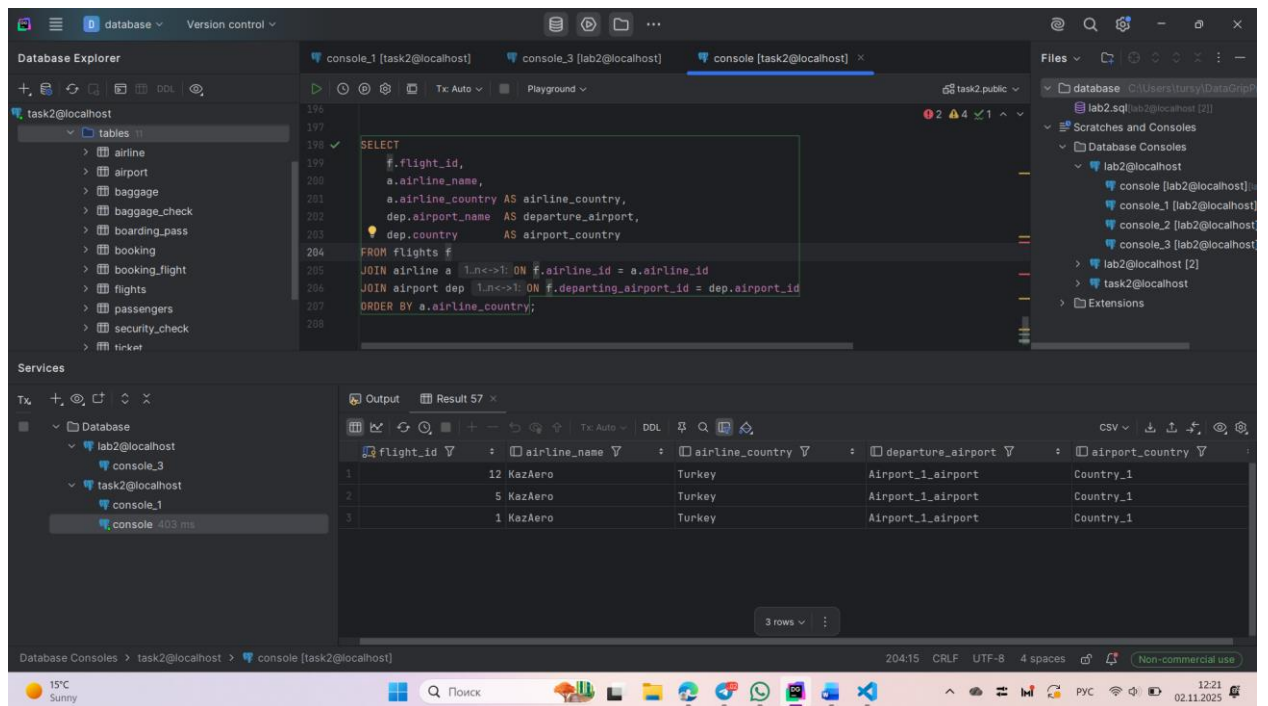

SELECT

f.flight_id,

a.airline_name,

a.airline_country AS airline_country,

dep.airport_name AS departure_airport,

dep.country AS airport_country

FROM flights f

JOIN airline a ON f.airline_id = a.airline_id

JOIN airport dep ON f.departing_airport_id = dep.airport_id

ORDER BY a.airline_country;