

#1

The screenshot shows a database management interface with a dark theme. On the left, the 'Database Explorer' shows a tree structure with 'task2@localhost' expanded, showing a 'public' schema with tables like 'airline', 'airport', 'baggage_check', and 'boarding_pass'. The main editor shows two SQL queries in a console window:

```
BEGIN;  
DELETE FROM booking WHERE booking_id = 1;  
SELECT * FROM booking;  
COMMIT;  
  
BEGIN;  
DELETE FROM booking WHERE booking_id = 999999;  
ROLLBACK;
```

Below the editor, the 'Services' section shows a table view for 'task2.public.booking'. The table has 9 rows and 8 columns: booking_id, flight_id, passenger_id, booking_platform, created_at, updated_at, status, and tick.


booking_id	flight_id	passenger_id	booking_platform	created_at	updated_at	status	tick
17	1	2	AviaKZ	2023-11-15 00:00:00.000000	2023-11-15 00:00:00.000000	Sold	
46	1	1	TestPlatform	2023-10-15 12:00:00.000000	2025-09-27 21:44:04.936118	Sold	
16	1	1	AviaKZ	2023-10-05 00:00:00.000000	2025-09-27 21:44:04.936118	Sold	
18	1	3	FlyApp	2024-01-20 00:00:00.000000	2024-01-20 00:00:00.000000	Sold	
19	1	4	FlyApp	2024-01-25 00:00:00.000000	2024-01-25 00:00:00.000000	Sold	
20	1	5	AirOnLine	2024-02-05 00:00:00.000000	2024-02-05 00:00:00.000000	Sold	
200	1	1	AviaKZ	2023-10-10 00:00:00.000000	2023-10-10 00:00:00.000000	Sold	
250	1	1	FlyApp	2023-10-15 00:00:00.000000	2023-10-15 00:00:00.000000	Sold	
300	1	1	AirOnLine	2023-10-20 00:00:00.000000	2023-10-20 00:00:00.000000	Sold	

The bottom status bar shows 'Database Consoles > task2@localhost > console [task2@localhost]' and a system tray with a clock showing 18:59 on 23.11.2025.

```
BEGIN;  
DELETE FROM booking WHERE booking_id = 1;  
SELECT * FROM booking;  
COMMIT;
```


```
BEGIN;  
DELETE FROM booking WHERE booking_id = 999999;  
ROLLBACK;
```

#2

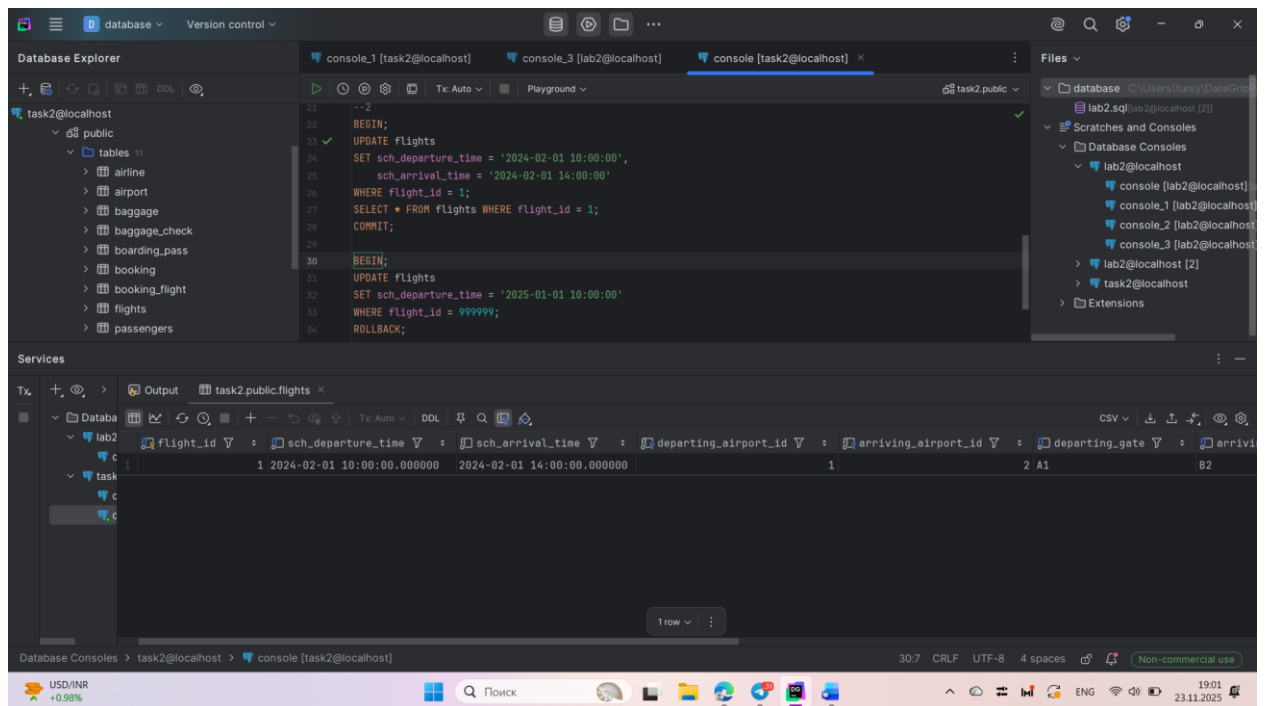

```
BEGIN;  
UPDATE flights  
SET sch_departure_time = '2024-02-01 10:00:00',  
    sch_arrival_time = '2024-02-01 14:00:00'  
WHERE flight_id = 1;  
SELECT * FROM flights WHERE flight_id = 1;  
COMMIT;
```


```
BEGIN;  
UPDATE flights  
SET sch_departure_time = '2025-01-01 10:00:00'  
WHERE flight_id = 999999;  
ROLLBACK;
```

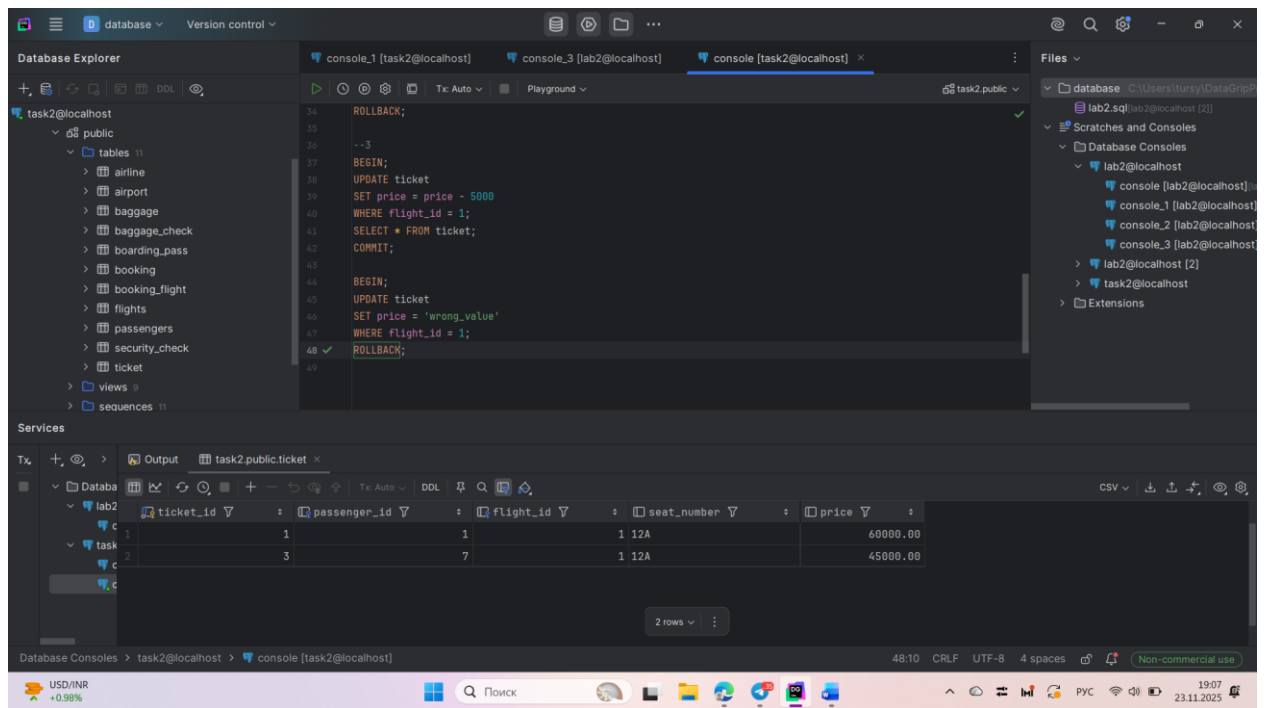

```
BEGIN;  
UPDATE ticket  
SET price = price - 5000  
WHERE flight_id = 1;  
SELECT * FROM ticket;  
COMMIT;
```


```
BEGIN;  
UPDATE ticket  
SET price = 'wrong_value'  
WHERE flight_id = 1;  
ROLLBACK;
```

#4

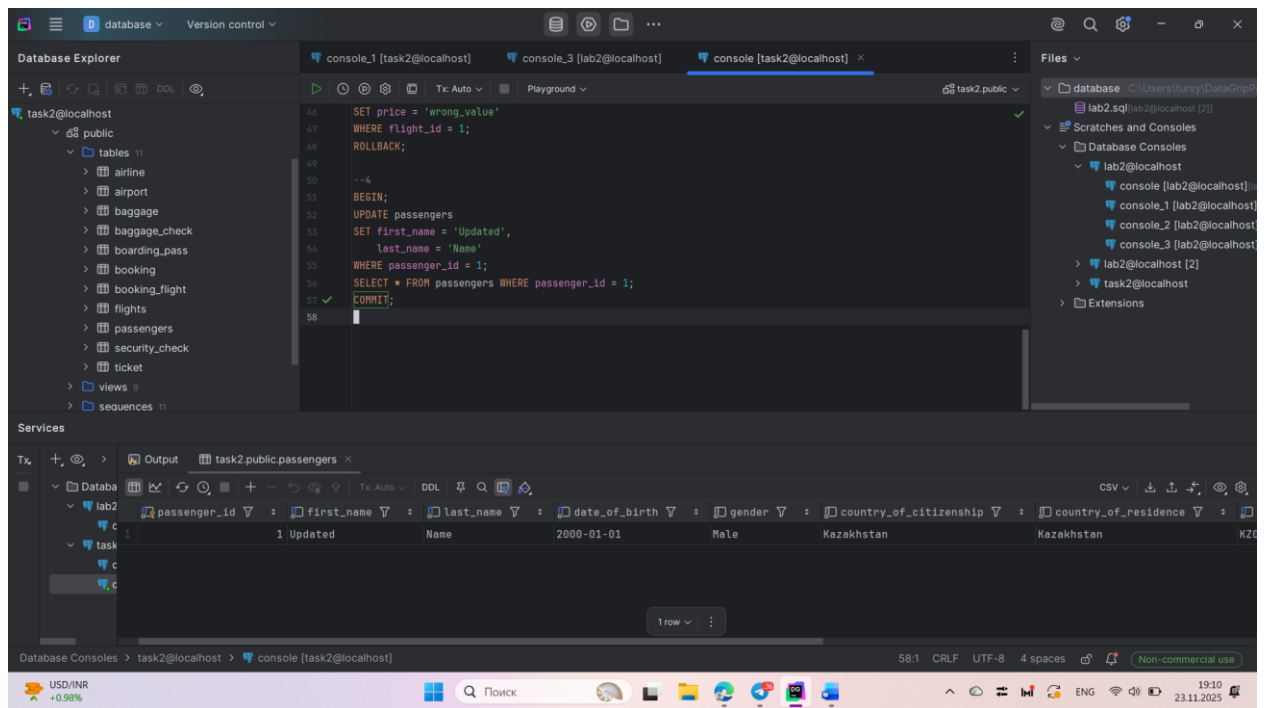

```
BEGIN;
UPDATE passengers
SET first_name = 'Updated',
    last_name = 'Name'
WHERE passenger_id = 1;
SELECT * FROM passengers WHERE passenger_id = 1;
COMMIT;
```

#5

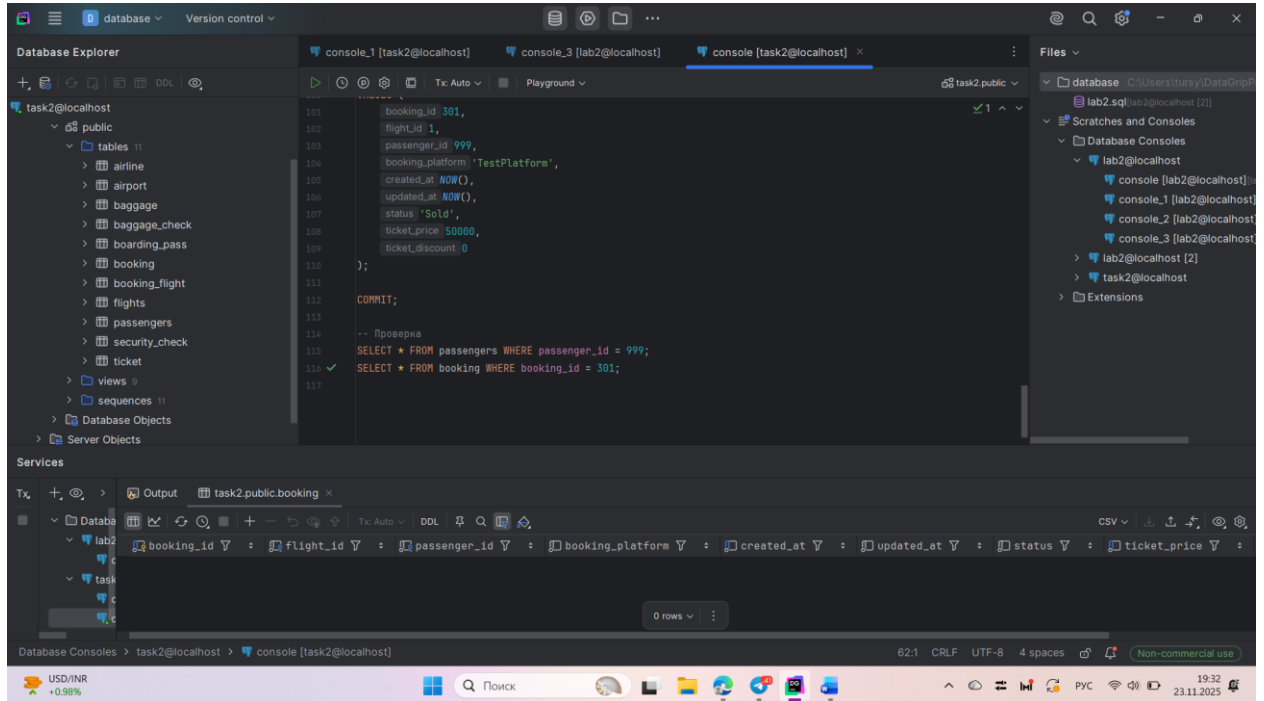

BEGIN;

INSERT INTO passengers (passenger_id, first_name, last_name, country_of_citizenship, date_of_birth, gender)

VALUES (999, 'Aruza', 'Test', 'Kazakhstan', '2005-05-05', 'Female');

INSERT INTO booking (booking_id, flight_id, passenger_id, booking_platform, created_at, updated_at, status, ticket_price, ticket_discount)

VALUES (999, 1, 999, 'TestPlatform', NOW(), NOW(), 'Sold', 50000, 0);

SELECT * FROM passengers WHERE passenger_id = 999;

SELECT * FROM booking WHERE booking_id = 999;

COMMIT;

#6

The screenshot shows a database management interface with a dark theme. The top section contains a 'Database Explorer' on the left, a central SQL editor, and a 'Files' panel on the right. The SQL editor shows a transaction with the following code:

```
115 SELECT * FROM passengers WHERE passenger_id = 999;
116 SELECT * FROM booking WHERE booking_id = 301;
117
118 --6
119 BEGIN;
120 UPDATE ticket
121 SET price = price + 10000
122 WHERE flight_id = 1;
123 SELECT * FROM ticket;
124 COMMIT;
```


The bottom section, labeled 'Services', shows a table view for 'task2.public.ticket'. The table has columns: ticket_id, passenger_id, flight_id, seat_number, and price. It displays two rows of data:

ticket_id	passenger_id	flight_id	seat_number	price
1	1	1	12A	70000.00
3	7	1	12A	55000.00

The status bar at the bottom indicates the current session is 'task2@localhost' and the console is 'console [task2@localhost]'. The system tray shows the time as 19:34 on 23.11.2025.

```
BEGIN;
UPDATE ticket
SET price = price + 10000
WHERE flight_id = 1;
SELECT * FROM ticket;
COMMIT;
```

#7

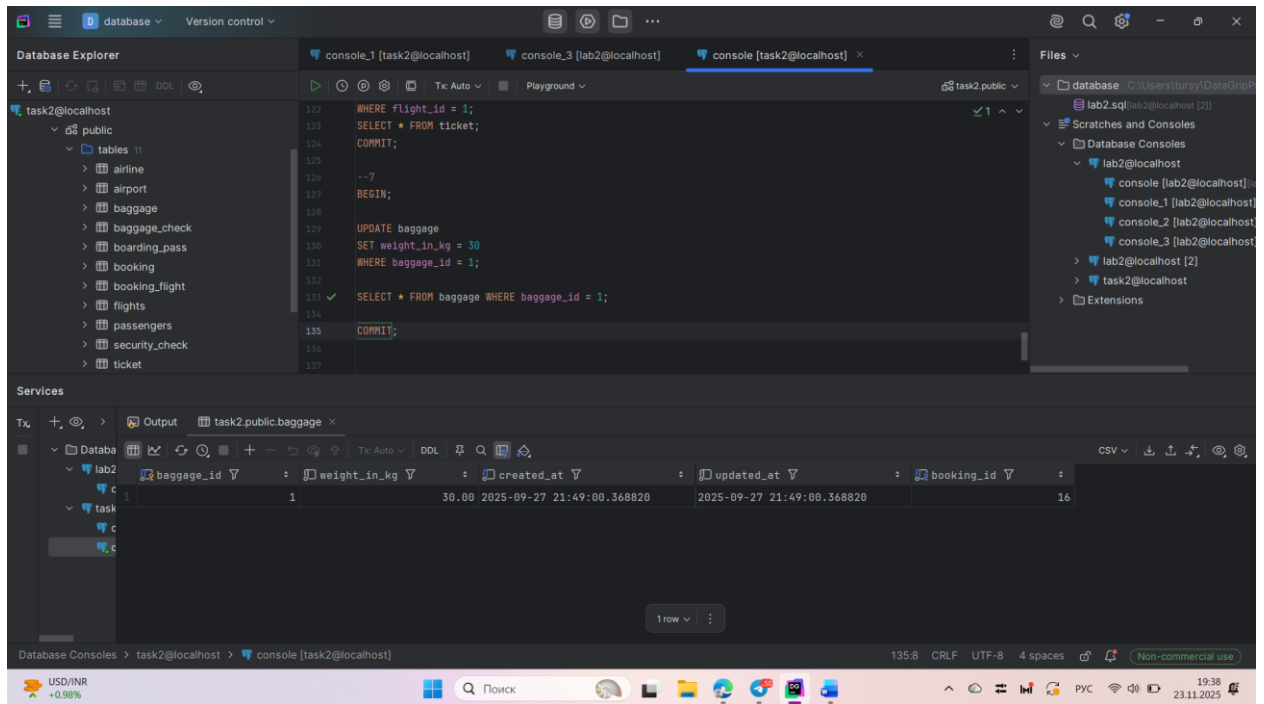


BEGIN;

UPDATE baggage
SET weight_in_kg = 30
WHERE baggage_id = 1;

SELECT * FROM baggage WHERE baggage_id = 1;

COMMIT;

#8

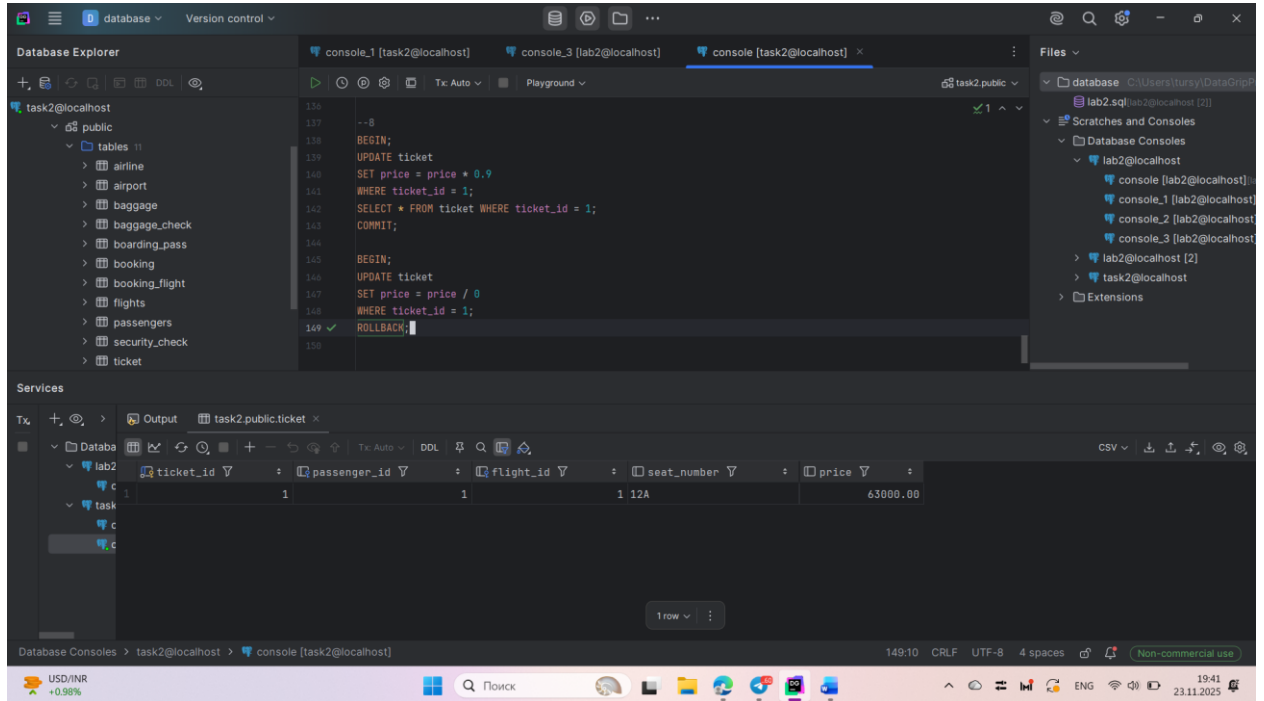

```
BEGIN;
UPDATE ticket
SET price = price * 0.9
WHERE ticket_id = 1;
SELECT * FROM ticket WHERE ticket_id = 1;
COMMIT;
```

```
BEGIN;
UPDATE ticket
SET price = price / 0
WHERE ticket_id = 1;
ROLLBACK;
```

#9

The screenshot shows a database management tool interface. The top panel displays a SQL query being executed in a console window. The query is as follows:

```
--9
BEGIN;
UPDATE booking
SET flight_id = 5
WHERE flight_id = 1;
SELECT * FROM booking WHERE flight_id = 5;
COMMIT;
```

The bottom panel shows the results of the query, displaying a table with 9 rows. The table has the following columns: booking_id, flight_id, passenger_id, booking_platform, created_at, updated_at, status, and tick.

booking_id	flight_id	passenger_id	booking_platform	created_at	updated_at	status	tick
17	5	2	AviaKZ	2023-11-15 00:00:00.000000	2023-11-15 00:00:00.000000	Sold	
46	5	1	TestPlatform	2023-10-15 12:00:00.000000	2025-09-27 21:44:04.936118	Sold	
16	5	1	AviaKZ	2023-10-05 00:00:00.000000	2025-09-27 21:44:04.936118	Sold	
18	5	3	FlyApp	2024-01-20 00:00:00.000000	2024-01-20 00:00:00.000000	Sold	
19	5	4	FlyApp	2024-01-25 00:00:00.000000	2024-01-25 00:00:00.000000	Sold	
20	5	5	AirOnLine	2024-02-05 00:00:00.000000	2024-02-05 00:00:00.000000	Sold	
200	5	1	AviaKZ	2023-10-10 00:00:00.000000	2023-10-10 00:00:00.000000	Sold	
250	5	1	FlyApp	2023-10-15 00:00:00.000000	2023-10-15 00:00:00.000000	Sold	
300	5	1	AirOnLine	2023-10-20 00:00:00.000000	2023-10-20 00:00:00.000000	Sold	

```
BEGIN;
UPDATE booking
SET flight_id = 5
WHERE flight_id = 1;
SELECT * FROM booking WHERE flight_id = 5;
COMMIT;
```