LAPORAN PEMROGRAMAN FRAMEWORK "SESSION 10 FIREBASE LOGIN"



Oleh:


Nama : Bagus Satria Putra


Kelas : 3F

Absen/NIM : 8 / 1841720146

PROGRAM STUDI TEKNIK INFORMATIKA JURUSAN TEKNOLOGI INFORMASI POLITEKNIK NEGERI MALANG


26 APRIL 2021

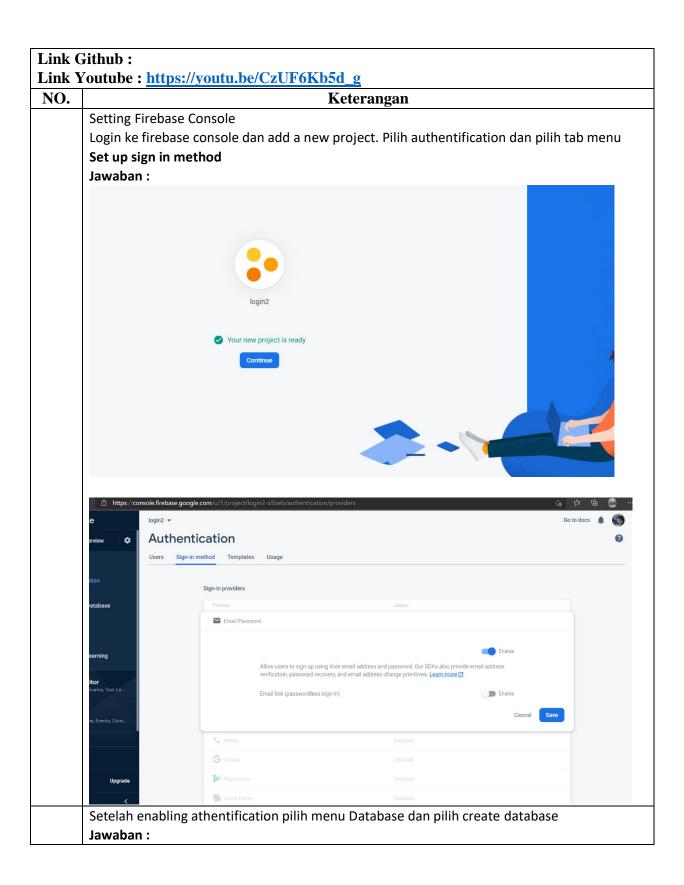

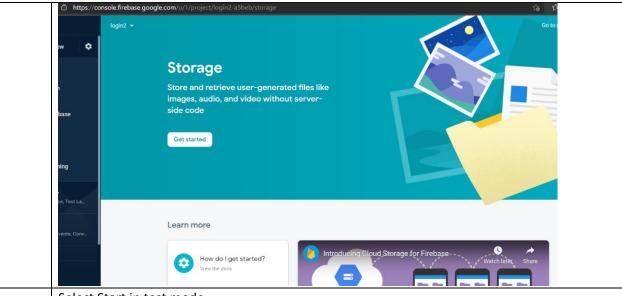



Select Start in test mode

Jawaban:

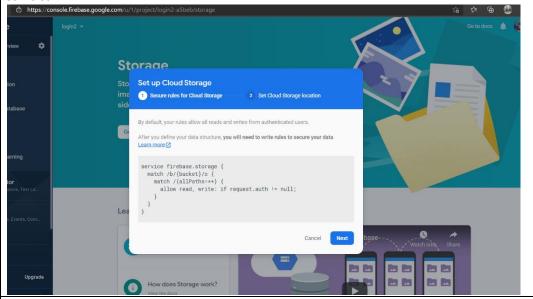


PIlih Done

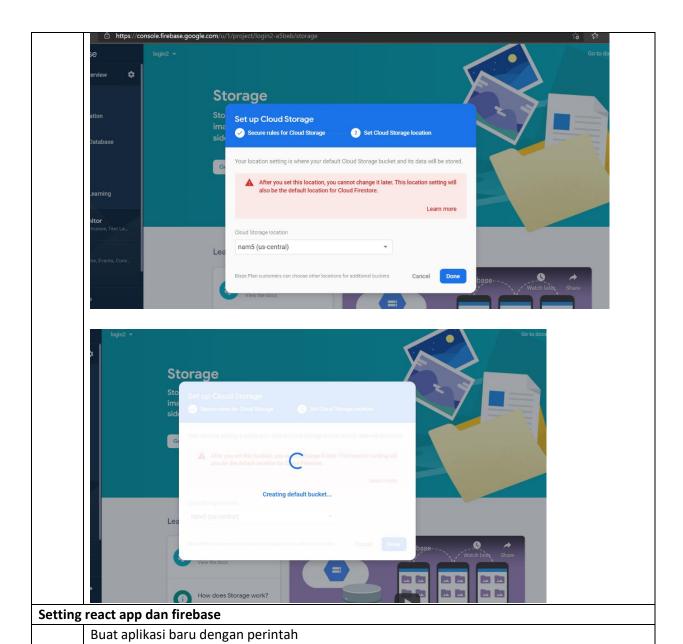

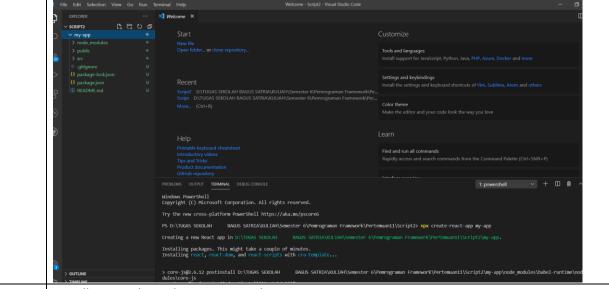

Install project baru dengan perintah

Jawaban:

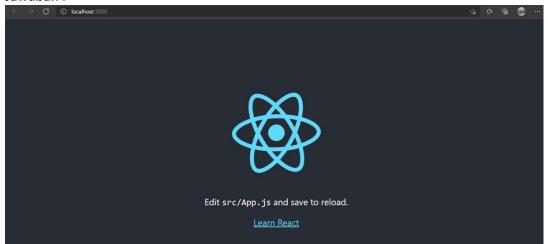

Install firebase

```
PS D:\TUGAS SEKOLAH BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\my-app> npm install -g firebase-tools npm MARI deprecated request@2.88.2: request has been deprecated, see https://github.com/request/request/issues/3142 npm MARI deprecated har-validator@5.1.5: this library is no longer supported
C:\Users\ROG SERIES\AppData\Roaming\npm\firebase -> C:\Users\ROG SERIES\AppData\Roaming\npm\node_modules\firebase-tools\lib\bin\firebase.js

> re2@1.15.9 install C:\Users\ROG SERIES\AppData\Roaming\npm\node_modules\firebase-tools\node_modules\re2
> install-from-cache --artifact build/Release/re2.node --host-var RE2_DOWNLOAD_MIRROR || npm run rebuild

Trying https://github.com/uhop/node-re2/releases/download/1.15.9/win32-x64-83.br ...
Writing to build/Release/re2.node ...
Done.

> protobufjs@6.10.2 postinstall C:\Users\ROG SERIES\AppData\Roaming\npm\node_modules\firebase-tools\node_modules\protobufjs
> node scripts/postinstall

npm MARI optional SKIPPING OPTIONAL DEPENDENCY: fsevents@-2.3.1 (node_modules\firebase-tools\node_modules\chokidar\node_modules\firebase-tools\protobuf_is and observed platform for fsevents@2.3.2: wanted {"os":"darwin", "arch":"any"} (current: {"os":"win32 added 635 nackages from 411 contributors in 261 542s
```

```
D:\TUGAS SEXOLAH BAGUS SATRIA\GULTAH\semester 6\Pemrograman Framework\Pertemuanil\Script2\my-app> firebase login
Firebase optionally collects CLI usage and error reporting information to help improve our products. Data is collected in accordance with Google's privacy policy (htt://policies.google.com/privacy) and is not used to identify you.
     Allow Firebase to collect CLI usage and error reporting information? Yes
To change your data collection preference at any time, run 'firebase logout' and log in again.
    isit this URL on this device to log in:
ttps://accounts.google.com/o/oauth/auth?client_id=563584335869-fgrhgmd47bqnekij5i8b5pr83h08496.apps.googleusercontent.com&scope=email%20penid%20https%3A%2F%2Fwww.goo
leapis.com%2Fauth%2Fcloudplatformprojects.readonly%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Fauth%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Ffirebase%20https%3A%2F%2Fwww.googleapis.com%2Ffirebase%20https%
    PS D:\TUGAS SEKOLAH BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\my-app> tirebase init
                                        You're about to initialize a Firebase project in this directory:
     D:\TUGAS SEKOLAH
                                                                       BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\my-app
     Are you ready to proceed? (Y/n)
Pilih setting untuk firebase nya firebase dan Hosting
    Which Firebase CLI features do you want to set up for this folder? Press Space to select features, then Enter to confirm your choices.

(*) Patabase: Configure Firebase Realtime Database and deploy rules

(*) Firestore: Deploy rules and create indexes for Firestore

(*) Finctions: Configure and deploy Cloud Functions
       *) Hosting: Configure and deploy Firebase Hosting sites
) Storage: Deploy Cloud Storage security rules
) Emulators: Set up local emulators for Firebase features
) Remote Config: Get, deploy, and rollback configurations for Remote Config
                                                                                                                                                                                                                                                                                                                                                                             ı
Pilih build jangan pilih Do not choose public
Jawaban:
    Are you ready to proceed? Yes which Firebase CLI features do you want to set up for this folder? Press Space to select features, then Enter to confirm your choice the confirm you can be a select feature of the confirm your choice that it is the confirm that is the confirmation of the confirmation that is the confirmation that is the confirmation to the confirmation that is t
    irst, let's associate this project directory with a Firebase project.
ou can create multiple project aliases by running firebase use --add,
ut for now we'll just set up a default project.
    Please select an option: Use an existing project
Select a default Firebase project for this directory: login2-a5beb (login2)
Using project login2-a5beb (login2)
  Firestore Security Rules allow you to define how and when to allow requests. You can keep these rules in your project directory and publish them with firebase deploy.
    What file should be used for Firestore Rules? firestore.rules
   irestore indexes allow you to perform complex queries while 
waintaining performance that scales with the size of the result 
with You can keep index definitions in your project directory 
and publish them with firebase deploy.
     What file should be used for Firestore indexes?
Pilih
Jawaban:
our public directory is the folder (relative to your project directory) that
will contain Hosting assets to be uploaded with firebase deploy. If you
have a build process for your assets, use your build's output directory.
     What do you want to use as your public directory? public
     Configure as a single-page app (rewrite all urls to /index.html)? Yes
     Set up automatic builds and deploys with GitHub? No
    File public/index.html already exists. Overwrite? No
        Skipping write of public/index.html
       Writing configuration info to firebase.json...
        Writing project information to .firebaserc...
         Firebase initialization complete!
Untuk membangun firebase
```

```
Jawaban:
PS D:\TUGAS SEKOLAH BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\my-app> npm run build
  > my-app@0.1.0 build D:\TUGAS SEKOLAH
                                                                                                                                               BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\mv-app
  > react-scripts build
Creating an optimized production build...
File sizes after gzip:
     41.34 KB build\static\js\2.910eb6d6.chunk.js
1.56 KB build\static\js\3.705cb397.chunk.js
1.17 KB build\static\js\runtime-main.f3336911.js
591 B build\static\js\main.d140991e.chunk.js
      591 B
574 B
                                      build\static\css\main.9d5b29c0.chunk.css
 The project was built assuming it is hosted at /.
You can control this with the homepage field in your package.json.
The build folder is ready to be deployed. You may serve it with a static server:
    npm install -g serve
serve -s build
  Find out more about deployment here:
     https://cra.link/deployment
    PS D:\TUGAS SEKOLAH BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\my-app> firebase serve
Serving from 'D:\TGAS SEXOLAH BAGUS SATKIA\KOLIZH\Semester 6\Penrograman Framework\Pertenuanli\Script2\my-app'...

hosting: Serving hosting files from: public
hosting: Local server: http://localhost.5000
hosting: Local server: http://localhost.5000
hosting: Local server: http://localhost.5000
hosting: 127.0.0.1 - _22/Apr/2021.1224.68 +00000] "GET / HTTP/1.1" 200 1721 "-" "Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (WHTML, like Gecko) Chrome/00.0.4430.85 Safari/537.36 Edg/90.0.818.46"
RRIETOR: RRIE Balformed
at decodeREI (caronymous)
at Responder-provider (C:\Users\NGO SERIES\AppGata\Nouning\nym\node modules\firebase-tools\node modules\superstatic\lib\middlesare\files,js:225:37
at processiticks\ndfiles(cetions (internal/process/fask queues,js:3915)
hosting: 127.0.0.1 - _[22/Apr/2021.1224:08 +00006] "GET /PAUBLIC LBUX/favicon.ico HTTD/1.1" 500 - "http://localhost:50000/" "Mozilla/5.0 (Windows NT 10.0; Win64; x64)
AppleWebKit/537.36 (GHTML, like Gecko) Chrome/90.0.4430.85 Safari/537.36 Edg/90.0.818.46"
RRIEFOR: RRIEFORM
at Responder, provider (C:\Users\NGO SERIES\AppGata\Nouning\nym\node modules\firebase-tools\node modules\superstatic\lib\middlesare\files,js:225:37
at processiticks\ndfile;etions (internal/process/fask gueues,js:3915)
setting: 227.0.0.1 - _[22/Apr/2021.1224:04 +00000] "GET /PAUBLIC LBUX/favicon.ico HTTD/1.1" 500 - "http://localhost:50000/" "Mozilla/5.0 (Windows NT 10.0; Win64; x64)
AppleWebKit/537.36 (WHTML, like Gecko) Chrome/90.0.4330.85 Safari/537.36 Edg/90.0.818.46"
shotting: 227.0.0.1 - _[22/Apr/2021.1224:04 +00000] "GET /PAUBLIC LBUX/faminfect,joon HTTD/1.1" 500 - "http://localhost:50000/" "Mozilla/5.0 (Windows NT 10.0; Win64; x64)
AppleWebKit/537.36 (WHTML, like Gecko) Chrome/90.0.4330.85 Safari/537.36 Edg/90.0.818.46"
shotting: 227.0.0.1 - _[22/Apr/2021.1224:24-0.0000] "GET / HTTD/1.1" 200 1721 "-" "Mozilla/5.0 (Windows NT 10.0; Win64; x64)
AppleWebKit/537.36 (WHTML, like Gecko) Chrome/90.0.4380.85 Safari/537.36 Edg/90.0.818.46"
shotting: 227.0.0.1 - _[22/Apr/2021.1224:24-
     === Serving from 'D:\TUGAS SEKOLAH BAGUS SATRIA\KULIAH\Semester 6\Pemrograman Framework\Pertemuan11\Script2\my-app'...
            Error: RRI malformed

at decodeRII (canonymous)

at Responder.provider (c:\users\NGG SERIES\App@ata\Roaming\upm\node_modules\firebase-tools\node_modules\superstatic\lib\mroviders\fs.js:71:16)

at C:\users\NGG SERIES\App@ata\Roaming\upm\node_modules\firebase-tools\node_modules\superstatic\lib\middleware\files.js:225:37

at processTicks\underliebtions (internal/process\fask_quaues,js:93:5)

hosting: 127.6.0.1 - [25/App?2021:141:2452 40000] "ET /PARBII C URIX/manifest.json HTTP/1.1" 500 - "http://localhost:5000/" "Mozilla/5.0 (kindows NT 10.0; kin64; x6

AppleWebKit/537.36 (kHTML, like Gecko) Chrome/90.0.4430.85 Safari/537.36 Edg/90.0.818.46"

TRI malformed

at decodeRII (canonymous)
Install Redux dan react redux, redux thunk
Jawaban:
```

Instalasi Redux

```
SYSTAIN BAGIS SATRIA\BRITAN\Semseter O\Penrogramen Framework\Perteman11\Script2\mathbb{\text{systapp}} app pm install redux
ghobel/plugin-laugifs ve-spread-parameters-in-optional.cdmining87.33.22 requires a peer of globel/coreg87.33.0 but none is installed. You must install peer dependencies yourself.


statilight2.10 requires a peer of typescript@p2-28.0 || >= 3.2.0-dev || >= 3.6.0-dev || >= 3.7.0-dev || >= 3.6.0-dev || >= 3.6
36 packages are looking for funding run 'npm fund' for details
              and 0 vulnerabilities
                                   Window SEDIAL BAZES SATRIANULIANS-sensiter ()Pemrograman Framework/Pertemanti/Script2/my-app. npm install react-redux
JAMES ASSESSATION SET OF THE PROPERTY OF
     react-redux@7.2.4

dded 8 packages from 52 contributors and audited 2044 packages in 16.942s
136 packages are looking for funding
run 'npm fund' for details
```

```
NG SERONAL MACES SHIPMACH INFORMATION CONTROL PROGRAMMENT OF THE PROGR
         136 packages are looking for funding
run 'npm fund' for details
             SOLIDESS SENSIAN BAGIS SATELANULIAN/Semester ()Pemrograman framework/Vertemannil/Script2/my-app> rpm install react-router-dom

making @nabel/plugin-bugfix-vi-spread-parameters-in-optional-chaiming@r.13.12 requires a peer of @nabel/core@?r.13.0 but none is installed. You must install peer dependencies yourself.


stall bud, you must install peer dependencies jpg@y-2.8.0 || > 3.7.0-dev || > 3.3.0-dev || > 3.3.0-dev || > 3.5.0-dev || > 3.6.0-dev || > 3.6.0-dev || > 3.6.0-dev || > 3.6.0-dev || > 3.7.0-dev || > 3.7.0
             react-router-dom@5.2.0
dded 10 packages from 5 contributors and audited 2056 packages in 20.43s
         136 packages are looking for funding
run `npm fund` for details
 Install firebase
Jawaban:
                                     | IDAS SEXCLAM | BAGIS SARRIANULIAN\Semester 6\Penrograman Framework\Pertensant\ScriptZ\up-app> rpm Install Tirebase
| Babbl/plugin-bugits-vd-spread-parameters-in-optional-chaining@f.13.12 requires a peer of [Babbl/core]P*13.0 but none is installed. You must install peer dependencies yourself.
| stuftigs[32.16 requires a peer of typescript[b=2.86 || > 3.7.0-dev || > 3.6.0-dev || > 3.6.0-dev || > 3.6.0-dev || > 3.7.0-dev ||
         135 packages are looking for funding
run 'npm fund' for details
Pilih UI library
 Jawaban:
                                           + @material-ui/core@4.11.3
added 26 packages from 19 contributors and audited 2082 packages in 23.836s
         140 packages are looking for funding
run `npm fund` for details
 Paste kan file public/index.html
 Jawban:
             clink rel="manifest" href="%PUBLIC_URL%/manifest.json" />
glink rel="stylesheet" href="https://fonts.googleapis.com/css?family=Roboto:300, 400, 500, 700&display=swap"/g
Install material icon
```

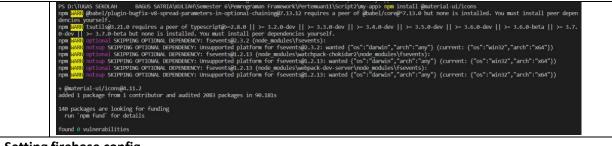


Setting firebase config

Pilih project setting


Jawaban:

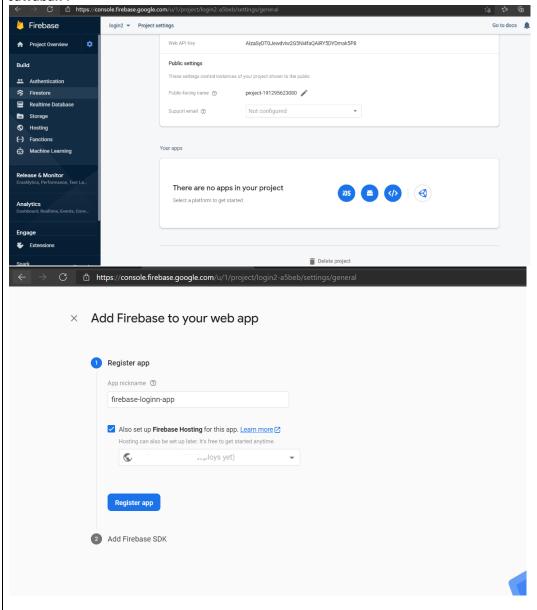


Pilih config

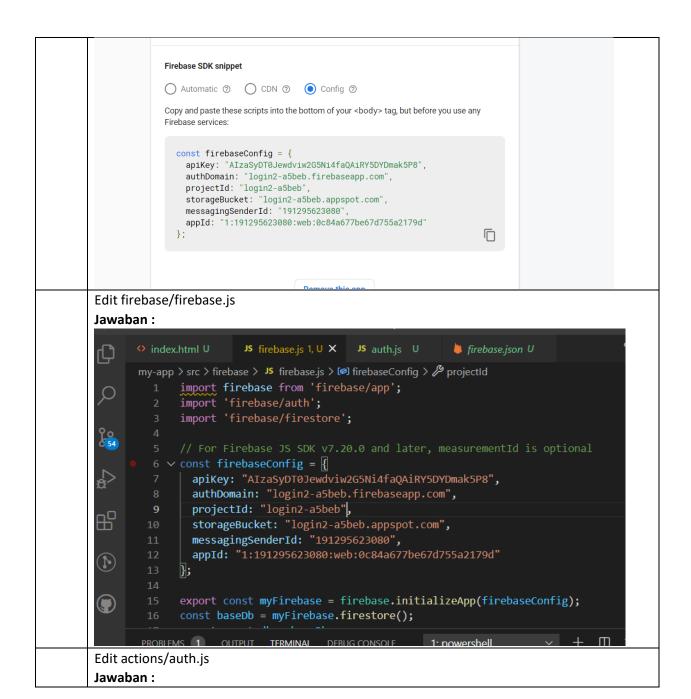

```
JS firebase.js U
                                           JS auth.js 1, U X
                                                           🔰 firebase.json U
                                                                                        th []
         my-app > src > actions > JS auth.js > ...
               import { myFirebase } from '../firebase/firebase';
               export const LOGIN REQUEST = 'LOGIN REQUEST';
               export const LOGIN_SUCCESS = 'LOGIN_SUCCESS';
               export const LOGIN_FAILURE = 'LOGIN_FAILURE';
               export const LOGOUT_REQUEST = 'LOGOUT_REQUEST';
               export const LOGOUT_SUCCESS = 'LOGOUT_SUCCESS';
               export const LOGOUT_FAILURE = 'LOGOUT_FAILURE';
               export const VERIFY_REQUEST = 'VERIFY_REQUEST';
               export const VERIFY SUCCESS = 'VERIFY SUCCESS';
  (1)
               const requestLogin = () => {
  type: LOGIN REQUEST
         PROBLEMS 1 OUTPUT TERMINAL DEBUG CONSOLE
                                                                               十 田 🏛
                                                       1: powershell
         First, let's associate this project directory with a Firebase project.
user requesting to login masih dalam actions/auth.js
Jawaban:
      index.html U
                         JS firebase.js U
                                             JS auth.js 1, U X
                                                               💄 firebase.json U
      my-app > src > actions > JS auth.js > ...
              const requestLogin = () => {
                  return {
                       type: LOGIN REQUEST
              const receiveLogin = user => {
                  return{
                       type: LOGIN_SUCCESS,
5
                       user
              const loginError = () => {
                  return {
                       type: LOGIN_FAILURE
edit loginUser()
Jawaban:
```

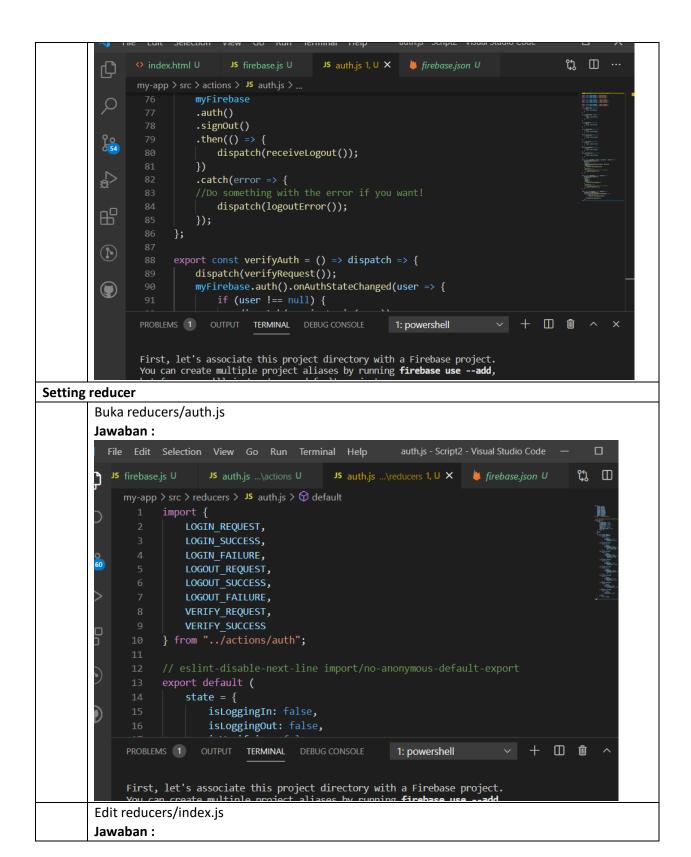

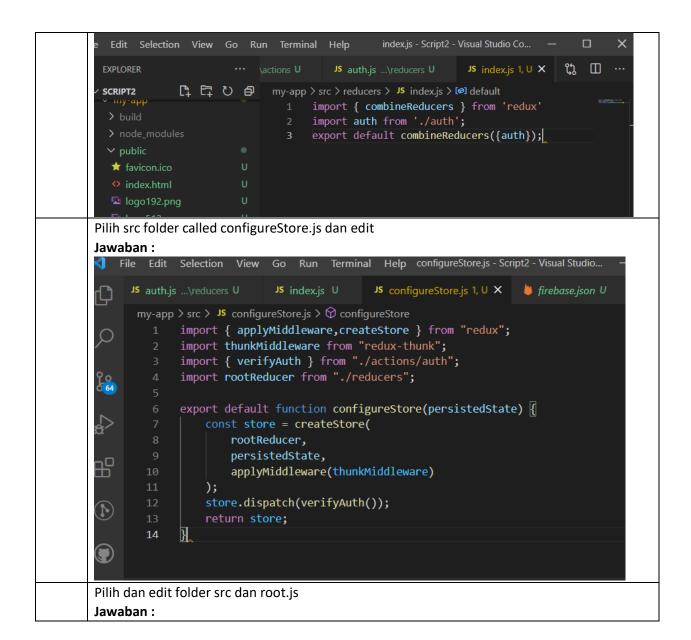

```
root.js - Script2 - Visual Studio Code —
                 JS index.js U
                                  JS configureStore.js U
                                                           JS root.js 1, U X
                                                                             b firebase.json U
                                                                                                  th II ...
        my-app > src > JS root.js > [@] default
                import React from "react";
                import { Provider } from "react-redux";
import { BrowserRouter as Router } from "react-router-dom";
                import App from "./App";
import configureStore from "./configureStore";
                const store = configureStore();
                function Root() {
                    return (
 留
                         <Provider store={store}>
                                  <App />
 (1)
 export default Root;
Pilih dan edit folder src/index.js
Jawaban:
                                                               index.js - Script2 - Visual Studio Co... —
                                                                                                  th III
        my-app > src > JS index.js
                import React from "react";
                import ReactDOM from "react-dom";
                import Root from "./root";
                import * as serviceWorker from "register-service-worker";
                ReactDOM.render(<Root />, document.getElementById("root"));
                // If you want to start measuring performance in your app, pass a function
 昭
                // to log results (for example: reportWebVitals(console.log))
                serviceWorker.unregister();
 (\mathbf{P})
```

Buat lah coding App.js

```
🚺 File Edit Selection View Go Run Terminal Help
                                                                              JS App.js 1, U X (1)
                                                        JS index.js ...\src U
       my-app > src > JS App.js > [€] default
              import React from "react";
              import { Route, Switch } from "react-router-dom";
              import { connect } from "react-redux";
              import ProtectedRoute from "./components/protectedRoute";
              import Home from "./components/Home";
import Login from "./components/Login";
              function App(props) {
                const { isAuthenticated, isVerifying } = props;
B
                  <Switch>
                  <ProtectedRoute</pre>
                    exact
(\mathbf{I})
                     path="/"
                    component={Home}
                    isAuthenticated={isAuthenticated}
isVerifying={isVerifying}
                  <Route path="/login" component={Login} />
                   </Switch>
              function mapStateToProps(state) {
```

Buatlah file dan simpan components/Login.js

Jawaban:

```
🗙 File Edit Selection View Go Run Terminal Help
                                                          Login.js - Script2 - Visual Studio Co...
                                                                          JS Login.js 1, U X \
       my-app > src > components > JS Login.js > [❷] default
              import React, { Component } from "react";
              import { connect } from "react-redux";
import { Redirect } from "react-router-dom";
              import { loginUser } from "../actions/auth";
              import { withStyles } from "@material-ui/styles";
              import Avatar from "@material-ui/core/Avatar";
              import Button from "@material-ui/core/Button";
import TextField from "@material-ui/core/TextField";
              import LockOutlinedIcon from "@material-ui/icons/LockOutlined";
品
              import Typography from "@material-ui/core/Typography";
              import Paper from "@material-ui/core/Paper";
              import Container from "@material-ui/core/Container";
(\mathbf{F})
              const styles = () => ({
                   "@global": {
body: {
                           backgroundColor: "#fff
                  paper: {
                       marginTop: 100,
                       display: "flex",
```

Buka component/Home.js


```
Home.js - Script2 - Visual Studio Co...
🔀 File Edit Selection View Go Run Terminal Help
                                        JS App.js U
                                                         JS Login.js U
                                                                         JS Home.js 1, U X
                                                                                           th \square
                   JS index.js ...\src U
       my-app > src > components > JS Home.js > [9] default
              import React, { Component } from "react";
              import { connect } from "react-redux";
              import { logoutUser } from "../actions/auth";
              class Home extends Component {
                  handleLogout = () => {
  const { dispatch } = this.props;
                       dispatch(logoutUser());
                  };
                  render() {
                       const { isLoggingOut, logoutError } = this.props; return (
                               <h1>This is your app's protected area.</h1>
(\mathbf{N})
                               Any routes here will also be protected
                               <button onClick={this.handleLogout}>Logout</button>
                               {isLoggingOut && Logging Out....}
{logoutError && Error logging out}
              function mapStateToProps(state) {
```

Buatfile dalam folder /src/component/ dengan nama protectedRoute.js

Jawaban:

```
File Edit Selection View Go Run Terminal Help protectedRoute.js - Script2 - Visual Studio...
                                                          JS Login.js U
   my-app > src > components > JS protectedRoute.js > [❷] default
         import React from "react";
         import { Route, Redirect } from "react-router-dom";
         const ProtectedRoute = ({
             component: Component,
             isAuthenticated,
             isVerifying,
                  {...rest}
                 render={props =>
                 isVerifying ? (
                  ) : isAuthenticated ? (
                     <Component {...props} />
                      <Redirect
                         pathname: "/login",
                         state: { from: props.location }
```

MAsuk ke firebase console kemudian add user

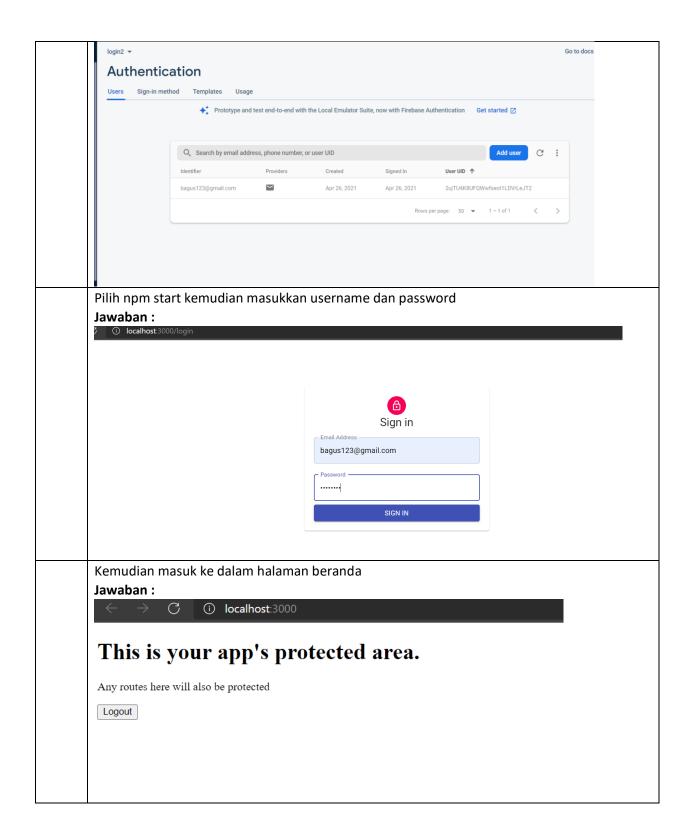

--Alhamdulillah--