#### Out[26]:

	Low_ELO	High_ELO	GroupedLeagueIndex	LeagueIndex	Age	HoursPerWeek	TotalHours
0	0.0	1.0	1.0	5.0	27.0	10.0	3000.0
1	0.0	1.0	1.0	5.0	23.0	10.0	5000.0
2	0.0	0.0	0.0	4.0	30.0	10.0	200.0
3	1.0	0.0	0.0	3.0	19.0	20.0	400.0
4	1.0	0.0	0.0	3.0	32.0	10.0	500.0
4							•

<class 'pandas.core.frame.DataFrame'>
Int64Index: 3338 entries, 0 to 3337
Data columns (total 22 columns):

#	Column	Non-Null Count	Dtype
0	Low_ELO	3338 non-null	float32
1	High_ELO	3338 non-null	float32
2	GroupedLeagueIndex	3338 non-null	float32
3	LeagueIndex	3338 non-null	float32
4	Age	3338 non-null	float32
5	HoursPerWeek	3338 non-null	float32
6	TotalHours	3338 non-null	float32
7	APM	3338 non-null	float32
8	SelectByHotkeys	3338 non-null	float32
9	AssignToHotkeys	3338 non-null	float32
10	UniqueHotkeys	3338 non-null	float32
11	MinimapAttacks	3338 non-null	float32
12	MinimapRightClicks	3338 non-null	float32
13	NumberOfPACs	3338 non-null	float32
14	GapBetweenPACs	3338 non-null	float32
15	ActionLatency	3338 non-null	float32
16	ActionsInPAC	3338 non-null	float32
17	TotalMapExplored	3338 non-null	float32
18	WorkersMade	3338 non-null	float32
19	UniqueUnitsMade	3338 non-null	float32
20	ComplexUnitsMade	3338 non-null	float32
21	ComplexAbilitiesUsed	3338 non-null	float32

dtypes: float32(22)
memory usage: 312.9 KB

```
In [28]: 1 inddatatxt = open("Data Explanation -- StarCraft II Ranked Players.txt"
2 print(inddatatxt.read())
3 var = []
4 for i in data:
5 var.append(i)
```

Data project data categories

Data pulled from https://www.kaggle.com/danofer/skillcraft (https://www.kaggle.com/danofer/skillcraft) which pulled the data from the University of California Irvine's machine learning repository located at http://archive.ics.uci.edu/ml/datasets/SkillCraft1+Master+Table+Dataset (http://archive.ics.uci.edu/ml/datasets/SkillCraft1+Master+Table+Dataset)

This data is taken from replays of 1v1 ranked games of StarCraft II, a real time strategy game in which two or more players compete by accruing resources, building an army and wiping out the enemy.

A player loses when all of their buildings are destroyed or when they surrender.

Players each start with one base hub and a number of workers located symme trically on a map. The map is littered with locations containing clusters of minerals and usually gas geysers.

These are the resources which the players will use to build buildings, con struct new technologies and produce armies.

```
00 GameID #
01 LeagueIndex # Numerical list (1-8) based on categorica
1 rank. Can be considered both categorical and numerical
02 Age # Age of player
03 HoursPerWeek # Hours player plays per week
04 TotalHours # Total hours player has played
05 APM # Average number of actions per minute (actions are commands given to units or structures)
```

# For the next few variables, one must understand control groups. Control groups are hotkeys that a player can assign units to such that when the hotkey is selected, the units and buildings assigned become selected for quick use.

```
# Number of units/buildings select
06 SelectByHotkeys
ed with hotkeys per timestamp
07 AssignToHotkeys
                                       # Number of units/buildings assign
ed to control groups per timestamp
08 UniqueHotkeys
                                       # Number of unique hotkeys used pe
r timestamp
                                       # Number of times a player uses th
09 MinimapAttacks
e minimap to order a unit to attack anything on the way to a location per
timestamp
10 MinimapRightClicks
                               # Number of right clicks on the minimap pe
r timestamp
```

# For the next few variables, PACs (Perception Action Cycl es) are when a player focuses on a certain area by moving their screen and then makes an action.

# Number of PACs per timestamp 11 NumberOfPACs 12 GapBetweenPACs # Average number of milliseconds b etween PACs 13 ActionLatency # Average time between focusing on an area and making the first action of the current PAC 14 ActionsInPAC # Average number of actions within a PAC # The amount of the map explored by a play 15 TotalMapExplored er per timestamp # Number of worker units trained per times 16 WorkersMade tamp 17 UniqueUnitsMade # Number of unique units made per timestamp # Number of units that require direct cont 18 ComplexUnitsMade rols to be effective trained per timestamp 19 ComplexAbilitiesUsed # Number of times abilities from aforement ioned complex units are used per timestamp


#### In [29]:

1 data.describe()

#### Out[29]:

	Low_ELO	High_ELO	GroupedLeagueIndex	LeagueIndex	Age	HoursPerV
count	3338.000000	3338.000000	3338.000000	3338.000000	3338.000000	3338.000
mean	0.319652	0.437388	0.437388	4.120731	21.650389	15.909
std	0.466412	0.496139	0.496139	1.448170	4.206357	11.96 <sub>4</sub>
min	0.000000	0.000000	0.000000	1.000000	16.000000	0.000
25%	0.000000	0.000000	0.000000	3.000000	19.000000	8.000
50%	0.000000	0.000000	0.000000	4.000000	21.000000	12.000
75%	1.000000	1.000000	1.000000	5.000000	24.000000	20.000
max	1.000000	1.000000	1.000000	7.000000	44.000000	168.000
4						

In [6]: 1 pd.plotting.scatter\_matrix(data,figsize=(24,24))
2 plt.show()

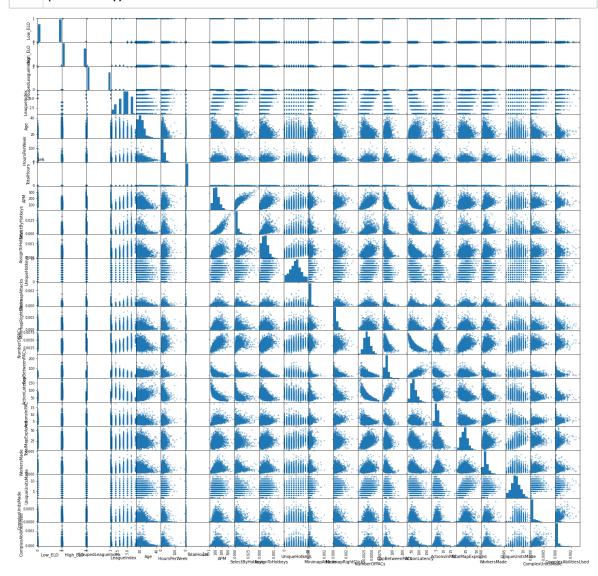


In [7]: IDs = ['LeagueIndex','APM','SelectByHotkeys','UniqueHotkeys','NumberOfP/ pd.plotting.scatter\_matrix(data[IDs],figsize=(24,24)) 3 plt.show()

# **Examine variables from sklearn.decomposition.PCA**

Out[8]: (3338, 7)

In [9]: 1 pd.plotting.scatter\_matrix(data\_transformed,figsize=(24,24))
2 plt.show()

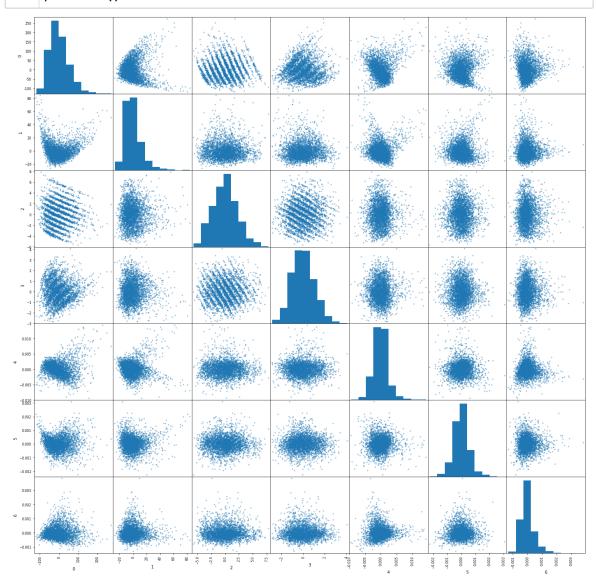


```
In [30]:
             # Code for the following graphs based on https://www.kaggle.com/immodal/
             leagueTitles = ["Low ELO", "High ELO"]
           3 leagueIndexs = [
                                    0.0,
                           = ['darkgoldenrod','gold']
           4 colors
           5 leagueDict = dict()
             for i, ind in enumerate(leagueIndexs):
           7
                  leagueDict[ind] = leagueTitles[i]
             leagueLabeled = data["GroupedLeagueIndex"].replace(leagueDict)
           9
          10 def violin_plot(y, title, w, h):
          11
                  plt.figure(figsize=(w,h))
          12
                  ax = sns.violinplot(x=leagueLabeled,y=y,palette=colors,order=league)
          13
                  ax.set(xlabel='ELO Group')
                  ax.set ylim(0,)
          14
                  plt.title(title)
          15
          16
                  plt.show()
          17
          18
             def density_plot(x, title, w, h):
          19
                  fig, (ax_box, ax_hist) = plt.subplots(2, sharex=True, gridspec_kw={
          20
                  fig.set size inches(w,h)
          21
                  ax box.set xlim(0,x.max())
          22
                  ax_hist.set_xlim(0,x.max())
          23
                  sns.boxplot(x,ax=ax box)
          24
                  sns.distplot(x,ax=ax_hist)
          25
                  ax_box.set(yticks=[])
          26
                  sns.despine(ax=ax hist)
          27
                  sns.despine(ax=ax box,left=True)
          28
                  ax_box.set_title(title)
          29
                  plt.show()
          30
          31
             def plot(feature, fig_num):
                  density_plot(data[feature],f"Figure {fig_num}: {feature} Distribution
          32
                  violin_plot(data[feature],f"Figure {fig_num}: {feature} by League",
          33
```


# In [31]: 1 plot("APM",1)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

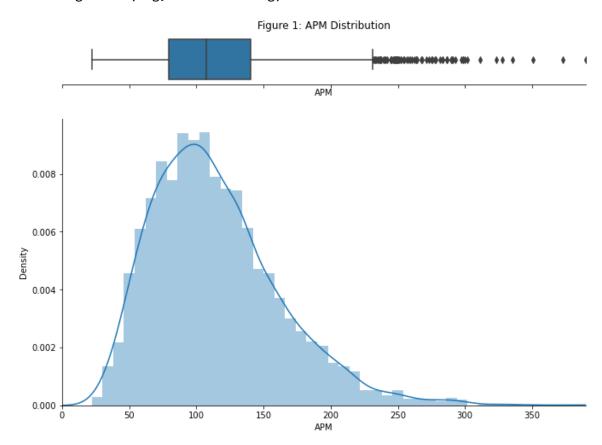

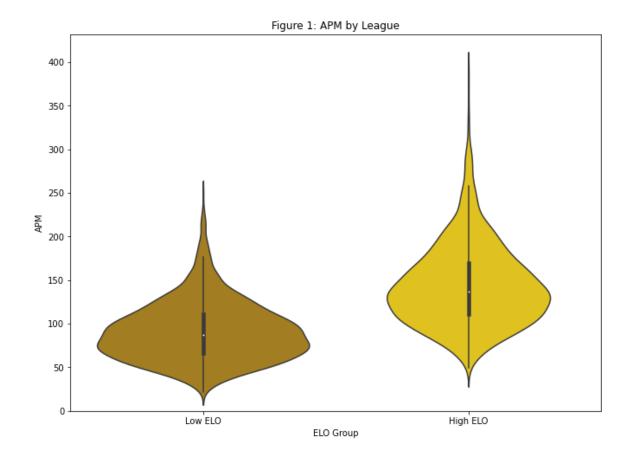

### In [32]: 1 plot("HoursPerWeek",2)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).


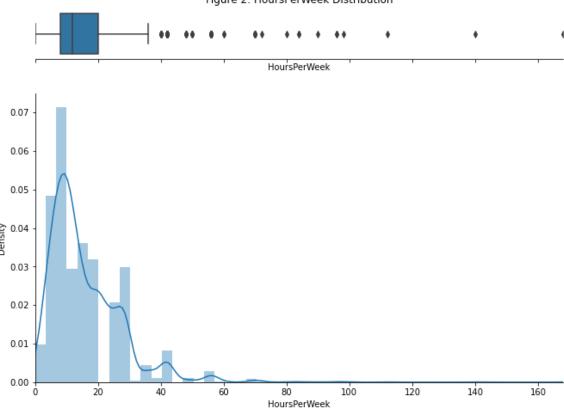


Figure 2: HoursPerWeek Distribution

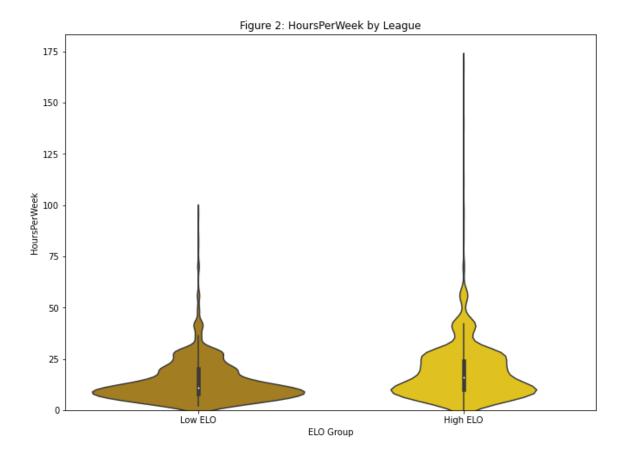


### In [33]: 1 plot("SelectByHotkeys",3)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

Figure 3: SelectByHotkeys Distribution SelectByHotkeys 200 150 100 50 0.000 0.005 0.010 0.015 0.030 0.035 0.040 0.020 0.025 SelectByHotkeys

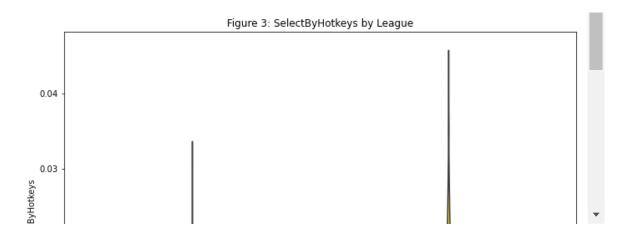

#### In [34]: plot("AssignToHotkeys",4)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\ deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distr ibutions.py:2557: FutureWarning: `distplot` is a deprecated function and w ill be removed in a future version. Please adapt your code to use either ` displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

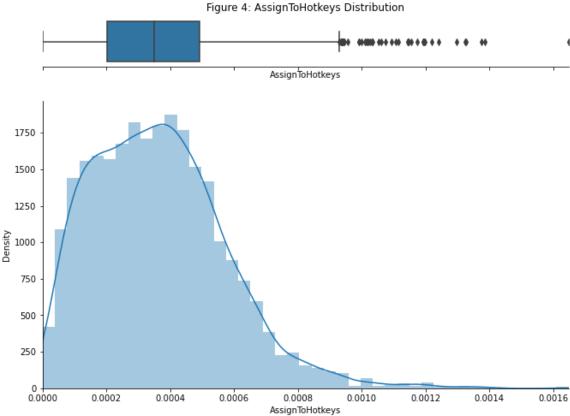


Figure 4: AssignToHotkeys by League



### In [35]: 1 plot("UniqueHotkeys",5)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

warnings.warn(msg, FutureWarning)


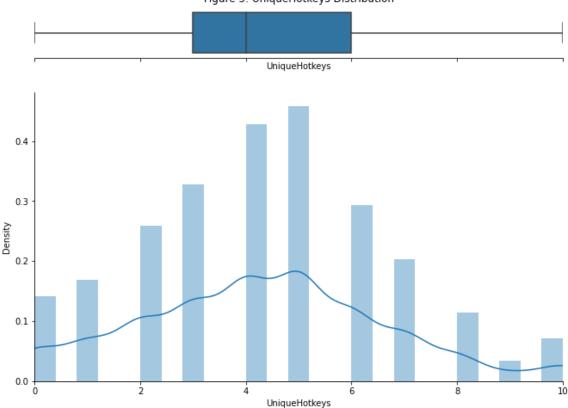


Figure 5: UniqueHotkeys Distribution

\_

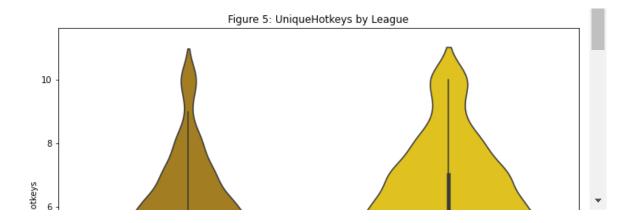

### In [36]: 1 plot("MinimapAttacks",6)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

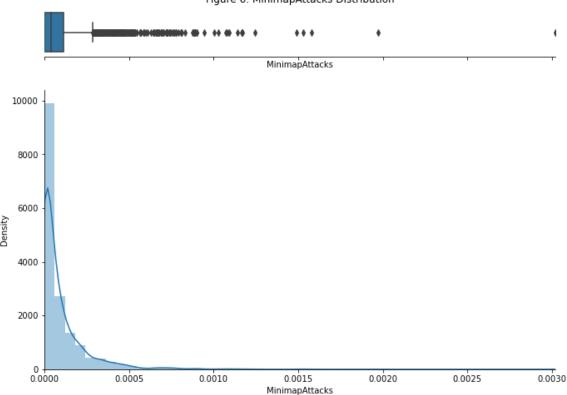


Figure 6: MinimapAttacks Distribution


0.0030 - 0.0025 -


### In [37]: 1 plot("MinimapRightClicks",7)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

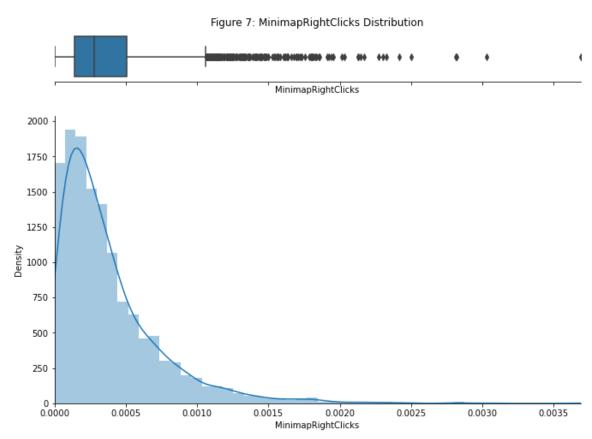

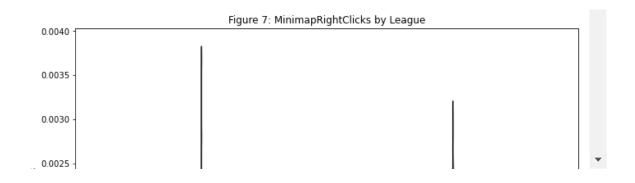

#### In [38]: plot("NumberOfPACs",8)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\ deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distr ibutions.py:2557: FutureWarning: `distplot` is a deprecated function and w ill be removed in a future version. Please adapt your code to use either ` displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

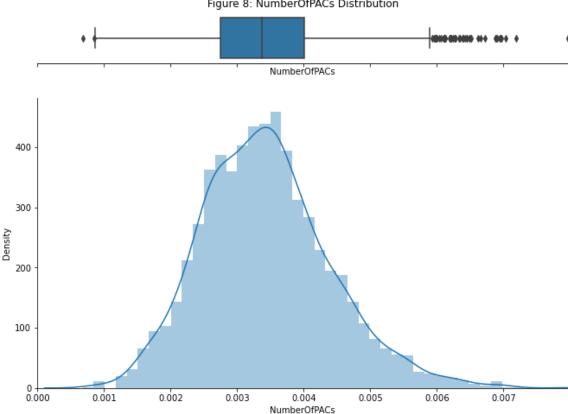


Figure 8: NumberOfPACs Distribution







# In [39]: 1 plot("GapBetweenPACs",9)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

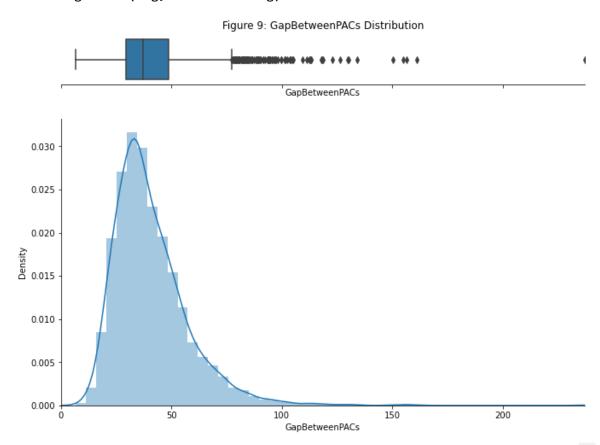

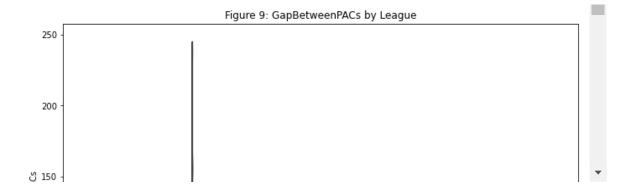

#### In [40]: plot("ActionLatency",10)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\ deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distr ibutions.py:2557: FutureWarning: `distplot` is a deprecated function and w ill be removed in a future version. Please adapt your code to use either ` displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

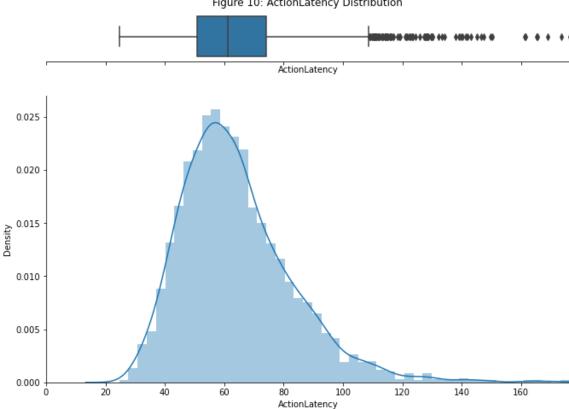


Figure 10: ActionLatency Distribution





#### In [41]: plot("ActionsInPAC",11)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\ deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distr ibutions.py:2557: FutureWarning: `distplot` is a deprecated function and w ill be removed in a future version. Please adapt your code to use either ` displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

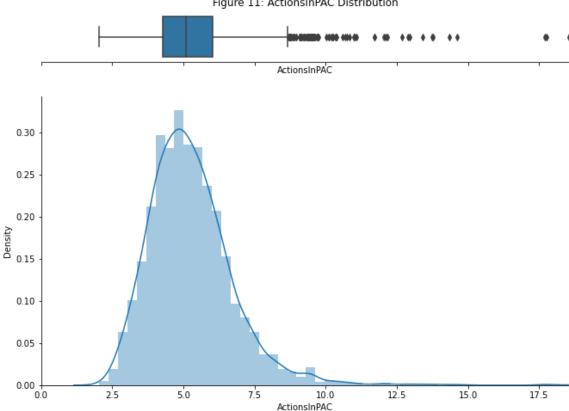


Figure 11: ActionsInPAC Distribution



### In [42]: 1 plot("TotalMapExplored",12)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).


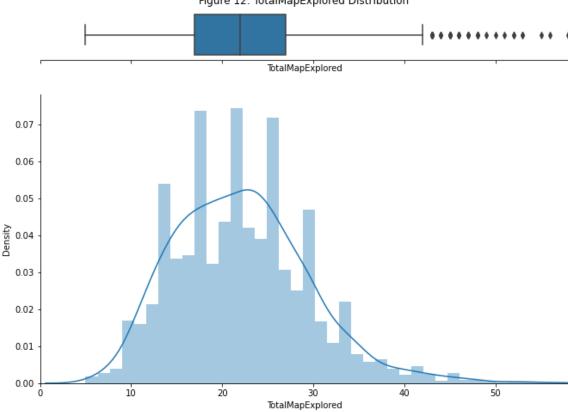


Figure 12: TotalMapExplored Distribution

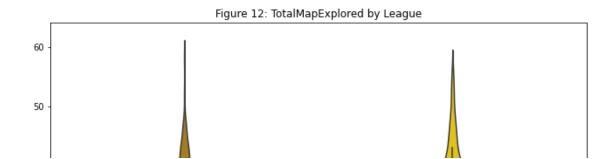

#### In [43]: plot("WorkersMade",13)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\ deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distr ibutions.py:2557: FutureWarning: `distplot` is a deprecated function and w ill be removed in a future version. Please adapt your code to use either ` displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

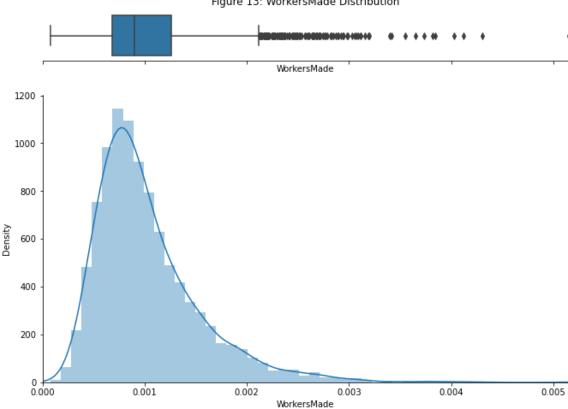


Figure 13: WorkersMade Distribution



### In [44]: 1 plot("ComplexUnitsMade",14)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

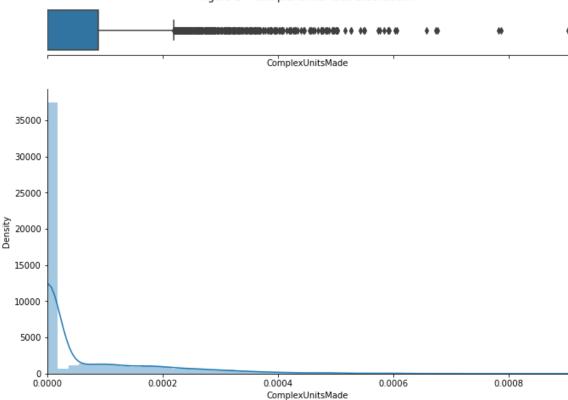


Figure 14: ComplexUnitsMade Distribution



### In [45]: 1 plot("ComplexAbilitiesUsed",15)

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\\_deco rators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, a nd passing other arguments without an explicit keyword will result in an e rror or misinterpretation.

warnings.warn(

C:\Users\Triplea657\anaconda3\envs\MSCS335\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

warnings.warn(msg, FutureWarning)

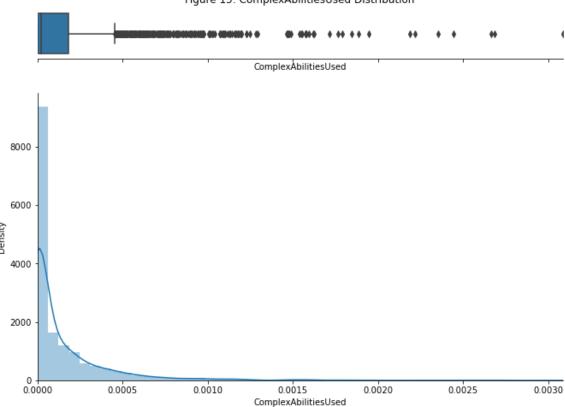


Figure 15: ComplexAbilitiesUsed Distribution

.

