Lab 4

Before RegisterTest.hex

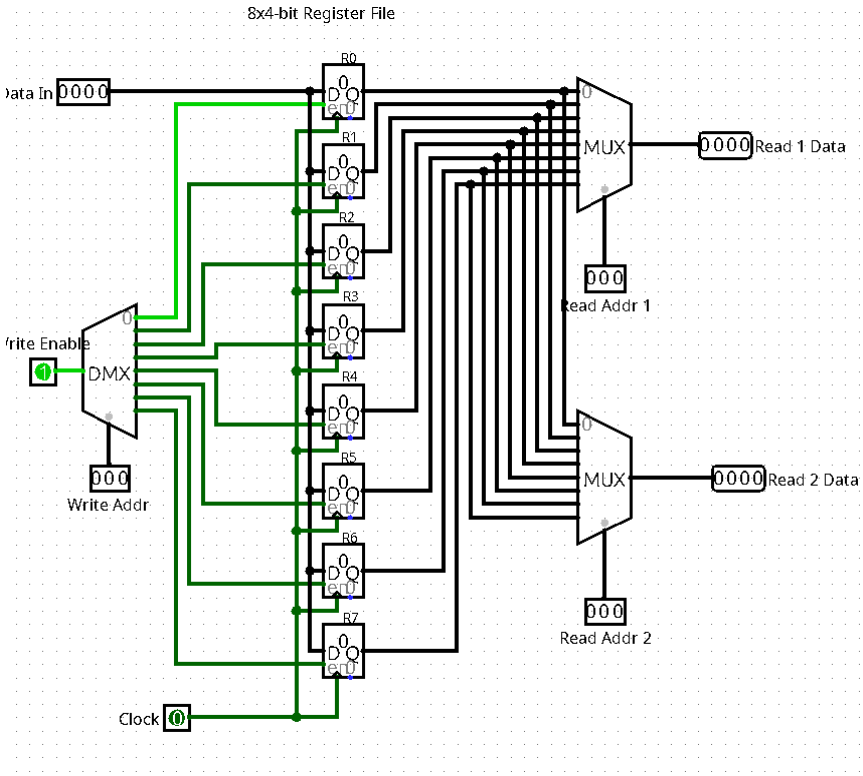

After RegisterTest.hex

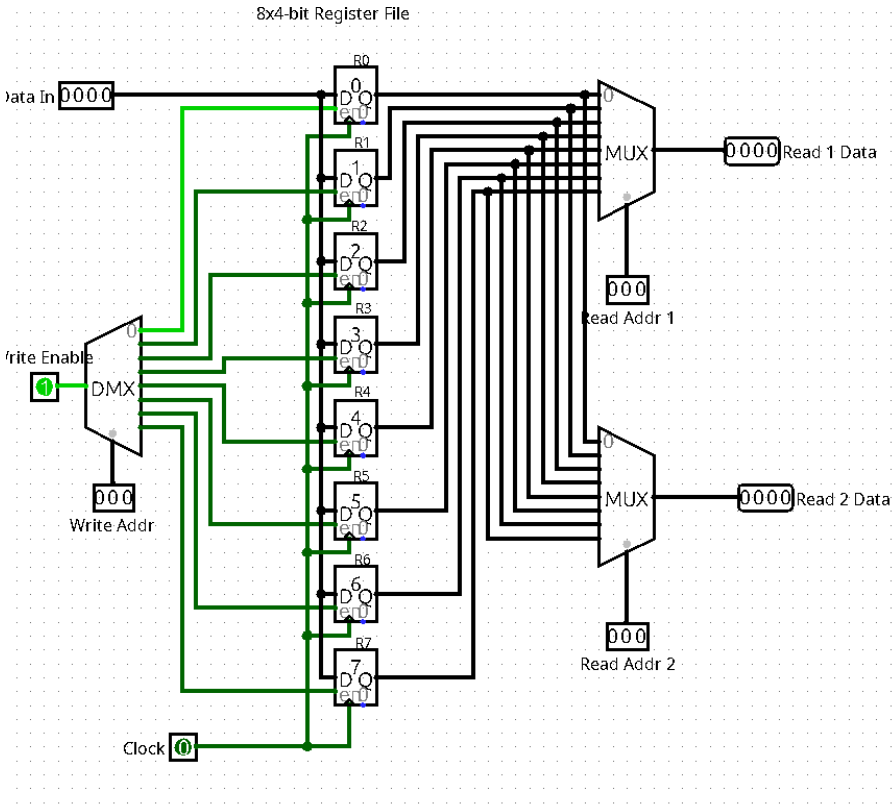

Before Reverse.hex ($r0 = 0 is set as array base address)

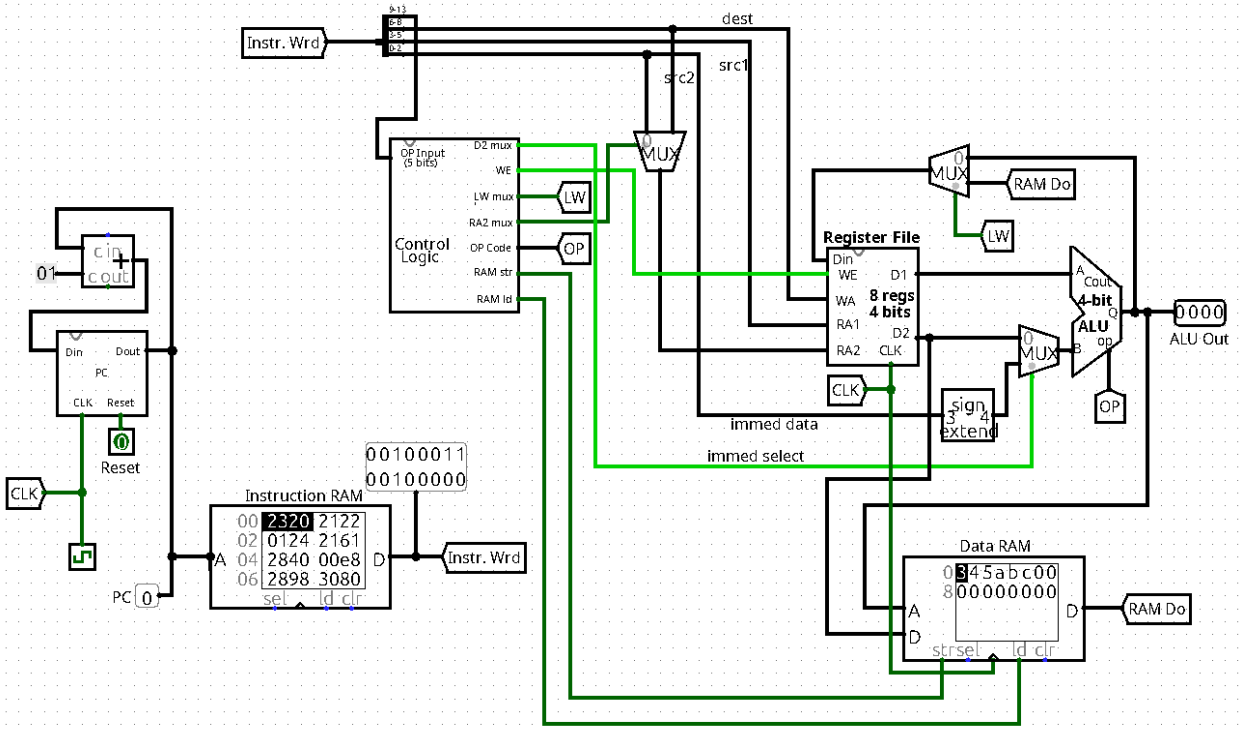

After Reverse.hex

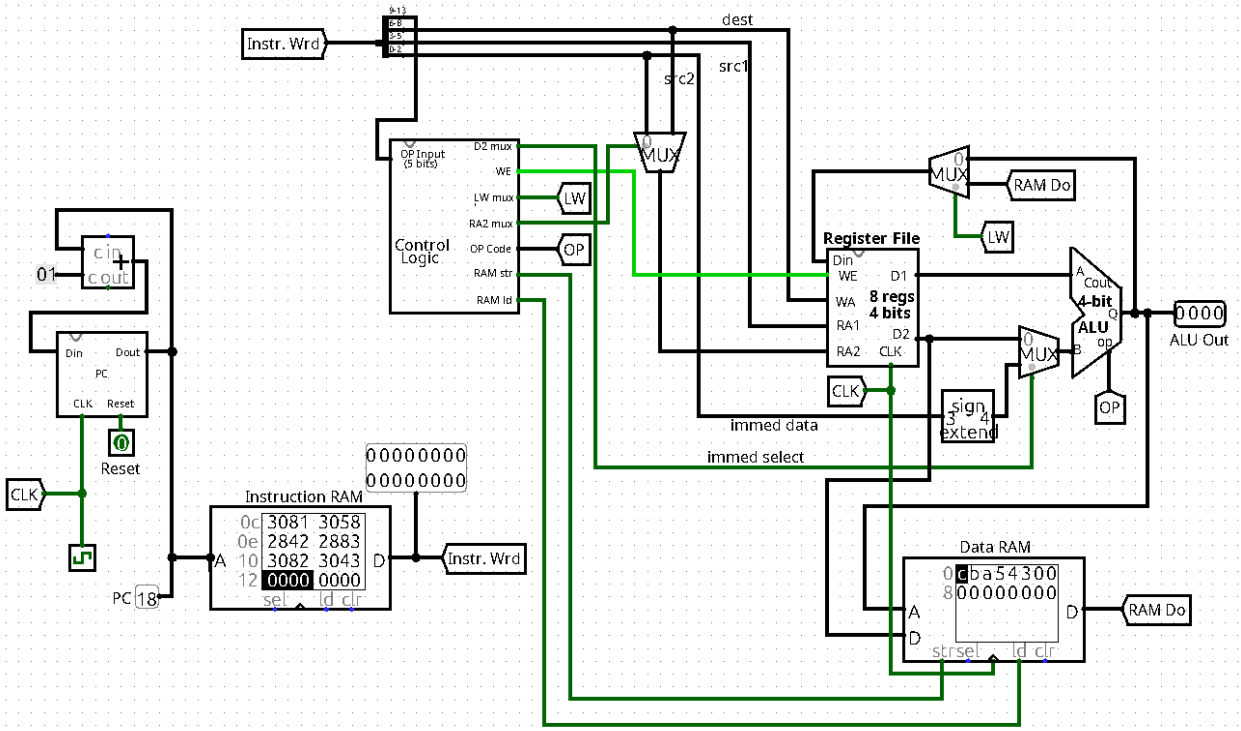

Before Reverse.hex ($r0 = 9 is set as array base address)

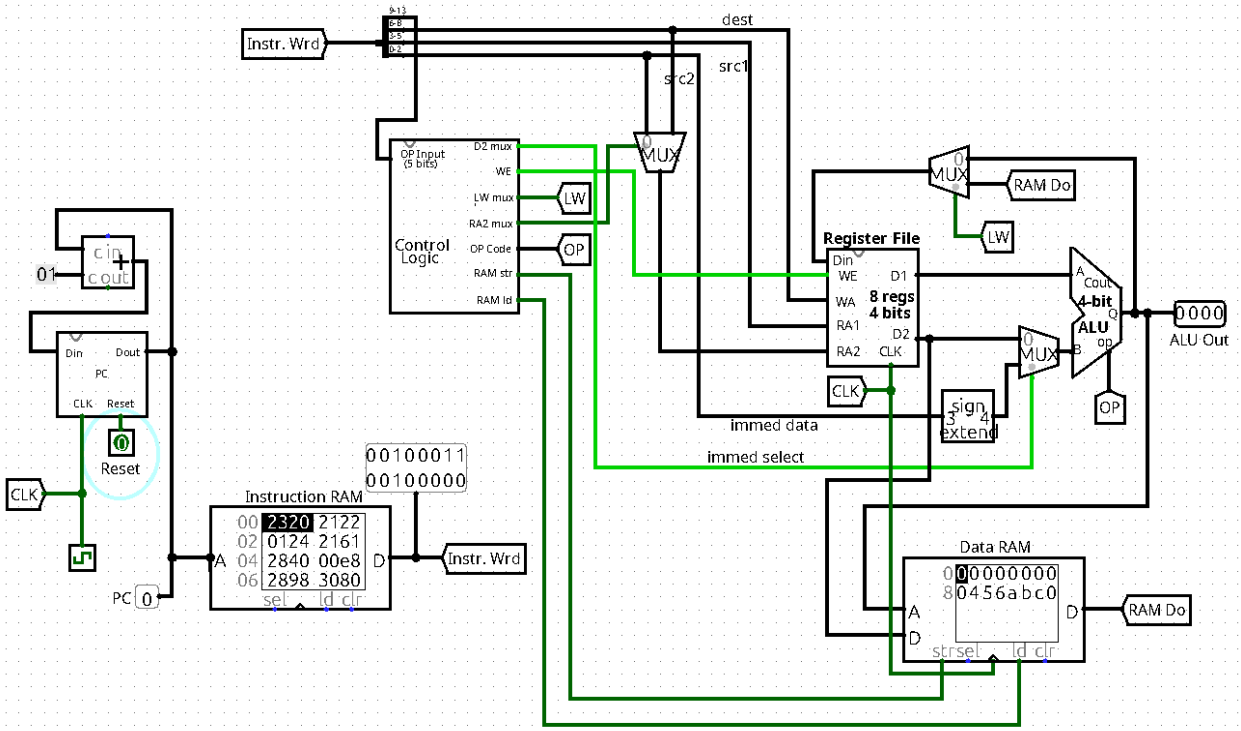
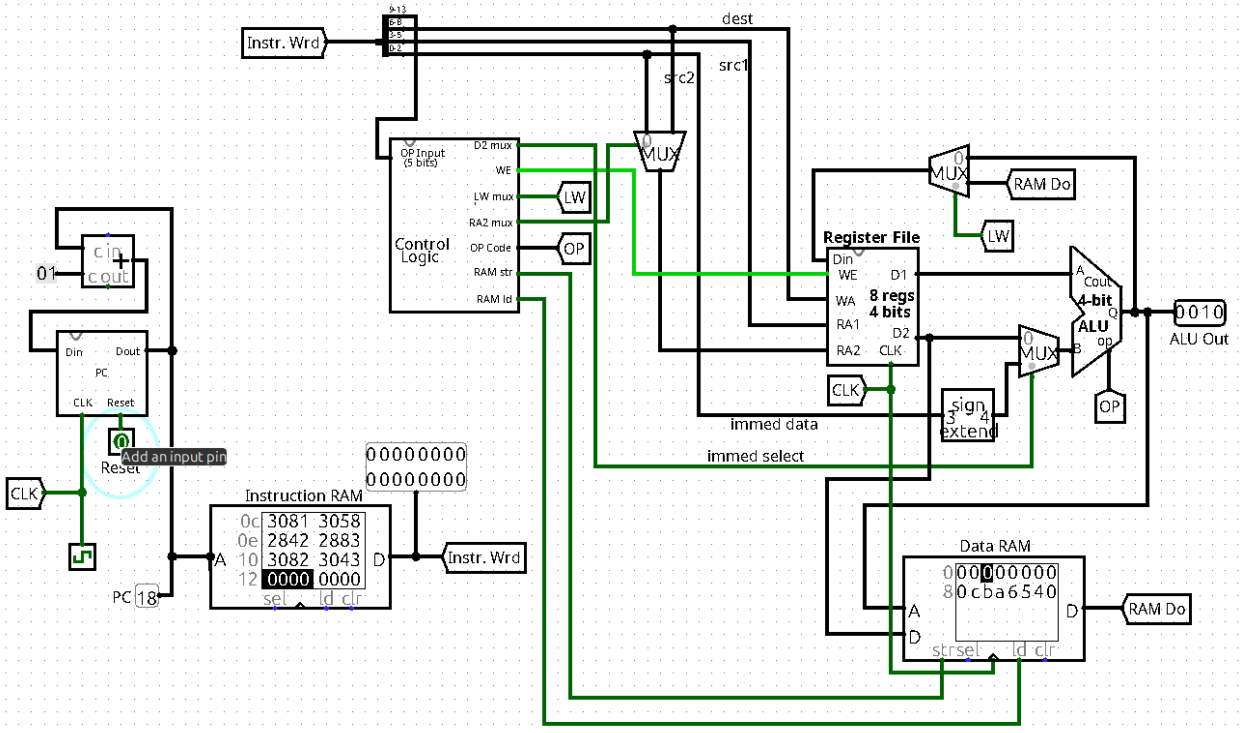
After Reverse.hex