First Name

Biba

Last Name

Boba

Email

gaftaf2034@gmail.com

Password

••••

Confirm Password

••••

Company

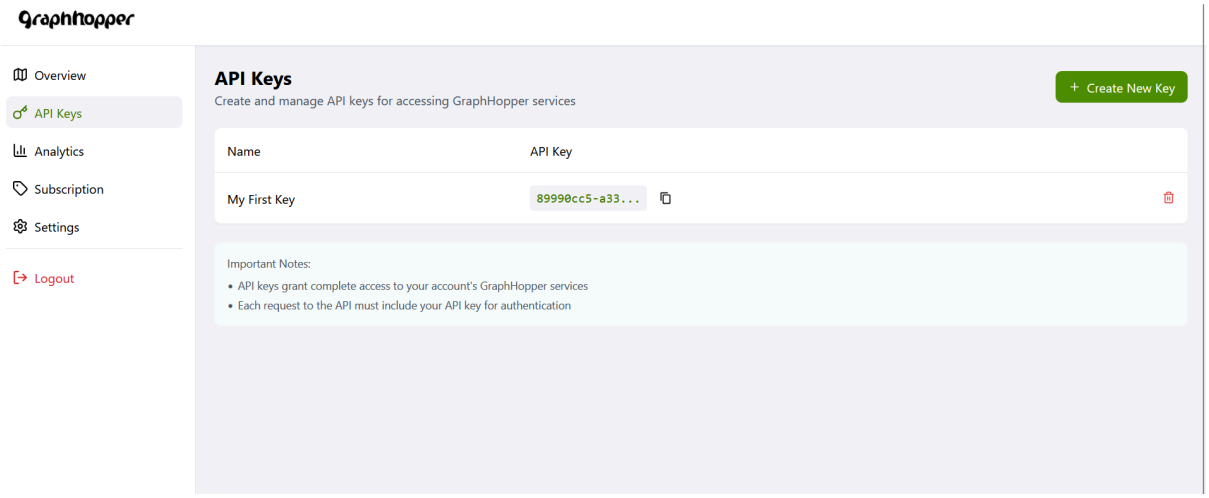
isco Networking Academy Student

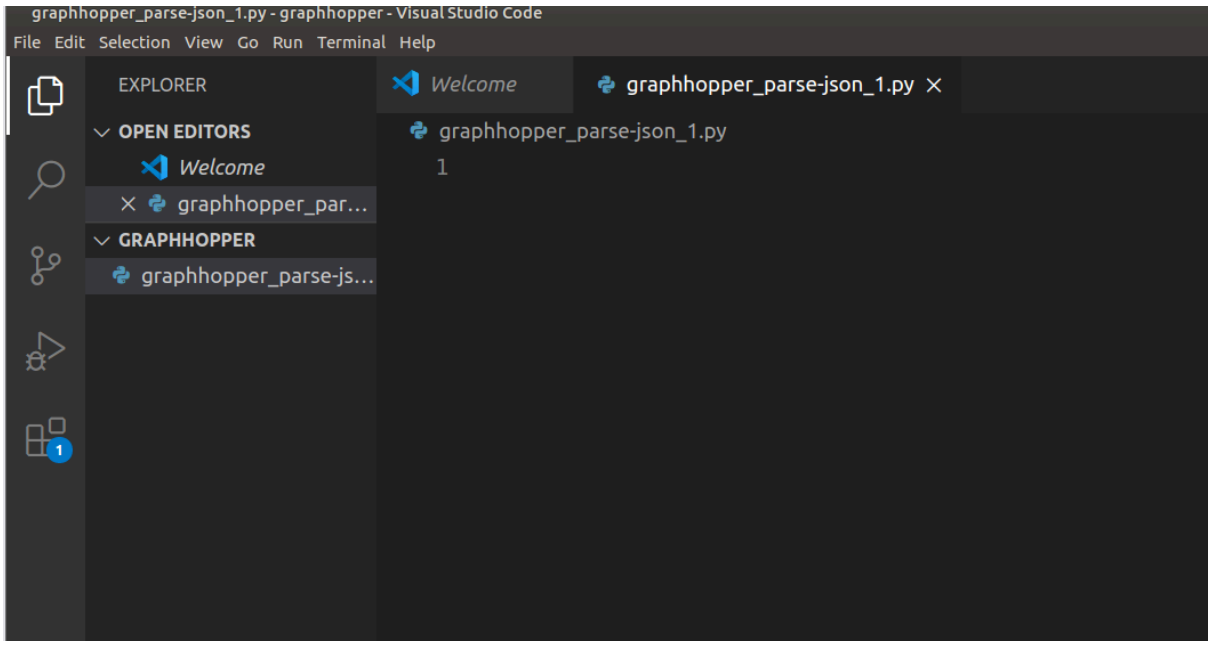
Country

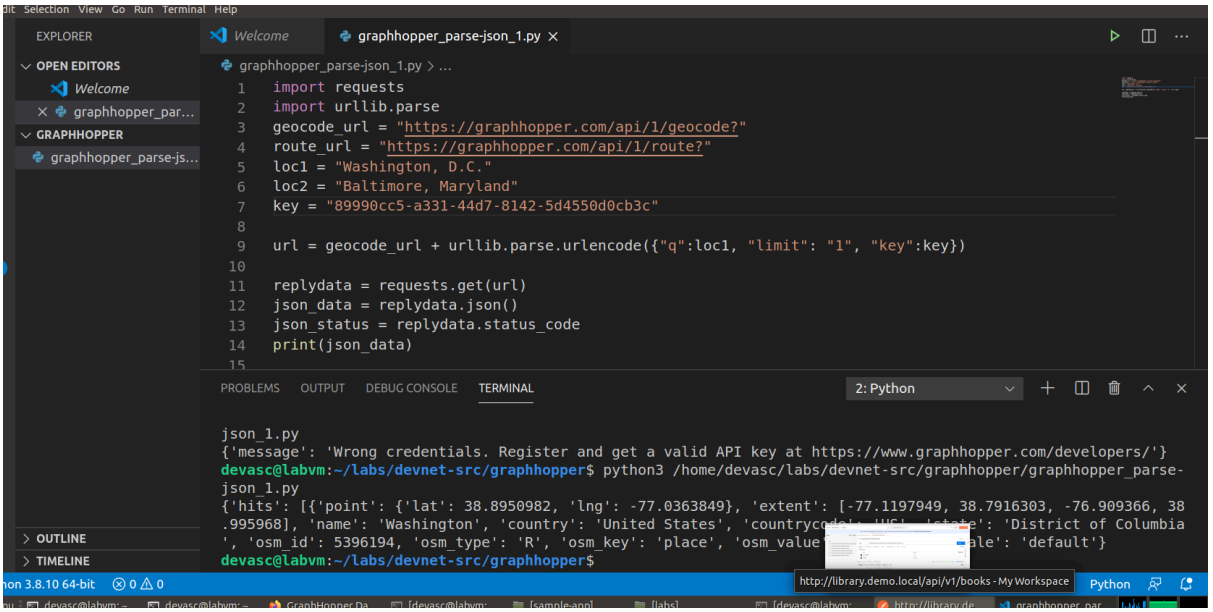
Germany

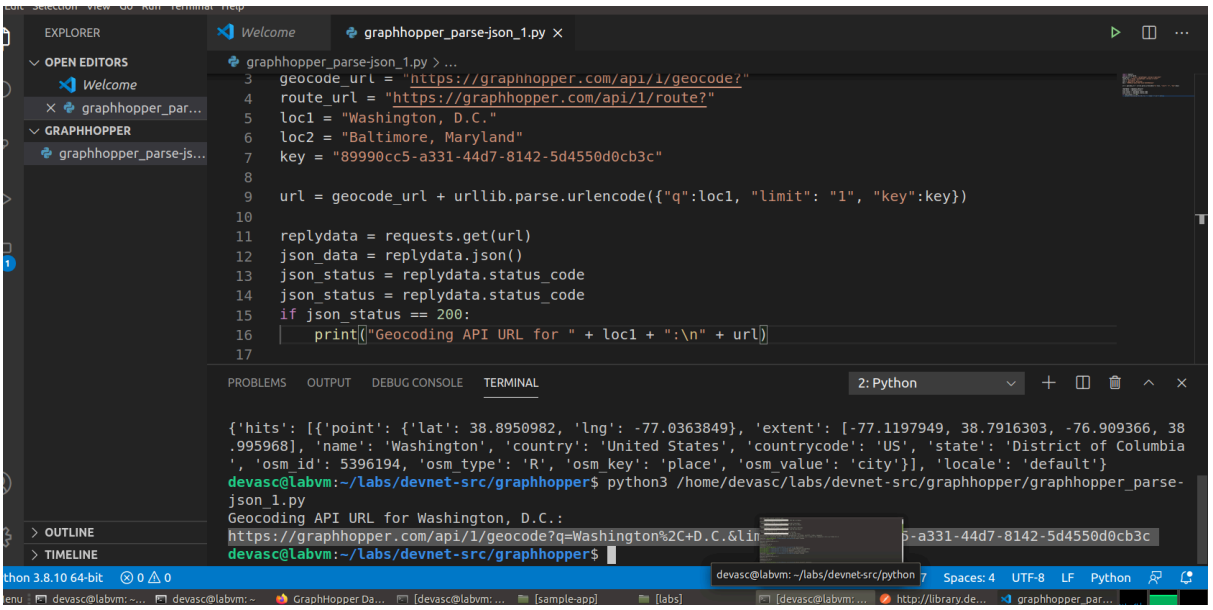
I agree to the terms and conditions

Subscribe to newsletter

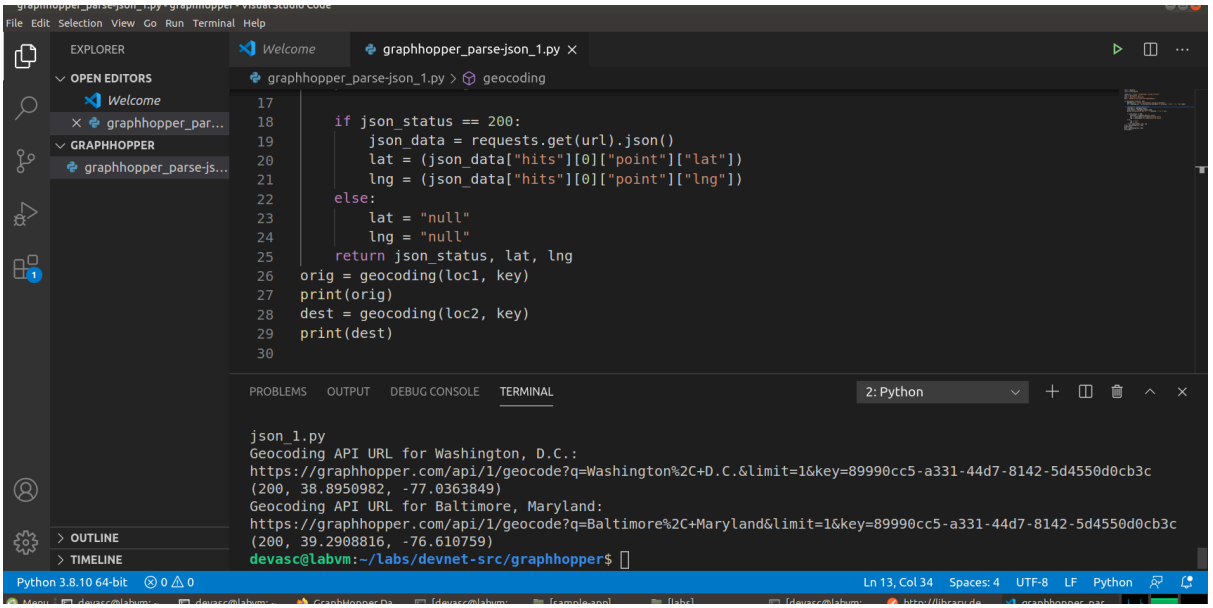


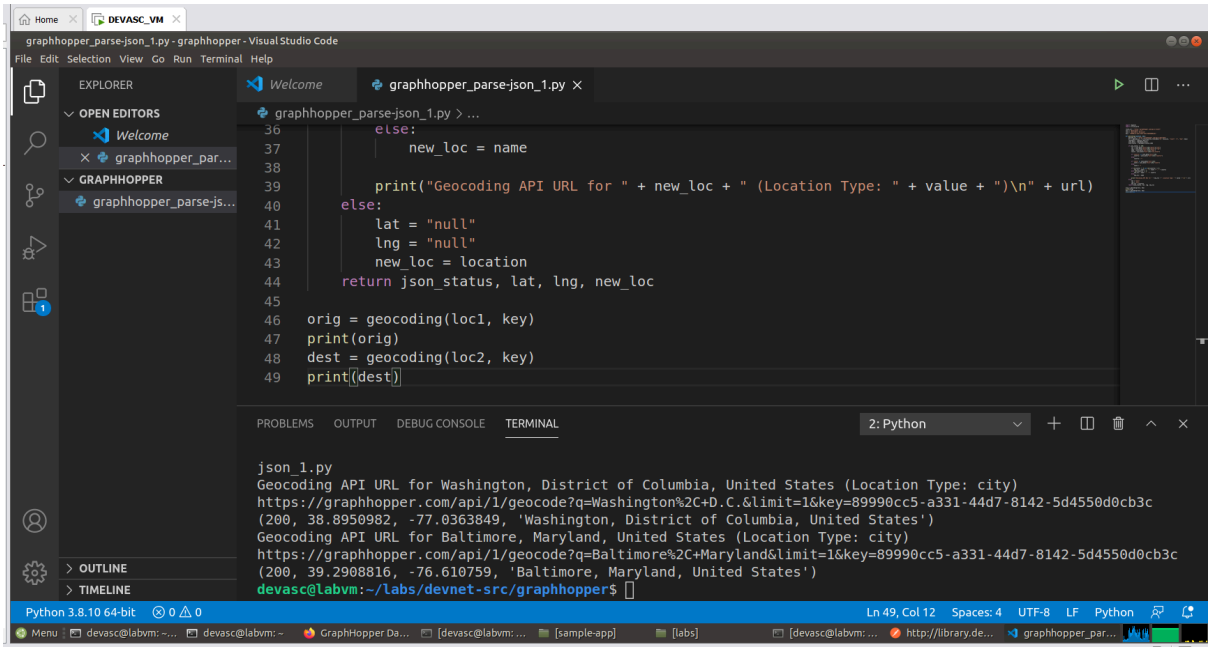

graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py
1

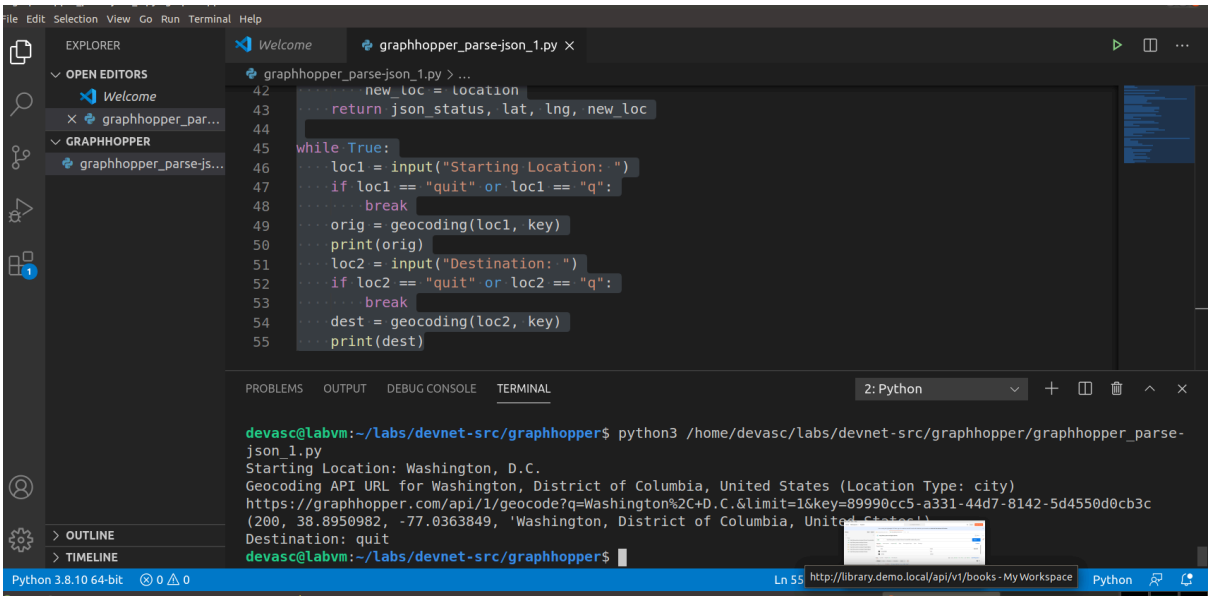

EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
1 import requests
2 import urllib.parse
3 geocode_url = "https://graphhopper.com/api/1/geocode?"
4 route_url = "https://graphhopper.com/api/1/route?"
5 loc1 = "Washington, D.C."
6 loc2 = "Baltimore, Maryland"
7 key = "89990cc5-a331-44d7-8142-5d4550d0cb3c"
8
9 url = geocode_url + urllib.parse.urlencode({"q":loc1, "limit": "1", "key":key})
10
11 replydata = requests.get(url)
12 json_data = replydata.json()
13 json_status = replydata.status_code
14 print(json_data)
15
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
json_1.py
{'message': 'Wrong credentials. Register and get a valid API key at https://www.graphhopper.com/developers/'}
devasc@labvm:~/labs/devnet-src/graphhopper$ python3 /home/devasc/labs/devnet-src/graphhopper/graphhopper_parse-
json_1.py
{'hits': [{'point': {'lat': 38.8950982, 'lng': -77.0363849}, 'extent': [-77.1197949, 38.7916303, -76.909366, 38
.995968], 'name': 'Washington', 'country': 'United States', 'countrycode': 'US', 'state': 'District of Columbia
', 'osm_id': 5396194, 'osm_type': 'R', 'osm_key': 'place', 'osm_value': 'city'}, 'type': 'default'}
devasc@labvm:~/labs/devnet-src/graphhopper$
OUTLINE
TIMELINE
http://library.demo.local/api/v1/books - My Workspace
Python

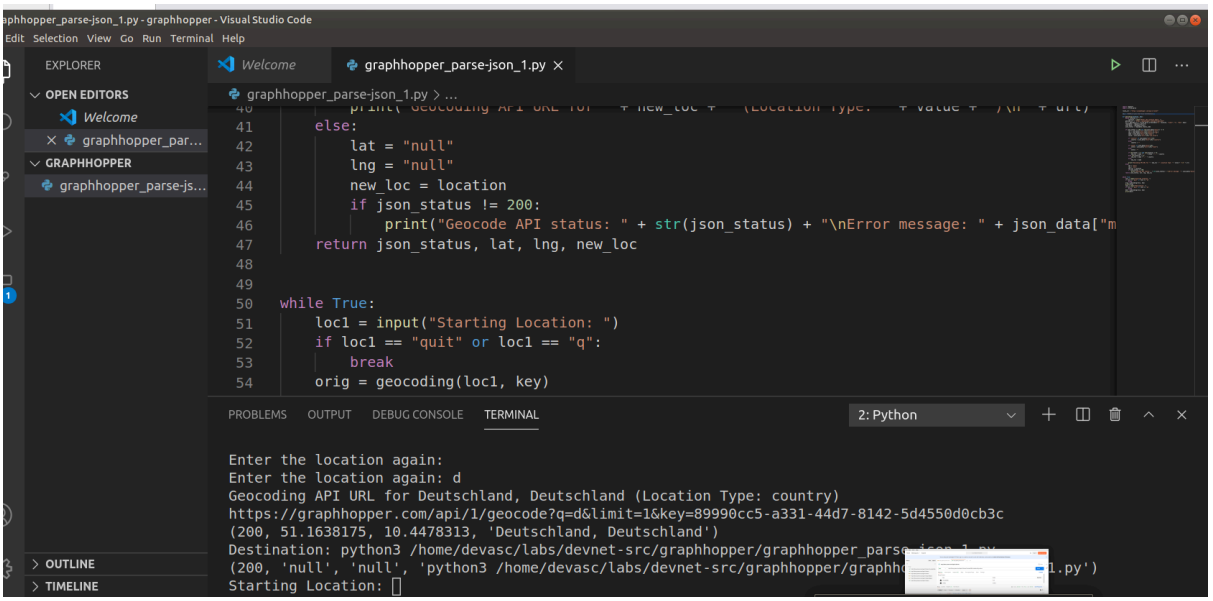

EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
graphhopper_parse-json_1.py
geocode_url = "https://graphhopper.com/api/1/geocode?"
route_url = "https://graphhopper.com/api/1/route?"
loc1 = "Washington, D.C."
loc2 = "Baltimore, Maryland"
key = "89990cc5-a331-44d7-8142-5d4550d0cb3c"
url = geocode_url + urllib.parse.urlencode({"q":loc1, "limit": "1", "key":key})
replydata = requests.get(url)
json_data = replydata.json()
json_status = replydata.status_code
json_status = replydata.status_code
if json_status == 200:
print("Geocoding API URL for " + loc1 + ":\n" + url)
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
2: Python
{'hits': [{'point': {'lat': 38.8950982, 'lng': -77.0363849}, 'extent': [-77.1197949, 38.7916303, -76.909366, 38
.995968], 'name': 'Washington', 'country': 'United States', 'countrycode': 'US', 'state': 'District of Columbia
', 'osm_id': 5396194, 'osm_type': 'R', 'osm_key': 'place', 'osm_value': 'city'}], 'locale': 'default'}
devasc@labvm:~/labs/devnet-src/graphhopper$ python3 /home/devasc/labs/devnet-src/graphhopper/graphhopper_parse-
json_1.py
Geocoding API URL for Washington, D.C.:
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&lin
devasc@labvm:~/labs/devnet-src/graphhopper$
devasc@labvm: ~/labs/devnet-src/python
OUTLINE
TIMELINE
thon 3.8.10 64-bit
Spaces: 4
UTF-8
LF
Python

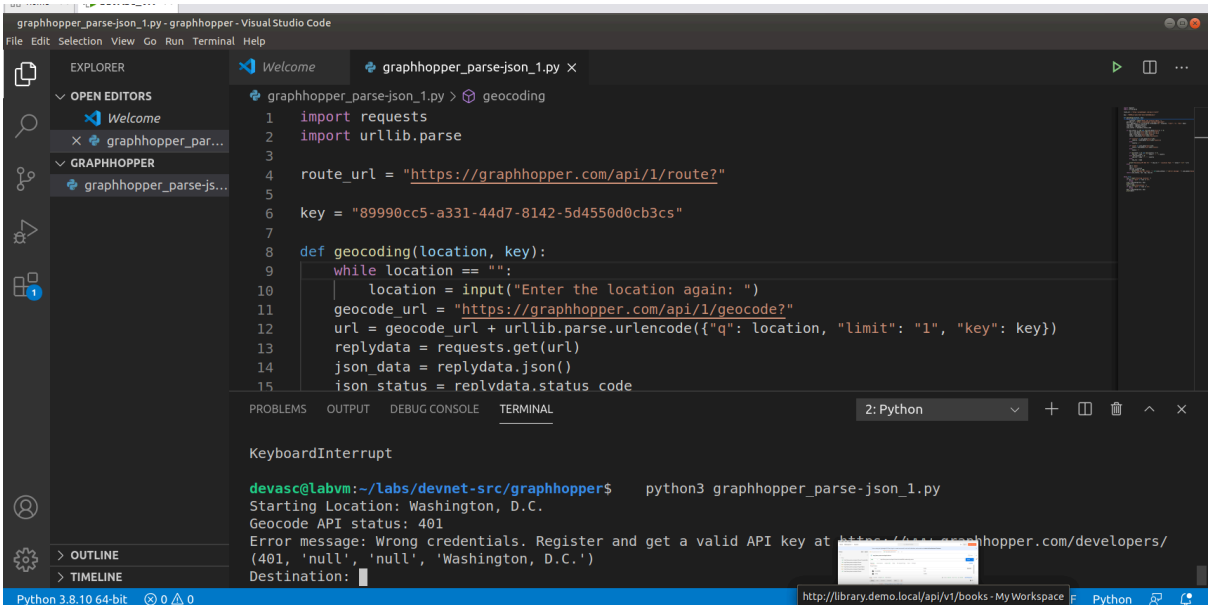

graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
JSON
Необработанные данные
Заголовки
Сохранить
Копировать
Свернуть все
Развернуть все
Поиск в JSON
hits:
0:
point:
lat: 38.8950982
lng: -77.0363849
extent:
0: -77.1197949
1: 38.7916303
2: -76.909366
3: 38.995968
name: "Washington"
country: "United States"
countrycode: "US"
state: "District of Columbia"
osm_id: 5396194
osm_type: "R"
osm_key: "place"
osm_value: "city"
locale: "default"

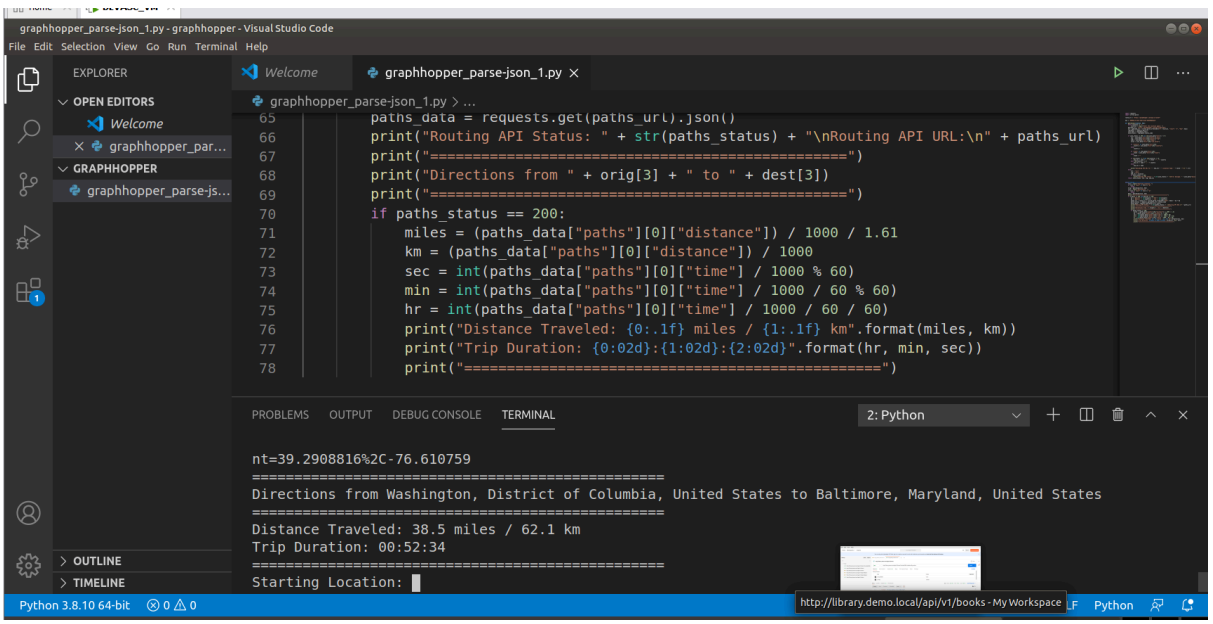

File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
graphhopper_parse-json_1.py
geocoding
if json_status == 200:
json_data = requests.get(url).json()
lat = (json_data["hits"][0]["point"]["lat"])
lng = (json_data["hits"][0]["point"]["lng"])
else:
lat = "null"
lng = "null"
return json_status, lat, lng
orig = geocoding(loc1, key)
print(orig)
dest = geocoding(loc2, key)
print(dest)
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
2: Python
json_1.py
Geocoding API URL for Washington, D.C.:
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
(200, 38.8950982, -77.0363849)
Geocoding API URL for Baltimore, Maryland:
https://graphhopper.com/api/1/geocode?q=Baltimore%2C+Maryland&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
(200, 39.2908816, -76.610759)
devasc@labvm:~/labs/devnet-src/graphhopper$
OUTLINE
TIMELINE
Python 3.8.10 64-bit
Ln 13, Col 34
Spaces: 4
UTF-8
LF
Python

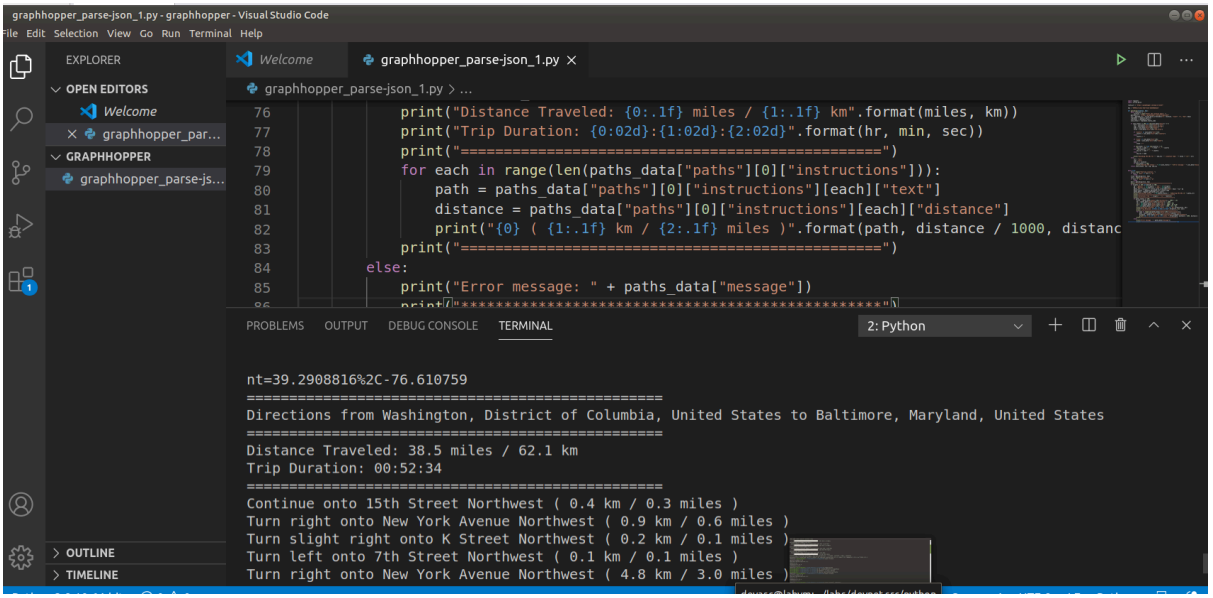

graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
graphhopper_parse-json_1.py
else:
new_loc = name
print("Geocoding API URL for " + new_loc + " (Location Type: " + value + ")\n" + url)
else:
lat = "null"
lng = "null"
new_loc = location
return json_status, lat, lng, new_loc
orig = geocoding(loc1, key)
print(orig)
dest = geocoding(loc2, key)
print(dest)
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
json_1.py
Geocoding API URL for Washington, District of Columbia, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
(200, 38.8950982, -77.0363849, 'Washington, District of Columbia, United States')
Geocoding API URL for Baltimore, Maryland, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Baltimore%2C+Maryland&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
(200, 39.2908816, -76.610759, 'Baltimore, Maryland, United States')
devasc@labvm:~/labs/devnet-src/graphhopper$
OUTLINE
TIMELINE
Python 3.8.10 64-bit
Ln 49, Col 12 Spaces: 4 UTF-8 LF Python

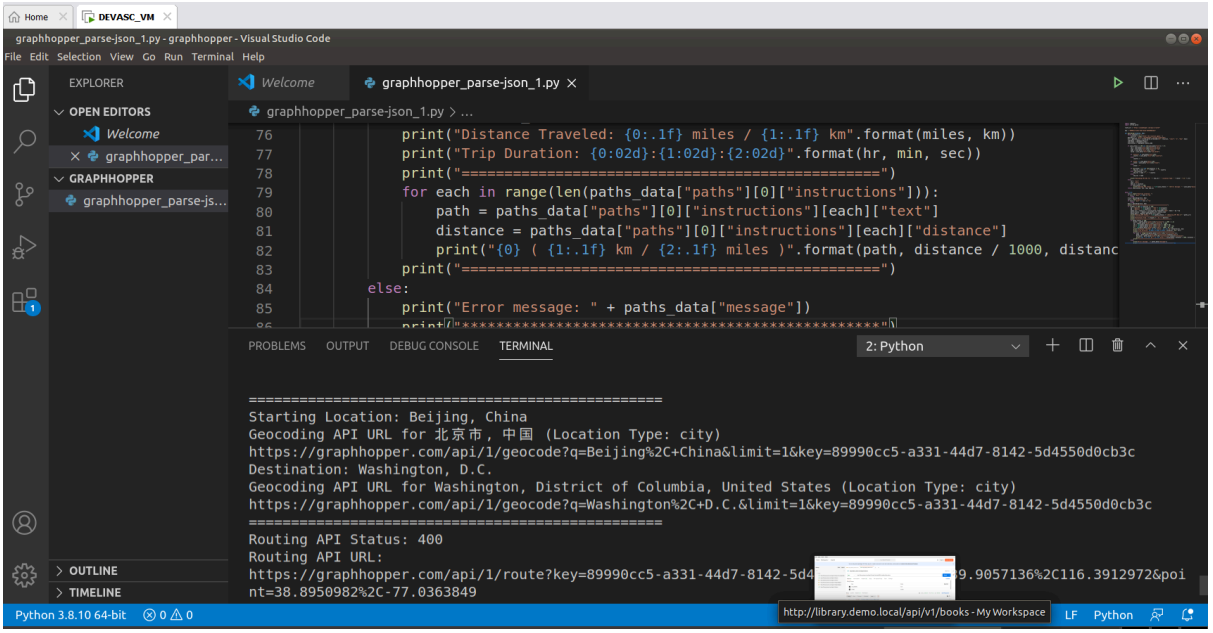

File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
graphhopper_parse-json_1.py
new_loc = location
return json_status, lat, lng, new_loc
while True:
loc1 = input("Starting Location: ")
if loc1 == "quit" or loc1 == "q":
break
orig = geocoding(loc1, key)
print(orig)
loc2 = input("Destination: ")
if loc2 == "quit" or loc2 == "q":
break
dest = geocoding(loc2, key)
print(dest)
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
devasc@labvm:~/labs/devnet-src/graphhopper$ python3 /home/devasc/labs/devnet-src/graphhopper/graphhopper_parse-json_1.py
Starting Location: Washington, D.C.
Geocoding API URL for Washington, District of Columbia, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
(200, 38.8950982, -77.0363849, 'Washington, District of Columbia, United States')
Destination: quit
devasc@labvm:~/labs/devnet-src/graphhopper$
OUTLINE
TIMELINE
Python 3.8.10 64-bit
http://library.demo.local/api/v1/books - My Workspace
Python

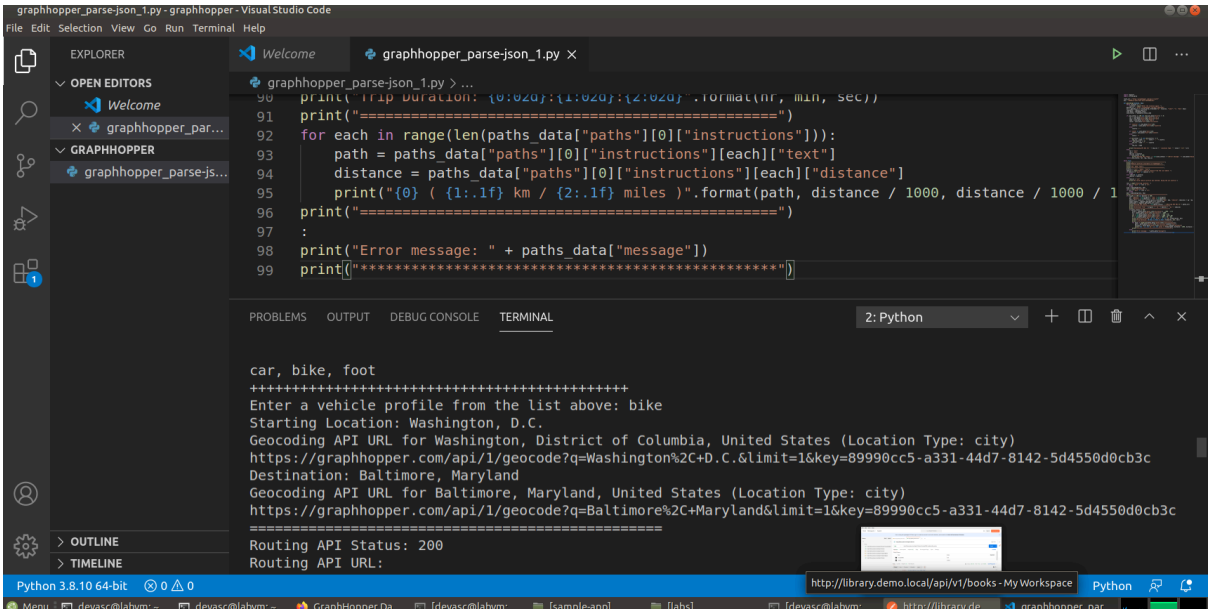

graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
OUTLINE
TIMELINE
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
41 else:
42 lat = "null"
43 lng = "null"
44 new_loc = location
45 if json_status != 200:
46 print("Geocode API status: " + str(json_status) + "\nError message: " + json_data["m
47 return json_status, lat, lng, new_loc
48
49
50 while True:
51 loc1 = input("Starting Location: ")
52 if loc1 == "quit" or loc1 == "q":
53 break
54 orig = geocoding(loc1, key)
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
Enter the location again:
Enter the location again: d
Geocoding API URL for Deutschland, Deutschland (Location Type: country)
https://graphhopper.com/api/1/geocode?q=d&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
(200, 51.1638175, 10.4478313, 'Deutschland, Deutschland')
Destination: python3 /home/devasc/labs/devnet-src/graphhopper/graphhopper_parse-json_1.py
(200, 'null', 'null', 'python3 /home/devasc/labs/devnet-src/graphhopper/graphhopper_parse-json_1.py')
Starting Location:

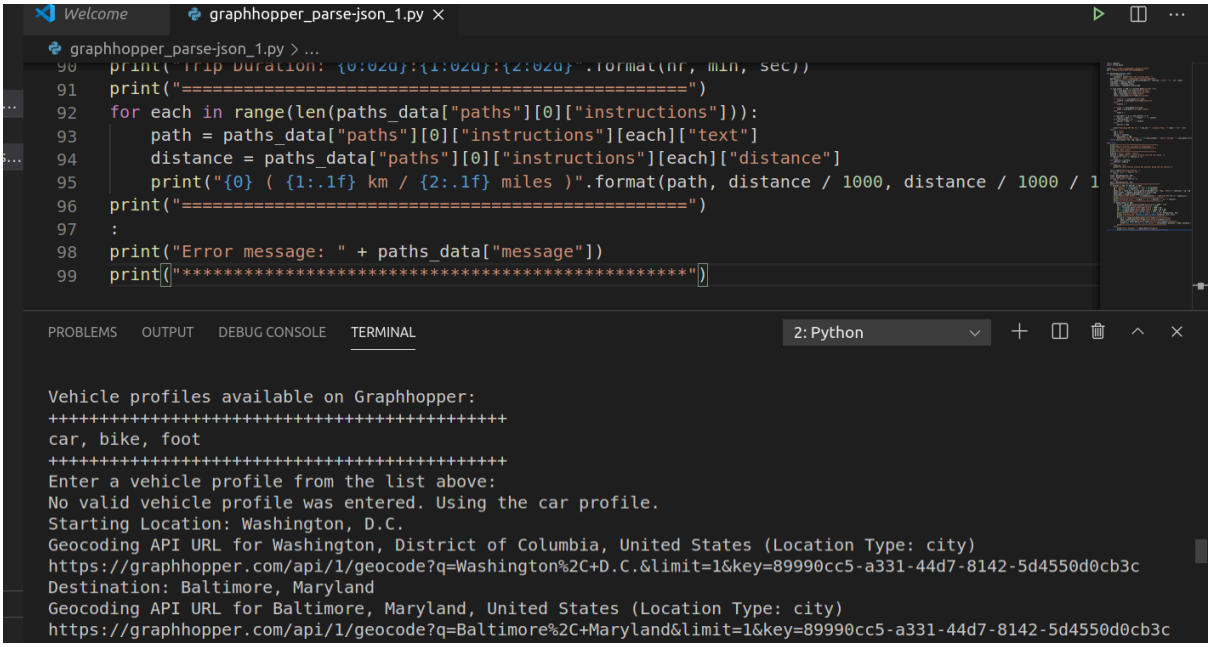

graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
OUTLINE
TIMELINE
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > geocoding
1 import requests
2 import urllib.parse
3
4 route_url = "https://graphhopper.com/api/1/route?"
5
6 key = "89990cc5-a331-44d7-8142-5d4550d0cb3cs"
7
8 def geocoding(location, key):
9 while location == "":
10 location = input("Enter the location again: ")
11 geocode_url = "https://graphhopper.com/api/1/geocode?"
12 url = geocode_url + urllib.parse.urlencode({"q": location, "limit": "1", "key": key})
13 replydata = requests.get(url)
14 json_data = replydata.json()
15 json_status = replydata.status_code
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
KeyboardInterrupt
devasc@labvm:~/labs/devnet-src/graphhopper$ python3 graphhopper_parse-json_1.py
Starting Location: Washington, D.C.
Geocode API status: 401
Error message: Wrong credentials. Register and get a valid API key at
(401, 'null', 'null', 'Washington, D.C.')
Destination:
Python 3.8.10 64-bit
http://library.demo.local/api/v1/books - My Workspace
Python

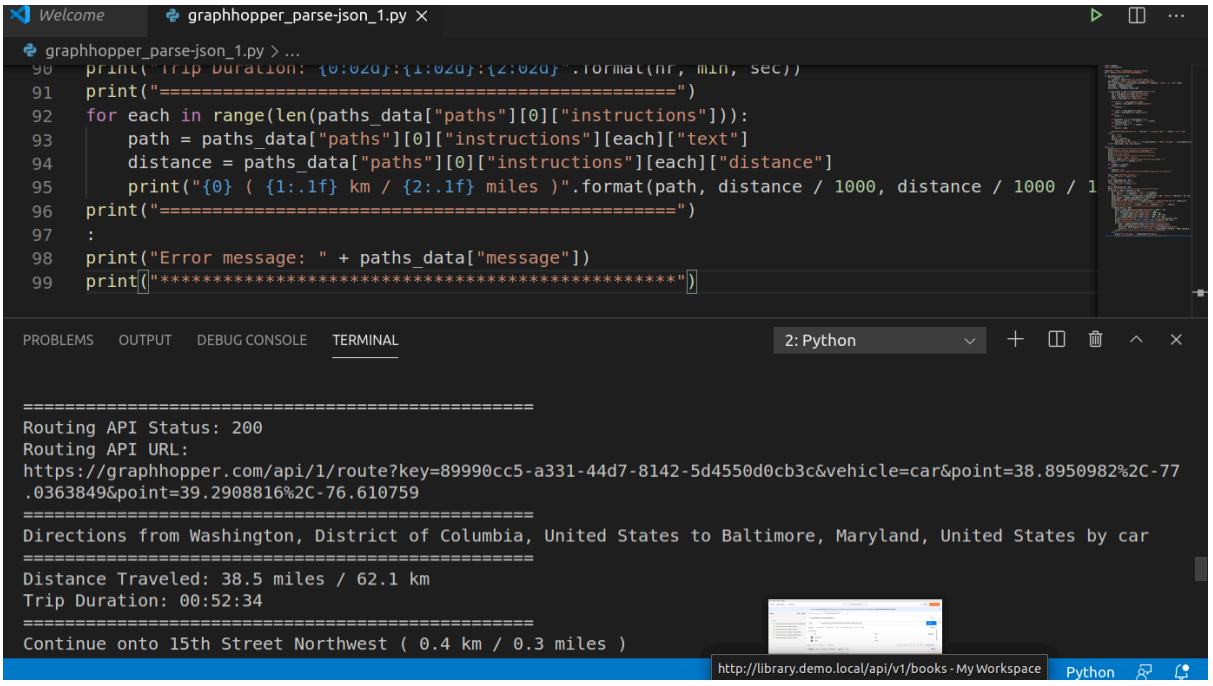

graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
OUTLINE
TIMELINE
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
65 paths_data = requests.get(paths_url).json()
66 print("Routing API Status: " + str(paths_status) + "\nRouting API URL:\n" + paths_url)
67 print("===")
68 print("Directions from " + orig[3] + " to " + dest[3])
69 print("===")
70 if paths_status == 200:
71 miles = (paths_data["paths"][0]["distance"]) / 1000 / 1.61
72 km = (paths_data["paths"][0]["distance"]) / 1000
73 sec = int(paths_data["paths"][0]["time"] / 1000 % 60)
74 min = int(paths_data["paths"][0]["time"] / 1000 / 60 % 60)
75 hr = int(paths_data["paths"][0]["time"] / 1000 / 60 / 60)
76 print("Distance Traveled: {0:.1f} miles / {1:.1f} km".format(miles, km))
77 print("Trip Duration: {0:02d}:{1:02d}:{2:02d}".format(hr, min, sec))
78 print("===")
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
nt=39.2908816%2C-76.610759
===
Directions from Washington, District of Columbia, United States to Baltimore, Maryland, United States
===
Distance Traveled: 38.5 miles / 62.1 km
Trip Duration: 00:52:34
===
Starting Location:
Python 3.8.10 64-bit
http://library.demo.local/api/v1/books - My Workspace
Python


graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
OUTLINE
TIMELINE
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
76 print("Distance Traveled: {0:.1f} miles / {1:.1f} km".format(miles, km))
77 print("Trip Duration: {0:02d}:{1:02d}:{2:02d}".format(hr, min, sec))
78 print("===")
79 for each in range(len(paths_data["paths"][0]["instructions"])):
80 path = paths_data["paths"][0]["instructions"][each]["text"]
81 distance = paths_data["paths"][0]["instructions"][each]["distance"]
82 print("{0} ({1:.1f} km / {2:.1f} miles)".format(path, distance / 1000, distanc
83 print("===")
84 else:
85 print("Error message: " + paths_data["message"])
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
nt=39.2908816%2C-76.610759
===
Directions from Washington, District of Columbia, United States to Baltimore, Maryland, United States
===
Distance Traveled: 38.5 miles / 62.1 km
Trip Duration: 00:52:34
===
Continue onto 15th Street Northwest (0.4 km / 0.3 miles)
Turn right onto New York Avenue Northwest (0.9 km / 0.6 miles)
Turn slight right onto K Street Northwest (0.2 km / 0.1 miles)
Turn left onto 7th Street Northwest (0.1 km / 0.1 miles)
Turn right onto New York Avenue Northwest (4.8 km / 3.0 miles)


Home
DEVASC_VM
graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
OUTLINE
TIMELINE
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
76 print("Distance Traveled: {0:.1f} miles / {1:.1f} km".format(miles, km))
77 print("Trip Duration: {0:02d}:{1:02d}:{2:02d}".format(hr, min, sec))
78 print("===")
79 for each in range(len(paths_data["paths"][0]["instructions"])):
80 path = paths_data["paths"][0]["instructions"][each]["text"]
81 distance = paths_data["paths"][0]["instructions"][each]["distance"]
82 print("{0} ({1:.1f} km / {2:.1f} miles)".format(path, distance / 1000, distanc
83 print("===")
84 else:
85 print("Error message: " + paths_data["message"])
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
===
Starting Location: Beijing, China
Geocoding API URL for 北京市, 中国 (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Beijing%2C+China&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
Destination: Washington, D.C.
Geocoding API URL for Washington, District of Columbia, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
===
Routing API Status: 400
Routing API URL:
https://graphhopper.com/api/1/route?key=89990cc5-a331-44d7-8142-5d4
9.9057136%2C116.3912972&poi
nt=38.8950982%2C-77.0363849
http://library.demo.local/api/v1/books - My Workspace
Python 3.8.10 64-bit
LF
Python


graphhopper_parse-json_1.py - graphhopper - Visual Studio Code
File Edit Selection View Go Run Terminal Help
EXPLORER
OPEN EDITORS
Welcome
graphhopper_par...
GRAPHHOPPER
graphhopper_parse-js...
OUTLINE
TIMELINE
Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
91 print("===")
92 for each in range(len(paths_data["paths"][0]["instructions"])):
93 path = paths_data["paths"][0]["instructions"][each]["text"]
94 distance = paths_data["paths"][0]["instructions"][each]["distance"]
95 print("{0} ({1:.1f} km / {2:.1f} miles)".format(path, distance / 1000, distance / 1000 / 1
96 print("===")
97 :
98 print("Error message: " + paths_data["message"])
99 print("***")
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
2: Python
car, bike, foot
+++
Enter a vehicle profile from the list above: bike
Starting Location: Washington, D.C.
Geocoding API URL for Washington, District of Columbia, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
Destination: Baltimore, Maryland
Geocoding API URL for Baltimore, Maryland, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Baltimore%2C+Maryland&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
===
Routing API Status: 200
Routing API URL:
http://library.demo.local/api/v1/books - My Workspace
Python 3.8.10 64-bit
Python


Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
print("Trip Duration: {0:02d}:{1:02d}:{2:02d}".format(hr, min, sec))
print("==")
for each in range(len(paths_data["paths"][0]["instructions"])):
path = paths_data["paths"][0]["instructions"][each]["text"]
distance = paths_data["paths"][0]["instructions"][each]["distance"]
print("{0} ({1:.1f} km / {2:.1f} miles)".format(path, distance / 1000, distance / 1000 / 1
print("==")
:
print("Error message: " + paths_data["message"])
print("**")
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
2: Python
Vehicle profiles available on Graphhopper:
++
car, bike, foot
++
Enter a vehicle profile from the list above:
No valid vehicle profile was entered. Using the car profile.
Starting Location: Washington, D.C.
Geocoding API URL for Washington, District of Columbia, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
Destination: Baltimore, Maryland
Geocoding API URL for Baltimore, Maryland, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Baltimore%2C+Maryland&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c


Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
print("Trip Duration: {0:02d}:{1:02d}:{2:02d}".format(hr, min, sec))
print("==")
for each in range(len(paths_data["paths"][0]["instructions"])):
path = paths_data["paths"][0]["instructions"][each]["text"]
distance = paths_data["paths"][0]["instructions"][each]["distance"]
print("{0} ({1:.1f} km / {2:.1f} miles)".format(path, distance / 1000, distance / 1000 / 1
print("==")
:
print("Error message: " + paths_data["message"])
print("**")
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
2: Python
==
Routing API Status: 200
Routing API URL:
https://graphhopper.com/api/1/route?key=89990cc5-a331-44d7-8142-5d4550d0cb3c&vehicle=car&point=38.8950982%2C-77
.0363849&point=39.2908816%2C-76.610759
==
Directions from Washington, District of Columbia, United States to Baltimore, Maryland, United States by car
==
Distance Traveled: 38.5 miles / 62.1 km
Trip Duration: 00:52:34
==
Continue onto 15th Street Northwest (0.4 km / 0.3 miles)
http://library.demo.local/api/v1/books - My Workspace
Python

```
Welcome   graphhopper_parse-json_1.py ×
graphhopper_parse-json_1.py > ...
91  print("================================================")
92  for each in range(len(paths_data["paths"][0]["instructions"])):
93      path = paths_data["paths"][0]["instructions"][each]["text"]
94      distance = paths_data["paths"][0]["instructions"][each]["distance"]
95      print("{0} ( {1:.1f} km / {2:.1f} miles )".format(path, distance / 1000, distance / 1000 / 1
96  print("================================================")
97  :
98  print("Error message: " + paths_data["message"])
99  print("************************************************")

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL                    2: Python

Enter a vehicle profile from the list above: Beijing, China
No valid vehicle profile was entered. Using the car profile.
Starting Location: Washington, D.C.
Geocoding API URL for Washington, District of Columbia, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Washington%2C+D.C.&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
Destination: Beijing, China
Geocoding API URL for 北京市, 中国 (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Beijing%2C+China&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
================================================
Routing API Status: 400
Routing API URL:
https://graphhopper.com/api/1/route?key=89990cc5-a331-44d7-8142-5d4                    e=car&point=38.8950982%2C-77

http://library.demo.local/api/v1/books - My Workspace        LF  Python
```

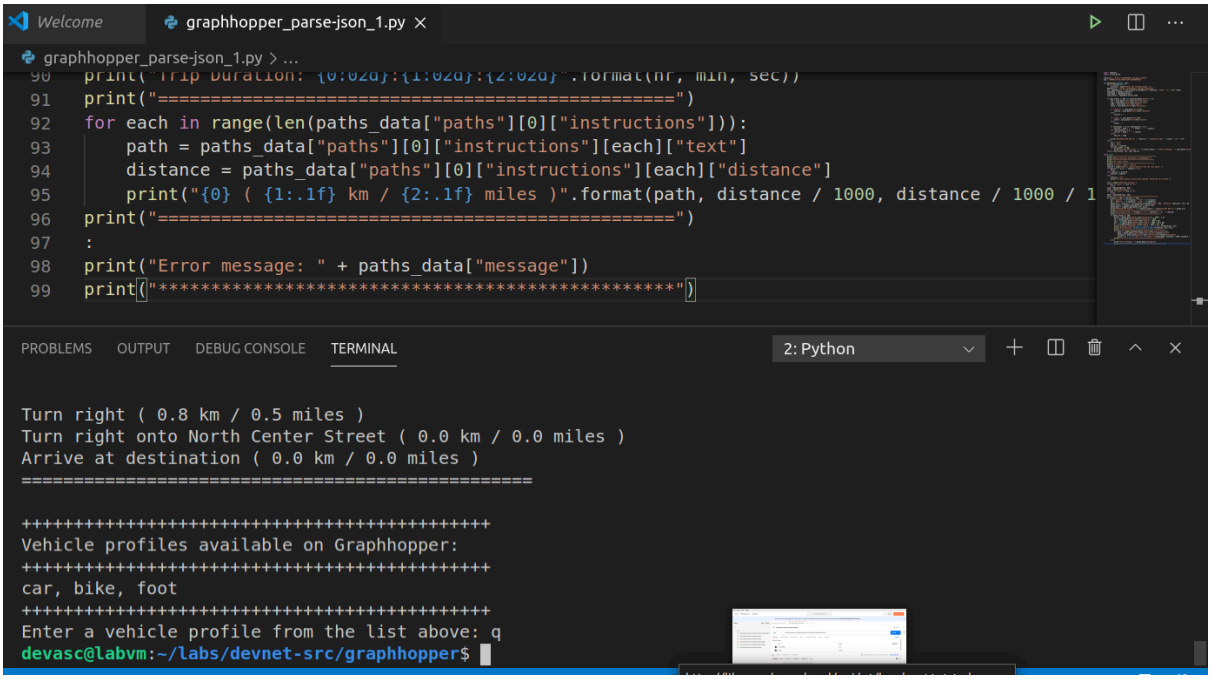


```
al  Help
Welcome   graphhopper_parse-json_1.py ×
graphhopper_parse-json_1.py > ...
91  print("================================================")
92  for each in range(len(paths_data["paths"][0]["instructions"])):
93      path = paths_data["paths"][0]["instructions"][each]["text"]
94      distance = paths_data["paths"][0]["instructions"][each]["distance"]
95      print("{0} ( {1:.1f} km / {2:.1f} miles )".format(path, distance / 1000, distance / 1000 / 1
96  print("================================================")
97  :
98  print("Error message: " + paths_data["message"])
99  print("************************************************")

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL                    2: Python

Vehicle profiles available on Graphhopper:
++++++++++++++++++++++++++++++++++++++++++++++++
car, bike, foot
++++++++++++++++++++++++++++++++++++++++++++++++
Enter a vehicle profile from the list above: foot
Starting Location: Tempe, Arizona
Geocoding API URL for Tempe, Arizona, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Tempe%2C+Arizona&limit=1&key=89990cc5-a331-44d7-8142-5d4550d0cb3c
Destination: Mesa, Arizona
Geocoding API URL for Mesa, Arizona, United States (Location Type: city)
https://graphhopper.com/api/1/geocode?q=Mesa%2C+Arizona&limit=1&key=89990cc5-                    4550d0cb3c
================================================
```




Welcome
graphhopper_parse-json_1.py
graphhopper_parse-json_1.py > ...
print("Trip Duration: {0:02d}:{1:02d}:{2:02d}".format(hr, min, sec))
print("==")
for each in range(len(paths_data["paths"][0]["instructions"])):
path = paths_data["paths"][0]["instructions"][each]["text"]
distance = paths_data["paths"][0]["instructions"][each]["distance"]
print("{0} ({1:.1f} km / {2:.1f} miles)".format(path, distance / 1000, distance / 1000 / 1
print("==")
:
print("Error message: " + paths_data["message"])
print("**")
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
2: Python
Turn right (0.8 km / 0.5 miles)
Turn right onto North Center Street (0.0 km / 0.0 miles)
Arrive at destination (0.0 km / 0.0 miles)
==========
++++++++++
Vehicle profiles available on Graphhopper:
++++++++++
car, bike, foot
++++++++++
Enter a vehicle profile from the list above: q
devasc@labvm:~/labs/devnet-src/graphhopper$