RESIDUAL GATED CONVOLUTION

The implementation gates the convolutional response and then adds a scaled residual update.

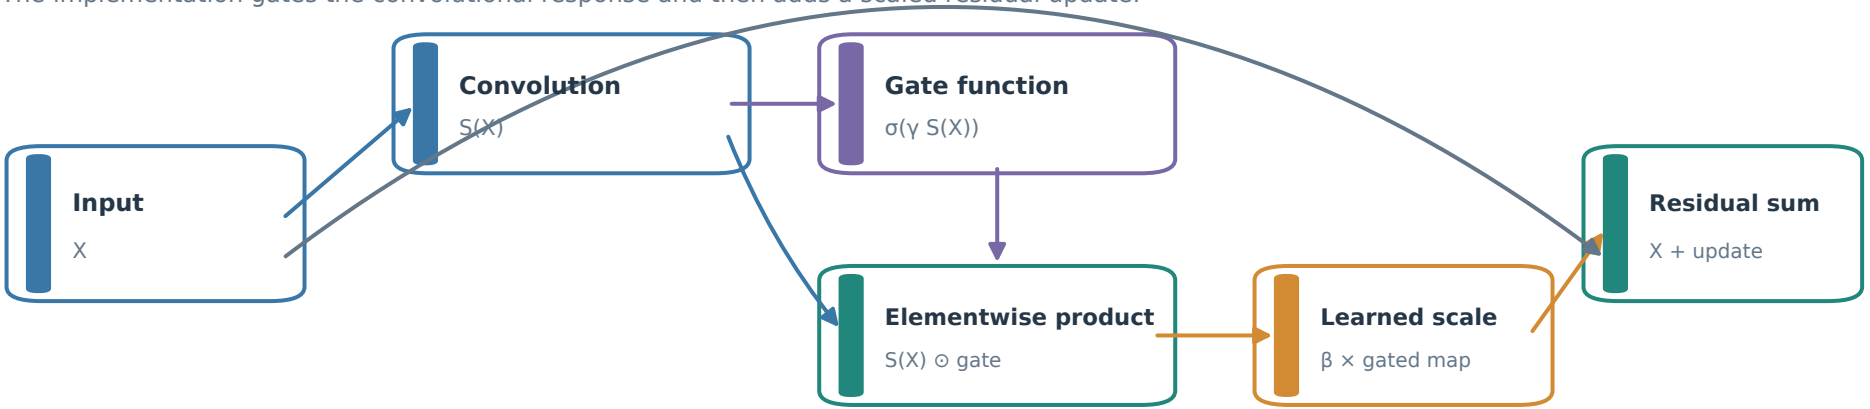

$$G(X) = S(X) \odot \sigma(\gamma S(X))$$

$$Y = X + \beta G(X)$$

β and γ are learned scalar parameters in residual mode. This operation is not a separate pixel-level foreground mask.