



RAJALAKSHMI ENGINEERING COLLEGE

Approved by AICTE | Affiliated to Anna University | Accredited by NAAC

LABORATORY RECORD NOTEBOOK

Name : BALAJI R

Register No : 2116231801018

Year / Semester : 4th / 7

Batch : 2023 - 2027

Branch : B.Tech., Artificial Intelligence and Data Science

Subject Code : CS23633

Subject Name : Cloud Computing

Academic Year : 2026 - 2027



RAJALAKSHMI ENGINEERING COLLEGE

Approved by AICTE | Affiliated to Anna University | Accredited by NAAC

BONAFIDE CERTIFICATE

Certified that this is a Bonafide Record of the practical work done by **BALAJI R**, Register No **2116231801018** of 4th Year / 7th Semester, B.Tech., Artificial Intelligence and Data Science Department in the **CS23633 – Cloud Computing** laboratory during the Academic Year 2026 - 2027.

Faculty in charge

Submitted for the Practical Examination held on:

INTERNAL EXAMINER

EXTERNAL EXAMINER

INDEX

EX.NO	DATE	NAME OF THE EXPERIMENT	PAGE NO	STAFF SIGN
1	24-06-2026	Private Cloud Setup Using OpenStack	1	
2	08-07-2026	Public Cloud Application Deployment Using PaaS	5	
3	22-07-2026	Hybrid Cloud Connectivity using AWS Free Tier VPC	10	
4	05-08-2026	Basic VPS Server Setup and Network Configuration	16	
5	07-08-2026	Cloud Migration and Backup Setup Using Amazon S3	22	
6	14-08-2026	CDN Service Selection and Configuration Using Amazon CloudFront	29	

Exp. 1	SETUP A PRIVATE CLOUD BY PERFORMING THE PROCEDURE USING A SINGLE NODE OPENSTACK IMPLEMENTATION
24-06-2026	

AIM

To set up a Private Cloud using a single-node OpenStack implementation and create virtual machine instances.

OBJECTIVE

- To understand the concept of Private Cloud Computing.
- To install and configure OpenStack using DevStack.
- To create and manage virtual machine instances in a cloud environment.
- To understand cloud resource management using the OpenStack Dashboard.

SOFTWARE REQUIREMENTS

- Ubuntu Server 22.04 LTS
- OpenStack (DevStack)
- Virtual Machine Software (VirtualBox/VMware)
- Internet Connection
- Web Browser

THEORY

Cloud Computing is a technology that provides computing resources such as servers, storage, databases, networking, and software over the internet. A Private Cloud is a cloud infrastructure dedicated to a single organization and offers greater control, security, and customization.

OpenStack is an open-source cloud computing platform used for building and managing private and public cloud environments. It provides Infrastructure as a Service (IaaS) through a collection of services for computing, networking, storage, and identity management.

The major services of OpenStack include:

- Nova – Compute Service
- Neutron – Networking Service
- Glance – Image Service
- Keystone – Identity Service
- Cinder – Block Storage Service
- Swift – Object Storage Service

ARCHITECTURE

OpenStack Private Cloud Architecture:

User → Horizon Dashboard → Keystone Authentication → Nova Compute → Neutron Networking → Glance Images → Cinder Storage

PROCEDURE

STEP 1: INSTALL UBUNTU SERVER

1. Create a virtual machine using VirtualBox or VMware.
2. Allocate at least 4 GB RAM and 2 CPU cores.
3. Install Ubuntu Server.

STEP 2: UPDATE SYSTEM PACKAGES

Execute the following commands:

```
sudo apt update
sudo apt upgrade -y
```

STEP 3: INSTALL GIT

Install Git for downloading DevStack:

```
sudo apt install git -y
```

STEP 4: DOWNLOAD DEVSTACK

Clone the DevStack repository:

```
git clone https://opendev.org/openstack/devstack
```

STEP 5: CONFIGURE DEVSTACK

Navigate to the DevStack directory:

```
cd devstack
```

Create a configuration file named local.conf and provide the required credentials.

STEP 6: INSTALL OPENSTACK

Run the installation script:

```
./stack.sh
```

Wait for the installation process to complete successfully.

STEP 7: ACCESS OPENSTACK

DASHBOARD

Open a web browser and enter:

```
http://<server-ip>/dashboard
```

Login using the administrator credentials.

STEP 8: CREATE PROJECT AND USER

1. Open Identity → Projects.
2. Create a new project.
3. Create users.
4. Assign appropriate roles.

STEP 9: LAUNCH VIRTUAL MACHINE INSTANCE

1. Open Compute → Instances.
2. Click Launch Instance.
3. Select image, flavor, and network.
4. Launch the instance.

STEP 10: VERIFY CONNECTIVITY

1. Assign a floating IP address.
2. Connect to the instance using SSH.
3. Verify connectivity using ping commands.

Commands Used

```
sudo apt update
sudo apt upgrade -y
sudo apt install git -y
git clone https://opendev.org/openstack/devstack
cd devstack
./stack.sh
openstack server list
openstack network list
openstack image list
```

OBSERVATIONS

Parameter	Status
Ubuntu Installation	Successful
DevStack Installation	Successful
OpenStack Dashboard Access	Successful
Project Creation	Successful
VM Instance Creation	Successful
Network Connectivity	Verified

EXPECTED OUTPUT

- OpenStack Dashboard accessible through a web browser.
- Project, users, and roles successfully created.
- Virtual machine instances launched successfully.
- Network connectivity verified.

RESULT

A Private Cloud environment was successfully created using OpenStack. Virtual machine instances were launched and managed through the OpenStack Dashboar

Exp. 2	DEVELOP A SIMPLE APPLICATION TO UNDERSTAND THE CONCEPT OF PAAS USING GAE/AMAZON ELASTIC BEANSTALK/IBM BLUE MIX/GCC AND LAUNCH IT
24-06-2026	

AIM

To develop and deploy a simple web application using a Platform as a Service (PaaS) cloud environment such as Google App Engine, Amazon Elastic Beanstalk, or IBM Cloud.

OBJECTIVE

- To understand the concept of Public Cloud Computing.
- To learn the Platform as a Service (PaaS) model.
- To deploy and manage applications in a cloud environment.
- To understand cloud-based application hosting and scaling.

SOFTWARE REQUIREMENTS

- Google Cloud Platform (GCP) / AWS Account
- Google App Engine or Amazon Elastic Beanstalk
- Python/Java/Node.js Runtime
- Web Browser
- Internet Connection
- Text Editor or IDE

THEORY

Public Cloud is a cloud deployment model in which computing resources such as servers, storage, databases, and networking are owned and managed by a third-party cloud provider and delivered over the internet. Users can access these resources on demand and pay only for what they use. Platform as a Service (PaaS) is a cloud service model that provides developers with a complete environment for developing, testing, deploying, and managing applications. The cloud provider manages the underlying infrastructure, operating systems, middleware, and runtime environments, allowing developers to focus only on application development. Examples of PaaS platforms include Google App Engine, Amazon Elastic Beanstalk, Microsoft Azure App Service, and IBM Cloud.

ADVANTAGES OF PAAS

- Faster application development and deployment.
- Reduced infrastructure management.

- Automatic scaling and load balancing.

ARCHITECTURE

PaaS Architecture:



ALGORITHM

1. Create an account on the cloud platform.
2. Develop a simple web application.
3. Configure the application deployment settings.
4. Install and configure Cloud SDK.
5. Create a cloud project.
6. Deploy the application to the cloud platform.
7. Verify application deployment.
8. Access the application through the generated URL.

FLOWCHART



Access Application URL

↓

Stop

PROCEDURE

STEP 1: CREATE A CLOUD ACCOUNT

1. Create an account on Google Cloud Platform or AWS.
2. Sign in to the cloud console.
3. Enable billing if required.

STEP 2: CREATE A SIMPLE APPLICATION

Create a sample web application.

Example (Python Flask):

```
from flask import Flask

app = Flask(__name__)

@app.route('/')
def home():
    return "Hello Cloud Computing"

if __name__ == '__main__':
    app.run()
```

STEP 3: CREATE APPLICATION CONFIGURATION FILE

Create a configuration file.

Example (app.yaml):

```
runtime: python39

handlers:
- url: /*
  script: auto
```

STEP 4: INSTALL CLOUD SDK

Install Google Cloud SDK or AWS CLI.

Verify installation:

```
gcloud version
```

STEP 5: LOGIN TO CLOUD PLATFORM

```
gcloud auth login
```

STEP 6: CREATE CLOUD PROJECT

Create a new project from the Google Cloud Console.

Project Name: cloud-lab-project

Alternatively, a project may be created using the Google Cloud SDK:

```
gcloud projects create cloud-lab-project
```

STEP 7: SET ACTIVE PROJECT

Configure the newly created project as the active project:

```
gcloud config set project cloud-lab-project
```

Verify the configuration:

```
gcloud config list
```

STEP 8: DEPLOY APPLICATION

Deploy the application:

```
gcloud app deploy
```

STEP 9: LAUNCH APPLICATION

```
gcloud app browse
```

STEP 10: VERIFY DEPLOYMENT

1. Open the generated URL.
2. Verify that the application loads successfully.
3. Test application functionality.

COMMANDS USED

```
gcloud auth login
gcloud projects create cloud-lab-project
gcloud config set project cloud-lab-project
gcloud app create
```

```
gcloud app deploy
gcloud app browse
```

OBSERVATIONS

Parameter	Status
Cloud Account Creation	Successful
Project Creation	Successful
Application Development	Successful
Application Deployment	Successful
URL Generation	Successful
Application Access	Verified

EXPECTED OUTPUT

- Cloud project created successfully.
- Application deployed on the cloud platform.
- Public URL generated.
- Application accessible through a web browser.
- Successful execution of application services.

RESULT

A simple web application was successfully deployed on a Public Cloud Platform using the PaaS model. The application was accessible through a web browser and managed by the cloud provider.

Exp. 3	Setting Up Hybrid Connectivity Experiment with setting up a secure VPN connection between an on-premises data center and a public cloud provider such as AWS or Azure
24-06-2026	

AIM

To implement a Hybrid Cloud environment using Amazon Web Services Free Tier by configuring a Virtual Private Cloud (VPC) with subnets and route tables, and establishing secure connectivity with a local on-premises system using OpenVPN.

OBJECTIVE

- To create a real VPC in AWS Free Tier.
- To configure subnets and route tables.
- To deploy an EC2 instance in cloud.
- To simulate on-premises system using VirtualBox.
- To establish secure VPN connectivity between cloud and local system.
- To understand Hybrid Cloud architecture practically.

SOFTWARE REQUIREMENTS

- AWS Free Tier Account
- VirtualBox
- Ubuntu 20.04 / 22.04 LTS (Local VM + EC2)
- OpenVPN
- Web Browser
- SSH Client (Optional)

THEORY

Hybrid Cloud is a computing model that combines on-premises infrastructure with public cloud services.


In this experiment:

- AWS provides cloud infrastructure (VPC, EC2, networking)
- Local VirtualBox VM acts as on-premises system
- OpenVPN provides secure encrypted communication

AWS COMPONENTS:

- **VPC (Virtual Private Cloud):** Isolated cloud network
- **Subnet:** Divides VPC into smaller networks
- **Route Table:** Controls traffic flow
- **Internet Gateway:** Enables internet access
- **EC2 Instance:** Virtual machine in cloud


ARCHITECTURE

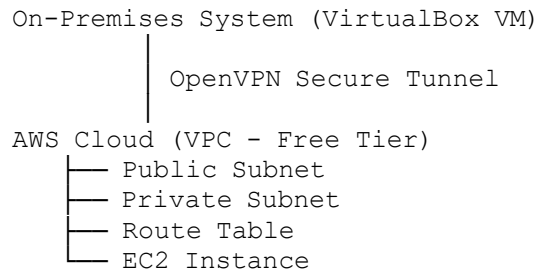

ALGORITHM

1. Create AWS Free Tier account.
2. Create VPC with CIDR block.
3. Create public and private subnets.
4. Attach Internet Gateway.
5. Configure route tables.
6. Launch EC2 instance.
7. Setup local VM using VirtualBox.
8. Install OpenVPN on both systems.
9. Configure VPN connection.
10. Verify connectivity using ping.

FLOWCHART

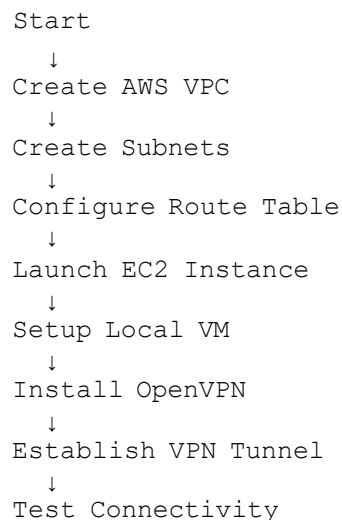

PROCEDURE

STEP 1: CREATE VPC IN AWS

1. Login to AWS Console.
2. Go to VPC Dashboard.
3. Click “Create VPC”.
4. Enter:
 - o Name: Hybrid-VPC
 - o CIDR: 10.0.0.0/16
5. Create VPC.

STEP 2: CREATE SUBNETS

- Public Subnet: 10.0.1.0/24
- Private Subnet: 10.0.2.0/24

Associate both with VPC.

STEP 3: CREATE INTERNET GATEWAY

1. Create Internet Gateway (IGW).
2. Attach it to VPC.

STEP 4: CONFIGURE ROUTE TABLE

Add route:

Destination	Target
0.0.0.0/0	Internet Gateway

Associate with Public Subnet

STEP 5: LAUNCH EC2 INSTANCE

1. Go to EC2 → Launch Instance
2. Choose Ubuntu (Free Tier eligible)
3. Select VPC and Public Subnet
4. Enable SSH (port 22)
5. Launch instance

STEP 6: SETUP LOCAL VM (ON-PREMISES)

Using VirtualBox:

- Install Ubuntu Linux
- Assign IP: 192.168.1.10

STEP 7: INSTALL OPENVPN

On both AWS EC2 and Local VM:

```
sudo apt update
sudo apt install openvpn -y
```

STEP 8: CONFIGURE VPN SERVER (AWS EC2)

```
sudo apt install easy-rsa -y
sudo systemctl start openvpn
sudo systemctl enable openvpn
```

STEP 9: CONFIGURE VPN CLIENT (LOCAL VM)

```
sudo openvpn --config client.ovpn
```

STEP 10: VERIFY CONNECTIVITY

From Local VM:

```
ping <EC2-private-IP>
```

From AWS EC2:

```
ping 192.168.1.10
```

COMMANDS USED

```
sudo apt update

sudo apt install openvpn -y

sudo apt install easy-rsa -y

sudo systemctl start openvpn

sudo systemctl enable openvpn

ping <ip-address>
```

OBSERVATIONS

Parameter	Status
VPC Creation	Successful
Subnet Configuration	Successful
Route Table Setup	Successful
EC2 Instance Deployment	Successful
VPN Setup	Successful
Connectivity Test	Successful

EXPECTED OUTPUT


- AWS VPC created successfully
- Public and private subnets configured
- Route tables properly assigned
- EC2 instance running in cloud
- Local VM connected as on-premises system
- Secure VPN tunnel established
- Successful communication between cloud and local system

RESULT

A Hybrid Cloud environment was successfully implemented using AWS Free Tier VPC and a local VirtualBox system. Secure communication between cloud and on-premises systems was established using OpenVPN.

HYBRID CLOUD ARCHITECTURE

Real AWS Enterprise Deployment (Site-to-Site VPN)

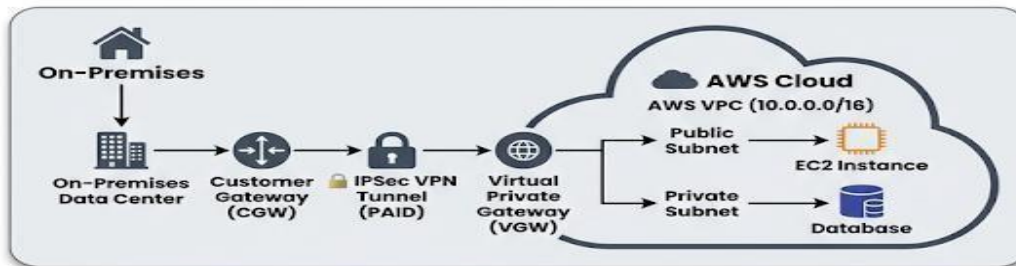

Step 1: AWS Account

Amazon Web Services account creation + billing enabled

Step 2: VPC Creation

CIDR: 10.0.0.0/16

Step 3: Subnets

Public: 10.0.1.0/24
Private: 10.0.2.0/24

Step 4: Internet Gateway

Attach to VPC

Step 5: Route Table

0.0.0.0/0 → IGW

Step 6: Virtual Private Gateway

✗ Paid component

Step 7: Customer Gateway

On-prem router IP

Step 8: VPN Connection

Site-to-Site IPsec tunnel

Step 9: On-Prem Setup

VPN configuration

Step 10: EC2 Launch

Ubuntu instance in VPC

Step 11: Route Propagation

Auto routing enabled

Step 12: Testing

Ping connectivity check

PAID COMPONENTS

✗ Paid AWS Services
Virtual Private Gateway (VGW)
Site-to-Site VPN Connection

Data transfer over VPN
NAT Gateway (optional)

LEARNING OUTCOMES

✓ Real Hybrid Cloud understanding
✓ AWS VPC architecture

✓ Secure network communication
✓ Industry-level cloud design

FOOTER

NOTE:

This is real enterprise architecture
Requires AWS billing account

Used in production environments
Not required for free lab experiments

Note: The following steps outline the operational workflow of a fully paid AWS environment.

Exp. 4	PROVISION A VPS INSTANCE FROM A CLOUD PROVIDER OR SET UP A VIRTUAL MACHINE ON YOUR LOCAL SYSTEM USING SOFTWARE LIKE VIRTUALBOX OR VMWARE
24-06-2026	

AIM

To provision a Virtual Private Server (VPS) using VirtualBox, install Ubuntu Server, configure network settings (IP Address, Subnet Mask, Gateway, DNS), and enable SSH remote access.

OBJECTIVES

1. To understand the concept of Virtual Private Server (VPS).
2. To create and manage virtual machines using VirtualBox.
3. To install Ubuntu Server OS.
4. To configure static network settings.
5. To enable SSH remote access.

SOFTWARE REQUIREMENTS

- Oracle VirtualBox
- Ubuntu Server 22.04 LTS ISO
- Windows/Linux Host System
- Internet Connection
- Terminal Access

THEORY

A Virtual Private Server (VPS) is a software-based server created using virtualization technology. It operates independently with its own operating system, storage, memory, and network configuration while sharing the physical hardware with other virtual machines.

Virtualization allows efficient utilization of resources and forms the foundation of cloud computing platforms.

Network configuration parameters include:

IP ADDRESS

A unique address assigned to a device on a network.

SUBNET MASK

Determines the network and host portions of an IP address.

GATEWAY

Provides access to networks outside the local network.


DNS (DOMAIN NAME SYSTEM)

Converts domain names into IP addresses.

SSH (SECURE SHELL)

A secure protocol used for remote administration of Linux systems.

ARCHITECTURE

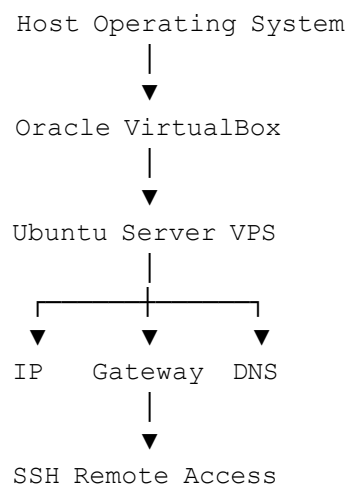

ALGORITHM

1. Install Oracle VirtualBox.
2. Create a new virtual machine.
3. Attach Ubuntu Server ISO image.
4. Install Ubuntu Server.
5. Update system packages.
6. Identify network interface.
7. Configure static IP address.
8. Configure subnet mask.
9. Configure default gateway.
10. Configure DNS server.

PROCEDURE

STEP 1: INSTALL VIRTUALBOX

Download and install Oracle VirtualBox.

STEP 2: CREATE VIRTUAL

MACHINE

Configure:

Parameter	Value
Name	VPS-Server
OS Type	Ubuntu (64-bit)
RAM	2 GB
CPU	2 Cores
Storage	20 GB

STEP 3: INSTALL UBUNTU SERVER

1. Attach Ubuntu Server ISO.
2. Start VM.
3. Follow installation wizard.
4. Create username and password.
5. Complete installation.

STEP 4: UPDATE UBUNTU

```
sudo apt update  
sudo apt upgrade -y
```

STEP 5: IDENTIFY NETWORK INTERFACE

```
ip a
```

Sample Interface:

```
ens33
```

STEP 6: CONFIGURE STATIC IP

Edit Netplan file:

```
sudo nano /etc/netplan/00-installer-config.yaml
```

Add:

```
network:
  version: 2
  ethernets:
    ens33:
      dhcp4: no
      addresses:
        - 192.168.1.100/24
      gateway4: 192.168.1.1
      nameservers:
        addresses:
          - 8.8.8.8
          - 8.8.4.4
```

Apply configuration:

```
sudo netplan apply
```

STEP 7: VERIFY NETWORK CONFIGURATION

Check IP:

```
ip addr
```

Check routing table:

```
ip route
```

Check DNS:

```
cat /etc/resolv.conf
```

STEP 8: TEST CONNECTIVITY

Test Internet:

```
ping -c 4 8.8.8.8
```

Test DNS:

```
ping -c 4 google.com
```

STEP 9: INSTALL SSH SERVER

```
sudo apt install openssh-server -y
```

STEP 10: ENABLE SSH SERVICE

```
sudo systemctl enable ssh  
sudo systemctl start ssh
```

Verify status:

```
sudo systemctl status ssh
```

STEP 11: CONNECT REMOTELY

From another system:

```
ssh username@192.168.1.100
```

COMMANDS USED

```
sudo apt update  
sudo apt upgrade -y  
ip a  
sudo nano /etc/netplan/00-installer-config.yaml  
sudo netplan apply  
ip addr  
ip route  
cat /etc/resolv.conf  
ping -c 4 8.8.8.8  
ping -c 4 google.com  
sudo apt install openssh-server -y  
sudo systemctl enable ssh  
sudo systemctl start ssh  
sudo systemctl status ssh  
ssh username@192.168.1.100
```

SAMPLE OUTPUT

IP CONFIGURATION

```
inet 192.168.1.100/24
```

ROUTING TABLE

```
default via 192.168.1.1 dev ens33
```

DNS CONFIGURATION

```
nameserver 8.8.8.8  
nameserver 8.8.4.4
```

OBSERVATIONS

Parameter	Status
VM Creation	Successful
Ubuntu Installation	Successful
Static IP Configuration	Successful
Subnet Mask Configuration	Successful
Gateway Configuration	Successful
DNS Configuration	Successful
Internet Connectivity	Verified
SSH Installation	Successful
SSH Service Running	Verified
Remote Login	Successful

RESULT

A Virtual Private Server (VPS) was successfully created using Oracle VirtualBox. Ubuntu Server was installed and configured with static IP address, subnet mask, gateway, and DNS settings. SSH service was installed, enabled, and verified for secure remote access.

Exp. 5	CLOUD MIGRATION AND BACKUP SETUP USING AMAZON S3
24-06-2026	

AIM

To perform cloud migration and backup operations by storing backup files in Amazon S3, automating backup schedules, and restoring data to verify integrity.

OBJECTIVES

- To understand cloud migration concepts.
- To understand cloud-based backup solutions.
- To create and configure Amazon S3 storage.
- To upload and restore backup data from the cloud.
- To automate backup operations.
- To verify data integrity after restoration.

THEORY

Cloud Migration is the process of moving data, applications, and workloads from local infrastructure to cloud environments.

Cloud Backup is the process of storing copies of data in cloud storage services to ensure recovery in case of hardware failure, accidental deletion, cyber-attacks, or disasters. Amazon S3 (Simple Storage Service) is a highly scalable object storage service provided by AWS. It offers durability, availability, security, and lifecycle management features suitable for backup and archival purposes. In this experiment, local files are backed up and uploaded to Amazon S3. The backup process is automated using Linux scheduling tools and data is restored to verify successful recovery.

ARCHITECTURE

Source Data



Backup Archive Creation



AWS CLI



Amazon S3 Bucket



Cloud Storage



Restore Process



Data Verification

ALGORITHM

1. Create AWS account.
2. Create S3 bucket.
3. Install AWS CLI.
4. Configure AWS credentials.
5. Create backup archive.
6. Upload backup to Amazon S3.
7. Verify uploaded files.
8. Restore files from S3.
9. Verify data integrity.
10. Automate backup using cron.

FLOWCHART

Start



Create S3 Bucket



Install AWS CLI



Configure AWS Credentials



Create Backup



Upload to S3



Verify Upload



Restore Data



Verify Integrity



Schedule Automated Backup



stop

PROCEDURE

STEP 1: LOGIN TO AWS CONSOLE

1. Login to AWS Management Console.
2. Navigate to Amazon S3.
3. Open S3 Dashboard.

STEP 2: CREATE S3 BUCKET

1. Click **Create Bucket**.
2. Enter bucket name:

cloud-backup-lab-bucket

3. Select Region.
4. Keep default settings.
5. Click **Create Bucket**.

STEP 3: INSTALL AWS CLI

Update system:

```
sudo apt update
```

Install AWS CLI:

```
sudo apt install awscli -y
```

Verify installation:

```
aws --version
```

STEP 4: CONFIGURE AWS CLI

```
aws configure
```

Provide:

- AWS Access Key ID
- AWS Secret Access Key
- Region Name
- Output Format

STEP 5: CREATE SAMPLE DATA

```
mkdir migration_data  
  
cd migration_data  
  
echo "Cloud Computing Lab Backup" > file1.txt  
echo "AWS S3 Backup Experiment" > file2.txt
```

STEP 6: CREATE BACKUP ARCHIVE

```
tar -czvf backup.tar.gz migration_data
```

STEP 7: UPLOAD BACKUP TO AMAZON S3

```
aws s3 cp backup.tar.gz s3://cloud-backup-lab-bucket/
```

STEP 8: VERIFY UPLOAD

```
aws s3 ls s3://cloud-backup-lab-bucket/
```

Expected Output:

```
backup.tar.gz
```

STEP 9: SIMULATE RESTORE OPERATION

Create restore directory:

```
mkdir restore_data
```

Download backup from S3:

```
aws s3 cp s3://cloud-backup-lab-bucket/backup.tar.gz .
```

Extract backup:

```
tar -xzf backup.tar.gz -C restore_data
```

STEP 10: VERIFY RESTORED FILES

```
ls restore_data/migration_data
```

Expected Output:

```
file1.txt  
file2.txt
```

STEP 11: AUTOMATE BACKUP PROCESS

Create backup script:

```
nano backup_script.sh
```

Script Content:

```
#!/bin/bash  
  
tar -czvf backup.tar.gz migration_data  
  
aws s3 cp backup.tar.gz s3://cloud-backup-lab-bucket/
```

Provide permission:

```
chmod +x backup_script.sh
```

Open cron editor:

```
crontab -e
```

Schedule daily backup:

```
0 10 * * * /home/user/backup_script.sh
```

COMMANDS USED

```
aws --version  
  
aws configure  
  
aws s3 ls  
  
aws s3 cp  
  
tar -czvf  
  
tar -xzvf  
  
chmod +x  
  
crontab -e
```

OBSERVATIONS

Parameter	Status
S3 Bucket Creation	Successful
AWS CLI Installation	Successful
AWS Configuration	Successful
Backup Creation	Successful
Upload to S3	Successful
Restore from S3	Successful
Data Verification	Successful
Automation Setup	Successful

EXPECTED OUTPUT

- Amazon S3 bucket created successfully.
- Backup archive uploaded to cloud storage.
- Files restored successfully from S3.
- Data integrity verified.
- Automated backup schedule configured.

RESULT

A cloud migration and backup solution was successfully implemented using Amazon S3. Backup files were uploaded to cloud storage, restored successfully, and automated backup scheduling was configured.

Exp. 6	CDN SERVICE SELECTION AND CONFIGURATION USING AMAZON CLOUDFRONT
24-06-2026	

AIM

To select a Content Delivery Network (CDN) provider, configure a CDN distribution, set up DNS records, and deliver web content through the CDN network using Amazon CloudFront.

OBJECTIVES

- To understand the concept of Content Delivery Networks (CDN).
- To study CDN providers and their features.
- To configure Amazon CloudFront as a CDN service.
- To configure DNS records for CDN integration.
- To create and manage CDN distributions.
- To verify content delivery through CDN edge locations.

SOFTWARE REQUIREMENTS

- AWS Account
- Amazon S3
- Amazon CloudFront
- Domain Name (Optional)
- Web Browser
- Internet Connection

.

THEORY

A Content Delivery Network (CDN) is a distributed network of servers that delivers web content from locations closest to users. CDN services reduce latency, improve website performance, enhance availability, and provide security features

Popular CDN providers include:

- Cloudflare
- Amazon CloudFront
- Akamai
- Microsoft Azure CDN
- Google Cloud CDN

Amazon CloudFront is AWS's CDN service that distributes content globally through edge locations. It integrates seamlessly with Amazon S3, EC2, Load Balancers, and custom origins.

DNS (Domain Name System) configuration is essential in CDN deployment. DNS records map domain names to CDN distributions, allowing users to access content through custom domains.

CDN PROVIDER COMPARISON

Provider	Features
Cloudflare	Free plan, DNS management, DDoS protection
Amazon CloudFront	Global AWS integration, scalable CDN
Akamai	Enterprise-grade CDN services
Azure CDN	Microsoft ecosystem integration
Google Cloud CDN	Integrated with Google Cloud

ARCHITECTURE

User Browser



DNS Resolution



Amazon CloudFront Distribution



Edge Location



Amazon S3 Bucket (Origin)



Content Delivery

ALGORITHM

1. Create AWS account.
2. Create S3 bucket.
3. Upload website content.
4. Configure S3 permissions.
5. Create CloudFront distribution.
6. Select S3 bucket as origin.
7. Configure CDN settings.
8. Configure DNS records.
9. Access content through CloudFront URL.
10. Verify CDN delivery.

FLOWCHART

Start



Create S3 Bucket



Upload Content



Create CloudFront Distribution



Configure Origin



Configure DNS



Deploy Distribution



Access CDN URL



Verify Content Delivery



Stop

PROCEDURE

STEP 1: LOGIN TO AWS CONSOLE

1. Open AWS Management Console.
2. Login using AWS credentials.
3. Navigate to Amazon S3.

STEP 2: CREATE S3 BUCKET

1. Click **Create Bucket**.
2. Enter bucket name:

cdn-lab-bucket

3. Select Region.
4. Click **Create Bucket**.

STEP 3: UPLOAD WEBSITE CONTENT

Create sample webpage:

```
<html>
<head>
<title>CDN Experiment</title>
</head>
<body>
<h1>Welcome to CloudFront CDN</h1>
</body>
</html>
```

Save as:

index.html

Upload file to S3 bucket.

STEP 4: ENABLE STATIC WEBSITE HOSTING

1. Open S3 Bucket.
2. Navigate to **Properties**.
3. Enable **Static Website Hosting**.
4. Set:

Index Document: index.html

5. Save changes.

STEP 5: CONFIGURE BUCKET PERMISSIONS

1. Navigate to **Permissions**.
2. Configure bucket policy to allow CloudFront access.
3. Save configuration.

STEP 6: CREATE CLOUDFRONT DISTRIBUTION

1. Open Amazon CloudFront Console.
2. Click **Create Distribution**.
3. Under Origin Domain select:

`cdn-lab-bucket.s3.amazonaws.com`

4. Configure default settings.
5. Enable caching.
6. Click **Create Distribution**.

STEP 7: WAIT FOR DISTRIBUTION

CloudFront creates a unique distribution URL:

Example:

`d123abcdxyz.cloudfront.net`

Deployment may take several minutes.

STEP 8: TEST CDN DISTRIBUTION

Open browser:

`https://d123abcdxyz.cloudfront.net`

Verify webpage loads successfully.

STEP 9: CONFIGURE CUSTOM DOMAIN (OPTIONAL)

Suppose domain:

`www.example.com`

Open DNS management panel.

STEP 10: VERIFY DNS RESOLUTION

Check DNS mapping:

```
nslookup www.example.com
```

OR

```
dig www.example.com
```

Verify CloudFront distribution is returned.

STEP 11: VERIFY CDN DELIVERY

Access:

```
https://www.example.com
```

Verify content is served successfully through CloudFront.

STEP 12: VIEW DISTRIBUTION STATISTICS

1. Open CloudFront Console.
2. Select Distribution.
3. View:

- Requests
- Data Transfer
- Cache Hit Ratio
- Geographic Distribution

COMMANDS USED

```
nslookup www.example.com
```

```
dig www.example.com
```

AWS Services Used:

- Amazon S3
- Amazon CloudFront

OBSERVATIONS

Parameter	Status
AWS Account Creation	Successful
S3 Bucket Creation	Successful
Website Upload	Successful
Static Hosting Enabled	Successful
CloudFront Distribution Creation	Successful
DNS Configuration	Successful
CDN URL Access	Successful
Content Delivery Verification	Successful

EXPECTED OUTPUT

- Website content uploaded successfully.
- CloudFront distribution created.
- DNS records configured.
- CDN URL accessible.
- Content delivered through CDN edge locations.
- Reduced latency and improved performance.

RESULT

A Content Delivery Network was successfully implemented using Amazon CloudFront. Website content was stored in Amazon S3, distributed through CloudFront edge locations, and accessed through CDN URLs and DNS configuration.