


Screenshots:

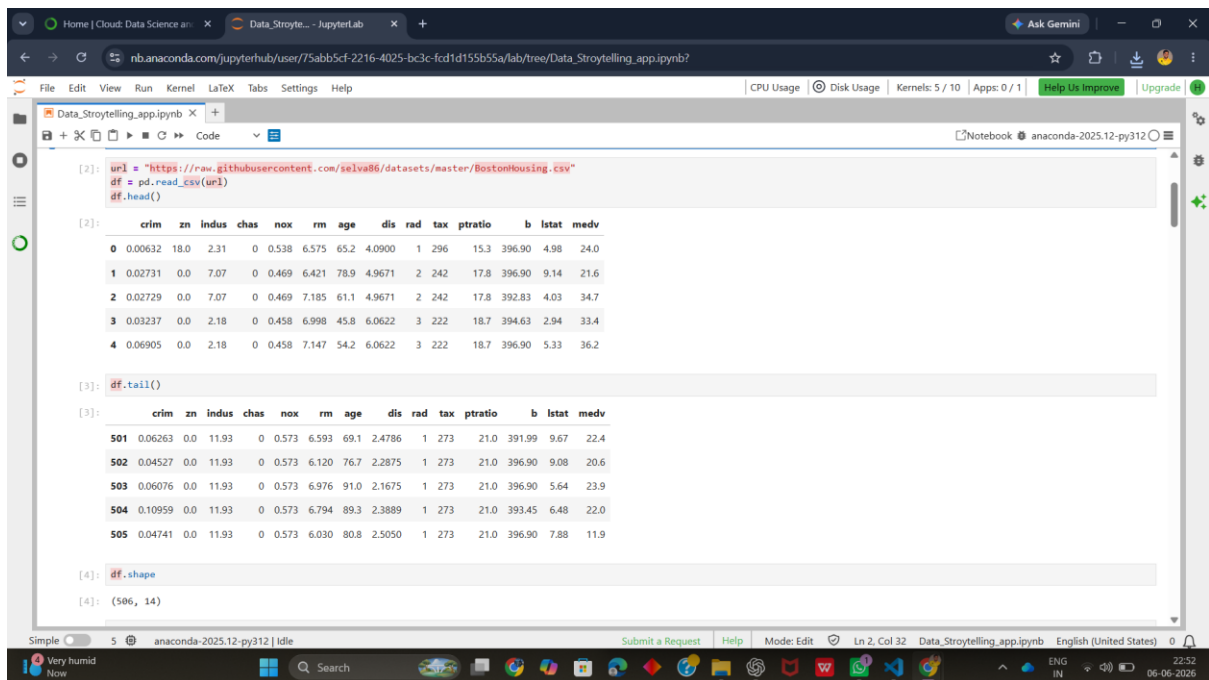

The screenshot shows a JupyterLab notebook with the following code and output:

```
[2]: url = "https://raw.githubusercontent.com/sejva86/datasets/master/Bostonhousing.csv"
df = pd.read_csv(url)
df.head()
```


	crim	zn	indus	chas	nox	rm	age	dis	rad	tax	ptratio	b	lstat	medv
0	0.00632	18.0	2.31	0	0.538	6.575	65.2	4.0900	1	296	15.3	396.90	4.98	24.0
1	0.02731	0.0	7.07	0	0.469	6.421	78.9	4.9671	2	242	17.8	396.90	9.14	21.6
2	0.02729	0.0	7.07	0	0.469	7.185	61.1	4.9671	2	242	17.8	392.83	4.03	34.7
3	0.03237	0.0	2.18	0	0.458	6.998	45.8	6.0622	3	222	18.7	394.63	2.94	33.4
4	0.06905	0.0	2.18	0	0.458	7.147	54.2	6.0622	3	222	18.7	396.90	5.33	36.2

```
[3]: df.tail()
```

	crim	zn	indus	chas	nox	rm	age	dis	rad	tax	ptratio	b	lstat	medv
501	0.06263	0.0	11.93	0	0.573	6.593	69.1	2.4786	1	273	21.0	391.99	9.67	22.4
502	0.04527	0.0	11.93	0	0.573	6.120	76.7	2.2875	1	273	21.0	396.90	9.08	20.6
503	0.06076	0.0	11.93	0	0.573	6.976	91.0	2.1675	1	273	21.0	396.90	5.64	23.9
504	0.10959	0.0	11.93	0	0.573	6.794	89.3	2.3889	1	273	21.0	393.45	6.48	22.0
505	0.04741	0.0	11.93	0	0.573	6.030	80.8	2.5050	1	273	21.0	396.90	7.88	11.9

```
[4]: df.shape
```

```
[4]: (506, 14)
```

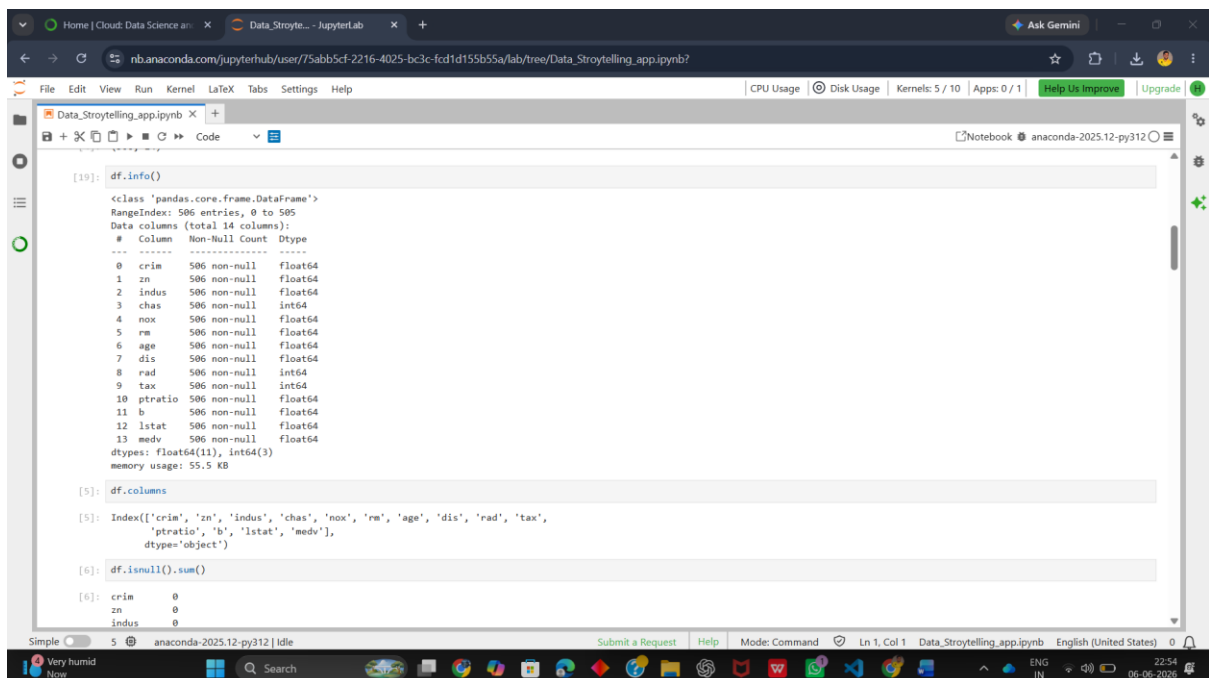

The screenshot shows a JupyterLab notebook with the following code and output:

```
[19]: df.info()
```



```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 506 entries, 0 to 505
Data columns (total 14 columns):
 #   Column  Non-Null Count  Dtype  
---  --
 0   crim    506 non-null     float64
 1   zn       506 non-null     float64
 2   indus    506 non-null     float64
 3   chas     506 non-null     int64  
 4   nox      506 non-null     float64
 5   rm       506 non-null     float64
 6   age      506 non-null     float64
 7   dis      506 non-null     float64
 8   rad      506 non-null     int64  
 9   tax      506 non-null     int64  
10   ptratio  506 non-null     float64
11   b        506 non-null     float64
12   lstat    506 non-null     float64
13   medv     506 non-null     float64
dtypes: float64(11), int64(3)
memory usage: 55.5 KB
```



```
[5]: df.columns
```



```
Index(['crim', 'zn', 'indus', 'chas', 'rm', 'age', 'dis', 'rad', 'tax',
       'ptratio', 'b', 'lstat', 'medv'],
      dtype='object')
```

```
[6]: df.isnull().sum()
```

	crim	zn	indus
	0	0	0

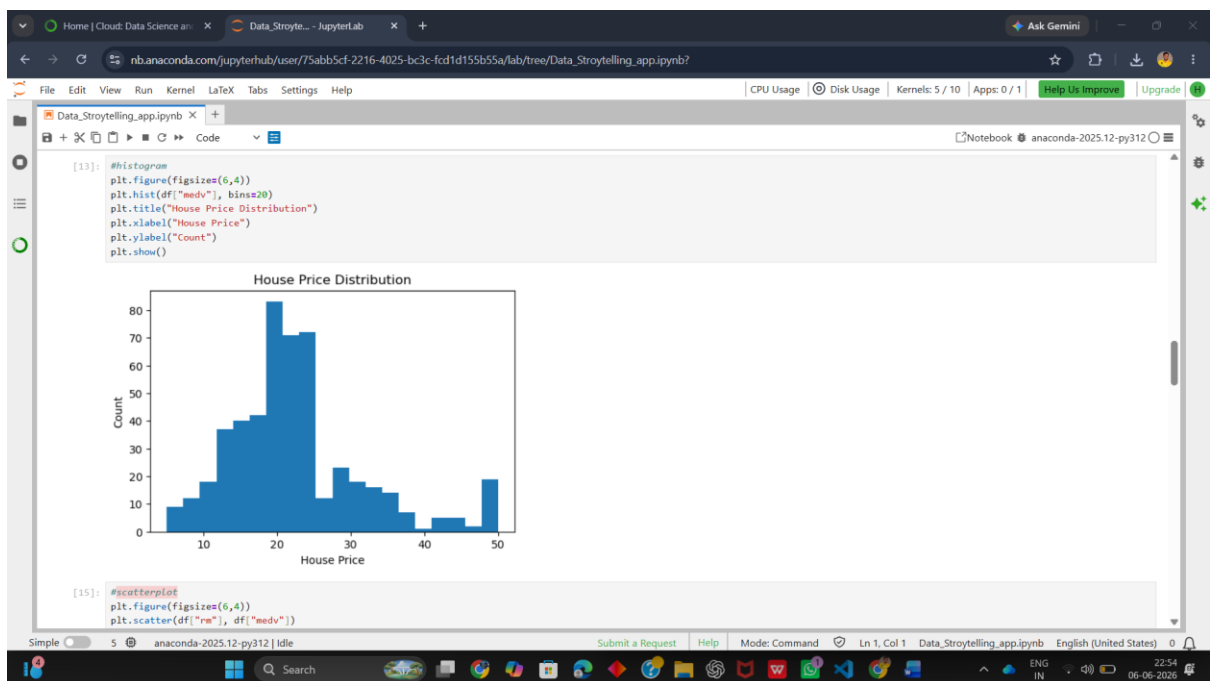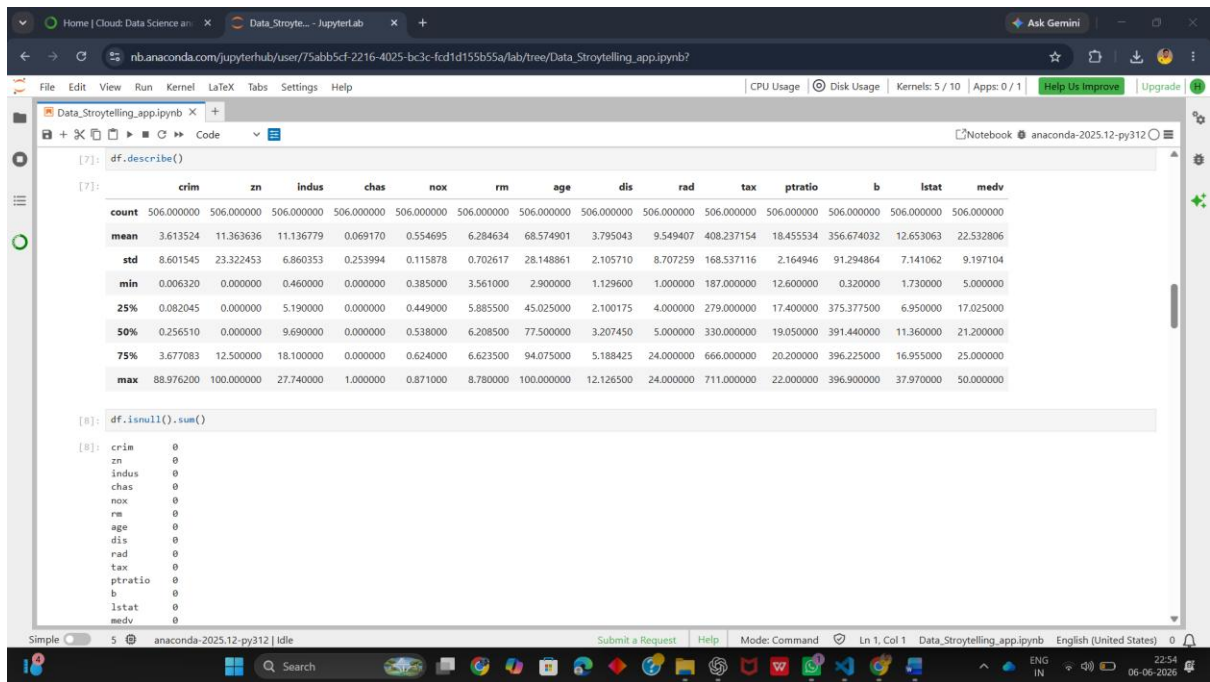

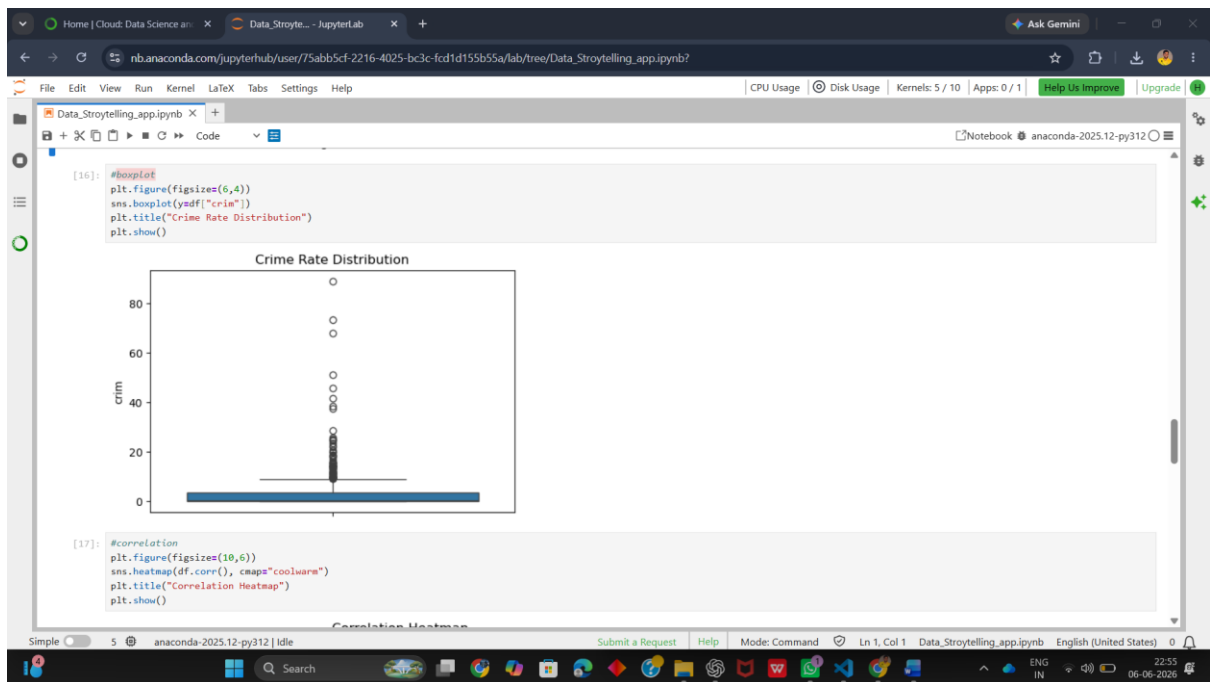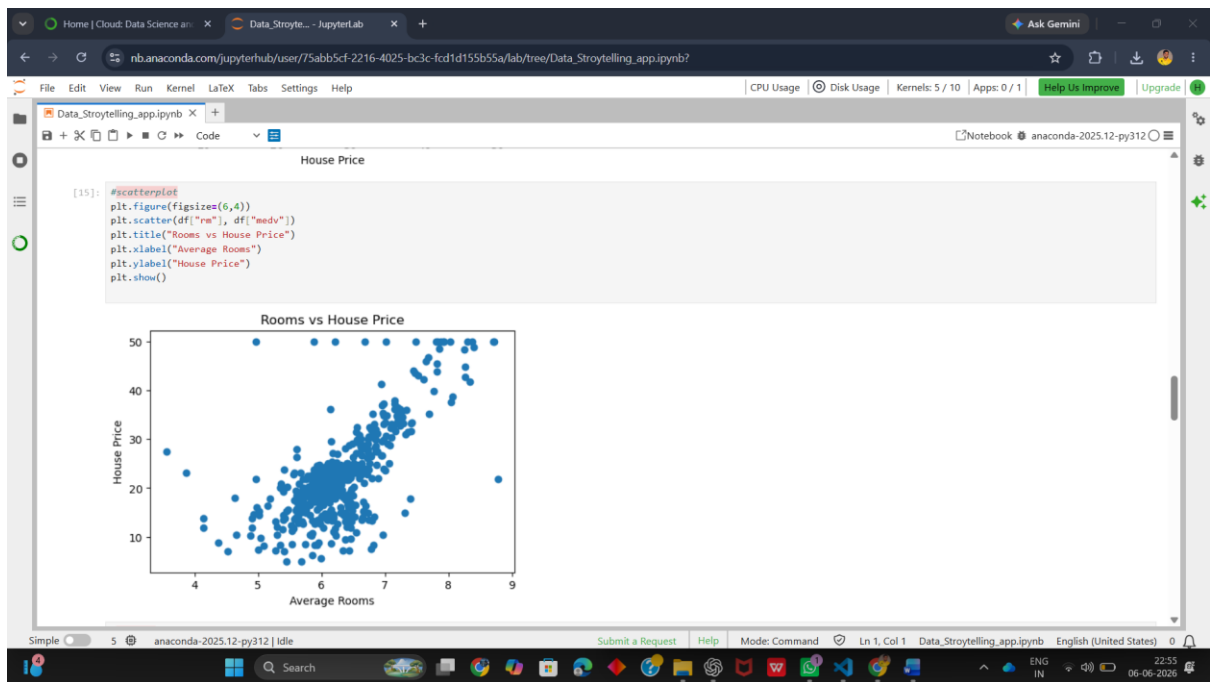

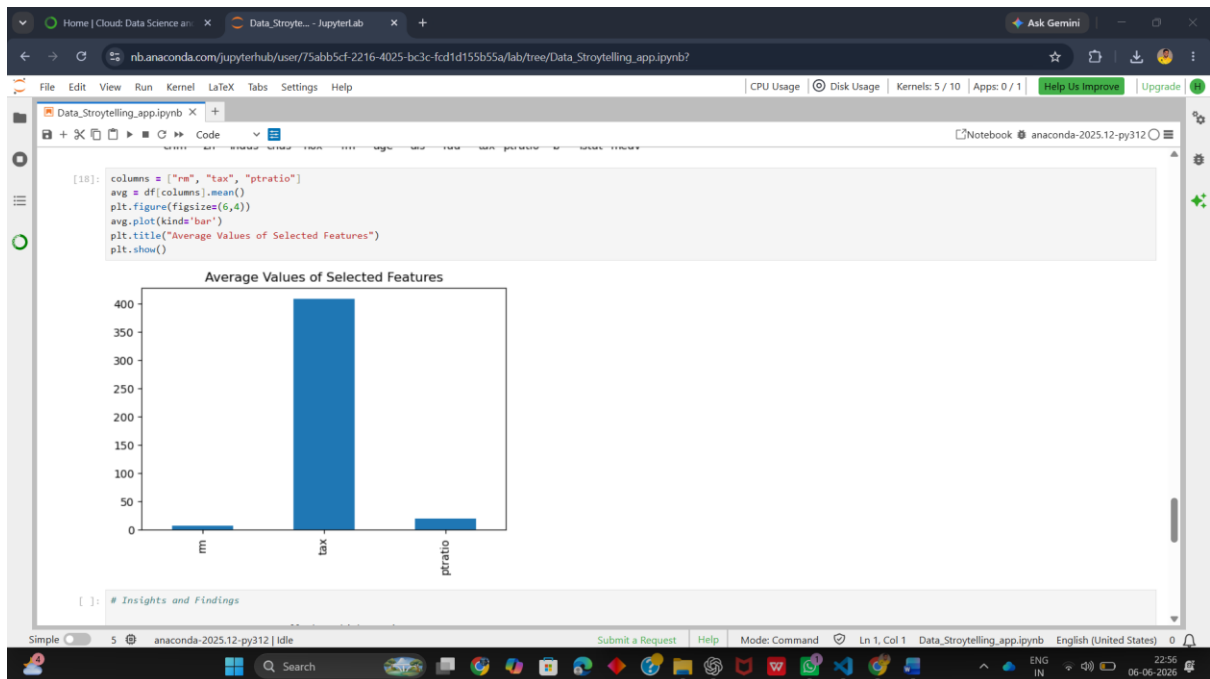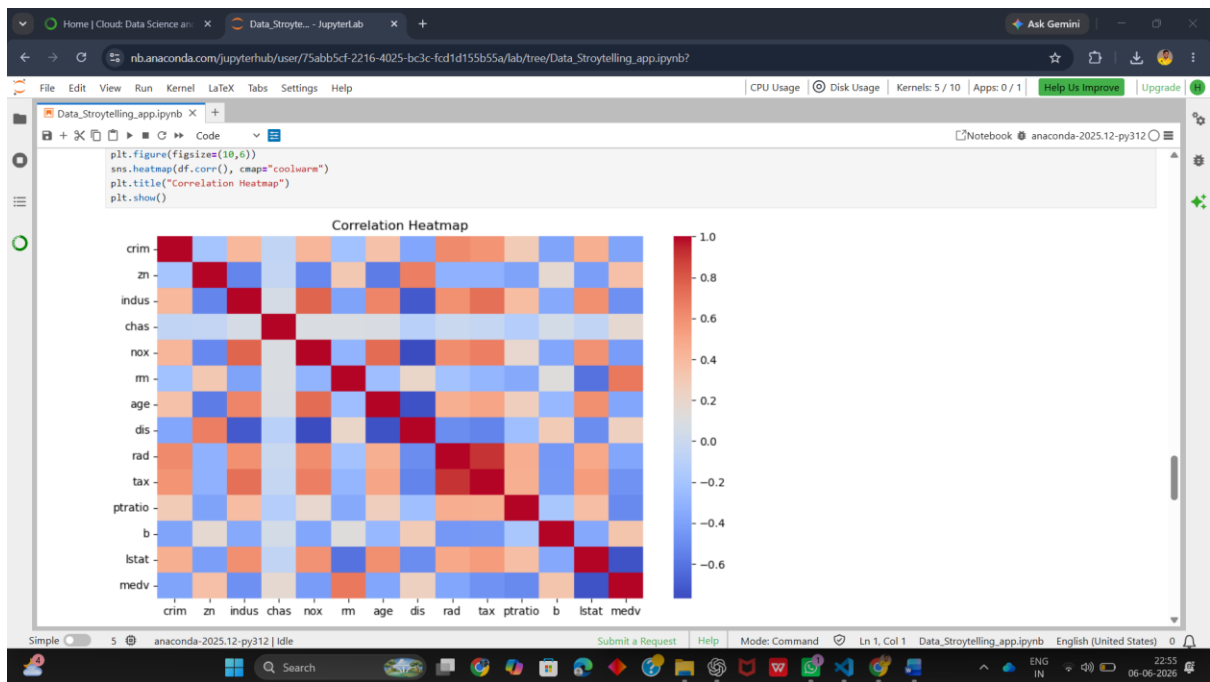

Home | Cloud: Data Science an... | Data_Stroyte... - JupyterLab | Ask Gemini

nb.anaconda.com/jupyterhub/user/75abb5cf-2216-4025-bc3c-fcd1d155b55a/lab/tree/Data_Stroytelling_app.ipynb?

File Edit View Run Kernel LaTeX Tabs Settings Help | CPU Usage | Disk Usage | Kernels: 5 / 10 | Apps: 0 / 1 | Help Us Improve | Upgrade

Data_Stroytelling_app.ipynb X +

Code

Notebook anaconda-2025.12-py312

```
[ ]: # Insights and Findings

1. Houses with more rooms generally have higher prices.
2. Areas with high crime rates tend to have lower housing prices.
3. Tax rate and neighborhood conditions affect house prices.
4. Most house prices fall in the medium price range.
5. Some variables strongly influence house value.

[ ]: # Final Conclusion / Recommendations

Based on the analysis, house prices are affected by several factors such as number of rooms, crime rate, and neighborhood conditions.

People planning to buy houses should prefer areas with lower crime and better facilities for long-term value.

[ ]:
```

Simple 5 anaconda-2025.12-py312 | Idle Submit a Request Help Mode: Command Ln 1, Col 1 Data_Stroytelling_app.ipynb English (United States) 0

22:56 06-06-2026