


Learn Java by building a university

You write real Java, you run it, and a 3D
model shows you what your code built.

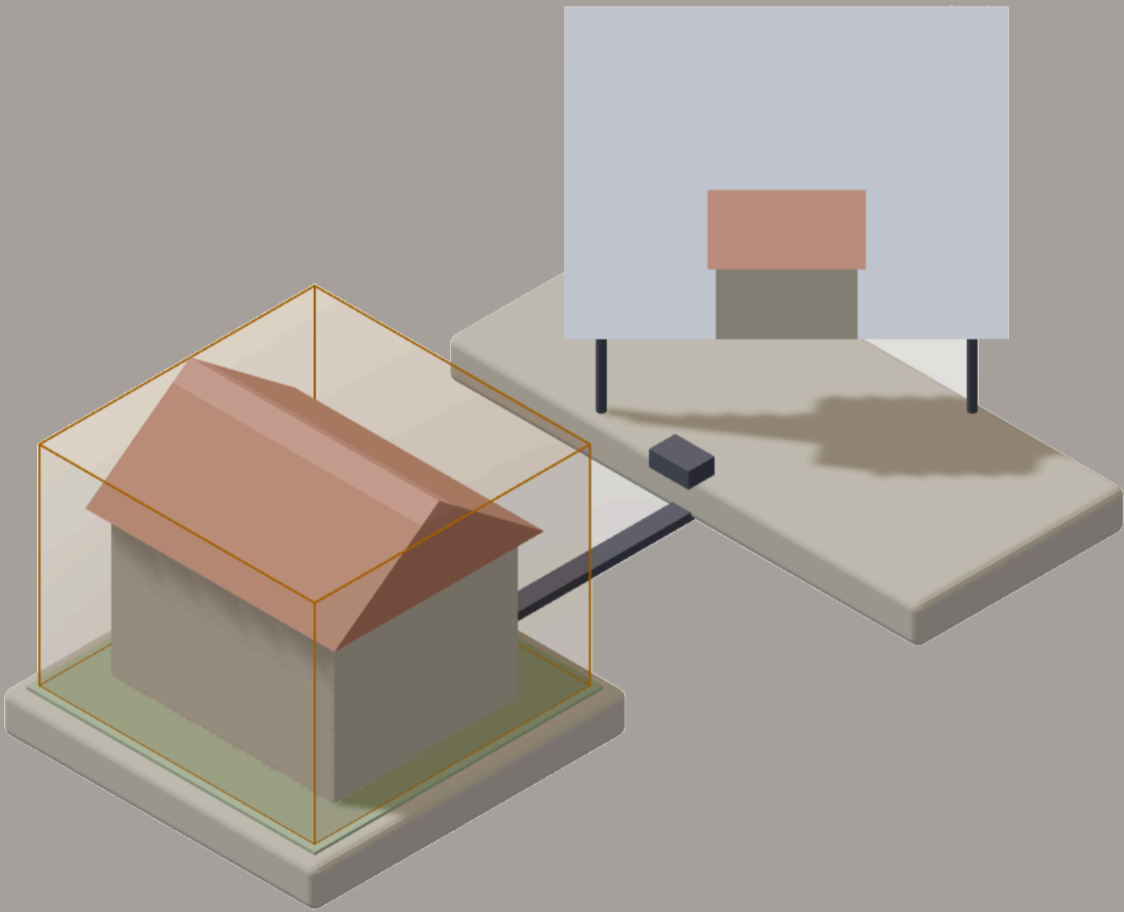

The class is the blueprint; the object,
the building.
20 challenges, four modules.

An object can't be seen

What a beginner lacks isn't the syntax: it's the mental model. new shows nothing, a reference shows nothing, and two variables pointing at the same object look exactly like two different objects.

All the console gives back is text about something nobody ever saw.

When the state of a program can't be seen, mistakes get memorised instead of understood.

Every piece is a concept



Isometric scene in Three.js: fixed orthographic camera, low-poly pieces floating with no infinite ground.

What each shape means

JAVA	IN THE MODEL
class	A blueprint, in thin line
new	A building that grows out of its island
object	Serial plate: FacultadRegional #1
reference	A label hanging from the building
composition	An attached island, joined by a small bridge
constructor	A crane over the island while it runs
==	Same serial number, same building

A list is a row of small buildings with a railing.

Code, site and log

< Clases, objetos y referencias

Clases, objetos y referencias · 1 / 5

▼ PEDIDO DE OBRA

Abrió tu primera Facultad Regional

0/3

FacultadRegional.java

Main.java

1

public class FacultadRegional {

2

// Declará acá los atributos de una Facultad Regional.

3

}

4

FR Resistencia

FacultadRegional

¿Qué es cada forma?

► Lista de piezas

Bitácora

Obra en construcción (0/3)

💡

Dicho sin código: El formulario está, pero a la FR Resistencia le faltan datos: es como entregar la inscripción con casilleros vacíos.

🔧

A FacultadRegional todavía le falta declarar como String: nombre, ciudad, provincia.

FacultadRegional.java:1

Una clase es un molde: los atributos que declararás son los datos que va a tener cada facultad.

Pista: Un atributo se declara dentro de la clase, con su tipo y su nombre. ¿Qué tipo guarda texto?

🔧

Todavía no existe ninguna Facultad Regional.

Main.java:2

La clase es solo el molde. Para tener una facultad hay que crear un objeto con new.

Pista: En main, ¿cómo le pedís a Java un objeto nuevo de la clase FacultadRegional?

Volver al código base

Ctrl/Cmd + Enter

Ejecutar

Every line of feedback points at a line of yours: FacultadRegional.java:1.

MONACO · THREE.JS

05 / 07

The state is real

The model doesn't interpret the code: it watches it run. The backend executes the program in an isolated environment and reads the state through **JDI**, the JVM's own debugging interface. What appears in the scene are the objects that actually existed.

BACKEND	Java 25 · Spring Boot 4 · JDI
FRONT	React · TypeScript · Vite · Monaco
SCENE	Three.js with React Three Fiber
DEPLOY	Railway · Cloudflare



OPEN

It is live

The 20 challenges play end
to end. No signup, nothing to
install.

ljb.balbianoluciano06.workers.dev

Open source; the course content is in
Spanish. What is missing is the beta with
students: if you teach OOP and want to run
it with your course, get in touch.