

✓ **Congratulations! You passed!**

Grade
received **90%**

Latest Submission
Grade 90%

To pass 80% or
higher

Go to next item

1. Using the notation for mini-batch gradient descent. To what of the following does $a^{[2]\{4\}(3)}$ correspond?

1 / 1 point

- ☐ The activation of the fourth layer when the input is the second example of the third mini-batch.
- ☒ The activation of the second layer when the input is the third example of the fourth mini-batch.
- ☐ The activation of the third layer when the input is the fourth example of the second mini-batch.
- ☐ The activation of the second layer when the input is the fourth example of the third mini-batch.

↗ Expand

✓ **Correct**

Yes. In general $a^{[l]\{l\}\{k\}}$ denotes the activation of the layer l when the input is the example k from the mini-batch l .

2. Which of these statements about mini-batch gradient descent do you agree with?

1 / 1 point

- ☐ You should implement mini-batch gradient descent without an explicit for-loop over different mini-batches, so that the algorithm processes all mini-batches at the same time (vectorization).
- ☒ One iteration of mini-batch gradient descent (computing on a single mini-batch) is faster than one iteration of batch gradient descent.
- ☐ Training one epoch (one pass through the training set) using mini-batch gradient descent is faster than training one epoch using batch gradient descent.

↗ Expand

✓ **Correct**

3. We usually choose a mini-batch size greater than 1 and less than m , because that way we make use of vectorization but not fall into the slower case of batch gradient descent.

1 / 1 point

- ☐ False
- ☒ True


↗ Expand


✓ **Correct**

Correct. Precisely by choosing a batch size greater than one we can use vectorization; but we choose a value less than m so we won't end up using batch gradient descent.

4. While using mini-batch gradient descent with a batch size larger than 1 but less than m the plot of the cost function J looks like this:

1 / 1 point



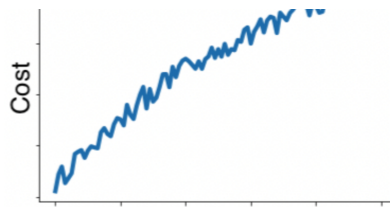

Which of the following do you agree with?

- ☐ If you are using mini-batch gradient descent or batch gradient descent this looks acceptable.
- ☐ If you are using batch gradient descent, this looks acceptable. But if you're using mini-batch gradient descent, something is wrong.
- ☐ If you are using mini-batch gradient descent, this looks acceptable. But if you're using batch gradient descent, something is wrong.
- ☒ No matter if using mini-batch gradient descent or batch gradient descent something is wrong.

[Expand](#)

✓ **Correct**

Yes. The cost is larger than when the process started, this is not right at all.

5. Suppose the temperature in Casablanca over the first two days of March are the following:

1 / 1 point

March 1st: $\theta_1 = 10^\circ \text{ C}$

March 2nd: $\theta_2 = 25^\circ \text{ C}$

Say you use an exponentially weighted average with $\beta = 0.5$ to track the temperature: $v_0 = 0, v_t = \beta v_{t-1} + (1 - \beta) \theta_t$. If v_2 is the value computed after day 2 without bias correction, and $v_2^{\text{corrected}}$ is the value you compute with bias correction. What are these values?

- ☐ $v_2 = 20, v_2^{\text{corrected}} = 20.$
- ☐ $v_2 = 20, v_2^{\text{corrected}} = 15.$
- ☒ $v_2 = 15, v_2^{\text{corrected}} = 20.$
- ☐ $v_2 = 15, v_2^{\text{corrected}} = 15.$

[Expand](#)

✓ **Correct**

Correct. $v_2 = \beta v_1 + (1 - \beta) \theta_2$ thus $v_1 = 5$, $v_2 = 15$. Using the bias correction $\frac{v_t}{1 - \beta^t}$ we get $\frac{15}{1 - (0.5)^2} = 20$.

6. Which of these is NOT a good learning rate decay scheme? Here, t is the epoch number.

0 / 1 point

- ☐ $\alpha = \frac{\alpha_0}{1 + 3t}$
- ☒ $\alpha = e^{-0.01t} \alpha_0.$
- ☐ $\alpha = 1.01^t \alpha_0$
- ☐ $\alpha = \frac{\alpha_0}{\sqrt{1 + t}}.$


[Expand](#)

✗ **Incorrect**

Incorrect. This is a good learning rate decay since it is a decreasing function of t .

7. You use an exponentially weighted average on the London temperature dataset. You use the following to track the temperature: $v_t = \beta v_{t-1} + (1 - \beta)\theta_t$. The yellow and red lines were computed using values β_1 and β_2 respectively. Which of the following are true?

1 / 1 point

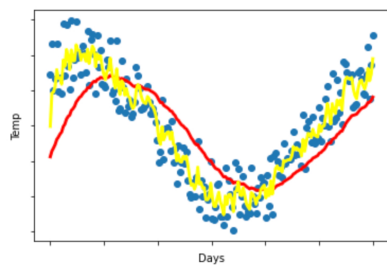

- ☐ $\beta_1 = 0, \beta_2 > 0$.
☐ $\beta_1 > \beta_2$.
☐ $\beta_1 = \beta_2$.
☒ $\beta_1 < \beta_2$.


[Expand](#)

✓ Correct

Correct. $\beta_1 < \beta_2$ since the yellow curve is noisier.

8. Consider the figure:

1 / 1 point

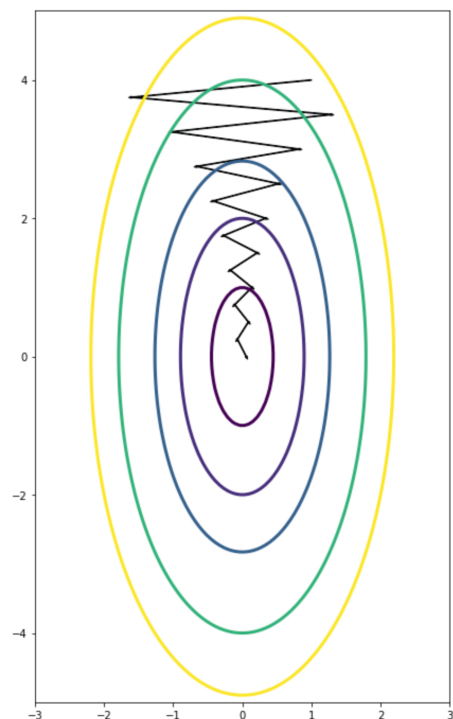

Suppose this plot was generated with gradient descent with momentum $\beta = 0.01$. What happens if we increase the value of β to 0.1?

- ☒ The gradient descent process moves less in the horizontal direction and more in the

vertical direction.

- ☐ The gradient descent process starts oscillating in the vertical direction.
- ☐ The gradient descent process moves more in the horizontal and the vertical axis.
- ☐ The gradient descent process starts moving more in the horizontal direction and less in the vertical.

 Expand

 **Correct**

Yes. The use of a greater value of β causes a more efficient process thus reducing the oscillation in the horizontal direction and moving the steps more in the vertical direction.

9. Suppose batch gradient descent in a deep network is taking excessively long to find a value of the parameters that achieves a small value for the cost function $\mathcal{J}(W^{[1]}, b^{[1]}, \dots, W^{[L]}, b^{[L]})$. Which of the following techniques could help find parameter values that attain a small value for \mathcal{J} ? (Check all that apply)

1 / 1 point

- ☐ Add more data to the training set.
- ☒ Normalize the input data.

 **Correct**

Yes. In some cases, if the scale of the features is very different, normalizing the input data will speed up the training process.

- ☒ Try using gradient descent with momentum.

 **Correct**

Yes. The use of momentum can improve the speed of the training. Although other methods might give better results, such as Adam.

- ☒ Try better random initialization for the weights

 **Correct**

Yes. As seen in previous lectures this can help the gradient descent process to prevent vanishing gradients.

 Expand

 **Correct**

Great, you got all the right answers.

10. Which of the following are true about Adam?

1 / 1 point

- ☐ The most important hyperparameter on Adam is ϵ and should be carefully tuned.
- ☐ Adam automatically tunes the hyperparameter α .
- ☐ Adam can only be used with batch gradient descent and not with mini-batch gradient descent.
- ☒ Adam combines the advantages of RMSProp and momentum.

 Expand

 **Correct**

True. Precisely Adam combines the features of RMSProp and momentum that is why we use two-parameter β_1 and β_2 , besides ϵ .